

[MS-CHAP-Diff]:

Extensible Authentication Protocol Method for Microsoft Challenge Handshake Authentication Protocol (CHAP)

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation (~~"this documentation"~~) for protocols, file formats, [data portability](#), [computer languages](#), [and standards](#) ~~as well as overviews of the interaction among each of these technologies~~ [support](#). [Additionally, overview documents cover inter-protocol relationships and interactions.](#)
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you [may can](#) make copies of it in order to develop implementations of the technologies [that are](#) described in ~~the Open Specifications~~ [this documentation](#) and [may can](#) distribute portions of it in your implementations ~~using that use~~ these technologies or [in](#) your documentation as necessary to properly document the implementation. You [may can](#) also distribute in your implementation, with or without modification, any ~~schema, IDL's~~ [schemas, IDLs](#), or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications ~~documentation~~.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that [may might](#) cover your implementations of the technologies described in the Open Specifications ~~documentation~~. Neither this notice nor Microsoft's delivery of ~~the this~~ documentation grants any licenses under those [patents](#) or any other Microsoft patents. However, a given Open ~~Specification~~ [Specification](#) ~~may~~ [Specifications document might](#) be covered by [the](#) Microsoft [Open Specifications Promise](#) or the [Microsoft Community Promise](#). If you would prefer a written license, or if the technologies described in ~~the Open Specifications~~ [this documentation](#) are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation [may might](#) be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, ~~e-mail~~ [email](#) addresses, logos, people, places, and events [that are](#) depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than [as](#) specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications ~~documentation~~ [does](#) not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications [documents](#) are intended for use in conjunction with publicly available ~~standards~~ [standards](#) specifications and network programming art, ~~and assumes, as such, assume~~ that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
10/22/2006	0.01	<u>New</u>	Version 0.01 release
1/19/2007	1.0	<u>Major</u>	Version 1.0 release
3/2/2007	1.1	<u>Minor</u>	Version 1.1 release
4/3/2007	1.2	<u>Minor</u>	Version 1.2 release
5/11/2007	1.3	<u>Minor</u>	Version 1.3 release
6/1/2007	1.3.1	Editorial	Changed language and formatting in the technical content.
7/3/2007	1.3.2	Editorial	Changed language and formatting in the technical content.
7/20/2007	1.3.3	Editorial	Changed language and formatting in the technical content.
8/10/2007	1.3.4	Editorial	Changed language and formatting in the technical content.
9/28/2007	1.3.5	Editorial	Changed language and formatting in the technical content.
10/23/2007	1.3.6	Editorial	Changed language and formatting in the technical content.
11/30/2007	2.0	Major	Updated and revised the technical content.
1/25/2008	2.0.1	Editorial	Changed language and formatting in the technical content.
3/14/2008	3.0	Major	Updated and revised the technical content.
5/16/2008	3.0.1	Editorial	Changed language and formatting in the technical content.
6/20/2008	3.0.2	Editorial	Changed language and formatting in the technical content.
7/25/2008	3.0.3	Editorial	Changed language and formatting in the technical content.
8/29/2008	3.0.4	Editorial	Changed language and formatting in the technical content.
10/24/2008	3.0.5	Editorial	Changed language and formatting in the technical content.
12/5/2008	4.0	Major	Updated and revised the technical content.
1/16/2009	4.0.1	Editorial	Changed language and formatting in the technical content.
2/27/2009	4.0.2	Editorial	Changed language and formatting in the technical content.
4/10/2009	5.0	Major	Updated and revised the technical content.
5/22/2009	6.0	Major	Updated and revised the technical content.
7/2/2009	6.0.1	Editorial	Changed language and formatting in the technical content.
8/14/2009	7.0	Major	Updated and revised the technical content.
9/25/2009	7.1	Minor	Clarified the meaning of the technical content.
11/6/2009	8.0	Major	Updated and revised the technical content.
12/18/2009	8.0.1	Editorial	Changed language and formatting in the technical content.
1/29/2010	9.0	Major	Updated and revised the technical content.

Date	Revision History	Revision Class	Comments
3/12/2010	9.1	Minor	Clarified the meaning of the technical content.
4/23/2010	9.1.1	Editorial	Changed language and formatting in the technical content.
6/4/2010	9.1.2	Editorial	Changed language and formatting in the technical content.
7/16/2010	9.2	Minor	Clarified the meaning of the technical content.
8/27/2010	9.3	Minor	Clarified the meaning of the technical content.
10/8/2010	9.3	None	No changes to the meaning, language, or formatting of the technical content.
11/19/2010	9.3	None	No changes to the meaning, language, or formatting of the technical content.
1/7/2011	10.0	Major	Updated and revised the technical content.
2/11/2011	11.0	Major	Updated and revised the technical content.
3/25/2011	11.0	None	No changes to the meaning, language, or formatting of the technical content.
5/6/2011	12.0	Major	Updated and revised the technical content.
6/17/2011	12.1	Minor	Clarified the meaning of the technical content.
9/23/2011	13.0	Major	Updated and revised the technical content.
12/16/2011	14.0	Major	Updated and revised the technical content.
3/30/2012	14.0	None	No changes to the meaning, language, or formatting of the technical content.
7/12/2012	14.0	None	No changes to the meaning, language, or formatting of the technical content.
10/25/2012	14.0	None	No changes to the meaning, language, or formatting of the technical content.
1/31/2013	14.0	None	No changes to the meaning, language, or formatting of the technical content.
8/8/2013	15.0	Major	Updated and revised the technical content.
11/14/2013	15.0	None	No changes to the meaning, language, or formatting of the technical content.
2/13/2014	15.0	None	No changes to the meaning, language, or formatting of the technical content.
5/15/2014	15.0	None	No changes to the meaning, language, or formatting of the technical content.
6/30/2015	16.0	Major	Significantly changed the technical content.
10/16/2015	17.0	Major	Significantly changed the technical content.

Table of Contents

1	Introduction	6
1.1	Glossary	6
1.2	References	7
1.2.1	Normative References	7
1.2.2	Informative References	8
1.3	Overview	8
1.4	Relationship to Other Protocols	9
1.5	Prerequisites/Preconditions	10
1.6	Applicability Statement	10
1.7	Versioning and Capability Negotiation	10
1.8	Vendor-Extensible Fields	10
1.9	Standards Assignments.....	10
2	Messages.....	11
2.1	Transport.....	11
2.2	Message Syntax.....	11
3	Protocol Details.....	13
3.1	Common Details	13
3.1.1	Abstract Data Model.....	13
3.1.2	Timers	13
3.1.3	Initialization.....	13
3.1.4	Higher-Layer Triggered Events	14
3.1.5	Message Processing Events and Sequencing Rules	14
3.1.5.1	Master Session Key (MSK) Derivation	14
3.1.5.2	username	15
3.1.6	Timer Events.....	15
3.1.7	Other Local Events.....	15
3.2	Peer Details.....	15
3.2.1	Abstract Data Model.....	15
3.2.2	Timers	16
3.2.3	Initialization.....	16
3.2.4	Higher-Layer Triggered Events	16
3.2.5	Message Processing Events and Sequencing Rules	17
3.2.5.1	General Packet Validation.....	17
3.2.5.2	Received Challenge-Request Packet	17
3.2.5.3	Received Success-Request Packet	17
3.2.5.4	Received Failure-Request Packet.....	17
3.2.5.5	Received EAP Success Packet	18
3.2.5.6	Received EAP Failure Packet.....	18
3.2.6	Timer Events.....	19
3.2.7	Other Local Events.....	19
3.3	EAP Server Details	19
3.3.1	Abstract Data Model.....	19
3.3.2	Timers	20
3.3.3	Initialization.....	20
3.3.4	Higher-Layer Triggered Events	20
3.3.5	Message Processing Events and Sequencing Rules	21
3.3.5.1	General Packet Validation.....	21
3.3.5.2	Received Challenge-Response Packet	21
3.3.5.3	Received Success-Response Packet	22
3.3.5.4	Received Change-Password-Response Packet	22
3.3.5.5	Received Failure-Response Packet.....	22
3.3.6	Timer Events.....	23
3.3.7	Other Local Events.....	23

4	Protocol Examples	24
4.1	Successful Mutual Authentication	24
4.2	Failure Scenario with Retry	24
4.3	Failure Scenario with No Retry	25
4.4	Failure Scenario with No Retry Followed by a Failure-Response	25
4.5	Success Scenario with Change-Password-Response	26
4.6	Success Scenario on Retry After Challenge-Response Is Recomputed	27
4.7	Authentication Failure at the Peer	27
5	Security	29
5.1	Security Considerations for Implementers	29
5.2	Index of Security Parameters	29
6	Appendix A: Product Behavior	30
7	Change Tracking	32
8	Index	34

1 Introduction

The Extensible Authentication Protocol Method for Microsoft Challenge Handshake Authentication Protocol (CHAP) uses the Microsoft Challenge Handshake Authentication Protocol version 2 (MSCHAPv2) [RFC2759], as an **authentication** method within the **Extensible Authentication Protocol (EAP)** framework [RFC3748].

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative ~~and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [RFC2119]. Sections 1.5 and 1.9 are also normative but do not contain those terms.~~ All other sections and examples in this specification are informative.

1.1 Glossary

~~The~~This document uses the following terms ~~are specific to this document:~~

authentication: The ability of one entity to determine the identity of another entity.

authentication server: The entity that verifies that a person or thing is who or what it claims to be (typically using a cryptographic protocol) and issues a ticket or token attesting to the validity of the claim. The total set of authentication protocol security support providers (SSPs) that are typically available on a Windows server release.

authenticator: The entity requesting the **authentication** of a peer.

code page: An ordered set of characters of a specific script in which a numerical index (code-point value) is associated with each character. Code pages are a means of providing support for character sets ~~(±)~~ and keyboard layouts used in different countries. Devices such as the display and keyboard can be configured to use a specific code page and to switch from one code page (such as the United States) to another (such as Portugal) at the user's request.

dictionary attack: A technique for defeating an authentication mechanism by systematically searching through a large number of possibilities to deduce shared secrets.

EAP: See **Extensible Authentication Protocol (EAP)**.

EAP method: An **authentication** mechanism that integrates with the **Extensible Authentication Protocol (EAP)**; for example, EAP-TLS, Protected EAP v0 (PEAPv0), EAP-MSCHAPv2, and so on.

EAP peer: A network access client that is requesting access to a network using EAP as the authentication method

EAP server: The backend **authentication server**; typically a RADIUS (as specified in [RFC2865]) server.

EAP-CHAP: The Extensible Authentication Protocol for the Microsoft Challenge Handshake Authentication Protocol.

encryption: In cryptography, the process of obscuring information to make it unreadable without special knowledge.

Extensible Authentication Protocol (EAP): A framework for **authentication** that is used to provide a pluggable model for adding **authentication** protocols for use in network access **authentication**, as specified in [RFC3748].

Group Policy: A mechanism that allows the implementer to specify managed configurations for users and computers in an Active Directory service environment.

master session key: A temporary cryptographic key that is used to derive other cryptographic keys to be used to encrypt and decrypt parts of a session-based protocol.

mutual authentication: A mode in which each party verifies the identity of the other party, as described in [RFC3748] section 7.2.1.

peer: The entity being authenticated by the authenticator.

session: A collection of multimedia senders and receivers and the data streams that flow between them. A multimedia conference is an example of a multimedia session.

user: The real person who has a member account. The user is **authenticated** by being asked to prove knowledge of the secret password associated with the user name.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the Errata.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dohelp@microsoft.com. We will assist you in finding the relevant information.

[IANA-EAP] IANA, "Extensible Authentication Protocol (EAP) Registry", October 2006, <http://www.iana.org/assignments/eap-numbers>

[MS-UCODEREF] Microsoft Corporation, "Windows Protocols Unicode Reference".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2548] Zorn, G., "Microsoft Vendor-Specific RADIUS Attributes", RFC 2548, March 1999, <http://www.ietf.org/rfc/rfc2548.txt>

[RFC2716] Aboba, B. and Simon, D., "PPP EAP TLS Authentication Protocol", RFC 2716, October 1999, <http://www.ietf.org/rfc/rfc2716.txt>

[RFC2759] Zorn, G., "Microsoft PPP CHAP Extensions, Version 2", RFC 2759, January 2000, <http://www.ietf.org/rfc/rfc2759.txt>

[RFC3079] Zorn, G., "Deriving Keys for Use with Microsoft Point-to-Point Encryption (MPPE)", RFC 3079, March 2001, <http://www.ietf.org/rfc/rfc3079.txt>

[RFC3748] Aboba, B., Blunk, L., Vollbrecht, J., Carlson, J., and Levkowitz, H., "Extensible Authentication Protocol (EAP)", RFC 3748, June 2004, <http://www.ietf.org/rfc/rfc3748.txt>

[UNICODE5.0.0/2007] The Unicode Consortium, "Unicode 5.0.0", 2007, <http://www.unicode.org/versions/Unicode5.0.0/>

1.2.2 Informative References

[IEEE802.1X] Institute of Electrical and Electronics Engineers, "IEEE Standard for Local and Metropolitan Area Networks - Port-Based Network Access Control", December 2004, <http://ieeexplore.ieee.org/iel5/9828/30983/01438730.pdf>

[MS-GPWL] Microsoft Corporation, "Group Policy: Wireless/Wired Protocol Extension".

[MS-PEAP] Microsoft Corporation, "Protected Extensible Authentication Protocol (PEAP)".

[RFC1661] Simpson, W., Ed., "The Point-to-Point Protocol (PPP)", STD 51, RFC 1661, July 1994, <http://www.ietf.org/rfc/rfc1661.txt>

[RFC2865] Rigney, C., Willens, S., Rubens, A., and Simpson, W., "Remote Authentication Dial In User Service (RADIUS)", RFC 2865, June 2000, <http://www.ietf.org/rfc/rfc2865.txt>

[RFC2869] Rigney, C., Willats, W., and Calhoun, P., "RADIUS Extensions", RFC 2869, June 2000, <http://www.ietf.org/rfc/rfc2869.txt>

1.3 Overview

When users or devices are attached to a network, network administrators often require them to be authenticated and authorized before they access the network. For example, a wireless network administrator might allow only known users to connect to the network. Similarly, a virtual private network (VPN) operator might require that only known and authorized users have remote network access.

The Extensible Authentication Protocol (EAP) enables extensible authentication for network access. **EAP methods** operate within the **EAP** framework to support a variety of authentication techniques. For example, an administrator who requires digital certificate-based authentication might deploy the EAP-TLS method. For more information, see [RFC2716].

Strong credentials such as digital certificates offer many security benefits. However, in many environments these credentials can be prohibitively expensive to send to clients. In such environments, an administrator might use a simple password-based EAP method where the client and server have shared authentication.

The Extensible Authentication Protocol Method for Microsoft Challenge Handshake Authentication Protocol (CHAP) is an EAP method that is designed to meet this need. It does so by having the client and server use MSCHAPv2 to mutually authenticate each other.

To understand the Extensible Authentication Protocol Method for Microsoft CHAP, it is necessary to understand both EAP and MSCHAPv2, as specified in [RFC3748] sections 3 and 4, and [RFC2759] section 1, respectively.

The flow for successful authentication with Extensible Authentication Protocol Method for Microsoft CHAP is as follows:

1. An EAP **session** is established between a client (**EAP peer**) and an **EAP server**.
2. The EAP server and EAP peer negotiate the EAP method to use. The Extensible Authentication Protocol Method for Microsoft CHAP is selected.
3. The EAP peer and EAP server continue to exchange EAP messages with MSCHAPv2 packets encapsulated in the payload.
4. After the MSCHAPv2 packets successfully authenticate the client and the server to each other, the EAP authentication finishes.

The Extensible Authentication Protocol Method for Microsoft CHAP is exposed to the same security threats as MSCHAPv2 and should needs to be protected inside a secure tunnel, such as the one specified in [MS-PEAP].

The Extensible Authentication Protocol Method for Microsoft CHAP is typically deployed in an environment such as the one that is shown in the following diagram. The EAP peer mutually authenticates with an EAP server through a network access server, for example, a Point-to-Point Protocol (PPP) dial-up server, wireless access point, or VPN gateway.

The Extensible Authentication Protocol Method for Microsoft CHAP messages are carried from the EAP peer to the network access server (NAS) over lower-layer protocols, such as PPP or 802.1X (Port-Based Network Access Control, which is an IEEE standard for local and metropolitan area networks) [IEEE802.1X].

The Extensible Authentication Protocol Method for Microsoft CHAP messages are then carried from the network access server to the EAP server over a higher-level protocol, such as Remote Authentication Dial-In User Service (RADIUS). For more information about RADIUS, see [RFC2865] and [RFC2869].

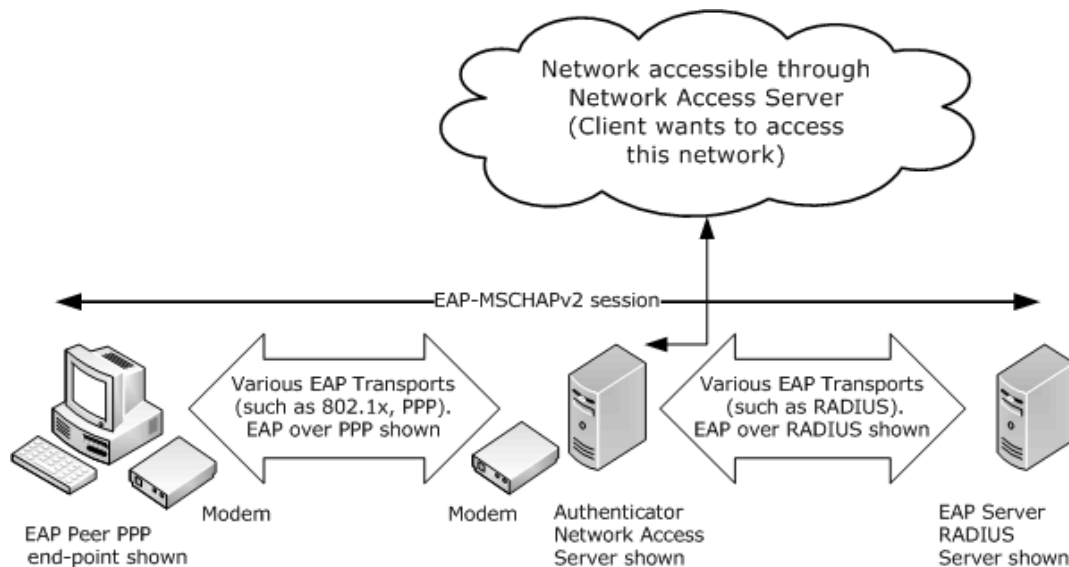


Figure 1: Typical deployment of Extensible Authentication Protocol Method for Microsoft CHAP

1.4 Relationship to Other Protocols

The Extensible Authentication Protocol Method for Microsoft CHAP is an EAP method that encapsulates MSCHAPv2 messages to provide password-based authentications in the EAP framework.

The Extensible Authentication Protocol Method for Microsoft CHAP, like EAP, can run over any EAP transport that is specified in [RFC3748]. For more information, refer to the Point-to-Point Protocol (PPP) [RFC1661], PEAP [MS-PEAP], or RADIUS [RFC2865].

The Extensible Authentication Protocol Method for Microsoft CHAP should not be confused with its separate from another protocol, specified in [IANA-EAP], that which has the EAP method type of 0x1D (decimal 29) and the same type description as the Extensible Authentication Protocol Method for Microsoft CHAP. this protocol. The protocol with that EAP method type 0x1D (decimal 29) is unused.

The diagram in section 2.1 illustrates the relationship between EAP [RFC3748], the Extensible Authentication Protocol Method for Microsoft CHAP, and MSCHAPv2 [RFC2759].

The protocol has a configuration setting called **fUseWinLogonCreds**, as specified in section 3.1.1. The EAP peer that initializes this protocol is responsible for configuring this setting as well. The peer itself might be configured through the **group policy**. For example, the Group Policy: Wireless/Wired Protocol Extension [MS-GPWL] specifies the group policy protocol to configure and deploy wireless local area network (WLAN). This configuration also carries the EAP method configuration as a part of it. The peer can use this configuration to initialize the MS-CHAP method.

1.5 Prerequisites/Preconditions

The Extensible Authentication Protocol Method for Microsoft CHAP has no specific prerequisites or preconditions; however, both EAP and MSCHAPv2 have their own prerequisites, as specified in [RFC3748] and [RFC2759], respectively.

For example, MSCHAPv2 depends on the out-of-band establishment of a shared secret between a **peer** and its **authentication server**. EAP depends on the out-of-band configuration of which methods are supported by a peer and its EAP server.

1.6 Applicability Statement

The Extensible Authentication Protocol Method for Microsoft CHAP is used when an EAP session is already set up and MSCHAPv2 is negotiated between a peer and its EAP server, as specified in [RFC3748] and [RFC2759], respectively.

The Extensible Authentication Protocol Method for Microsoft CHAP is susceptible to **dictionary attacks** and any other vulnerabilities of MSCHAPv2. ~~It should only be used by~~By itself, it is only appropriate for use in environments where it is safe from eavesdroppers. In other cases (for example, in wireless networks), it is recommended that EAP with the MSCHAPv2 authentication method is run with **encryption** to provide additional protection.

The client and server implementations of this protocol will interoperate if the username is made up of standard ASCII characters. If the username is made up of extended ASCII characters, the **code pages** of the client and server have to be the same for the client and server to interoperate.

For more information, see [MS-PEAP] or [RFC2716].

The Extensible Authentication Protocol Method for Microsoft CHAP security claims are specified in section 5.

The client and server implementations of this protocol have to use the same system active **ANSI code page** as specified in [MS-UCODEREF] section 2.2.1 for them to interoperate successfully.

1.7 Versioning and Capability Negotiation

None.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

Parameter	Value	Reference
EAP Type ID "MS-EAP-Authentication"	0x1A (decimal 26)	[IANA-EAP]

2 Messages

2.1 Transport

When MSCHAPv2 is used as an EAP authentication method, protocols that carry EAP ultimately provide the transport of the encapsulated MSCHAPv2 messages, for example, the Point-to-Point Protocol (PPP) [RFC1661], 802.1X [IEEE802.1X], and RADIUS [RFC2865].

In the following diagram, the shaded regions represent the Extensible Authentication Protocol Method for Microsoft CHAP.

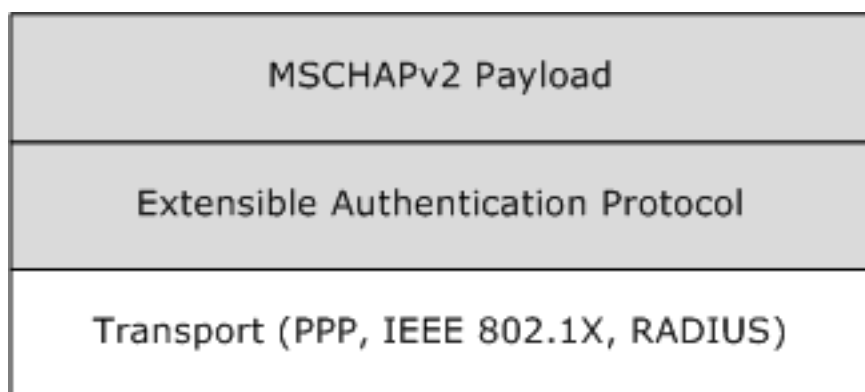


Figure 2: Transport representation for the Extensible Authentication Protocol Method for Microsoft CHAP

2.2 Message Syntax

All message fields are transmitted from left to right, unless otherwise indicated.

The general format of EAP-MSCHAPv2 request and response messages is to embed MSCHAPv2 [RFC2759] packets in the Type-Data (or the payload) part of an EAP [RFC3748] message. In two response messages, only the MSCHAPv2 Success/Failure Code value is encapsulated instead of the whole MSCHAPv2 packet.

The following table specifies the encapsulation of MSCHAPv2 in EAP request messages, which are received by the peer. The format of EAP request messages are specified in [RFC3748] section 4.1, with the **Type** field set to 0x1A and an OpCode of 01 for request. <1>

EAP-MSCHAPv2 message	Encapsulation
Challenge-Request	MSCHAPv2 Challenge Packet
Success-Request	MSCHAPv2 Success Packet
Failure-Request	MSCHAPv2 Failure Packet

The MSCHAPv2 Failure packet, encapsulated in a Failure-Request packet, SHOULD have the **E** field (error code) set to ERROR_PASSWD_EXPIRED(648) or ERROR_AUTHENTICATION_FAILURE(691). The **R** bit can be set to zero or one as specified in section 3.3.5.2. The **C** field is the challenge value and the **V** field SHOULD always be set to 3 (as specified in [RFC2759]). The M=<msg> field is currently not used. The processing rules for the Failure-Request packet are as specified in sections 3.2.5.4 and 3.3.5.2.

The following table specifies the encapsulation of MSCHAPv2 in EAP response messages, which are received by the EAP server. The format of EAP response messages is specified in [RFC3748] section 4.1, with the **Type** field set to 0x1A and an OpCode of 02 for response.

EAP-MSCHAPv2 message	Encapsulation
Challenge-Response	MSCHAPv2 Response Packet
Success-Response	MSCHAPv2 Success Code value only
Failure-Response	MSCHAPv2 Failure Code value only
Change-Password-Response	MSCHAPv2 Change-Password Packet

3 Protocol Details

The following sections specify details of the Extensible Authentication Protocol Method for Microsoft CHAP, including abstract data models and message processing rules.

The protocol details that follow are presented in three sections:

- Common details for both peer and EAP servers (section 3.1)
- Peer-specific details (section 3.2)
- EAP server-specific details (section 3.3)

3.1 Common Details

The details in this section are common to both peers and EAP server.

3.1.1 Abstract Data Model

This section describes a conceptual model that an implementation can maintain to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This specification does not mandate that an implementation adhere to this model as long as the external behavior of the implementation is consistent with the behavior that is described in this document.

The **EAP-CHAP** peer and server participating in this protocol must maintain the following variables.

PeerChallenge: A 16-octet random number generated by peer and used in the generation of NT Response ([RFC2759] section 4), Master Session Key (section 3.1.5.1), and AuthenticatorResponse ([RFC2759] section 5).

AuthenticatorChallenge: A 16-octet random number generated by EAP Server and used in the generation of NT Response ([RFC2759] section 4), Master Session Key (section 3.1.5.1), and AuthenticatorResponse ([RFC2759] section 5).

Username: A 0-256 octet string formed by using the system active **ANSI code page** as specified in [MS-UCODEREF] section 2.2.1, and used in the generation of NT Response ([RFC2759] section 4), Master Session Key (section 3.1.5.1), and AuthenticatorResponse ([RFC2759] section 5).

Password: A 0-256 Unicode string (generated using Normalization Form C [UNICODE5.0.0/2007]), used in the generation of NT Response ([RFC2759] section 4), Master Session Key (section 3.1.5.1), and AuthenticatorResponse ([RFC2759] section 5). The **Password** could belong to a **user** or a machine, and is obtained in an implementation-specific mechanism.

fUseWinLogonCreds: A Boolean flag (configured through LogonCreds flag as specified in [MS-GPWL] section 2.2.3.1.3) indicating whether **Username** and **Password** are obtained from the currently logged on user context.

3.1.2 Timers

EAP-CHAP relies on EAP timers, as specified in [RFC3748] section 4.3.

3.1.3 Initialization

See sections 3.2.3 and 3.3.3.

3.1.4 Higher-Layer Triggered Events

None.

3.1.5 Message Processing Events and Sequencing Rules

The Extensible Authentication Protocol Method for Microsoft CHAP uses the common message processing events and sequencing rules specified for EAP in [RFC3748]. These include:

- The optional EAP-Identity message exchange prior to authentication, which is used when an **authenticator** does not know the identity of a peer (as specified in [RFC3748] section 3.1).
- EAP Request/Response processing.
- EAP Success/Failure, which indicates the termination of the authentication phase.

An implementation **MUST** follow the semantics for all EAP messages, as specified in [RFC3748].

If a peer or an EAP server receives an invalid Extensible Authentication Protocol Method for Microsoft CHAP message, the authentication phase **MUST** terminate. In this instance, invalid means "not conforming to this specification".

EAP method execution at an entity involves processing the embedded MSCHAPv2 packet (if any) from the received Extensible Authentication Protocol Method for Microsoft CHAP message. Any processing of an embedded MSCHAPv2 message **MUST** be done as specified in [RFC2759]. Any resulting MSCHAPv2 message is embedded into a new EAP message and returned to the remote entity. The following list provides more detail.

- If the MSCHAPv2 processing generates a new MSCHAPv2 packet, it **MUST** be enclosed as a Type-Data of an EAP message with Type-Code set to 0x1A and sent to the other end. The rules for selecting the appropriate EAP code value for the MSCHAPv2 code value are specified in section 2.
- If the MSCHAPv2 processing results in an error, the peer and EAP server processing differ from each other. Message processing events are specified in sections 3.2.5 and 3.3.5.
- If the MSCHAPv2 processing results in either an error or a new MSCHAPv2 packet (as happens when a peer receiving a Success-Request message that has an embedded MSCHAPv2 Success packet is validated successfully), the applicable message processing events are as specified in section 3.2.5.

3.1.5.1 Master Session Key (MSK) Derivation

Upon successful authentication, Extensible Authentication Protocol Method for Microsoft CHAP derives two 16-byte keys, MasterSendKey and MasterReceiveKey (as specified in [RFC3079], section 3.3).

MS-MPPE key attributes, defined in [RFC2548] section 2.4.2 and 2.4.3, are defined as follows on an Authenticator:

```
MS-MPPE-Recv-Key      = MasterReceiveKey
MS-MPPE-Send-Key      = MasterSendKey
```

MS-MPPE keys attributes on a Peer are as populated as follows.

```
MS-MPPE-Recv-Key      = MasterSendKey
MS-MPPE-Send-Key      = MasterReceiveKey
```

The **Master Session Key** [RFC3748] is derived from the two keys as follows:

MSK = MasterReceiveKey + MasterSendKey + 32 bytes zeroes (padding)

3.1.5.2 username

The **username** field is used in different routines, as specified in [RFC2759]. It is formed using the system's ANSI code page.

[RFC2759] implementations MUST treat username as an opaque stream of bytes and MUST NOT convert it into ASCII format.

3.1.6 Timer Events

EAP-CHAP relies on the timer events in EAP, as specified in [RFC3748] section 4.3.

3.1.7 Other Local Events

None.

3.2 Peer Details

The details in this section are peer-specific.

3.2.1 Abstract Data Model

This section describes a model of possible data organization that a peer-side implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This specification does not mandate that an implementation adhere to this model as long as the external behavior of the implementation is consistent with what is described in this specification.

The peer maintains the current state of the authentication in an integer variable called **currentState**. The **currentState** variable is initialized to EAP_CHAP_BEGIN when the client starts the EAP-CHAP authentication, and remains valid until the authentication is completed. At any point in time, the **currentState** variable can have one of the following values, each one representing the current state of the client machine.

- EAP_CHAP_BEGIN
- EAP_CHAP_CHALLENGE_RESPONSE_SENT
- EAP_CHAP_SUCCESS_RESPONSE_SENT
- EAP_CHAP_FAILURE_RESPONSE_SENT
- EAP_CHAP_SUCCESS
- EAP_CHAP_FAILED

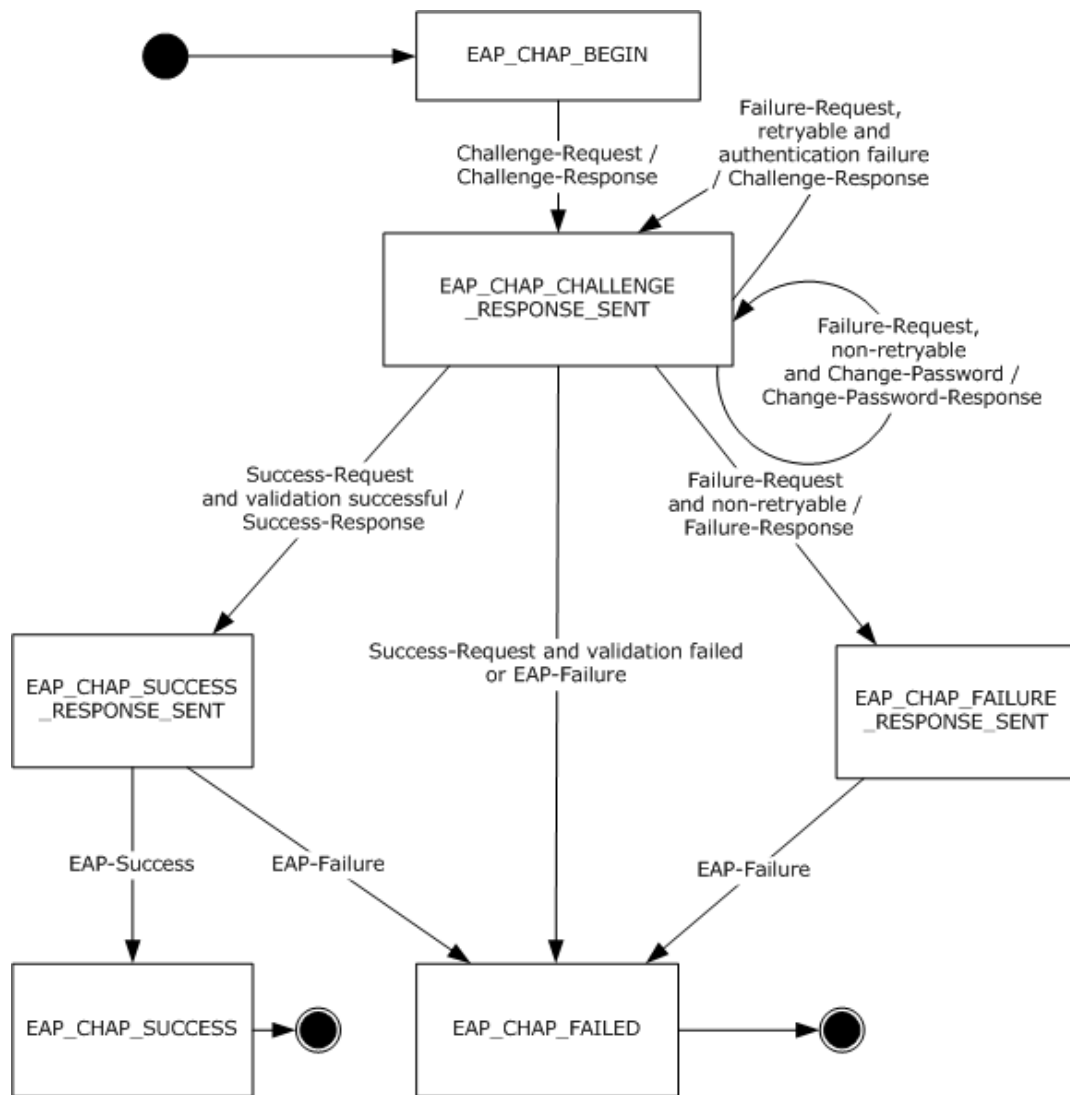


Figure 3: EAP-CHAP Peer State Machine

3.2.2 Timers

See section 3.1.2.

3.2.3 Initialization

The Extensible Authentication Protocol Method for Microsoft CHAP is initialized on the peer when it is invoked by EAP as an authentication method. This initialization occurs when an Extensible Authentication Protocol Method for Microsoft CHAP Challenge-Request message is received from the EAP server. <2> The **currentState** variable is initialized to EAP_CHAP_BEGIN.

3.2.4 Higher-Layer Triggered Events

As specified in [RFC3748] sections 3.2 and 3.3, EAP gets used directly on top of data link layers such as [IEEE802.1X] or Point-to-Point Protocol. The data link layer initializes EAP for use as the authentication mechanism, which ultimately results in an EAP server or Authenticator sending an

Identity Request message (as specified in [RFC3748] section 5.1) or a Challenge-Request message (in case the identity exchange is optional as specified in [RFC3748] section 7.3). If the peer EAP layer receives an Identity request, it requests the identity from the EAP-CHAP method. EAP-CHAP obtains the Username and Password using an implementation-specific mechanism and gives the Username as the identity. <3>

3.2.5 Message Processing Events and Sequencing Rules

3.2.5.1 General Packet Validation

When receiving a packet, the EAP-CHAP peer MUST validate that the packet conforms to the syntax as specified in Message Syntax (section 2.2). If an invalid packet is received, it MUST be discarded.

3.2.5.2 Received Challenge-Request Packet

If the **currentState** variable is set to EAP_CHAP_BEGIN, then:

- Assign the Challenge obtained from the embedded MSCHAPv2 packet to **AuthenticatorChallenge**.
- If the **Username** and **Password** are not obtained as specified in the section 3.2.4, then the **Username** and **Password** are obtained using an implementation-specific mechanism.<4> If the **fUseWinLogonCreds** element is set, then **Username** and **Password** are obtained from the presently logged on user context by using an implementation-specific mechanism.
- Generate a **PeerChallenge**, as specified in [RFC2759] section 4.
- Prepare a Challenge-Response packet that embeds an MSCHAPv2 Challenge-Response packet, and send it to the server.
- Set **currentState** to EAP_CHAP_CHALLENGE_RESPONSE_SENT.

If the **currentState** variable is not set to EAP_CHAP_BEGIN, the packet is ignored.

3.2.5.3 Received Success-Request Packet

If the **currentState** variable is set to EAP_CHAP_CHALLENGE_RESPONSE_SENT, then:

- Validate the embedded MSCHAPv2 Success packet, as specified in [RFC2759] section 8.8.
- If the validation is successful, then:
 - Prepare a Success-Response packet, and send it to the server.
 - Set **currentState** to EAP_CHAP_SUCCESS_RESPONSE_SENT.
- If validation fails, then:
 - Trigger the transport layer with the authentication result as Failed.
 - Set **currentState** to EAP_CHAP_FAILED.

If the **currentState** variable is not set to EAP_CHAP_CHALLENGE_RESPONSE_SENT, the packet is ignored.

3.2.5.4 Received Failure-Request Packet

If the **currentState** variable is set to EAP_CHAP_CHALLENGE_RESPONSE_SENT, then:

- If the embedded MSCHAPv2 packet's **R** bit is set to 1 ([RFC2759] section 6), then:
 - Assign the Challenge obtained from the embedded MSCHAPv2 Failure packet to **AuthenticatorChallenge**.
 - Obtain the **Password** using an implementation-specific mechanism.
 - Generate a **PeerChallenge**, as specified in [RFC2759] section 4.
 - Prepare a Challenge-Response packet which embeds the MSCHAPv2 Challenge-Response packet, and send it to the server.
 - Leave the **currentState** set at EAP_CHAP_CHALLENGE_RESPONSE_SENT.
- If the embedded MSCHAPv2 packet's **R** bit is set to zero ([RFC2759] section 6), and the error code is set to password expiration error, then:
 - Assign the Challenge obtained from the embedded MSCHAPv2 Failure packet to **AuthenticatorChallenge**.
 - Obtain the **Password** using an implementation-specific mechanism.
 - Generate a **PeerChallenge**, as specified in [RFC2759] section 4.
 - Prepare a Change-Password-Response packet which embeds the MSCHAPv2 Change-Password packet, and send it to the server.
 - Leave the **currentState** set at EAP_CHAP_CHALLENGE_RESPONSE_SENT.
- If the embedded MSCHAPv2 packet's **R** bit is set to zero ([RFC2759] section 6) and the error code is not set to password expiration error, then:
 - The peer SHOULD trigger the transport layer with the authentication result as Failed and set **currentState** to EAP_CHAP_FAILED or, MAY prepare a Failure-Response packet, send it to the server, and set **currentState** to EAP_CHAP_FAILURE_RESPONSE_SENT.

If the **currentState** variable is not set to EAP_CHAP_CHALLENGE_RESPONSE_SENT, the packet is ignored.

3.2.5.5 Received EAP Success Packet

If the **currentState** variable is set to EAP_CHAP_SUCCESS_RESPONSE_SENT, then:

- Obtain the Master Session Key (section 3.1.5.1) using **AuthenticatorChallenge**, **PeerChallenge**, **Username**, and **Password**.
- Trigger the transport layer with the authentication result as Success, and pass the Master Session Key to the transport layer.
- Set **currentState** to EAP_CHAP_SUCCESS.

If the **currentState** variable is not set to EAP_CHAP_SUCCESS_RESPONSE_SENT, the packet is ignored.

3.2.5.6 Received EAP Failure Packet

If the **currentState** variable is set to EAP_CHAP_SUCCESS_RESPONSE_SENT, EAP_CHAP_FAILURE_RESPONSE_SENT, or EAP_CHAP_CHALLENGE_RESPONSE_SENT, then:

- Trigger the transport layer with the authentication result as Failed.

- Set **currentState** to EAP_CHAP_FAILED.

If the **currentState** variable is not set to EAP_CHAP_SUCCESS_RESPONSE_SENT, EAP_CHAP_FAILURE_RESPONSE_SENT, or EAP_CHAP_CHALLENGE_RESPONSE_SENT, the packet is ignored.

3.2.6 Timer Events

See section 3.1.6.

3.2.7 Other Local Events

None.

3.3 EAP Server Details

The details in this section are specific to EAP server.

3.3.1 Abstract Data Model

This section describes a model of possible data organization that a peer-side implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This specification does not mandate that an implementation adhere to this model as long as the external behavior of the implementation is consistent with the behavior that is described in this document.

The EAP-CHAP server participating in this protocol MUST maintain the following variables:

RetryCount: An unsigned integer indicating the number of times the peer will be allowed to resubmit the challenge response. This variable is initialized to a non-negative integer as part of EAP-CHAP method configuration and is used as specified in section 3.3.5.2.

AllowPasswordChange: A Boolean variable indicating whether the server ~~should allow~~allows the client to change the client password after it has expired. This variable is initialized as part of EAP-CHAP method configuration and is used as specified in section 3.3.5.2.

The server maintains the current state of the authentication in an integer variable called **currentState**. The **currentState** variable is initialized when the server starts the EAP-CHAP authentication, and remains valid until authentication is completed. At any point in time, the **currentState** variable can have one of the following values, each one representing the current state of the server.

- EAP_CHAP_CHALLENGE_SENT
- EAP_CHAP_SUCCESS_REQUEST_SENT
- EAP_CHAP_FAILURE_REQUEST_SENT
- EAP_CHAP_CHANGE_PASSWORD_SENT
- EAP_CHAP_SUCCESS
- EAP_CHAP_FAILED

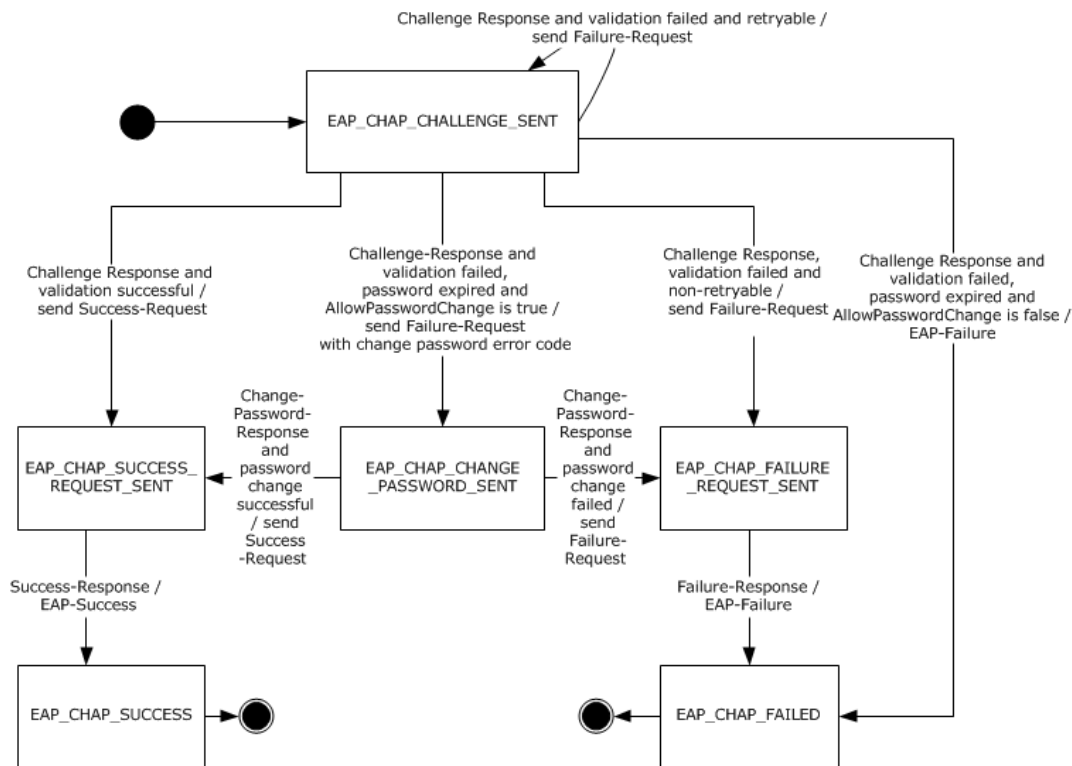


Figure 4: EAP-CHAP server state machine

3.3.2 Timers

The Extensible Authentication Protocol Method for Microsoft CHAP relies on the timers in the Extensible Authentication Protocol (EAP) [RFC3748], for EAP server. See section 3.1.2.

3.3.3 Initialization

The Extensible Authentication Protocol Method for Microsoft CHAP is initialized on the EAP server when it is invoked by EAP as an authentication method. This initialization occurs when an EAP-enabled protocol (such as RADIUS [RFC2865]) invokes EAP. The EAP server responds with EAP-CHAP, and the peer performs an EAP-CHAP negotiation. After the transport layer indicates to initiate an authentication, the server prepares a Challenge-Request packet, and sends it to the peer. The **currentState** variable is initialized to EAP_CHAP_CHALLENGE_SENT, and the Challenge sent in the Challenge-Request message is assigned to **AuthenticatorChallenge**.

3.3.4 Higher-Layer Triggered Events

The Extensible Authentication Protocol Method for Microsoft CHAP is initialized on the EAP server when it is invoked by EAP as an authentication method. This occurs when an EAP-enabled protocol, such as RADIUS [RFC2865], invokes EAP. The EAP server proposes the use of the Extensible Authentication Protocol Method for Microsoft CHAP by sending a Challenge-Request message to the peer.<5>

3.3.5 Message Processing Events and Sequencing Rules

3.3.5.1 General Packet Validation

When receiving a packet, the EAP-CHAP server MUST validate that the packet conforms to the syntax as specified in Message Syntax (section 2.2). If an invalid packet is received, it MUST be discarded.

3.3.5.2 Received Challenge-Response Packet

If the **currentState** variable is set to EAP_CHAP_CHALLENGE_SENT, then:

- Obtain the **Username** and **PeerChallenge** from the embedded MSCHAPv2 Challenge-Response packet.
- Obtain the user (specified by **Username**) **Password** using an implementation-specific mechanism.
- Validate the embedded MSCHAPv2 Challenge-Response packet, as specified in [RFC2759] section 4.
- If the validation is successful, then:
 - Prepare a Success-Request packet which embeds the resulting MSCHAPv2 Success packet, and send it to the peer.
 - Set **currentState** to EAP_CHAP_SUCCESS_REQUEST_SENT.
- If the validation fails due to an expired password and AllowPasswordChange is true, then:
 - Prepare a Failure-Request packet that embeds the MSCHAPv2 Failure packet with the **R** bit set to zero and the corresponding validation error, and send it to the peer.
 - Obtain the **AuthenticatorChallenge** from the Failure-Request packet.
 - Set **currentState** to EAP_CHAP_CHANGE_PASSWORD_SENT.
- If the validation fails due to an expired password and AllowPasswordChange is false, then:
 - Prepare an **EAP Failure packet** and send it to the peer.
 - Set **currentState** to EAP_CHAP_FAILED.
- If the validation fails due to authentication failure ([RFC2759] section 6) and the **RetryCount** datum is nonzero, then:
 - Prepare a Failure-Request packet which embeds the MSCHAPv2 Failure packet with **R** bit set to one and the corresponding validation error, and send it to the peer.
 - Decrement the **RetryCount** datum by one.
 - Obtain the AuthenticatorChallenge from the Failure-Request packet.
 - Leave **currentState** set at EAP_CHAP_CHALLENGE_SENT.
- If the validation fails because on an authentication failure ([RFC2759] section 6) and the **RetryCount** datum is zero, then:<6>
 - Prepare a Failure-Request packet which embeds the MSCHAPv2 Failure packet with the **R** bit set to zero and the corresponding validation error, and send it to the peer.
 - Set **currentState** to EAP_CHAP_FAILURE_REQUEST_SENT.

If the **currentState** variable is not set to EAP_CHAP_CHALLENGE_SENT, the packet is ignored.

3.3.5.3 Received Success-Response Packet

If the **currentState** variable is set to EAP_CHAP_SUCCESS_REQUEST_SENT, then:

- Prepare an EAP Success packet, and send it to the peer.
- Obtain a Master Session Key (section 3.1.5.1) using **AuthenticatorChallenge**, **PeerChallenge**, **Username**, and **Password**.
- Trigger the transport layer with the authentication result as Success, and pass the Master Session Key to the transport layer.
- Set **currentState** to EAP_CHAP_SUCCESS.

If the **currentState** variable is not set to EAP_CHAP_SUCCESS_REQUEST_SENT, the packet is ignored.

3.3.5.4 Received Change-Password-Response Packet

If the **currentState** variable is set to EAP_CHAP_CHANGE_PASSWORD_SENT, then:

- Obtain **PeerChallenge** from the embedded MSCHAPv2 Change-Password-Response packet.
- Validate the embedded MSCHAPv2 Change-Password-Response packet, as specified in [RFC2759] section 7.
- If the validation is successful, then:
 - Obtain the new **Password** from the embedded MSCHAPv2 Change-Password-Response packet.
 - Prepare a Success-Request packet which embeds the MSCHAPv2 Success-Request packet, and send it to the peer.
 - Set **currentState** to EAP_CHAP_SUCCESS_REQUEST_SENT.
- If the validation fails, then: <7>
 - Prepare a Failure-Request packet which embeds the MSCHAPv2 Failure packet that corresponds to the validation error, and send it to the peer.
 - Set **currentState** to EAP_CHAP_FAILURE_REQUEST_SENT.

If the **currentState** variable is not set to EAP_CHAP_CHANGE_PASSWORD_SENT, the packet is ignored.

3.3.5.5 Received Failure-Response Packet

If the **currentState** variable is set to EAP_CHAP_FAILURE_REQUEST_SENT, then:

- Prepare an EAP Failure packet, and send it to the peer.
- Set **currentState** to EAP_CHAP_FAILED.

If the **currentState** variable is not set to EAP_CHAP_FAILURE_REQUEST_SENT, the packet is ignored.

3.3.6 Timer Events

See section 3.1.6.

3.3.7 Other Local Events

None.

4 Protocol Examples

This section presents examples of messages exchanged between a peer and an EAP server during the course of various authentication scenarios. Initial EAP Identity exchanges and a pass-through authenticator are not shown in the examples. EAP-Success and EAP-Failure messages are shown to indicate the status of the authentication.

4.1 Successful Mutual Authentication

This example shows a peer and an EAP server successfully using Extensible Authentication Protocol Method for Microsoft CHAP messages for **mutual authentication**.

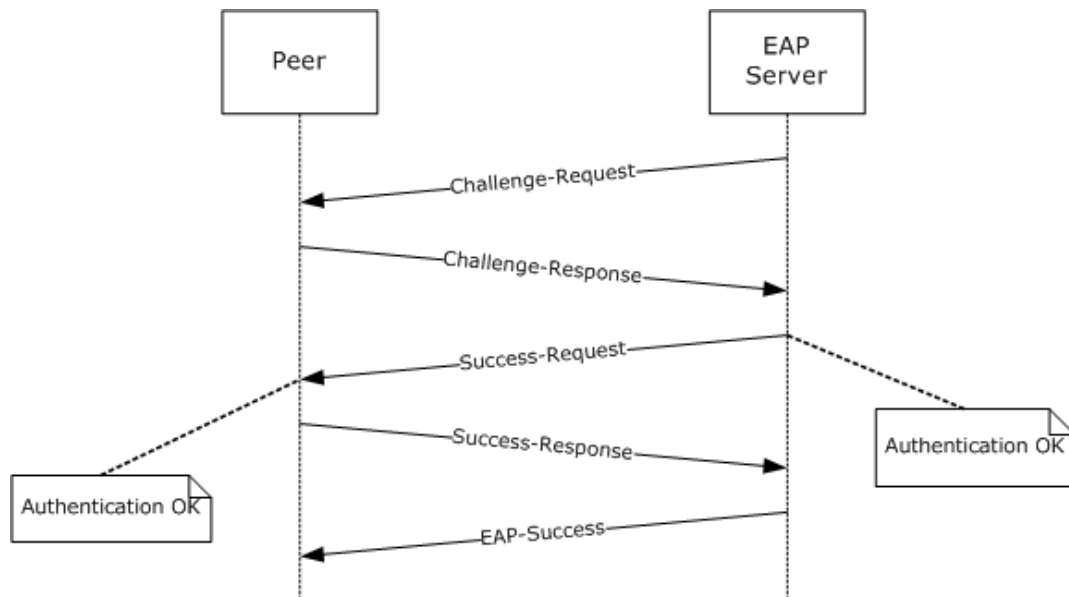


Figure 5: Peer and EAP server using successful mutual authentication

4.2 Failure Scenario with Retry

This example shows an authentication failure that was then retried, a subsequent authentication failure, and the EAP server terminating the authentication procedure.

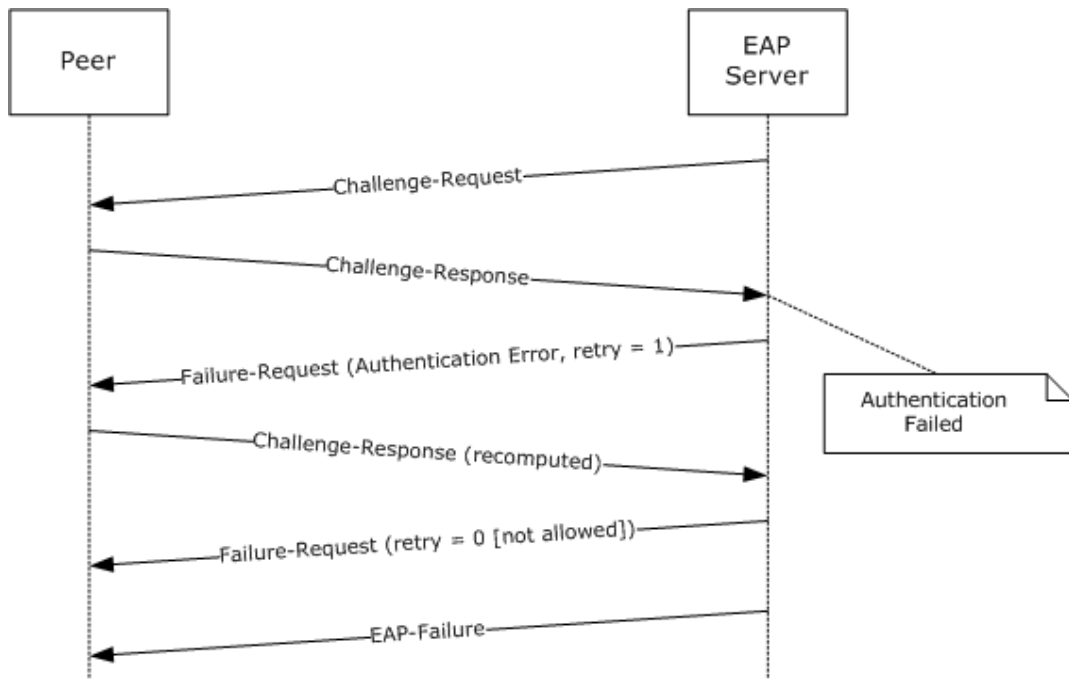


Figure 6: Authentication failure with retry that also fails

4.3 Failure Scenario with No Retry

This example shows an EAP server terminating the authentication procedure when a non-retryable error occurs. The EAP server is not allowed to transmit a Failure-Request message.

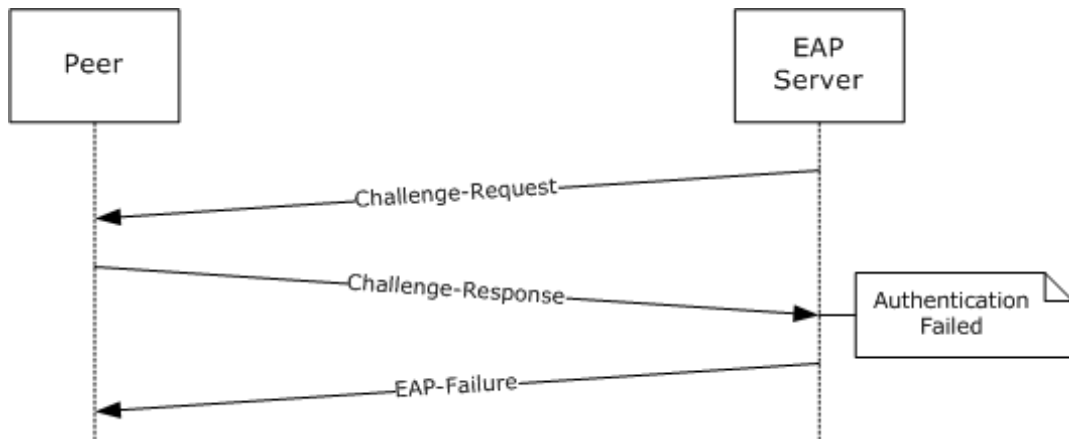


Figure 7: Authentication failure with no retry allowed

4.4 Failure Scenario with No Retry Followed by a Failure-Response

This example shows an EAP server transmitting a Failure-Request message on a non-retryable error. It also shows the peer responding with a Failure-Response message before the EAP server terminates the authentication procedure.

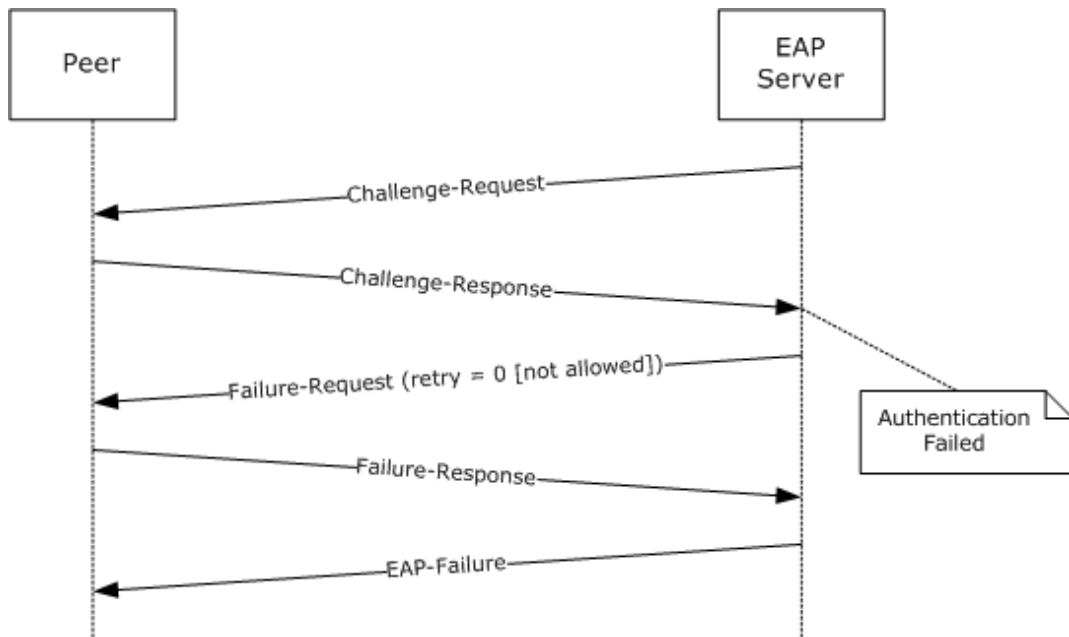


Figure 8: Failure scenario with no retry followed by a Failure-Response

4.5 Success Scenario with Change-Password-Response

This example shows a successful password change when the EAP server sends an expired password indication to the peer. Before sending such an indication, the EAP server checks the local policy to see if a password change is allowed. The peer collects a new password by invoking the user interface, and it sends a Change-Password-Response message to the EAP server.

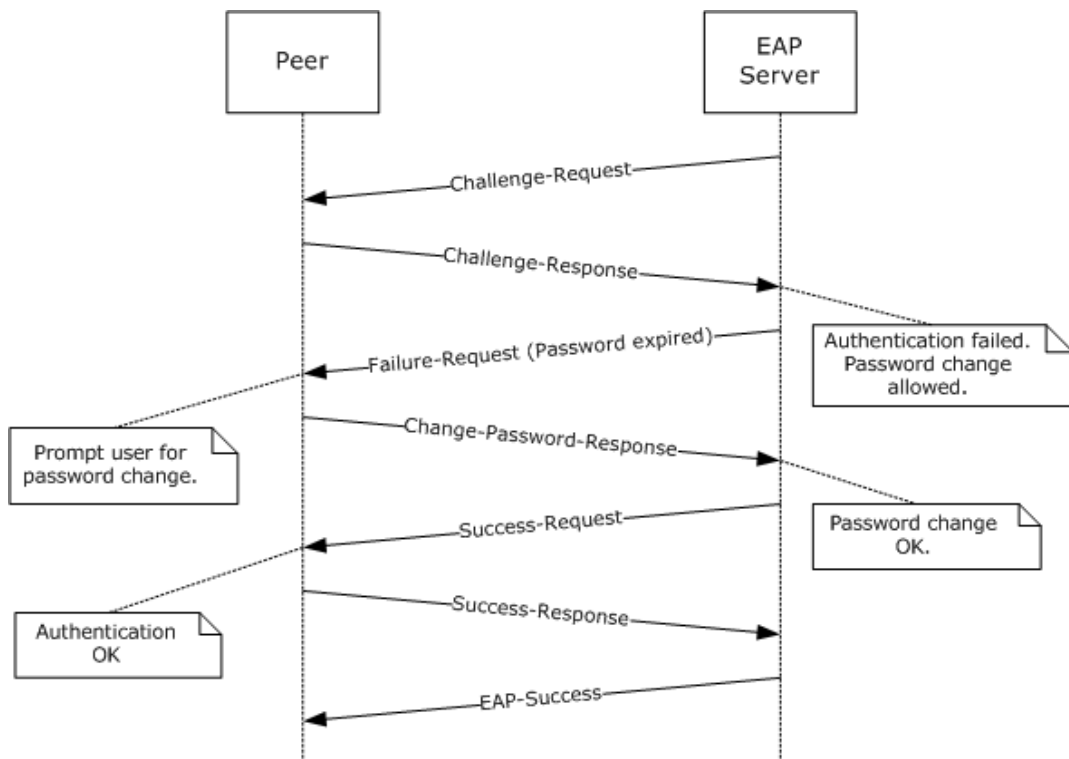


Figure 9: Success scenario with Change-Password-Response

4.6 Success Scenario on Retry After Challenge-Response Is Recomputed

This example shows the successful retry of an authentication after an attempt has failed. The EAP server sends a retryable failure indication to the peer. The peer recomputes the MSCHAPv2 response, possibly after invoking the user interface to collect the user password again.

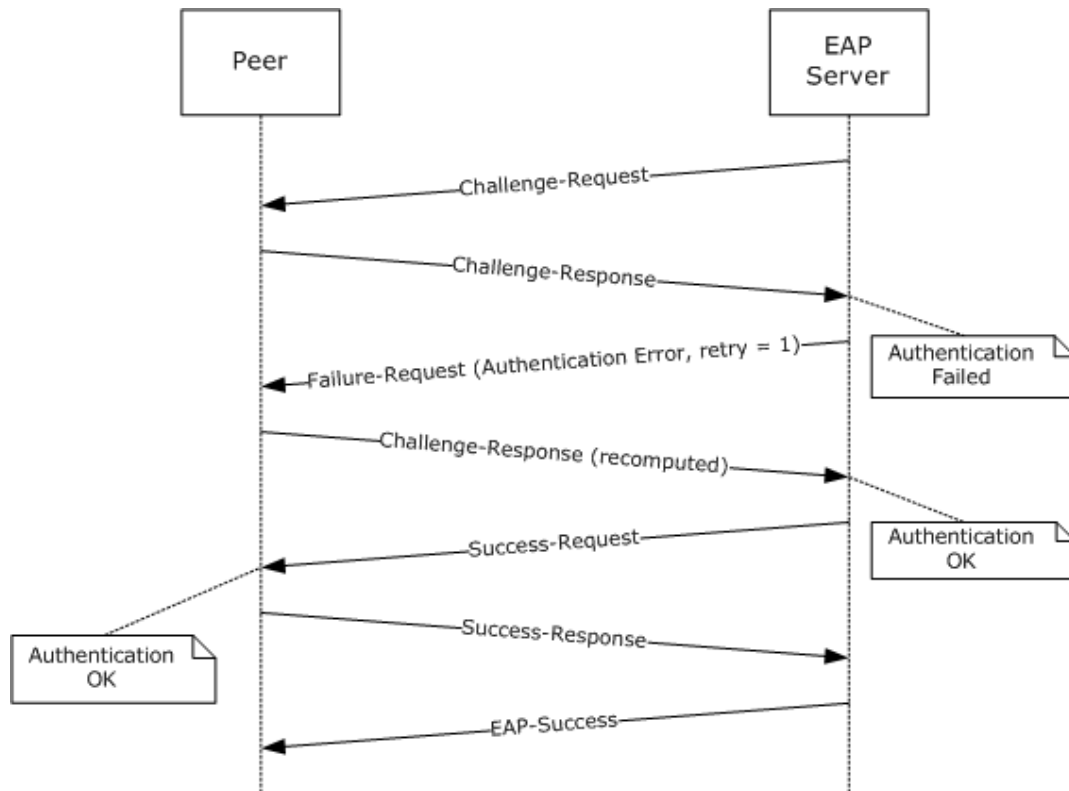


Figure 10: Success scenario on retry after Challenge-Response is recomputed

4.7 Authentication Failure at the Peer

This example shows a mutual authentication scenario in which the EAP server fails authentication at the peer.

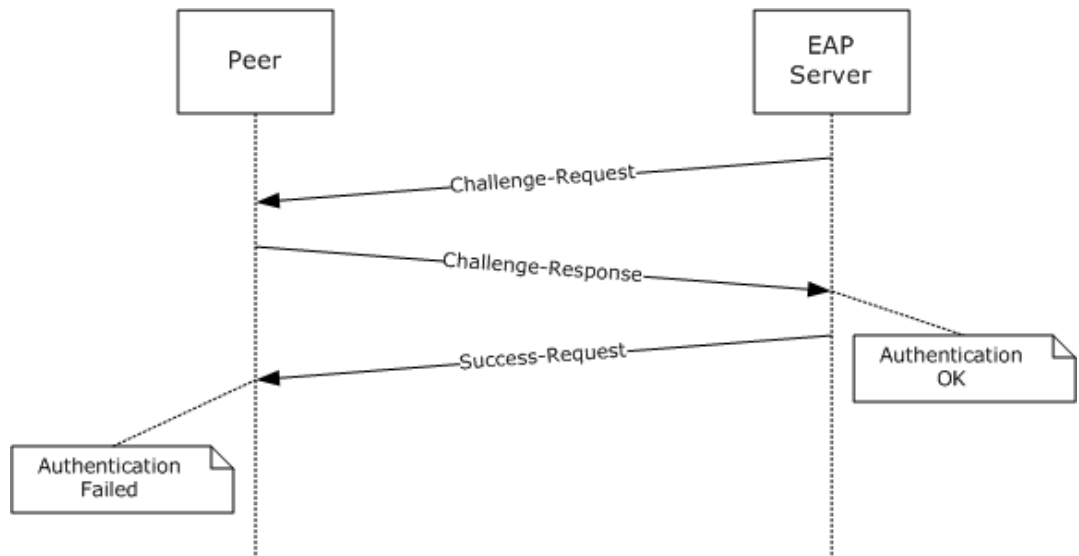


Figure 11: Authentication failure at the peer

5 Security

5.1 Security Considerations for Implementers

Running MSCHAPv2 as an EAP method has the same security considerations as running it without EAP.

Using the terminology of the Extensible Authentication Protocol (EAP) (see [RFC3748] section 7.2.1), the security claims of this specification are shown in the following table.

Authentication mechanism	Password
CipherSuite negotiation	No
Mutual authentication	Yes
Integrity protection	Yes
Replay protection	Yes
Confidentiality	No
Key derivation	Yes
Key strength	Depends on password policy.
Dictionary attack protection	No
Fast reconnect	No
Cryptographic binding	N/A
Session independence	Depends on password policy.
Fragmentation	No
Channel binding	No

5.2 Index of Security Parameters

Security parameter	Section
Challenge	See [RFC2759] section 3.
Peer-Challenge	See [RFC2759] section 4.

6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

~~Note: Some of the information in this section is subject to change because it applies to a preliminary product version, and thus may differ from the final version of the software when released. All behavior notes that pertain to the preliminary product version contain specific references to it as an aid to the reader.~~

- Windows NT operating system
- Windows 2000 operating system
- Windows Server 2003 operating system
- Windows XP operating system
- Windows Vista operating system
- Windows Server 2008 operating system
- Windows 7 operating system
- Windows Server 2008 R2 operating system
- Windows 8 operating system
- Windows Server 2012 operating system
- Windows 8.1 operating system
- Windows Server 2012 R2 operating system
- Windows 10 operating system
- Windows Server 2016 ~~Technical Preview~~ operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

<1> Section 2.2: On an EAP server, Windows initializes the EAP Identifier to zero for the first EAP identity request packet of an EAP session (as specified in [RFC3748]). From here on, for all the subsequent EAP Request messages, the Identifier is incremented by one. The peer uses the same identifier it received in the request packet for the EAP response packet (as specified in [RFC3748]).

<2> Section 3.2.3: On a peer, Windows maintains a configuration that specifies whether the Extensible Authentication Protocol Method for Microsoft CHAP is to be used.

<3> Section 3.2.4: On a peer, Windows invokes a user interface to accept the credentials from the user, and if they are provided, message processing continues. Trigger the transport layer with the authentication result as Failed, if the user cancels the authentication.

<4> Section 3.2.5.2: On a peer, Windows invokes a user interface to accept the credentials from the user, and if they are provided, message processing continues. Trigger the transport layer with the authentication result as Failed, if the user cancels the authentication.

<5> Section 3.3.4: On an EAP server, Windows maintains a list of configured EAP methods that are supported and determines if the Extensible Authentication Protocol Method for Microsoft CHAP is supported.

<6> Section 3.3.5.2: On a server, when validation fails, Windows sends an EAP Failure packet.

<7> Section 3.3.5.4: On a server, when validation fails, Windows sends an EAP Failure packet.

7 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- The removal of a document from the documentation set.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact dochelp@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.1 Abstract Data Model	72748 : Clarified origin(s) of password.	Y	Content update.

8 Index

A

Abstract data model
 peer (section 3.1.1 13, section 3.2.1 15)
 server (section 3.1.1 13, section 3.3.1 19)
Applicability 10
Applicability statement 10
Authentication failure at the peer example 27

C

Capability negotiation 10
Change tracking 32

D

Data model - abstract
 peer (section 3.1.1 13, section 3.2.1 15)
 server (section 3.1.1 13, section 3.3.1 19)
Details - overview 13

E

eap interface 19
Events
 local - server 23
 timer - server 23
Examples
 authentication failure at the peer 27
 failure scenario
 authentication at the peer 27
 no retry 25
 no retry followed by Failure-Response 25
 retry 24
 failure scenario with no retry 25
 failure scenario with no retry followed by a failure-response 25
 failure scenario with retry 24
 overview 24
 success scenario
 Change-Password-Response 26
 mutual authentication 24
 retry after Challenge-Response recomputed 27
 success scenario on retry after challenge-response is recomputed 27
 success scenario with change-password-response 26
 successful mutual authentication 24

F

Failure scenario
 authentication at the peer example 27
 no retry example 25
 no retry followed by Failure-Response example 25
 retry example 24
Failure scenario with no retry example 25
Failure scenario with no retry followed by a failure-response example 25
Failure scenario with retry example 24
Fields - vendor-extensible 10

G

General Packet Validation method 21

Glossary 6

H

Higher-layer triggered events

- peer (section 3.1.4 14, section 3.2.4 16)
- server (section 3.1.4 14, section 3.3.4 20)

I

Implementer - security considerations 29

Index of security parameters 29

Informative references 8

Initialization

- peer (section 3.1.3 13, section 3.2.3 16)
- server (section 3.1.3 13, section 3.3.3 20)

Interfaces - server

- eap 19

Introduction 6

L

Local events

- peer (section 3.1.7 15, section 3.2.7 19)
- server (section 3.1.7 15, section 3.3.7 23)

M

Message processing

peer

- Challenge-Request packet - received 17
- EAP Failure packet - received 18
- EAP Success packet - received 18
- Failure-Request packet - received 17
- general packet validation 17
- Master Session Key (MSK) derivation 14
- overview 14
- Success-Request packet - received 17
- username 15

server

- Challenge-Response packet - received 21
- Change-Password-Response packet - received 22
- Failure-Response packet - received 22
- general packet validation 21
- Master Session Key (MSK) derivation 14
- overview 14
- Success-Response packet - received 22
- username 15

Messages

- syntax 11
- transport 11

Methods

- General Packet Validation 21
- Received Challenge-Response Packet 21
- Received Change-Password-Response Packet 22
- Received Failure-Response Packet 22
- Received Success-Response Packet 22

N

Normative references 7

O

Overview (synopsis) 8

P

Parameters - security index 29

Peer

- abstract data model (section 3.1.1 13, section 3.2.1 15)
 - higher-layer triggered events (section 3.1.4 14, section 3.2.4 16)
 - initialization (section 3.1.3 13, section 3.2.3 16)
 - local events (section 3.1.7 15, section 3.2.7 19)
 - message processing
 - Challenge-Request packet - received 17
 - EAP Failure packet - received 18
 - EAP Success packet - received 18
 - Failure-Request packet - received 17
 - general packet validation 17
 - Master Session Key (MSK) derivation 14
 - overview 14
 - Success-Request packet - received 17
 - username 15
 - overview (section 3.1 13, section 3.2 15)
 - sequencing rules
 - Challenge-Request packet - received 17
 - EAP Failure packet - received 18
 - EAP Success packet - received 18
 - Failure-Request packet - received 17
 - general packet validation 17
 - Master Session Key (MSK) derivation 14
 - overview 14
 - Success-Request packet - received 17
 - username 15
 - timer events (section 3.1.6 15, section 3.2.6 19)
 - timers (section 3.1.2 13, section 3.2.2 16)
- Preconditions 10
- Prerequisites 10
- Product behavior 30
- Protocol Details
- overview 13

R

- Received Challenge-Response Packet method 21
 - Received Change-Password-Response Packet method 22
 - Received Failure-Response Packet method 22
 - Received Success-Response Packet method 22
- References 7
- informative 8
 - normative 7
- Relationship to other protocols 9

S

Security

- implementer considerations 29
- parameter index 29

Sequencing rules

peer

- Challenge-Request packet - received 17
- EAP Failure packet - received 18
- EAP Success packet - received 18
- Failure-Request packet - received 17
- general packet validation 17
- Master Session Key (MSK) derivation 14
- overview 14
- Success-Request packet - received 17

- username 15
- server
 - Challenge-Response packet - received 21
 - Change-Password-Response packet - received 22
 - Failure-Response packet - received 22
 - general packet validation 21
 - Master Session Key (MSK) derivation 14
 - overview 14
 - Success-Response packet - received 22
 - username 15
- Server
 - abstract data model (section 3.1.1 13, section 3.3.1 19)
 - eap interface 19
 - General Packet Validation method 21
 - higher-layer triggered events (section 3.1.4 14, section 3.3.4 20)
 - initialization (section 3.1.3 13, section 3.3.3 20)
 - local events (section 3.1.7 15, section 3.3.7 23)
 - message processing
 - Challenge-Response packet - received 21
 - Change-Password-Response packet - received 22
 - Failure-Response packet - received 22
 - general packet validation 21
 - Master Session Key (MSK) derivation 14
 - overview 14
 - Success-Response packet - received 22
 - username 15
 - overview (section 3.1 13, section 3.3 19)
 - Received Challenge-Response Packet method 21
 - Received Change-Password-Response Packet method 22
 - Received Failure-Response Packet method 22
 - Received Success-Response Packet method 22
 - sequencing rules
 - Challenge-Response packet - received 21
 - Change-Password-Response packet - received 22
 - Failure-Response packet - received 22
 - general packet validation 21
 - Master Session Key (MSK) derivation 14
 - overview 14
 - Success-Response packet - received 22
 - username 15
 - timer events (section 3.1.6 15, section 3.3.6 23)
 - timers (section 3.1.2 13, section 3.3.2 20)
- Standards assignments 10
- Success scenario
 - Change-Password-Response example 26
 - mutual authentication example 24
 - retry after Challenge-Response recomputed example 27
- Success scenario on retry after challenge-response is recomputed example 27
- Success scenario with change-password-response example 26
- Successful mutual authentication example 24
- Syntax – message 11

T

- Timer events
 - peer (section 3.1.6 15, section 3.2.6 19)
 - server (section 3.1.6 15, section 3.3.6 23)
- Timers
 - peer (section 3.1.2 13, section 3.2.2 16)
 - server (section 3.1.2 13, section 3.3.2 20)
- Tracking changes 32
- Transport 11
- Transport – messages 11
- Triggered events – higher layer
 - peer (section 3.1.4 14, section 3.2.4 16)

server (section 3.1.4 14, section 3.3.4 20)

V

Vendor-extensible fields 10

Versioning 10