

[MS-CMP]:

MSDTC Connection Manager: OleTx Multiplexing Protocol

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
4/3/2007	1.0		Version 1.0 release
7/3/2007	2.0	Major	MLonghorn+90
7/20/2007	3.0	Major	Updated and revised the technical content.
8/10/2007	3.0.1	Editorial	Changed language and formatting in the technical content.
9/28/2007	4.0	Major	Made a change to the IDL.
10/23/2007	5.0	Major	Updated and revised the technical content.
11/30/2007	5.0.1	Editorial	Changed language and formatting in the technical content.
1/25/2008	5.0.2	Editorial	Changed language and formatting in the technical content.
3/14/2008	5.1	Minor	Clarified the meaning of the technical content.
5/16/2008	5.1.1	Editorial	Changed language and formatting in the technical content.
6/20/2008	6.0	Major	Updated and revised the technical content.
7/25/2008	6.1	Minor	Clarified the meaning of the technical content.
8/29/2008	7.0	Major	Updated and revised the technical content.
10/24/2008	7.0.1	Editorial	Changed language and formatting in the technical content.
12/5/2008	7.0.2	Editorial	Editorial Update.
1/16/2009	8.0	Major	Updated and revised the technical content.
2/27/2009	9.0	Major	Updated and revised the technical content.
4/10/2009	10.0	Major	Updated and revised the technical content.
5/22/2009	10.1	Minor	Clarified the meaning of the technical content.
7/2/2009	10.1.1	Editorial	Changed language and formatting in the technical content.
8/14/2009	10.1.2	Editorial	Changed language and formatting in the technical content.
9/25/2009	11.0	Major	Updated and revised the technical content.
11/6/2009	12.0	Major	Updated and revised the technical content.
12/18/2009	13.0	Major	Updated and revised the technical content.
1/29/2010	13.1	Minor	Clarified the meaning of the technical content.
3/12/2010	14.0	Major	Updated and revised the technical content.
4/23/2010	14.0.1	Editorial	Changed language and formatting in the technical content.
6/4/2010	15.0	Major	Updated and revised the technical content.
7/16/2010	15.0	None	No changes to the meaning, language, or formatting of the technical content.
8/27/2010	15.0	None	No changes to the meaning, language, or formatting of the

Date	Revision History	Revision Class	Comments
			technical content.
10/8/2010	15.0	None	No changes to the meaning, language, or formatting of the technical content.
11/19/2010	15.0	None	No changes to the meaning, language, or formatting of the technical content.
1/7/2011	16.0	Major	Updated and revised the technical content.
2/11/2011	17.0	Major	Updated and revised the technical content.
3/25/2011	18.0	Major	Updated and revised the technical content.
5/6/2011	18.0	None	No changes to the meaning, language, or formatting of the technical content.
6/17/2011	18.1	Minor	Clarified the meaning of the technical content.
9/23/2011	18.1	None	No changes to the meaning, language, or formatting of the technical content.
12/16/2011	19.0	Major	Updated and revised the technical content.
3/30/2012	19.0	None	No changes to the meaning, language, or formatting of the technical content.
7/12/2012	19.0	None	No changes to the meaning, language, or formatting of the technical content.
10/25/2012	19.0	None	No changes to the meaning, language, or formatting of the technical content.
1/31/2013	19.0	None	No changes to the meaning, language, or formatting of the technical content.
8/8/2013	19.1	Minor	Clarified the meaning of the technical content.
11/14/2013	19.1	None	No changes to the meaning, language, or formatting of the technical content.
2/13/2014	19.1	None	No changes to the meaning, language, or formatting of the technical content.
5/15/2014	19.1	None	No changes to the meaning, language, or formatting of the technical content.
6/30/2015	20.0	Major	Significantly changed the technical content.

Table of Contents

1	Introduction	6
1.1	Glossary	6
1.2	References	6
1.2.1	Normative References	6
1.2.2	Informative References	7
1.3	Overview	7
1.4	Relationship to Other Protocols	9
1.5	Prerequisites/Preconditions	10
1.6	Applicability Statement	10
1.7	Versioning and Capability Negotiation	10
1.8	Vendor-Extensible Fields	10
1.9	Standards Assignments.....	10
2	Messages.....	11
2.1	Transport.....	11
2.1.1	Transmitting Messages and Boxcars.....	11
2.1.1.1	Boxcar Format.....	11
2.1.1.2	Boxcar Size Limitations.....	11
2.1.1.3	Transmitting Boxcars.....	11
2.1.2	Security.....	12
2.2	Message Syntax.....	12
2.2.1	BOX_CAR_HEADER	12
2.2.2	MESSAGE_PACKET.....	12
2.2.3	MTAG_DISCONNECT	14
2.2.4	MTAG_DISCONNECTED	15
2.2.5	MTAG_CONNECTION_REQ_DENIED.....	15
2.2.6	MTAG_PING	16
2.2.7	MTAG_CONNECTION_REQ	16
2.2.8	MTAG_USER_MESSAGE	17
3	Protocol Details.....	18
3.1	Common Details	18
3.1.1	Abstract Data Model.....	18
3.1.1.1	Connection Object.....	19
3.1.1.2	Boxcar Object.....	19
3.1.2	Timers	19
3.1.2.1	Idle Timer	19
3.1.3	Initialization.....	20
3.1.3.1	Initialization by a Higher-Layer Protocol.....	20
3.1.3.2	Initialization by the Protocol	20
3.1.4	Higher-Layer Triggered Events	20
3.1.4.1	Send Message	20
3.1.4.2	Create Connection.....	21
3.1.4.3	Disconnect Connection.....	22
3.1.5	Message Processing Events and Sequencing Rules	22
3.1.5.1	MTAG_DISCONNECT (MsgTag 0x00000001).....	22
3.1.5.2	MTAG_DISCONNECTED (MsgTag 0x00000002).....	23
3.1.5.3	MTAG_CONNECTION_REQ_DENIED (MsgTag 0x00000003)	23
3.1.5.4	MTAG_PING (MsgTag 0x00000004).....	23
3.1.5.5	MTAG_CONNECTION_REQ (MsgTag 0x00000005)	24
3.1.5.6	MTAG_USER_MESSAGE (MsgTag 0x00000FFF)	24
3.1.6	Timer Events.....	25
3.1.6.1	Idle Timer	25
3.1.7	Other Local Events.....	25
3.1.7.1	Enqueuing a Message	25

3.1.7.2	Session Down	25
3.1.7.3	Allocate Incoming Connection Objects	25
3.1.7.4	Notify Higher-Layer of Incoming Message Events	26
3.1.7.4.1	Receiving a Message	26
3.1.7.4.2	Connection Disconnected.....	26
3.1.7.4.3	Connection Request Denied	26
4	Protocol Examples	27
4.1	Sending Messages.....	27
4.1.1	Creating the MESSAGE_PACKETS	27
4.1.2	Creating a Boxcar	28
4.1.3	Sending the Boxcar Using the Underlying MSDTC Connection Manager: OleTx Transports Protocol Session	30
4.2	A Simple Connection Scenario	30
4.2.1	Initiating a Connection	30
4.2.1.1	Connection Denied	30
4.2.1.2	Connection Accepted	31
4.2.2	Disconnecting a Connection	31
5	Security	33
5.1	Security Considerations for Implementers	33
5.2	Index of Security Parameters	33
6	Appendix A: Product Behavior	34
7	Change Tracking.....	35
8	Index.....	37

1 Introduction

This document specifies the MSDTC Connection Manager: OleTx Multiplexing Protocol.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are specific to this document:

acceptor: A participant that receives a session or connection request. This role is also known as the "subordinate".

boxcar: A set of messages transmitted together by way of an underlying MSDTC Connection Manager: OleTx Transports Protocol session.

connection: In OleTx, an ordered set of logically related messages. The relationship between the messages is defined by the higher-layer protocol, but they are guaranteed to be delivered exactly one time and in order relative to other messages in the connection.

connection type: A specific set of interactions between participants in an OleTx protocol that accomplishes a specific set of state changes. A connection type consists of a bidirectional sequence of messages that are conveyed by using the MSDTC Connection Manager: OleTx Transports Protocol and the MSDTC Connection Manager: OleTx Multiplexing Protocol transport protocol, as described in [\[MS-CMPO\]](#) and [\[MS-CMP\]](#). A specified transaction typically involves many different connection types during its lifetime.

initiator: A participant that originates a session or connection request.

little-endian: Multiple-byte values that are byte-ordered with the least significant byte stored in the memory location with the lowest address.

Name Object: An object that contains endpoint contact information (as specified in [\[MS-CMPO\]](#) section 3.2.1.4).

session: In OleTx, a transport-level connection between a Transaction Manager and another Distributed Transaction participant over which multiplexed logical connections and messages flow. A **session** remains active so long as there are logical connections using it.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[MS-CMPO] Microsoft Corporation, "[MSDTC Connection Manager: OleTx Transports Protocol](#)".

[MS-CMP] Microsoft Corporation, "[MSDTC Connection Manager: OleTx Multiplexing Protocol](#)".

[MS-DTCM] Microsoft Corporation, "[MSDTC Connection Manager: OleTx Transaction Internet Protocol](#)".

[MS-DTCO] Microsoft Corporation, "[MSDTC Connection Manager: OleTx Transaction Protocol](#)".

[MS-ERREF] Microsoft Corporation, "[Windows Error Codes](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

1.2.2 Informative References

None.

1.3 Overview

This protocol allows partners to multiplex any number of two-way **connections** over the transport **session** between them, as specified in [\[MS-CMPO\]](#). To do this, this protocol defines a small number of messages to manage connections and uses the transport protocol resource requests to allocate connection-related resources. To facilitate higher-level protocols, this protocol defines a single user message and allows associating a **connection type** with a connection.

To illustrate these concepts, the following figure depicts typical messages of this protocol to initiate, use, and terminate two connections between partners labeled A and B.

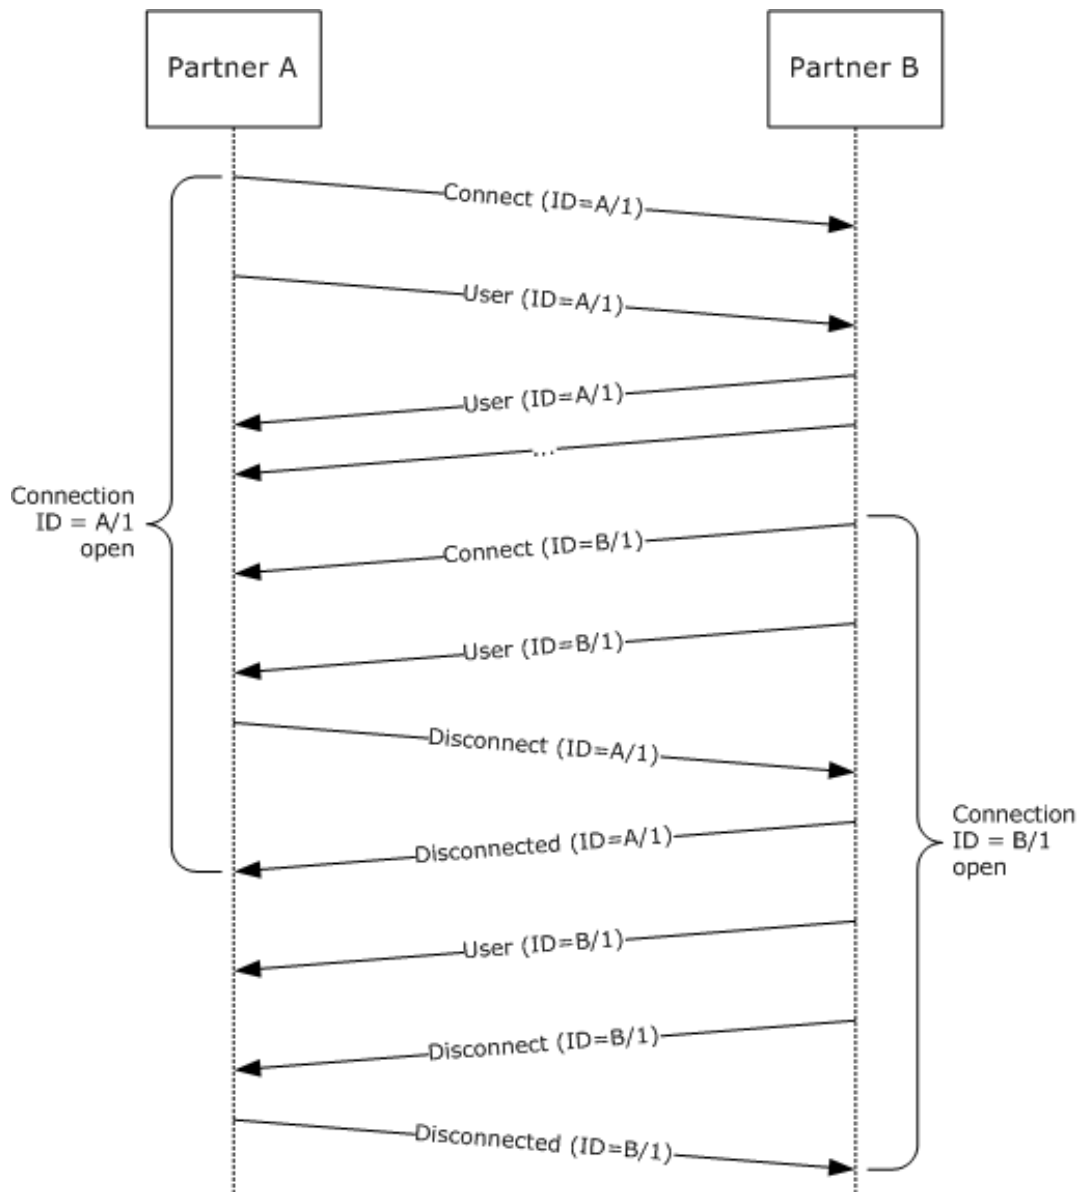


Figure 1: Messages used to manage two connections between partners

As the first message of the preceding figure depicts, to initiate a connection, either partner sends a Connect message ([MTAG_CONNECTION_REQ](#)) to the other partner over their session.

A Connect message includes an identifier for the new connection (abbreviated ID in the figure). To simplify connection management, connections are identified by two pieces of information: the partner that initiated the connection, and an identifier assigned by that partner. This scheme allows each partner to assign identifiers without the risk of collision with the other partner. In effect, each partner maintains two tables of connections: those initiated by itself (so-called "outgoing" connections) and those initiated by the other partner (so-called "incoming" connections). Despite the names "outgoing" and "incoming", either partner has the option to send messages to the other by using any open connection. To correlate a message with its connection, the message includes a flag (`fIsMaster`) indicating which table the connection belongs to, in addition to the **initiator**-assigned identifier (`dwConnectionId`) for the connection.

Though not depicted in the figure, a Connect message also includes a type to identify the higher-level protocol for the connection's messages. Specifically, this connection type typically implies which types of User messages are expected over the connection.

As depicted in the preceding figure, a Connect message is assumed to succeed. If the receiving partner does not want to accept the connection, it sends a not-acknowledged message ([MTAG_CONNECTION_REQ_DENIED](#)).

After a connection is open, either partner has the option to send any number of User messages ([MTAG_USER_MESSAGE](#)) to the other partner by using that connection. User messages include their connection, a message type handled by a higher-level protocol, and the message payload. As the receiving partner never sends positive acknowledgment to a Connect message, the sending partner is free to send User messages to the connection along with the Connect message. If the receiving partner does not accept the connection, it will ignore these extraneous User messages.

A partner receives messages in the order in which they were sent over the connection.

To close a connection, the partner that initiated the connection sends a Disconnect message ([MTAG_DISCONNECT](#)) to the other partner; either partner has the option to initiate a connection, but only the partner that initiated a connection is allowed to close it. Unlike the Connect message, the Disconnect message is assumed to fail. As the preceding figure depicts, if the receiving partner has the option to close the connection, it does so and sends a Disconnect acknowledgment message ([MTAG_DISCONNECTED](#)). Finally, on receipt of the Disconnected message, the initiating partner closes the connection on its side. This asymmetric design allows the receiving partner to send any outstanding messages to the initiating partner before acknowledging the Disconnect message.

For efficiency, the MSDTC Connection Manager: OleTx Multiplexing Protocol batches messages by using [Boxcar objects](#) that contain one or more messages for one or more connections. A **Boxcar** includes the number of messages it encloses, their total size, and the messages themselves. Typically, the fact that messages are enclosed in a Boxcar is transparent to connection management and User messages in the MSDTC Connection Manager: OleTx Multiplexing Protocol. One exception occurs when a partner receives an unrecognized message type and discards the rest of the messages in the Boxcar.

1.4 Relationship to Other Protocols

This protocol is explicitly layered upon the transport protocol that is specified in [\[MS-CMPO\]](#), and its design is greatly influenced by that protocol. It relies on the transport protocol to provide sessions and peer-to-peer message exchange. This protocol, in turn, provides message batching and connection multiplexing services to a protocol layered above it. For example, the transaction protocol that is specified in [\[MS-DTCM\]](#) is a set of connections with different connection types layered above this protocol, and it is used for coordinating distributed atomic transactions.

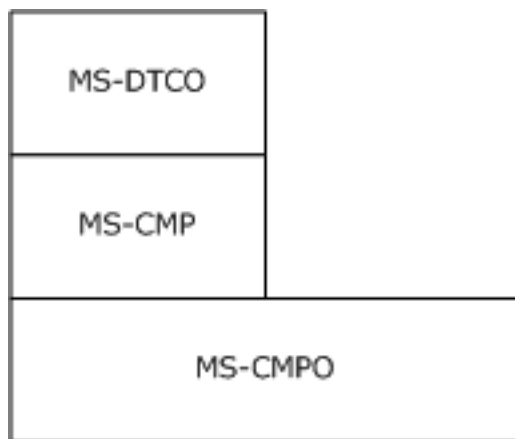


Figure 2: Relationship of MS-CMP to other protocols

1.5 Prerequisites/Preconditions

This protocol relies on the transports protocol specified in [\[MS-CMPO\]](#) for carrying communication; there is no handshake between MSDTC Connection Manager: OleTx Multiplexing Protocol instances. The initialization of the transports protocol instance occurs during the initialization of the instance of this protocol, and is as described in section [3.1.3](#).

1.6 Applicability Statement

This protocol is suitable for use as a connection multiplexing protocol over the transports protocol specified in [\[MS-CMPO\]](#), and it is applicable in all of the same situations.

1.7 Versioning and Capability Negotiation

There are no optional capabilities exposed by the MSDTC Connection Manager: OleTx Multiplexing Protocol, and there are no extensibility points within the MSDTC Connection Manager: OleTx Multiplexing Protocol. There are therefore no version negotiation capabilities in this protocol.

1.8 Vendor-Extensible Fields

There are no Vendor-Extensible Fields used by the MSDTC Connection Manager: OleTx Multiplexing Protocol.

1.9 Standards Assignments

The MSDTC Connection Manager: OleTx Multiplexing Protocol does not use any standard assignments.

2 Messages

This section specifies how the MSDTC Connection Manager: OleTx Multiplexing Protocol messages are encapsulated on the wire and common data types.

2.1 Transport

Messages in this protocol MUST be transported over an instance of the transports protocol specified in [\[MS-CMPO\]](#) session; therefore, each instance of this protocol MUST have an underlying transports protocol instance. The initialization of the transports protocol instance occurs during the initialization of the instance of this protocol, and is specified in section [3](#).

2.1.1 Transmitting Messages and Boxcars

Every message in MSDTC Connection Manager: OleTx Multiplexing Protocol is an extension of the message packet structure specified in section [2.2.2](#). When any event causes an implementation of this protocol to send a message, an implementation of this protocol MUST place this message in a boxcar. Boxcars are represented conceptually as [Boxcar objects](#) in the abstract data model; adding a message to a boxcar is represented conceptually as adding a message to the end of the Message List in a Boxcar object. For more information about Boxcar objects in the abstract data model, see section [3.1.1.2](#). For more information about processing boxcars, see section [3.1.5](#).

2.1.1.1 Boxcar Format

A boxcar is formatted as an array of bytes that begins with a [BOX_CAR_HEADER \(section 2.2.1\)](#) structure and continues with one or more [MESSAGE_PACKET](#) structures, each of which is appended with its associated variable length data (if any). Each MESSAGE_PACKET structure in a boxcar MUST be aligned on an 8-byte boundary. Because the size of each MESSAGE_PACKET structure is a multiple of 4 bytes (as defined in section [2.2.2](#)), padding bytes MUST be added as necessary between the structures in order to have each structure aligned on a 8-byte boundary. Any necessary padding bytes can be set to any value, and MUST be ignored on receipt. The **dwcMessages** field of the BOX_CAR_HEADER structure MUST be equal to the number of messages in the boxcar, and the **dwcTotal** field of the BOX_CAR_HEADER structure MUST be equal to the total number of bytes in the boxcar.

2.1.1.2 Boxcar Size Limitations

A boxcar MUST contain at least one message, and MUST NOT contain more than 3,412 messages. Furthermore, the total size of a boxcar MUST be at least 40 bytes, and MUST NOT exceed 81,920 bytes. Unless otherwise specified, an MSDTC Connection Manager: OleTx Multiplexing Protocol implementation SHOULD add one or more messages to a boxcar as long as doing so does not cause the boxcar to exceed any of these size restrictions.

2.1.1.3 Transmitting Boxcars

When an implementation of this protocol wants to transmit a boxcar over a session, it provides the underlying implementation of the transports protocol (specified in [\[MS-CMPO\]](#)) with the session to transmit the boxcar on, the count of messages in the boxcar, and the byte array that makes up the boxcar itself, as specified in [\[MS-CMPO\] section 3.4.6.5](#). Also, an MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST NOT transmit more than one boxcar at a time.

For more information about transmitting messages in boxcars, see section [3.1.7.1](#). For more information about interpreting boxcars after they have been received, see section [3.1.5](#).

2.1.2 Security

This protocol does not introduce any additional security beyond what is provided by the transports protocol specified in [\[MS-CMPO\]](#). The security level value provided by the higher-layer protocol during initialization, as specified in section [3.1.3](#), MUST be provided to the transports protocol as specified in [\[MS-CMPO\]](#) section 2.1.3.

2.2 Message Syntax

All integer fields in the following structures are in **little-endian** byte order, and all structures MUST be aligned with an 8-byte alignment. Any padding bytes that are required to align the [MESSAGE_PACKET](#) structures within the boxcar can be set to any value, and MUST be ignored on receipt.

2.2.1 BOX_CAR_HEADER

This structure MUST be the first structure in each boxcar transmitted via the underlying protocol specified in [\[MS-CMPO\]](#) session.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
dwSeqNumThisCar																															
dwAckSeqNum																															
dwcbTotal																															
dwcMessages																															

dwSeqNumThisCar (4 bytes): This field is not used, it MUST be set to 0x00000000, and it MUST be ignored on receipt.

dwAckSeqNum (4 bytes): This field is not used, it MUST be set to 0x00000000, and it MUST be ignored on receipt.

dwcbTotal (4 bytes): An unsigned 4-byte integer value which MUST be the total number of bytes in the boxcar message, including its header and all Message Packets. It MUST be greater than or equal to 40 bytes, and it MUST be less than or equal to 81,920 bytes.

dwcMessages (4 bytes): An unsigned 4-byte integer value which contains the number of [Message Packet](#) structures that follow the end of this structure in the boxcar. This number MUST be greater than or equal to 1, and MUST BE less than or equal to 3,412.

2.2.2 MESSAGE_PACKET

Each message sent using this protocol MUST be an extension of the MESSAGE_PACKET structure. This structure forms the basis for all of these messages. All integer fields of this structure are in little-endian byte order.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
MsgTag																															
fIsMaster																															

dwConnectionId
dwUserMsgType
dwcbVarLenData
dwReserved1

MsgTag (4 bytes): A 4-byte integer value that describes the message type and its interpretation. This value MUST be one of the following values.

Value	Meaning
MTAG_DISCONNECT 0x00000001	Indicates a request to disconnect the specified connection.
MTAG_DISCONNECTED 0x00000002	Indicates that the specified connection has been disconnected.
MTAG_CONNECTION_REQ_DENIED 0x00000003	Indicates that the connection request for the specified connection has been denied.
MTAG_PING 0x00000004	A successful MTAG_PING indicates that the session is active.
MTAG_CONNECTION_REQ 0x00000005	Indicates that a new connection is being requested.
MTAG_USER_MESSAGE 0x000000FF	Indicates that a user (level-three protocol) message should be delivered on the specified connection.

If the value is not one of the preceding values, then the remainder of the boxcar MUST be discarded. The details of each message type are given in the following sections.

fIsMaster (4 bytes): A 4-byte value indicating the direction of the message in the conversation. This value MUST be one of the following values.

Value	Meaning
0x00000000	Message is sent by the party that accepted the connection.
0x00000001	Message is sent by the party that initiated the connection, or message is not associated with a connection because either the connection is down or the connection request has been denied.

dwConnectionId (4 bytes): A 4-byte integer value that contains the unique identifier for the associated connection. The value of the identifier depends on the value of the **MsgTag** field, as follows.

MsgTag field value	dwConnectionId field
0x00000001 MTAG_DISCONNECT	MUST contain the ID of the connection being disconnected.
0x00000002	MUST contain the ID of the connection that was just disconnected.

MsgTag field value	dwConnectionId field
MTAG_DISCONNECTED	
0x00000003 MTAG_CONNECTION_REQ_DENIED	MUST contain the ID of the connection that was rejected.
0x00000004 MTAG_PING	MUST be set to 0x00000000
0x00000005 MTAG_CONNECTION_REQ	MUST contain the ID of the connection being requested.
0x000000FF MTAG_USER_MESSAGE	MUST contain the ID of the connection that the message relates to.

dwUserMsgType (4 bytes): A 4-byte integer value that contains additional details about the message, depending on the value of the **MsgTag** field, as follows.


MsgTag field value	dwUserMsgType field
0x00000001 MTAG_DISCONNECT	MUST contain the connection type of the connection being disconnected.
0x00000002 MTAG_DISCONNECTED	MUST be set to 0x00000000.
0x00000003 MTAG_CONNECTION_REQ_DENIED	MUST be set to 0x00000000.
0x00000004 MTAG_PING	MUST be set to 0x00000000.
0x00000005 MTAG_CONNECTION_REQ	MUST contain the connection type of the connection being requested.
0x000000FF MTAG_USER_MESSAGE	MUST contain the type of user message to be delivered.

dwcbVarLenData (4 bytes): Unsigned 4-byte integer value that contains the size, in bytes, of the variable-length data buffer. This value MUST NOT be greater than 81880. This number is the maximum size of a boxcar, as specified in section [2.1.1.2](#), minus the size of a [BOX CAR HEADER](#) and the MESSAGE_PACKET itself, which is logically the largest single message that is possible to be transmitted in this protocol.

dwReserved1 (4 bytes): Reserved. This value can be set to any value, and MUST be ignored on receipt. [<1>](#)

2.2.3 MTAG_DISCONNECT

The MTAG_DISCONNECT message indicates a request to disconnect the specified connection.

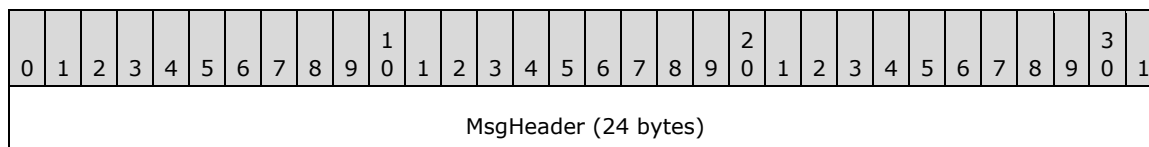

...
...

MsgHeader (24 bytes): This field contains a [MESSAGE_PACKET](#) structure. The fields MUST be set as specified in section 2.2.2. In particular:

- The **MsgTag** field MUST be set to 0x00000001 (MTAG_DISCONNECT).
- The **fIsMaster** field MUST be set to 0x00000001.
- The **dwcbVarLenData** field MUST be set to 0x00000000.

2.2.4 MTAG_DISCONNECTED

The MTAG_DISCONNECTED message indicates that the request to disconnect the specified connection was successful.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
MsgHeader (24 bytes)																															
...																															
...																															

MsgHeader (24 bytes): This field contains a [MESSAGE_PACKET](#) structure. The fields MUST be set as specified in section 2.2.2. In particular:

- The **MsgTag** field MUST be set to 0x00000002 (MTAG_DISCONNECTED).
- The **fIsMaster** field MUST be set to 0x00000000.
- The **dwcbVarLenData** field MUST be set to 0x00000000.

2.2.5 MTAG_CONNECTION_REQ_DENIED

The MTAG_CONNECTION_REQ_DENIED message indicates that the connection request for the specified connection has been denied. It represents a not-acknowledged response to an [MTAG_CONNECTION_REQ](#) message. (There is no positive acknowledgment response to an MTAG_CONNECTION_REQ message.)

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
MsgHeader (24 bytes)																															
...																															
...																															
Reason																															

MsgHeader (24 bytes): This field contains a [MESSAGE_PACKET](#) structure. The fields MUST be set as specified in section 2.2.2. In particular:

- The **MsgTag** field MUST be set to 0x00000003 (MTAG_CONNECTION_REQ_DENIED).
- The **fIsMaster** field MUST be set to 0x00000000.
- The **dwcbVarLenData** field MUST be set to 4.

Reason (4 bytes): This field contains a 4-byte unsigned integer that indicates the reason that the connection request was denied. The values for this field are defined by the higher-layer protocol.

2.2.6 MTAG_PING

This message is used by a protocol participant to determine if it can still contact the transports protocol session partner as specified in [\[MS-CMPO\]](#). For more information about the message processing event, see [3.1.5.4](#).

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
MsgHeader (24 bytes)																															
...																															
...																															

MsgHeader (24 bytes): This field contains a [MESSAGE_PACKET](#) structure. The fields MUST be set as specified in section 2.2.2. In particular:

- The **MsgTag** field MUST be set to 0x00000004 (MTAG_PING).
- The **fIsMaster** field MUST be set to 0x00000001.
- The **dwConnectionId** field MUST be set to 0x00000000.
- The **dwcbVarLenData** field MUST be set to 0x00000000.

2.2.7 MTAG_CONNECTION_REQ

The MTAG_CONNECTION_REQ message specifies a request to create the connection. A not-acknowledged response to this message is communicated with an [MTAG_CONNECTION_REQ_DENIED](#) message. (There is no positive acknowledgment response to an MTAG_CONNECTION_REQ message.)

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
MsgHeader (24 bytes)																															
...																															
...																															

MsgHeader (24 bytes): This field contains a [MESSAGE_PACKET](#) structure. The fields MUST be set as specified in section 2.2.2. In particular:

- The **MsgTag** field MUST be set to 0x00000005 (MTAG_CONNECTION_REQ).
- The **fIsMaster** field MUST be set to 0x00000001.
- The **dwcbVarLenData** field MUST be set to 0x00000000.

2.2.8 MTAG_USER_MESSAGE

The MTAG_USER_MESSAGE message indicates that a user (level-three protocol) message should be delivered on the specified connection.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
MsgHeader (24 bytes)																															
...																															
...																															
MessageData (variable)																															
...																															

MsgHeader (24 bytes): This field contains a [MESSAGE_PACKET](#) structure. The fields MUST be set as specified in section 2.2.2. In particular:

- The **MsgTag** field MUST be set to 0x00000FFF (MTAG_USER_MESSAGE).
- The **dwcbVarLenData** field MUST be set to the length in bytes of the **MessageData** field, if it is present, otherwise it MUST be set to 0x00000000.

MessageData (variable): A byte array containing the body of the message. The format of this body is defined by the higher-layer software operating over this protocol, and it is generally indicated by the value of the **dwUserMsgType** field in the **MsgHeader** structure. The contents of this field MUST be treated as opaque.

3 Protocol Details

3.1 Common Details

3.1.1 Abstract Data Model

This section describes a conceptual model of a possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol performs. This document does not mandate that the implementations adhere to this model as long as their external behavior is consistent with that described in this document.

Note For the sake of clarity, the term "local partner" is used to indicate the role that is being described, and the term "remote partner" is used to indicate the partner with which the local partner is communicating.

An implementation of this protocol uses the following data elements, as specified in [\[MS-CMPO\]](#) section 3.2.1.1:

- **Local Name Object**
- **Minimum Level 2 Version Number**
- **Maximum Level 2 Version Number**
- **Minimum Level 3 Version Number**
- **Maximum Level 3 Version Number**
- **Security Level**

An implementation of this protocol MUST maintain the following data elements:

- **Session Table:** A table of Session objects that is maintained by a transports protocol partner as specified in [\[MS-CMPO\]](#) section 3.2.1.2. This protocol does not maintain a Session Table itself, but the Session object MUST be extended to support the following additional data elements:
 - **Outgoing Connection Table:** A table of [Connection objects](#) in use that are initiated by the local partner and indexed by the **Connection ID** field of the Connection object.
 - **Count of Allocated Outgoing Connections:** An unsigned 32-bit integer counting the number of outgoing connections that have been allocated for the local partner in the session. Partners in this protocol use their respective underlying transports protocol instances to negotiate a number of pre-allocated Connection objects that each connection requires. More connections are allocated by this instance when it is discovered that the number of entries in the Outgoing Connection Table equals the current value of the Count of Allocated Outgoing Connections. To create a new connection, there MUST be at least one allocated outgoing connection available. Outgoing connections are allocated, and the corresponding count increased, by requesting the local partner to allocate more connection resources through the underlying transports protocol instance.
 - **Incoming Connection Table:** A table of Connection objects in use that are initiated by the remote partner and indexed by the **Connection ID** field of the Connection object.
 - **Count of Allocated Incoming Connections:** An unsigned 32-bit integer counting the number of incoming connections that have been allocated by the remote partner in the session. Partners in this protocol use their respective underlying transports protocol instances to negotiate a number of pre-allocated Connection objects that each connection requires. The

number of allocated incoming connections is the value requested by the remote partner. New connections are allowed to be created until the number of entries in the Incoming Connection Table equals the count requested by the remote partner. If the remote partner requires more connections to be created, it MUST request that more be allocated, causing this count to be increased.

- **Boxcar Queue:** An ordered queue of [Boxcar objects](#) to be transmitted on this session.

The management of these additional data elements is the responsibility of this protocol implementation as outlined in sections [3.1.4.2](#), [3.1.5.1](#), [3.1.5.5](#), and [3.1.7.3](#).

Note that it is possible to implement the conceptual data by using a variety of techniques. An implementation is at liberty to implement such data in any way it pleases.

3.1.1.1 Connection Object

A Connection object MUST contain the following data elements:

Connection ID: An unsigned 32-bit integer that identifies the connection. The Connection ID MUST be unique within a table. Note that a given Connection object is allowed to have the same Connection ID as another Connection object (related to the same Session object), so long as the other Connection object is in the other connection table. For example, the first connection is in the Incoming Connection Table and the second connection is in the Outgoing Connection Table, or vice versa.

Accepted: A Boolean value, indicating whether the connection was accepted or rejected by the higher-layer protocol. This value is initially false.

Connection Type: An unsigned 32-bit integer that identifies the set of messages defined by a higher-level protocol sent over the connection. Higher-level messages are grouped based on the specific set of state changes they produce, and that grouping is identified by connection type.

Incoming Message Notification Interface: The local event of a higher-layer that is used by this protocol to notify a higher-layer protocol of incoming message events, as specified in section [3.1.7.4](#).

Note It is possible to implement the conceptual data by using a variety of techniques. An implementation is at liberty to implement such data in any way it pleases.

3.1.1.2 Boxcar Object

A Boxcar object MUST contain the following data elements:

Message List: A list of [MESSAGE PACKET](#) structures (section 2.2.2) in the boxcar.

When called for, Boxcar objects MUST be formatted and transmitted as specified in section [2.1.1.1](#).

Note It is possible to implement the conceptual data by using a variety of techniques. An implementation is at liberty to implement such data in any way it wants.

3.1.2 Timers

An implementation of this protocol MUST maintain the following timers.

3.1.2.1 Idle Timer

There is an instance of this timer corresponding to each Session object. This timer MUST be set when both the Incoming Connection Table and the Outgoing Connection Table are empty, and it MUST be

canceled when a [Connection object](#) is added to either the Incoming Connection Table or the Outgoing Connection Table. The default value of the timer is specific to the implementation.

3.1.3 Initialization

An instance of this protocol is explicitly initialized with the data elements specified in sections [3.1.3.1](#) and [3.1.3.2](#), as specified in [\[MS-CMPO\]](#) section 3.2.1.1. These elements are required for the initialization of its underlying transports protocol instance, as specified in [\[MS-CMPO\]](#) section 3.2.3.1.

3.1.3.1 Initialization by a Higher-Layer Protocol

An instance of this protocol is explicitly initialized with the following data elements, as specified in [\[MS-CMPO\]](#) section 3.2.3.1.

- A **Local Name Object**, as defined in [\[MS-CMPO\]](#) section 3.2.1.1. The higher-layer protocol that initializes an MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST initialize this public data element.
- The **Minimum Level 3 Version Number** and **Maximum Level 3 Version Number**, as defined in [\[MS-CMPO\]](#) section 3.2.1.1. The higher-layer protocol that initializes an instance of this protocol MUST initialize this public data element.
- A **Security Level**, as defined in [\[MS-CMPO\]](#) section 3.2.1.1. The higher-layer protocol that initializes an instance of this protocol MUST initialize this public data element.

3.1.3.2 Initialization by the Protocol

The MSDTC Connection Manager: OleTx Multiplexing Protocol MUST perform the following action:

- Initialize an underlying transports protocol instance, as specified in [\[MS-CMPO\]](#) section 3.2.3.1, with the following data elements:
 - A **Minimum Level 2 Version Number** of 1, as defined in [\[MS-CMPO\]](#) section 3.2.1.1.
 - A **Maximum Level 2 Version Number** of 1, as defined in [\[MS-CMPO\]](#) section 3.2.1.1.

If the initialization of the above data elements fails or the initialization of an underlying MSDTC Connection Manager: OleTx Transports Protocol instance fails as specified in [\[MS-CMPO\]](#) section 3.2.3.2, then the initialization of the MSDTC Connection Manager: OleTx Multiplexing Protocol MUST also fail and the implementation-specific failure result MUST be returned to the higher-layer protocol.

3.1.4 Higher-Layer Triggered Events

3.1.4.1 Send Message

When the higher-layer protocol requests to send a message, it MUST specify the [Connection object](#) on which to send the message (which implies the connection table containing it), an unsigned 32-bit integer representing the type of message, and a byte array containing the body of the message. The byte array MUST NOT be more than 81880 bytes long.

The MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST allocate an [MTAG_USER_MESSAGE](#) message. It MUST set the **dwUserMsgType** field in the **MsgHeader** field to the provided message type, it MUST set the **dwConnectionId** field in the **MsgHeader** field to the Connection ID of the provided Connection object, it MUST set the **dwcbVarLenData** field in the **MsgHeader** field to the length of the provided array, and it MUST set the **MessageData** field to the provided byte array. Finally, if the provided Connection object is contained in an Outgoing Connection

Table, then the **flsMaster** field of the **MsgHeader** field MUST be set to 0x00000001; otherwise, it MUST be set to 0x00000000.

This message MUST be enqueued on the Session object associated with the provided Connection object as described in section [3.1.7.1](#).

3.1.4.2 Create Connection

When the higher-layer protocol requests a new connection, it MUST specify the following arguments.

- The **Name Object** of the partner with which to create the connection.
- The Outgoing connection type of the connection to create.
- The Incoming Message Notification Interface.

First, the MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST look up the Session object with the specified Name Object in the Session Table. If a matching session does not exist, the MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST request a new session with the partner from the underlying transports instance as specified in [\[MS-CMPO\]](#). If the request is unsuccessful, then the connection request MUST fail. The MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST initialize its extensions to the Session object as follows:

- The Incoming Connection Table MUST be empty.
- The Outgoing Connection Table MUST be empty.
- The Count of Allocated Outgoing Connections MUST be zero.
- The Count of Allocated Incoming Connections MUST be zero.
- The Boxcar Queue MUST be empty.

After a Session object has been found or created, the MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST compare the number of [Connection objects](#) in the Outgoing Connection Table in the Session object with the Count of Allocated Outgoing Connections. If they are equal, then the MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST request resource allocation from the underlying transports protocol instance, as specified in [\[MS-CMPO\]](#) section 3.4.6.4. The MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST provide the Session object. In addition, it MUST specify the RT_CONNECTIONS value for the **RESOURCE_TYPE** enumeration as specified in [\[MS-CMPO\]](#) section 2.2.7, and it MUST specify a number of resources equal to or greater than 1.

If the request is successful, then the number of resources that were actually allocated MUST be added to the Count of Allocated Outgoing Connections. Otherwise, the connection request MUST fail and the Session object MUST be left unmodified, with the exception that if both the Incoming and Outgoing Connection Tables are empty, then the [Idle Timer](#) associated with the Session object MUST be started.

Note If this is a newly created session object and the Idle Timer is already running (due to both Incoming and Outgoing Connection Tables being initialized as empty) and the connection resource allocation has failed, then the Idle Timer is restarted at this point.

Next, the MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST allocate a new Connection object with the specified connection type and with a connection identifier that is currently unused in the Outgoing Connection Table. The **Accepted** field of the new Connection object MUST be set to true. This Connection object MUST be added to the Outgoing Connection Table. If the Idle Timer is active, the timer MUST be canceled. The Incoming Message Notification Interface that was provided by the higher-layer protocol MUST be stored in the Incoming Message Notification ADM element.

Finally, the MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST allocate an [MTAG_CONNECTION_REQ](#) message. It MUST set the **dwUserMsgType** field in the **MsgHeader** field to the specified connection type, and it MUST set the **dwConnectionId** field in the **MsgHeader** field to the connection identifier of the new Connection object. It MUST enqueue the message on the Session object as described in section [3.1.7.1](#).

3.1.4.3 Disconnect Connection

When the higher-layer protocol requests to disconnect a connection, it MUST specify the following argument.

- [Connection object](#) to disconnect.

This Connection object MUST be contained in an Outgoing Connection Table in a Session object contained in the Session Table; otherwise, the request to disconnect the connection MUST fail.

The MSDTC Connection Manager: OleTx Multiplexing Protocol instance MUST allocate an [MTAG_DISCONNECT](#) message and set the **dwConnectionId** field in the **MsgHeader** field of the message to the connection identifier of that specified Connection object. It MUST enqueue this message on the Session object of the specified Connection object as described in section [3.1.7.1](#).

3.1.5 Message Processing Events and Sequencing Rules

MSDTC Connection Manager: OleTx Multiplexing Protocol messages are received from the underlying transports protocol as specified in [\[MS-CMPO\]](#) section 3.3.4.4. The buffers that are provided by the transports protocol MUST be formatted boxcars as specified in section [2.1.1](#).

The relative position of each message in the boxcar MUST be used to order the messages; messages that occur at a smaller offset from the boxcar header in the boxcar MUST be considered to come before messages that occur later in the boxcar. Boxcars MUST be ordered by the time of their receipt by an MSDTC Connection Manager: OleTx Multiplexing Protocol implementation; all of the messages in a boxcar that is received earlier than another boxcar are considered to come before all of the messages in the later boxcar. The **dwConnectionId** field of the message MUST be used to logically group messages; messages MUST be in the same group if their **dwConnectionId** fields are equal. (The messages MAY be physically ordered by their **dwConnectionId** fields in the boxcar.)

An MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST NOT process a message until it has processed all messages in the same group that come before it. (Message order MUST be preserved within an MSDTC Connection Manager: OleTx Multiplexing Protocol connection.) An MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MAY process messages in any order that does not violate the preceding restriction.

All MSDTC Connection Manager: OleTx Multiplexing Protocol messages are extensions of the [MESSAGE_PACKET](#) structure as specified in section 2.2.2. An MSDTC Connection Manager: OleTx Multiplexing Protocol message is identified by looking at the value of the **MsgTag** field; the interpretation of the message depends on the value of that field. If the value of the **MsgTag** field is outside of the expected range (as specified in section 2.2.2), then all remaining unprocessed messages in the boxcar MUST be ignored, regardless of which connection they are intended for.

3.1.5.1 MTAG_DISCONNECT (MsgTag 0x00000001)

When an MTAG_DISCONNECT message is received over a session, the MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST look at the **dwConnectionId** field of the **MsgHeader** field of the message, and retrieve the [Connection object](#) with the matching Connection ID from the Incoming Connection Table of the Session object. If no such Connection object exists, the MTAG_DISCONNECT message MUST be silently ignored.

Otherwise, the higher-layer protocol MUST be notified of the [Connection Disconnected \(section 3.1.7.4.2\)](#) event by signaling this event using the Incoming Message Notification Interface as described in section 3.1.1.1, and the MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST remove the Connection object from the Incoming Connection Table of the Session object. If both the Incoming Connection Table and the Outgoing Connection Table of the Session object are now empty, the [Idle Timer](#) MUST be started.

The MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST then allocate a new MTAG_DISCONNECTED message, set the **dwUserMsgType** field of the **MsgHeader** field to the connection type of the Connection object, and set the **dwConnectionId** field of the **MsgHeader** to the Connection ID of the Connection object. Finally, the message MUST be enqueued on the Session object as specified in section [3.1.7.1](#).

3.1.5.2 MTAG_DISCONNECTED (MsgTag 0x00000002)

When an [MTAG_DISCONNECTED \(section 2.2.4\)](#) message is received over a session, the MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST look at the **dwConnectionId** field of the **MsgHeader** field of the message and retrieve the [Connection object \(section 3.1.1.1\)](#) with the matching **Connection ID** from the **Outgoing Connection Table** of the Session object. If no such **Connection object** exists or no [MTAG_DISCONNECT \(section 2.2.3\)](#) message has been sent for the **Connection object**, the MTAG_DISCONNECTED message MUST be silently ignored.

Otherwise, the higher-layer protocol MUST be notified of the [Connection Disconnected \(section 3.1.7.4.2\)](#) event by signaling this event using the Incoming Message Notification Interface as described in section 3.1.1.1, and the MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST remove the **Connection object** from the **Outgoing Connection Table** of the Session object. If there are no more connections in the **Outgoing Connection Table** of the Session object and there are no connections in the **Incoming Connection Table** of the Session object, then the [Idle Timer](#) MUST be started as specified in section 3.1.2.1.

3.1.5.3 MTAG_CONNECTION_REQ_DENIED (MsgTag 0x00000003)

When an MTAG_CONNECTION_REQ_DENIED message is received over a session, the MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST look at the **dwConnectionId** field of the **MsgHeader** field of the message, and retrieve the [Connection object](#) with the matching Connection ID from the Outgoing Connection Table of the Session object. If no such Connection object exists, the MTAG_CONNECTION_REQ_DENIED message MUST be silently ignored.

Note The MTAG_CONNECTION_REQ_DENIED message does not remove Connection IDs from the Outgoing Connection Table. A Connection ID value can only be reused in a subsequent MTAG_CONNECTION_REQ message after an MTAG_DISCONNECT message has been sent.

Otherwise, the higher-layer protocol MUST be notified of the fact that the connection request was denied for the particular Connection object, along with the value in the **Reason** field of the message by signaling the [Connection Request Denied \(section 3.1.7.4.3\)](#) event using the Incoming Message Notification Interface as described in section 3.1.1.1.

3.1.5.4 MTAG_PING (MsgTag 0x00000004)

A protocol implementation SHOULD send out MTAG_PING messages periodically to verify that its session with a communication partner is active. (If the session is unavailable, sending the MTAG_PING message will return an error [\[MS-ERREF\]](#).) A successful MTAG_PING indicates that the RPC session with the communication partner is active. When an MTAG_PING message is received over a session, the MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST ignore it.

3.1.5.5 MTAG_CONNECTION_REQ (MsgTag 0x00000005)

When this message is received over a Session object, the implementation of the multiplexing protocol specified in [\[MS-CMP\]](#) MUST first compare the number of [Connection objects](#) in the Incoming Connection Table on the Session object with the Count of Allocated Incoming Connections on the Session object. If the Count of Allocated Incoming Connections is equal to the number of Connection objects in the table, then the implementation of the multiplexing protocol MUST ignore this message.

Otherwise, the implementation of the multiplexing protocol MUST look at the **dwConnectionId** field of the **MsgHeader** field of the message, and attempt to retrieve the Connection object with the matching Connection ID from the Incoming Connection Table of the Session object. If a Connection object is found, then this message MUST be silently ignored.

Otherwise, the implementation of the multiplexing protocol MUST allocate a Connection object, initializing the connection type field to the **dwUserMsgType** field of the **MsgHeader** field of the message, the **Accepted** field to false, and the **Connection ID** field to the **dwConnectionId** field of the **MsgHeader** field of the message. It MUST add the Connection object to the Incoming Connection Table of the Session object. If the [Idle Timer](#) is active, then it MUST be canceled.

The implementation MUST then notify the higher-layer protocol of the incoming connection, providing the Connection object and its connection type. The higher-layer protocol MUST either accept or reject the connection.

If the higher-layer protocol rejects the connection, then it MUST provide a protocol-specific, 32-bit unsigned integer that specifies the reason for the rejection. The implementation MUST then allocate a new [MTAG_CONNECTION_REQ_DENIED](#) message, initializing the **dwConnectionId** field of the **MsgHeader** field to the Connection ID of the Connection object and the **Reason** field to the unsigned integer provided by the higher-layer protocol. It MUST then enqueue this message on the Session object as specified in section [3.1.7.1](#).

If the higher-layer protocol accepts the connection, then the implementation of the multiplexing protocol MUST set the **Accepted** field of the Connection object to true.

3.1.5.6 MTAG_USER_MESSAGE (MsgTag 0x00000FFF)

When an MTAG_USER_MESSAGE message is received over a Session object, the MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST examine the **fIsMaster** field of the **MsgHeader** field of the message to determine which table contains the destination [Connection object](#). If the **fIsMaster** field is 0x00000000, then the MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST attempt to find a Connection object with a Connection ID that matches the **dwConnectionId** field of the **MsgHeader** field of the message in the Incoming Connection Table of the Session object. Otherwise, the MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST attempt to find a Connection object with a Connection ID that matches the **dwConnectionId** field of the **MsgHeader** field of the message in the Outgoing Connection Table of the Session object.

If no Connection object is found in the selected table, or the **Accepted** field of the Connection object is false, then the MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST ignore the message. Otherwise, the higher-layer protocol MUST be notified of the incoming message by signaling the [Receiving a Message \(section 3.1.7.4.1\)](#) event using the Incoming Message Notification Interface, as described in section 3.1.1.1. The MSDTC Connection Manager: OleTx Multiplexing Protocol implementation MUST provide the higher-layer protocol with the Connection object, the value of the **dwUserMsgType** field of the **MsgHeader** field of the message, and the **MessageData** field of the MTAG_USER_MESSAGE field if it is present.

3.1.6 Timer Events

3.1.6.1 Idle Timer

This timer is active only when there are no [Connection objects](#) in both the Outgoing Connection Table and the Incoming Connection Table. When this timer associated with a Session object expires (the maximum number of MTAG_PING messages have been sent), an implementation of this protocol MUST request a forced session teardown for the underlying transports protocol Session object specified in [\[MS-CMPO\]](#). As there are no Connection objects in both the Outgoing Connection Table and the Incoming Connection Table, it is not required to inform the higher-layer protocol of the teardown.

3.1.7 Other Local Events

3.1.7.1 Enqueuing a Message

Various events in the protocol require that a message be queued on a particular Session object. This section describes how this is done.

If it is possible to add the provided message to the end of the Message List of the last [Boxcar object](#), in the Boxcar Queue associated with the provided Session object, then it MUST be added to that Boxcar object. (The constraints governing whether it is possible to add a message to the list are provided in section [2.1.1.2](#).) Otherwise, a new Boxcar object MUST be allocated and added to the end of the Boxcar Queue associated with the provided Session object; the message MUST then be added to the end of the Message List in new Boxcar object instead.

An MSDTC Connection Manager: OleTx Multiplexing Protocol implementation can choose to transmit the Boxcar object at the head of the Boxcar Queue at any time, as long as it contains at least one message; however, an implementation SHOULD transmit this Boxcar as soon as possible when there is at least one other Boxcar object in the Boxcar Queue. Boxcars MUST be formatted and transmitted as described in section [2.1.1.1](#).

3.1.7.2 Session Down

When the underlying transports protocol Session object specified in [\[MS-CMPO\]](#) is torn down or fails for any reason other than the expiration of the [Idle Timer](#), the higher-layer protocol MUST be notified of the teardown using the Incoming Message Notification Interface as specified in section [3.1.1.1](#). The higher-layer protocol MUST be provided with the [Connection Disconnected \(section 3.1.7.4.2\)](#) event for every Connection object in both the Outgoing Connection Table and the Incoming Connection Table of the Session object. The Connection objects MUST then be removed from their containing tables. Any resources associated with the session SHOULD also be reclaimed at this time.

3.1.7.3 Allocate Incoming Connection Objects

When the underlying transports protocol is requested to allocate more [Connection object \(section 3.1.1.1\)](#) resources from a partner as specified in [\[MS-CMPO\]](#), this protocol determines the number (if any) of Connection object resources to be allocated and reports the number of allocated resources back to the transports protocol. The manner in which Connection objects are allocated is implementation-specific, as described in section [3.1.1.1](#), and the determination regarding how many are allocated is also implementation-specific. For example, an implementation can decide to limit the increase of allocated Connection objects to 10 at a time. As a result, if a partner requests the allocation of 20 objects, only 10 will be allocated. This demonstrates how the number of allocated objects returned by the transports protocol can differ from the number requested by a partner. In Windows, Connection objects are created by allocating new objects from the memory heap and saving them on a list of "free" Connection objects. The only limit that is imposed is the amount of available memory.

3.1.7.4 Notify Higher-Layer of Incoming Message Events

When the MSDTC Connection Manager: OleTx Multiplexing Protocol receives incoming message events as described in section [3.1.5](#), and the protocol expects a higher-layer protocol to be notified of these incoming events, then the MSDTC Connection Manager: OleTx Multiplexing Protocol MUST use the Incoming Message Notification Interface provided by the higher-layer protocol.

3.1.7.4.1 Receiving a Message

The Receiving a Message event MUST be signaled with the following arguments.

- A protocol message that extends the [MESSAGE_PACKET \(section 2.2.2\)](#) structure, along with its associated variable **dwcbVarLenData** field and the appropriate variable-length data buffer.
- A [Connection object](#).

3.1.7.4.2 Connection Disconnected

The Connection Disconnected event MUST be signaled with the following argument.

- A [Connection object](#).

3.1.7.4.3 Connection Request Denied

The Connection Request Denied event MUST be signaled with the following arguments.

- A [Connection object](#).
- The **Reason** field of the message, as defined in section [2.2.5](#).

4 Protocol Examples

In the following examples, there are two instances of the transaction protocol specified in [\[MS-DTCO\]](#): initiator and **acceptor**. It is assumed that the two instances have established a session with each other, and that the initiator has negotiated a sufficient number of resources with the acceptor.

- [Sending Messages](#)
- [A Simple Connection Scenario](#)

4.1 Sending Messages

The Sending Messages example shows how the initiator creates the appropriate structures to create a connection and then sends a message on that connection. In this case, the connection type of the connection is 0x00000101, and the user message type of the first message is 0x00002001. (These values are CONNTYPE_PARTNERTM_PROPAGATE and PARTNERTM_PROPAGATE_MTAG_PROPAGATE, respectively, as specified in [\[MS-DTCO\]](#).)

The initiator is going to create two [MESSAGE_PACKET](#) structures, format them into a boxcar, and then submit them to the underlying transports protocol session to be transmitted as specified in [\[MS-CMPO\]](#). (Because it is assumed that a connection request will succeed, both MESSAGE_PACKET structures are put into the same boxcar.)

4.1.1 Creating the MESSAGE_PACKETs

To start the connection, the initiator allocates the next free connection identifier; in this instance, it is 0x00000001. The initiator then creates a [MESSAGE_PACKET](#), with the **MsgTag** field set to [MTAG_CONNECTION_REQ \(0x00000005\)](#) and with the **dwUserMsgType** field set to 0x00000101 (which is CONNTYPE_PARTNERTM_PROPAGATE as specified in [\[MS-DTCO\]](#). By definition, the instance that creates the connection always sets the **fIsMaster** field to 0x00000001, and as this MESSAGE_PACKET structure contains no extra data, the **dwcbVarLenData** is set to 0x00000000.

The following table displays the first MESSAGE_PACKET structure that the initiator creates (all values are 32-bits wide).

Field	Value	Value description
MsgTag	0x00000005	MTAG_CONNECTION_REQ
fIsMaster	0x00000001	1
dwConnectionId	0x00000001	1
dwUserMsgType	0x00000101	CONNTYPE_PARTNERTM_PROPAGATE
dwcbVarLenData	0x00000000	0
dwReserved1	0xcd64cd64	dwReserved1: 0xcd64cd64

The initiator then creates a second MESSAGE_PACKET to contain the user message. It sets the **MsgTag** field to [MTAG_USER_MESSAGE \(0x00000FFF\)](#) and the **dwUserMsgType** field to 0x00002001 (which is PARTNERTM_PROPAGATE_MTAG_PROPAGATE as specified in [\[MS-DTCO\]](#)).

The MESSAGE_PACKET also contains an extra 64 bytes of data for the message body, so it sets the **dwcbVarLenData** field to 0x00000040. The message body that follows is specific to the message; in this instance, it specifies a transaction ID (**guidTx**, set to 9fa8a337-eaf7-4230-9232-b57379d65077), a transaction isolation level (**isoLevel**, set to 0x00100000, which is ISOLATIONLEVEL_SERIALIZABLE), and a transaction description (**szDesc**, set to the string "Example

Transaction - 39 chars long...."). The following table is the second MESSAGE_PACKET structure that the initiator creates.

Field	Value	Value Description
MsgTag	0x00000FFF	MTAG_USER_MESSAGE
fIsMaster	0x00000001	1
dwConnectionId	0x00000001	1
dwUserMsgType	0x00002001	PARTNERTM_PROPAGATE_MTAG_PROPAGATE
dwcbVarLenData	0x00000040	64
dwReserved1	0xcd64cd64	dwReserved1: 0xcd64cd64
<ul style="list-style-type: none"> ▪ guidTx <ul style="list-style-type: none"> ▪ 0x9fa8a337 ▪ 0x4230eaf7 ▪ 0x73b53292 ▪ 0x7750d679 	<ul style="list-style-type: none"> ▪ 9fa8a337-eaf7-4230-9232-b57379d65077 	
isoLevel	0x00100000	ISOLATIONLEVEL_SERIALIZABLE
<ul style="list-style-type: none"> ▪ szDesc <ul style="list-style-type: none"> ▪ 0x6d617845 ▪ 0x20656c70 ▪ 0x6e617254 ▪ 0x74636173 ▪ 0x206e6f69 ▪ 0x3933202d ▪ 0x61686320 ▪ 0x6c207372 ▪ 0x2e676e6f ▪ 0x002e2e2e 	<ul style="list-style-type: none"> ▪ "Example Transaction - 39 chars long...." 	

To send these MESSAGE_PACKETs, the initiator wraps the two messages into a single boxcar, which is in turn passed to the instance of the underlying transports protocol specified in [\[MS-CMPO\]](#), as specified in sections [2.1.1.3](#) and [3.1.7.1](#).

4.1.2 Creating a Boxcar

A boxcar always begins with a [BOX CAR HEADER](#) structure. The first two fields (**dwSeqNumThisCar** and **dwAckSeqNum**) are reserved and are always set to zero. The third field (**dwcbTotal**) contains the total number of bytes in the Boxcar (in this case, 0x00000080; 128 bytes.) The fourth field

(**dwcMessages**) contains the total number of [MESSAGE_PACKETs](#) in the BOX_CAR_HEADER (in this case, 2).

The rest of the boxcar contains an array of MESSAGE_PACKET structures. In this example, the two MESSAGE_PACKET structures from section [4.1.1](#) are included in this boxcar. Note that individual MESSAGE_PACKET structures are aligned to 8-byte boundaries, and that they are present in the order that they are intended to be processed. The following is the final boxcar structure.

Field	Value	Value description
dwSeqNumThisCar	0x00000000	dwSeqNumThisCar: 0
dwAckSeqNum	0x00000000	dwAckSeqNum: 0
dwcbTotal	0x00000080	dwcbTotal: 128
dwcMessages	0x00000002	dwcMessages: 2
MsgTag	0x00000005	MTAG_CONNECTION_REQ
fIsMaster	0x00000001	1
dwConnectionId	0x00000001	1
dwUserMsgType	0x00000101	CONNTYPE_PARTNERTM_PROPAGATE
dwcbVarLenData	0x00000000	0
dwReserved1	0xcd64cd64	dwReserved1: 0xcd64cd64
MsgTag	0x000000FF	MTAG_USER_MESSAGE
fIsMaster	0x00000001	1
dwConnectionId	0x00000001	1
dwUserMsgType	0x00002001	PARTNERTM_PROPAGATE_MTAG_PROPAGATE
dwcbVarLenData	0x00000040	64
dwReserved1	0xcd64cd64	dwReserved1: 0xcd64cd64
<ul style="list-style-type: none"> ▪ guidTx <ul style="list-style-type: none"> ▪ 0x9fa8a337 ▪ 0x4230eaf7 ▪ 0x73b53292 ▪ 0x7750d679 	<ul style="list-style-type: none"> ▪ 9fa8a337-eaf7-4230-9232-b57379d65077 	
isoLevel	0x00100000	ISOLATIONLEVEL_SERIALIZABLE
<ul style="list-style-type: none"> ▪ szDesc <ul style="list-style-type: none"> ▪ 0x6d617845 ▪ 0x20656c70 ▪ 0x6e617254 ▪ 0x74636173 	<ul style="list-style-type: none"> ▪ "Example Transaction - 39 chars long...." ▪ Padding 	

Field	Value	Value description
	<ul style="list-style-type: none"> ▪ 0x206e6f69 ▪ 0x3933202d ▪ 0x61686320 ▪ 0x6c207372 ▪ 0x2e676e6f ▪ 0x002e2e2e ▪ 0x00000000 	

4.1.3 Sending the Boxcar Using the Underlying MSDTC Connection Manager: OleTx Transports Protocol Session

Now that the boxcar has been constructed, this protocol provides the underlying transports protocol implementation with the session on which to transmit the boxcar, the count of messages in the boxcar, and the byte array that makes up the boxcar itself, as specified in [\[MS-CMPO\]](#) section 3.4.6.5. The transports protocol session will ensure that the boxcar is delivered to the acceptor, which will parse it and process the messages it contains.

4.2 A Simple Connection Scenario

In this example, the initiator starts a connection and then, when all of the messages associated with the connection are complete, the initiator disconnects the connection.

4.2.1 Initiating a Connection

[Sending Messages](#) shows how the initiator would create two [MESSAGE_PACKET](#) structures to request a new connection with connection type 0x00000101 (CONNTYPE_PARTNERTM_PROPAGATE as specified in [\[MS-DTCO\]](#)) and send the first message. In this scenario, after the first message is sent, the connection type that the initiator has requested indicates that the initiator should wait for some sort of response message. As this will be the first message that the initiator receives on the connection, the initiator will also be informed that the connection request was denied.

4.2.1.1 Connection Denied

Assume for a moment that the acceptor denies the connection request, then the acceptor will create a [MESSAGE_PACKET](#) with the **MsgTag** field set to [MTAG_CONNECTION_REQ_DENIED \(0x00000003\)](#), and it will provide a reason for the rejection in the **Reason** field (for example, E_ACCESSDENIED, or 0x80070005), which is appended to the end of the MESSAGE_PACKET. It will set the **dwConnectionId** field to the connection identifier that the initiator requested (0x00000001), and it will set the **dwcbVarLenData** field to four (the size of the **Reason** field that follows). The **dwUserMsgType** field is set to zero, because this is a MTAG_CONNECTION_REQ_DENIED message; likewise, the **fIsMaster** field is set to 0x00000000. The acceptor will then drop all incoming messages with a **dwConnectionId** field set to 0x00000001 until it receives a disconnect request.

The MESSAGE_PACKET structure is as follows.

Field	Value	Description
MsgTag	0x00000003	MTAG_CONNECTION_REQ_DENIED
fIsMaster	0x00000000	0
dwConnectionId	0x00000001	1
dwUserMsgType	0x00000000	dwUserMsgType: 0
dwcbVarLenData	0x00000004	4
dwReserved1	0xcd64cd64	dwReserved1: 0xcd64cd64
dwReason	0x80070005	E_ACCESSDENIED

4.2.1.2 Connection Accepted

If the acceptor accepts the connection request instead, then it does not send back a specific message to that effect. Instead, the acceptor will move on to process the next message in the boxcar. In this case, the next message is a user message and therefore, the higher-layer protocol (the transaction protocol) MUST be notified of the user message by signaling the message received event with the message and the Connection object, as specified in [\[MS-DTCO\]](#) section 3.1.8.4.

In this example, the higher-layer protocol will respond with another user message. The acceptor will create a [MESSAGE_PACKET](#) structure with the **MsgTag** field set to [MTAG_USER_MESSAGE \(0x00000FFF\)](#), and the **dwUserMsgType** field set to 0x00002002, which is the value that the transaction protocol described in [\[MS-DTCO\]](#) sends to indicate that the PARTNERTM_PROPAGATE_MTAG_PROPAGATED message was processed successfully. The message has no body, so the **dwcbVarLenData** field is set to 0x00000000, and the message is being sent by the acceptor, so the **fIsMaster** field is set to 0x00000000. The message is being sent as a response on the connection that the initiator started, so the **dwConnectionId** field is set to 0x00000001.

The response MESSAGE_PACKET ultimately looks like the following.

Field	Value	Description
MsgTag	0x00000FFF	MTAG_USER_MESSAGE
fIsMaster	0x00000000	0
dwConnectionId	0x00000001	1
dwUserMsgType	0x00002002	PARTNERTM_PROPAGATE_MTAG_PROPAGATED
dwcbVarLenData	0x00000000	0
dwReserved1	0xcd64cd64	dwReserved1: 0xcd64cd64

Regardless of whether the acceptor chooses to accept or reject the connection, the MESSAGE_PACKET that the acceptor generates is packed into a boxcar (as described earlier) and it is transmitted back to the initiator.

4.2.2 Disconnecting a Connection

The initiator is responsible for disconnecting the connection when the connection is complete, even if the connection was denied by the acceptor.

The initiator begins the disconnect sequence for a connection by creating a [MESSAGE_PACKET](#) structure with the **MsgTag** field set to [MTAG_DISCONNECT \(0x00000001\)](#), the **dwConnectionId** field set to the identifier of the connection being disconnected (0x00000001), and the **dwUserMsgType** field set to CONNTYPE_PARTNERTM_PROPAGATE (0x00000101).

The MESSAGE_PACKET structure is as follows.

Field	Value	Description
MsgTag	0x00000001	MTAG_DISCONNECT
fIsMaster	0x00000001	1
dwConnectionId	0x00000001	1
dwUserMsgType	0x00000101	CONNTYPE_PARTNERTM_PROPAGATE
dwcbVarLenData	0x00000000	0
dwReserved1	0xcd64cd64	dwReserved1: 0xcd64cd64

The initiator packages this MESSAGE_PACKET into a boxcar and sends it to the acceptor over the underlying transports protocol session as specified in [\[MS-CMPO\]](#).

When the acceptor receives the disconnect request, the acceptor begins the process of cleaning up any connection-specific resources. After this process is complete, the acceptor creates a MESSAGE_PACKET structure with the **MsgTag** field set to [MTAG_DISCONNECTED \(0x00000002\)](#), the **dwConnectionId** field set to the identifier of the connection that was just disconnected (0x00000001), and the **dwUserMsgType** field set to zero (0x00000000). The complete MESSAGE_PACKET structure is as follows:

Field	Value	Description
MsgTag	0x00000002	MTAG_DISCONNECTED
fIsMaster	0x00000000	0
dwConnectionId	0x00000001	1
dwUserMsgType	0x00000000	dwUserMsgType: 0
dwcbVarLenData	0x00000000	0
dwReserved1	0xcd64cd64	dwReserved1: 0xcd64cd64

When the initiator receives the disconnected message, the initiator then cleans up any connection-specific resources and reclaims the connection identifier for future use.

5 Security

5.1 Security Considerations for Implementers

This protocol has no additional security considerations beyond those in the transports protocol described in [\[MS-CMPO\]](#) section 5.1.

5.2 Index of Security Parameters

None.

6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

Note: Some of the information in this section is subject to change because it applies to an unreleased, preliminary version of the Windows Server operating system, and thus may differ from the final version of the server software when released. All behavior notes that pertain to the unreleased, preliminary version of the Windows Server operating system contain specific references to Windows Server 2016 Technical Preview as an aid to the reader.

- Windows NT 4.0 operating system Option Pack for Windows NT Server
- Windows 2000 operating system
- Windows XP operating system
- Windows Server 2003 operating system
- Windows Vista operating system
- Windows Server 2008 operating system
- Windows 7 operating system
- Windows Server 2008 R2 operating system
- Windows 8 operating system
- Windows Server 2012 operating system
- Windows 8.1 operating system
- Windows Server 2012 R2 operating system
- Windows 10 operating system
- Windows Server 2016 Technical Preview operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.2](#): All versions of Windows set this field to a random 4-byte value.

7 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- The removal of a document from the documentation set.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact dochelp@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
6 Appendix A: Product Behavior	Added Windows 10 to the applicability list.	Y	Content update.

8 Index

A

Abstract data model
[Boxcar Object](#) 19
[Connection Object](#) 19
[overview](#) 18
[Applicability](#) 10

B

[BOX_CAR_HEADER message](#) 12
[BOX_CAR_HEADER packet](#) 12
Boxcar
[format](#) 11
[size limit](#) 11
transmitting ([section 2.1.1](#) 11, [section 2.1.1.3](#) 11)
[Boxcar Object - abstract data model](#) 19

C

[Capability negotiation](#) 10
[Change tracking](#) 35
Connection
[creating](#) 21
[disconnecting](#) 22
[Connection accepted example](#) 31
[Connection denied example](#) 30
Connection Disconnected
[events](#) 26
[Connection Object - abstract data model](#) 19
Connection Request Denied
[events](#) 26
[Connection scenario](#) 30
[Creating Boxcar example](#) 28
[Creating connections](#) 21
[Creating MESSAGE_PACKET example](#) 27

D

Data model - abstract
[Boxcar Object](#) 19
[Connection Object](#) 19
[overview](#) 18
[Details](#) 18
[Disconnecting connection accepted example](#) 31
[Disconnecting connections](#) 22

E

[Enqueuing messages](#) 25
Events
[Connection Disconnected](#) 26

[Connection Request Denied](#) 26
[Receiving a Message](#) 26
Examples
[connection accepted example](#) 31
[connection denied example](#) 30
[connection scenario](#) 30
[creating Boxcar example](#) 28
[creating MESSAGE_PACKET example](#) 27
[disconnecting connection example](#) 31
[initiating connection example](#) 30
[overview](#) 27
[sending Boxcar example](#) 30
[sending messages example](#) 27

F

[Fields - vendor-extensible](#) 10

G

[Glossary](#) 6

H

[Higher-layer triggered events](#) 20

I

Idle Timer ([section 3.1.2.1](#) 19, [section 3.1.6.1](#) 25)
[Implementer - security considerations](#) 33
[Index of security parameters](#) 33
[Informative references](#) 7
[Initialization](#) 20
[Initialization by a Higher-Layer Protocol](#) 20
[Initialization by the Protocol](#) 20
[Initialization by a Higher-Layer Protocol](#) 20
[Initialization by the Protocol](#) 20
[Initiating connection example](#) 30
[Introduction](#) 6

L

[Local events](#) 25

M

[Message processing](#) 22
[MESSAGE_PACKET message](#) 12
[MESSAGE_PACKET packet](#) 12
Messages

[BOX_CAR_HEADER](#) 12
[enqueueing](#) 25
[MESSAGE_PACKET](#) 12
[MTAG_CONNECTION_REQ](#) 16
[MTAG_CONNECTION_REQ_DENIED](#) 15
[MTAG_DISCONNECT](#) 14
[MTAG_DISCONNECTED](#) 15
[MTAG_PING](#) 16
[MTAG_USER_MESSAGE](#) 17
[overview](#) 11
[sending](#) 20
[syntax](#) 12
[transmitting](#) 11
[transport](#) 11
[MTAG_CONNECTION_REQ \(MsgTag 0x00000005\)](#) 24
[MTAG_CONNECTION_REQ message](#) 16
[MTAG_CONNECTION_REQ packet](#) 16
[MTAG_CONNECTION_REQ_DENIED \(MsgTag 0x00000003\)](#) 23
[MTAG_CONNECTION_REQ_DENIED message](#) 15
[MTAG_CONNECTION_REQ_DENIED packet](#) 15
[MTAG_DISCONNECT \(MsgTag 0x00000001\)](#) 22
[MTAG_DISCONNECT message](#) 14
[MTAG_DISCONNECT packet](#) 14
[MTAG_DISCONNECTED \(MsgTag 0x00000002\)](#) 23
[MTAG_DISCONNECTED message](#) 15
[MTAG_DISCONNECTED packet](#) 15
[MTAG_PING \(MsgTag 0x00000004\)](#) 23
[MTAG_PING message](#) 16
[MTAG_PING packet](#) 16
[MTAG_USER_MESSAGE \(MsgTag 0x000000FF\)](#) 24
[MTAG_USER_MESSAGE message](#) 17
[MTAG_USER_MESSAGE packet](#) 17

N

[Normative references](#) 6
[Notify Higher-Layer of Incoming Message Events](#) 26

O

[Overview \(synopsis\)](#) 7

P

[Parameters - security index](#) 33
[Preconditions](#) 10
[Prerequisites](#) 10
[Product behavior](#) 34

R

Receiving a Message
[events](#) 26
[References](#) 6
[informative](#) 7
[normative](#) 6

[Relationship to other protocols](#) 9

S

Security
[implementer considerations](#) 33
[messages](#) 12
[parameter index](#) 33
[Sending Boxcar example](#) 30
[Sending messages](#) 20
[Sending messages example](#) 27
[Sequencing rules](#) 22
[Session down](#) 25
[Standards assignments](#) 10
[Syntax](#) 12

T

[Timer events](#) 25
[Timers](#) 19
[Tracking changes](#) 35
[Transmitting Boxcars](#) 11
[Transmitting messages](#) 11
[Transport](#) 11
[Triggered events - higher-layer](#) 20

V

[Vendor-extensible fields](#) 10
[Versioning](#) 10