

# [MS-DHA-Diff]:

## Device Health Attestation Protocol

---

### Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation (“this documentation”) for protocols, file formats, data portability, computer languages, and standards support. Additionally, overview documents cover inter-protocol relationships and interactions.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you can make copies of it in order to develop implementations of the technologies that are described in this documentation and can distribute portions of it in your implementations that use these technologies or in your documentation as necessary to properly document the implementation. You can also distribute in your implementation, with or without modification, any schemas, IDLs, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications documentation.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that might cover your implementations of the technologies described in the Open Specifications documentation. Neither this notice nor Microsoft's delivery of this documentation grants any licenses under those patents or any other Microsoft patents. However, a given Open Specifications document might be covered by the Microsoft [Open Specifications Promise](#) or the [Microsoft Community Promise](#). If you would prefer a written license, or if the technologies described in this documentation are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation might be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events that are depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than as specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications documentation does not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications documents are intended for use in conjunction with publicly available standards specifications and network programming art and, as such, assume that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
7/14/2016	1.0	MajorNew	<del>Initial Availability</del> Released new document.
<u>3/16/2017</u>	<u>2.0</u>	Major	Significantly changed the technical content.

# Table of Contents

<b>1</b>	<b>Introduction</b>	<b>5</b>
1.1	Glossary	5
1.2	References	6
1.2.1	Normative References	6
1.2.2	Informative References	7
1.3	Overview	7
1.4	Relationship to Other Protocols	8
1.5	Prerequisites/Preconditions	9
1.6	Applicability Statement	9
1.7	Versioning and Capability Negotiation	9
1.8	Vendor-Extensible Fields	10
1.9	Standards Assignments	10
<b>2</b>	<b>Messages</b>	<b>11</b>
2.1	Transport	11
2.2	Common Data Types	11
2.2.1	Namespaces	11
2.2.2	HTTP Methods	12
2.2.3	HTTP Headers	12
2.2.4	XML Elements	12
2.2.4.1	Claims	12
2.2.4.2	HealthCertificateBlob	12
2.2.5	Simple Types	12
2.2.5.1	Boolean_T	12
2.2.6	Attributes	<a href="#">12+3</a>
2.2.6.1	ErrorCode	13
2.2.6.2	ErrorMessage	13
2.2.7	Common Data Structures	13
<b>3</b>	<b>Protocol Details</b>	<b>14</b>
3.1	DHA-Enabled Client Details	14
3.1.1	Abstract Data Model	17
3.1.2	Timers	17
3.1.3	Initialization	17
3.1.4	Higher-Layer Triggered Events	17
3.1.5	Message Processing Events and Sequencing Rules	17
3.1.5.1	DHA-Boot-Data	18
3.1.5.1.1	POST	18
3.1.5.1.1.1	Request Body	18
3.1.5.1.1.2	Response Body	18
3.1.5.1.1.3	Processing Details	19
3.1.6	Timer Events	19
3.1.7	Other Local Events	19
3.2	DHA-Service Details	19
3.2.1	Abstract Data Model	19
3.2.2	Timers	19
3.2.3	Initialization	19
3.2.4	Higher-Layer Triggered Events	19
3.2.5	Message Processing Events and Sequencing Rules	20
3.2.5.1	DHA-Encrypted-Data	20
3.2.5.1.1	POST	20
3.2.5.1.1.1	Request Body	20
3.2.5.1.1.2	Response Body	21
3.2.5.1.1.3	Processing Details	21
3.2.6	Timer Events	22

3.2.7	Other Local Events.....	22
<b>4</b>	<b>Protocol Examples.....</b>	<b>23</b>
<b>5</b>	<b>Security.....</b>	<b>24</b>
5.1	Security Considerations for Implementers .....	24
5.2	Index of Security Parameters .....	24
<b>6</b>	<b>Appendix A: Full XML Schema.....</b>	<b>25</b>
6.1	Health CertificateRequestV1 Schema .....	25
6.2	Health CertificateRequestV3 Schema .....	25
6.3	HealthCertificateResponseV1 Schema .....	26
6.4	HealthCertificateResponseV3 Schema .....	27
6.5	HealthCertificateValidationRequestV1 Schema .....	28
6.6	HealthCertificateValidationRequestV3 Schema .....	29
6.7	HealthCertificateValidationResponseV1 Schema .....	29
6.8	HealthCertificateValidationResponseV3 Schema .....	30
<b>7</b>	<b>Appendix B: Product Behavior .....</b>	<b>33</b>
<b>8</b>	<b>Change Tracking.....</b>	<b>34</b>
<b>9</b>	<b>Index.....</b>	<b>35</b>

# 1 Introduction

This document specifies the Device Health Attestation (DHA) Protocol.

The DHA protocol enables devices: to submit information about the code/programs that were loaded & executed during boot (the state the device is booted to) to a remote reporting service called Device Health Attestation Service (DHA-Service), and get an encrypted BLOB back that is cached on the device or made available to a MDM service provider.

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative. All other sections and examples in this specification are informative.

## 1.1 Glossary

This document uses the following terms:

**attestation:** A process of establishing some property of a computer platform or of a trusted platform module (TPM) key, in part through TPM cryptographic operations.

**attestation certificate (AIKCert):** An X.509 certificate, issued by a Privacy-CA ([TCG-Cred] section 2.6), that contains the public portion of an Attestation Identity Key signed by a Privacy-CA. It states that the public key is associated with a valid TPM. See [TCG-Cred] section 3.4 for more information.

**Attestation Identity Key (AIK):** An asymmetric (public/private) key pair that can substitute for the Endorsement Key (EK) as an identity for the trusted platform module (TPM). The private portion of an AIK can never be revealed or used outside the TPM and can only be used inside the TPM for a limited set of operations. Furthermore, it can only be used for signing, and only for limited, TPM-defined operations.

**binary large object (BLOB):** A discrete packet of data that is stored in a database and is treated as a sequence of uninterpreted bytes.

**endorsement certificate (EKCert):** An X.509 certificate issued by a platform manufacturer indicating that the trusted platform module (TPM) with the specified endorsement key was built into a specified computer platform. See [TCG-Cred] section 3.2 for more information.

**endorsement key (EK):** A Rivest-Shamir-Adleman (RSA) public and private key pair, which is created randomly on the trusted platform module (TPM) at manufacture time and cannot be changed. The private key never leaves the TPM, while the public key is used for attestation and for encryption of sensitive data sent to the TPM. See [TCG-Cred] section 2.4 for more information.

**Hypertext Transfer Protocol (HTTP):** An application-level protocol for distributed, collaborative, hypermedia information systems (text, graphic images, sound, video, and other multimedia files) on the World Wide Web.

**Hypertext Transfer Protocol Secure (HTTPS):** An extension of HTTP that securely encrypts and decrypts web page requests. In some older protocols, "Hypertext Transfer Protocol over Secure Sockets Layer" is still used (Secure Sockets Layer has been deprecated). For more information, see [SSL3] and [RFC5246].

**Secure Sockets Layer (SSL):** A security protocol that supports confidentiality and integrity of messages in client and server applications that communicate over open networks. SSL uses two keys to encrypt data—a public key known to everyone and a private or secret key known only to the recipient of the message. SSL supports server and, optionally, client authentication (2) using X.509 certificates (2). For more information, see [X509]. The SSL protocol is precursor to Transport Layer Security (TLS). The TLS version 1.0 specification is based on SSL version 3.0 [SSL3].

**simple type:** An element that can contain only text and appears as <simpleType> in an XML document or any attribute of an element. Attributes are considered simple types because they contain only text. See also complex type.

**TCP/IP:** A set of networking protocols that is widely used on the Internet and provides communications across interconnected networks of computers with diverse hardware architectures and various operating systems. It includes standards for how computers communicate and conventions for connecting networks and routing traffic.

**Transport Layer Security (TLS):** A security protocol that supports confidentiality and integrity of messages in client and server applications communicating over open networks. TLS supports server and, optionally, client authentication by using X.509 certificates (as specified in [X509]). TLS is standardized in the IETF TLS working group. ~~See [RFC4346].~~

**trusted platform module (TPM):** A component of a trusted computing platform. The TPM stores keys, passwords, and digital certificates. See [TCG-Architect] for more information.

**XML namespace:** A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [RFC3986]. A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [XMLNS-2ED].

**XML namespace prefix:** An abbreviated form of an XML namespace, as described in [XML].

**XML schema:** A description of a type of XML document that is typically expressed in terms of constraints on the structure and content of documents of that type, in addition to the basic syntax constraints that are imposed by XML itself. An XML schema provides a view of a document type at a relatively high level of abstraction.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as defined in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the Errata.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

~~[MS-MDM] Microsoft Corporation, "Mobile Device Management Protocol".~~

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

~~[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol—HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>~~

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[TCG-Cred] Trusted Computing Group, "TCG Credential Profiles", [Specification Version 1.1, Revision 1.014, May 2007](http://www.trustedcomputinggroup.org/files/temp/642686EC-1D09-3519-AD58BB4C50BD5028/wp-content/uploads/IWG%20Credential-Credential_Profiles_V1_R1_14.pdf), [http://www.trustedcomputinggroup.org/files/temp/642686EC-1D09-3519-AD58BB4C50BD5028/wp-content/uploads/IWG%20Credential-Credential\\_Profiles\\_V1\\_R1\\_14.pdf](http://www.trustedcomputinggroup.org/files/temp/642686EC-1D09-3519-AD58BB4C50BD5028/wp-content/uploads/IWG%20Credential-Credential_Profiles_V1_R1_14.pdf)

[X509] ITU-T, "Information Technology - Open Systems Interconnection - The Directory: Public-Key and Attribute Certificate Frameworks", Recommendation X.509, August 2005, <http://www.itu.int/rec/T-REC-X.509/en>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

## 1.2.2 Informative References

[TPM] Trusted Computing Group, "TPM Work Group", <https://www.trustedcomputinggroup.org/groups/tpm/>

## 1.3 Overview


Many enterprises check software state and policy compliance before allowing computers to access corporate network resources. The goal of these checks is to ensure that the operating system (OS) is properly updated, the OS configuration meets company policy, and that antivirus software is up-to-date.

The Device Health Attestation (DHA) protocol provides a way for a device to submit its policy compliance status and software status in a tamper-resistant way to a Device Health Attestation Service (DHA-Service) such that its state can later be evaluated by an entity such as an MDM (mobile device management) to determine compliance status.

The following diagram describes the three components that interact in a Device Health Attestation communications.


1. **DHA-Enabled Device:** that supports Trusted Platform Module (TPM) in Firmware or Discreet format.
2. **Device Management Server (MDM):** initiates the Device Health Attestation flow, reviews the Device Health Attestation Report (DHA-Report), and evaluates whether the reported state is equivalent to compliance status.
3. **DHA-Service:** a component that processes Device Health Attestation data, produces DHA-Report.

This document discusses only the interaction between the client and the DHA-Service.

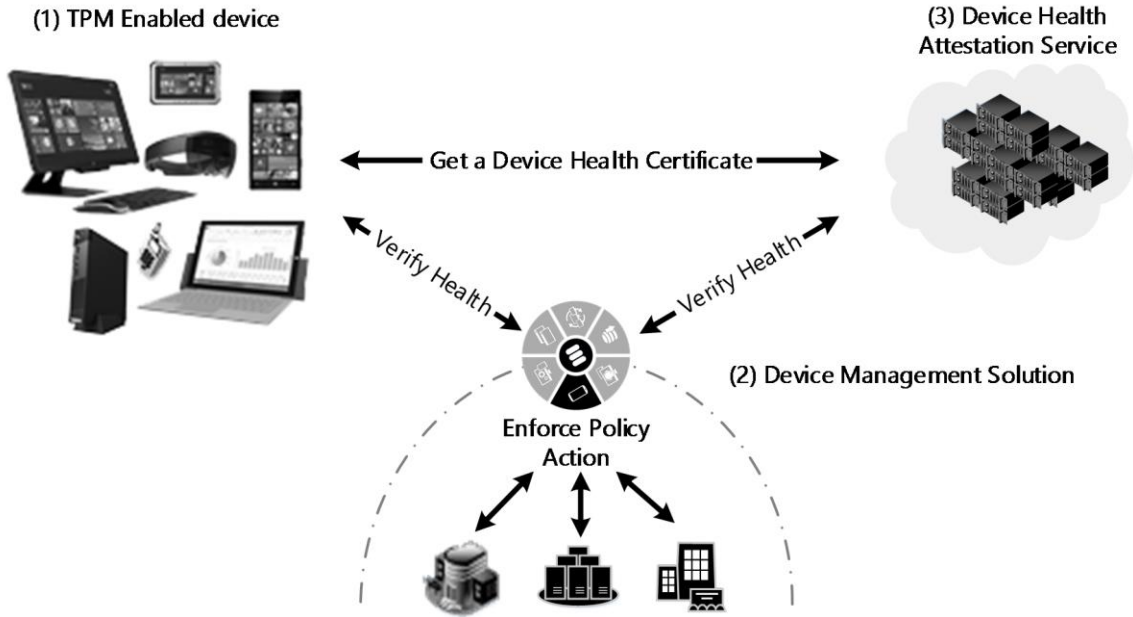

**Figure 1: Device health attestation**

The following is a sequence diagram that describes how the three components interact, during a Device Health Attestation session.

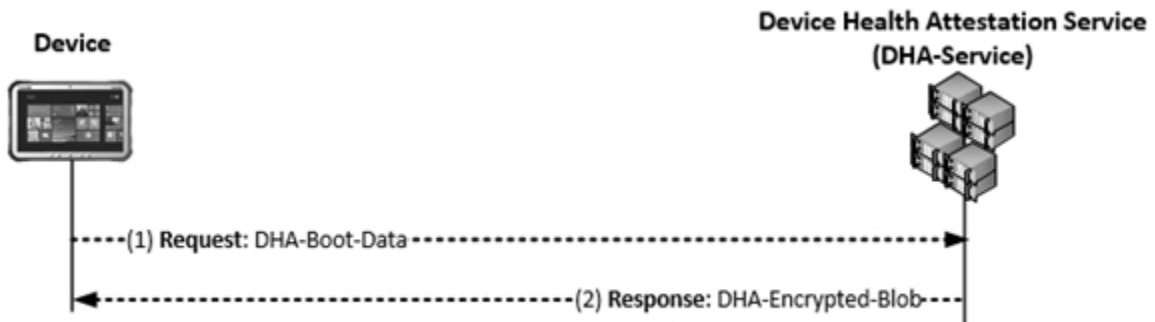


**Figure 2: Device, DHA-service communication**

### 1.4 Relationship to Other Protocols

The following figure illustrates the relationship of this protocol to industry-standard protocols.:

The Device Health Attestation Protocol depends upon [HTTP \[RFC2616\]](#) [HTTPS \[RFC2818\]](#) and can only be used with [\[MS-MDM\]](#).



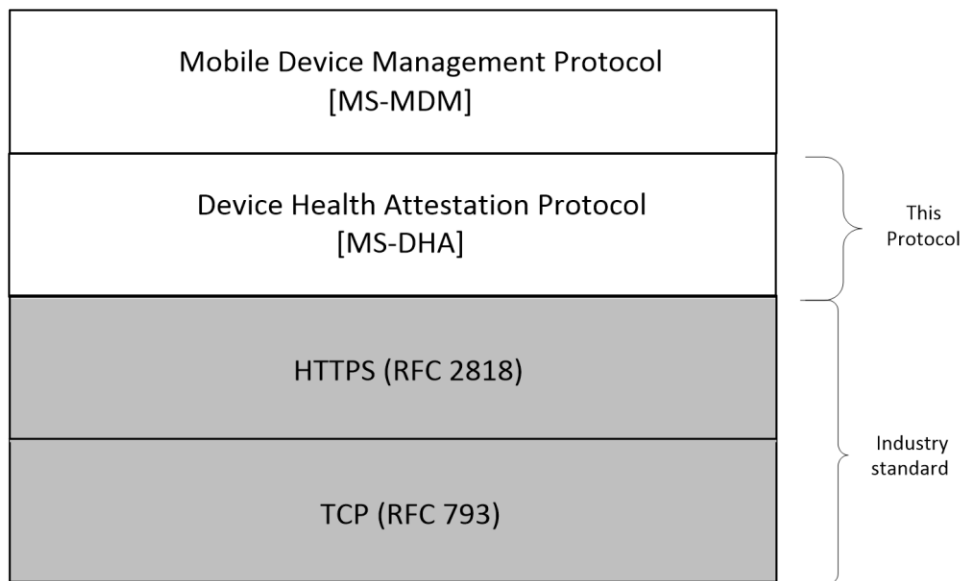

**Figure 3: Relationship of DHA protocol to industry-standard protocols**

### 1.5 Prerequisites/Preconditions

The DHA protocol assumes the availability of the following resources:

- An HTTPS channel [RFC2818].
- A mobile device management service.
- Devices MUST support a Trusted Module Platform (TPM) that is designed based on standards specified in [TPM] .

### 1.6 Applicability Statement

The DHA protocol is applicable for monitoring/assessing the state into which a device is booted, and to monitor/verify if the device is booted to a secure/compliant state.

### 1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol can be implemented on top of TLS/SSL and HTTPS as discussed in section 2.1.
- **Protocol Versions:** This is version 3.0 of the DHA protocol. It is also compatible with TPM-devices that have standardized around versions 1.2 and 2.0 of the TPM specification. The server implementation of the Device Health Attestation Protocol supports the following client versions:
  - Version 1.0: The first release of the protocol.
  - Version 2.0: An update to support a Security Version Number in the Health report.
  - Version 3.0: An Update to support TPM 1.2 devices (which results in a TPMVersion node being added to the Health report).

## **1.8 Vendor-Extensible Fields**

None.

## **1.9 Standards Assignments**

None.

## 2 Messages

### 2.1 Transport

DHA is a client-to-server protocol that consists of an HTTP- based Web service. It supports TLS over ~~HTTP~~/HTTPS over TCP/IP [~~RFC2616~~-RFC2818], using the following endpoints:

**GET:** <devicehealthattestation/gethealthcertificate/v1>  
<devicehealthattestation/gethealthcertificate/v3>

**VALIDATE:** <devicehealthattestation/validatehealthcertificate/v1>  
<devicehealthattestation/validatehealthcertificate/v3>

The TPM-compatible device and the DHA-Service communicate via a TLS/SSL protected communication channel in following format.

- Device Requests use TLS/SSL for forwarding DHA-Boot-Data to DHA-Service
- The DHA-Service Responses use TLS/SSL to forward an encrypted BLOB to the Device

### 2.2 Common Data Types

XML schema element definitions that are specific to a particular request/response body are described within the corresponding sections.

#### 2.2.1 Namespaces

This specification defines and references various XML namespaces that use the mechanisms specified in [XMLNS]. Although this specification associates a specific XML namespace prefix with each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefixes and XML namespaces used in this specification are as follows.

Prefix	Namespace URI	Reference
xsd	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	[XMLSCHEMA 1]
xmlns	<a href="http://schemas.microsoft.com/windows/security/healthcertificate/request/v1">http://schemas.microsoft.com/windows/security/healthcertificate/request/v1</a>	This specification
xmlns	<a href="http://schemas.microsoft.com/windows/security/healthcertificate/request/v3">http://schemas.microsoft.com/windows/security/healthcertificate/request/v3</a>	This specification
<a href="http://schemas.microsoft.com/windows/security/healthcertificate/response/v1">xmlns</a>	<a href="http://schemas.microsoft.com/windows/security/healthcertificate/response/v1">http://schemas.microsoft.com/windows/security/healthcertificate/response/v1</a>	<a href="#">This specification</a>
<a href="http://schemas.microsoft.com/windows/security/healthcertificate/response/v3">xmlns</a>	<a href="http://schemas.microsoft.com/windows/security/healthcertificate/response/v3">http://schemas.microsoft.com/windows/security/healthcertificate/response/v3</a>	<a href="#">This specification</a>
<a href="http://schemas.microsoft.com/windows/security/healthcertificate/validation/request/v1">xmlns</a>	<a href="http://schemas.microsoft.com/windows/security/healthcertificate/validation/request/v1">http://schemas.microsoft.com/windows/security/healthcertificate/validation/request/v1</a>	<a href="#">This specification</a>
<a href="http://schemas.microsoft.com/windows/security/healthcertificate/validation/request/v3">xmlns</a>	<a href="http://schemas.microsoft.com/windows/security/healthcertificate/validation/request/v3">http://schemas.microsoft.com/windows/security/healthcertificate/validation/request/v3</a>	<a href="#">This specification</a>

Prefix	Namespace URI	Reference
xmlns	http://schemas.microsoft.com/windows/security/healthcertificate/validation/response/v1	This specification
xmlns	http://schemas.microsoft.com/windows/security/healthcertificate/validation/response/v3	This specification

## 2.2.2 HTTP Methods

This protocol uses the existing set of standard HTTP methods.

## 2.2.3 HTTP Headers

None.

## 2.2.4 XML Elements

### 2.2.4.1 Claims

<Claims> contain Base64 opaque information that is gathered from the client and returned to the server, upon which the basis of health attestation is established. In the case of HealthCertificateRequest, <Claims> will also contain the TCG (boot) log from the client.

### 2.2.4.2 HealthCertificateBlob

An encrypted **blobBLOB** containing the Health Certificate.

## 2.2.5 Simple Types

The following table summarizes the set of custom simple type definitions that are included in this specification.

Simple type	Section	Description
Boolean_T	section 2.2.5.1	The contents are either true or false.

### 2.2.5.1 Boolean\_T

```
<xs:simpleType name="Boolean_T">:
  <xs:restriction base="xs:boolean">:
    <xs:pattern value="true|false"/>:
  </xs:restriction>:
</xs:simpleType>
```

## 2.2.6 Attributes

The following table summarizes the set of common XML schema attribute definitions that are included in this specification.

<b>Attribute</b>	<b>Section</b>	<b>Description</b>
ErrorCode	section 2.2.6.1	Contains the code that is associated with the error.
ErrorMessage	section 2.2.6.2	Contains a description of the error.

### **2.2.6.1 ErrorCode**

Contains the code that is associated with the error.

### **2.2.6.2 ErrorMessage**

Contains a description of the error.

### **2.2.7 Common Data Structures**

None.

## 3 Protocol Details

### 3.1 DHA-Enabled Client Details

The DHA protocol enables Mobile Device Management (MDM) solutions to get a Device Health Report (DHA-Report) from devices that meet the following requirements.

- Support Trusted Module Platform (TPM) version 1.xx or 2.xx in the following formats.
  - Firmware (i.e. Windows phone)
  - Discrete (i.e. PC devices that have a physical TPM chip)

The EK, EKCert and Windows Attestation Identity Key (AIK) and Windows Attestation Certificate (AIKCert), as specified in [TCG-Cred], MUST be provisioned previous to initiating the attestation protocol. The health attestation protocol can be initiated asynchronously after boot once the TPM has been provisioned (i.e. EK, EK Cert, AIK, AIK Cert are created) or it can be initiated as a part of a service request by mobile device management server. For more information about the AIK enrollment process, see [X509].

The Device Health Report (DHA-Report) is device bound and is valid only for the current boot cycle. It will also have a time bounded lifetime to force an attestation check for long-running devices.

Following is a brief overview of the Device Health Attestation, asynchronous processing flow:


1. Upon Boot the device sends information about its boot state (DHA-Boot-Data) to Device Health Attestation Service (DHA-Service)
2. DHA-Service replies back with an encrypted data ~~blob~~BLOB (DHA-Encrypted-Data)
3. When a Device Management Server (MDM-Server) needs to get a Device Health Report (DHA-Report), it sends a request to the TPM-compatible device (that is enrolled to - managed by the MDM-Server), initiates the DHA data validation session
4. The TPM-compatible device sends an alert to the Device Management Server, informs that the Device Health Validation Data (DHA-Validation-Data) is ready for pickup
5. The Device Management Server sends a request to the TPM-compatible device to get the DHA-Validation-Data
6. The TPM-compatible device sends the DHA-Validation-Data to Device Management Server (MDM-Server)
7. The Device Management Server (MDM-Server) adds a "Nonce" to the payload, forwards the DHA-Validation-Data to DHA-Service
8. The DHA-Service review the data, sends a report (DHA-Report) to the Device Management Server (MDM-Server)

## Device Health Attestation – Asynchronous Flow

### (A) Device sends DHA-Boot-Data when it boots or reboots



### (B) Device Management server gets a DHA-Report

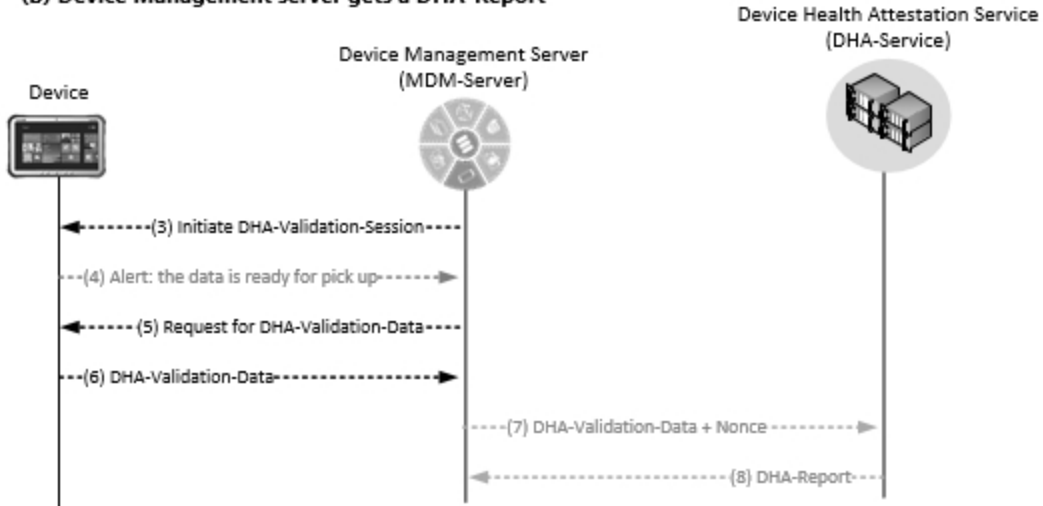


**Figure 4: Device health attestation asynchronous processing flow**

Following is a brief overview of the Device Health Attestation, synchronous processing flow:

1. The Device Management Server (MDM-Server) sends a request to the TPM-compatible device to initiate the DHA data validation session
2. The TPM-compatible device sends an alert to the Device Management Server (MDM-Server), informs that the data is not ready for pickup
3. The TPM-compatible sends its boot data (DHA-Boot-Data) to the DHA-Service
4. The DHA-Service sends an encrypted BLOB back to the TPM-compatible device
5. The TPM-compatible device sends an alert to the Device Management Server (MDM-Server) informs that DHA data is ready for pickup
6. The Device Management Server sends a request to the TPM-compatible device to get the DHA-Validation-Data
7. The TPM-compatible device sends the DHA-Validation-Data to Device Management Server (MDM-Server)


8. The Device Management Server (MDM-Server) adds a "Nonce" to the payload, forwards the DHA-Validation-Data to DHA-Service
9. The DHA-Service review the data, sends a report (DHA-Report) to the Device Management Server (MDM-Server)

**Device Health Attestation – Synchronous Flow**

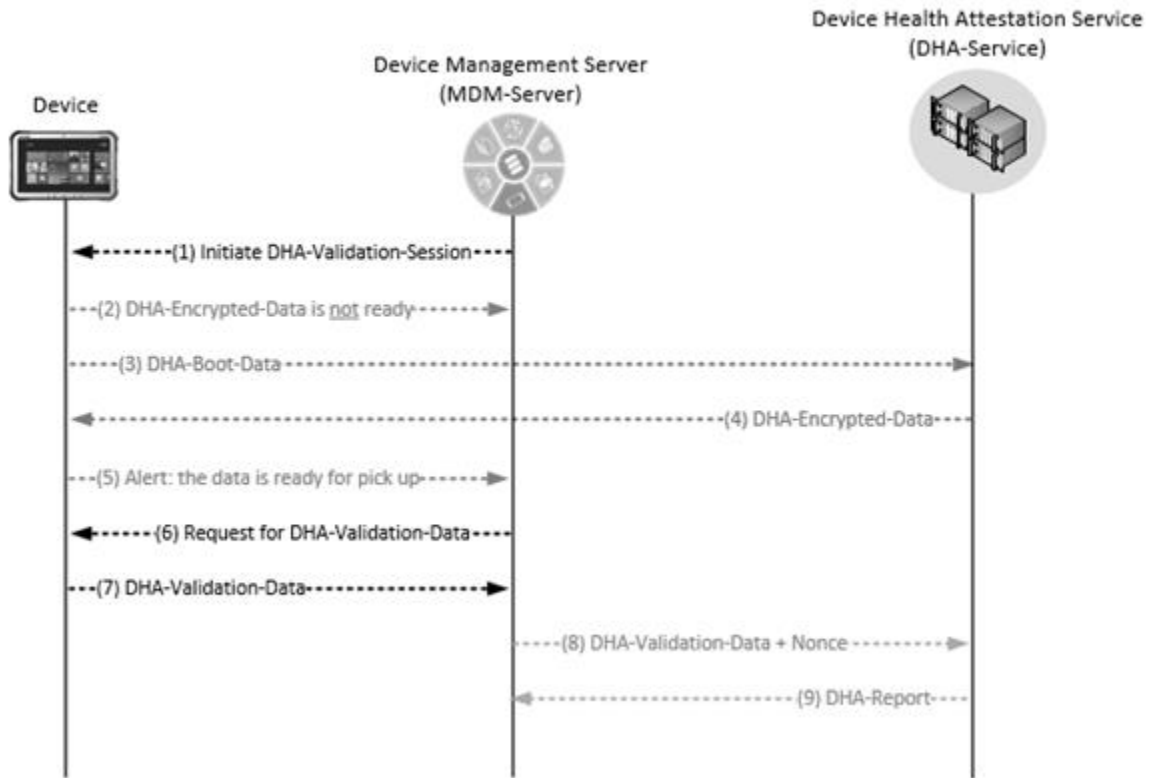

**Figure 5: Device health attestation synchronous processing flow**

The DHA-enabled client is a computing device that supports TPM in firmware or discrete format, and is enrolled/managed by a Device Management Server (MDM-Server). The following state diagram shows an exchange in a negotiation between the TPM-compatible device and the Device Health Attestation Service (DHA-Service).

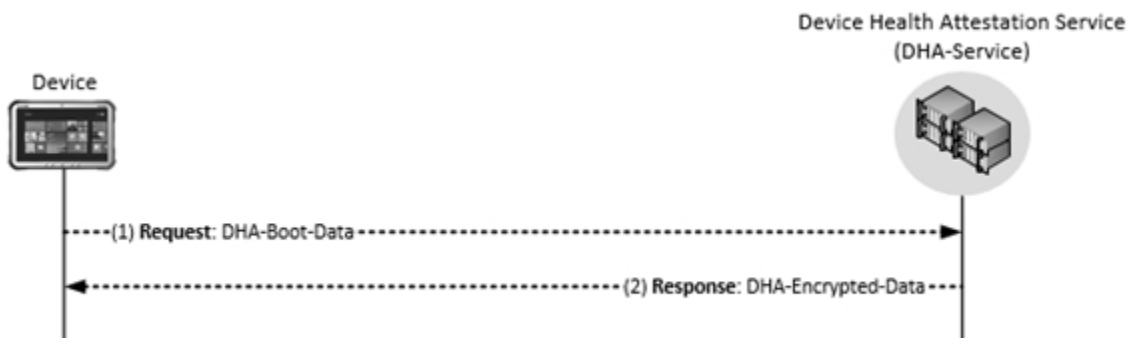



## Figure 6: Device Health Attestation

The Device Management Server (MDM-Server) can initiate a request for DHA Data as needed. When the Device Management Server (MDM-Server) sends this request: the TPM-compatible device prepares DHA-Validation-Data, forward it to Device Management Server (MDM-Server)



## Figure 7: Device to MDM-Server communication

### 3.1.1 Abstract Data Model

None.

### 3.1.2 Timers

None.

### 3.1.3 Initialization

The Device health attestation flow is triggered on a TPM-compatible device under the following conditions.

- When the device boots.
- When the device reboots.

### 3.1.4 Higher-Layer Triggered Events

The device receives a mobile device management request for device health verification.

### 3.1.5 Message Processing Events and Sequencing Rules

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
POST	section 3.1.5.1.1	Send DHA-Boot-Data to DHA-Service

The responses to all the resources can result in the following status codes.

Status code	Reason phrase	Description
200	HTTP OK	Successful request
400	Bad Request	The server cannot or will not process the request due to something that is perceived to be a client error (e.g., malformed request syntax, invalid request message framing, request mismatch or deceptive request routing, invalid BLOB )
500	Internal Server Error	A generic error message, given when an unexpected condition was encountered and no more specific message is suitable. An issue is preventing the service from issuing certificates

### 3.1.5.1 DHA-Boot-Data

The TPM-compatible client sends DHA-Boot-Data (i.e. TCG logs, PC measurements, a signed certificate) to the DHA-Service (DHA-Service) - receives an Encrypted **blobBLOB** from the DHA-Service Provider (DHA-EB).

#### 3.1.5.1.1 POST

This method sends information from the TPM-compatible device to the DHA-Service.

##### 3.1.5.1.1.1 Request Body

The request body from the TPM-compatible device to the DHA-Service is an encrypted **blobBLOB**. It resembles the following.

```
<HealthCertificateRequest ProtocolVersion='3'
xmlns='http://schemas.microsoft.com/windows/security/healthcertificate/request/v3'>

<Claims>AQAAAAQAAABlAAAAABgEAAAAAAAAAUqQAA/1RDR4AYACIACzrZ01nPbX4MkSK7O8Tam7UYSUM6q51mumDTW/9KK
ir8AAAAAAAAAALEZshCdiDh7rYJANltqkYJzMLFAAAAAQALA///wAUQ31e1GTYuKMMGHqqWhQhOCq+TmQAFAAEAQBP18
y38myfaPpJJ1PLY+bfckDowdGVcjAyYFRF8AJuRdP+cv7UpMxE+JnNRseWYjVXiWqkeQ81ctjKLx/oIFdL2m/s7mRroc
j4C7dUWWeqnHiboAgT3+9UF1dgUacBq5Tt/ /BAUwAwEB/zAFBgNVHSMEGDAWgBTv91bLj+
/1erYd/uoZnT3FYeiIEIiLoi+9UcQDOUDVYdpUI7mqxogHVAgMBAAGjggF2MIIBcJASBgkrBgEEAYI3FQEEBQIDAQABMC
MGCSsGAQQBgjcVAgQWBBT4wWu3f3dTsvM1Nx1OoSZ7DyBwgDAdBgNVHQ4EFgQUE62/Qwm9gnCcJNVPmW7VipiKG9QwGQY
JKwYBBAGCNxQCBAweCgBTAHUAYgBDAEEwCwYDVR0PBAQDAgGMA8GA1UdEwEB/wQFMAMBAf8wHwYDVR0jBBGwFoAURWZS
Q+F+WBG/1k6eI1UIOzoiaqgwXAYDVR0fBFUwUzBRoE+
.
.
.
.neJUBAAAFdCQ0wFAAAABwAAgAEAAAALANgEPWt7ha01jrO2rmqHOrfvI6JjUsXcT6pa7trPXrQbHQAAAEV4aXQgQm9v
dCBTZxJ2aWNlcyBjbnZvY2F0aW9uBQAAAAcAAIABAAAAcWc1T3VCy9hyqBqdneqDmyuNdHx+vV6mYVxA9C9EptvroCgAA
ABFeG10IEJvb3QgU2VydmljZXNjZXMgUmV0dXJuZWQgd2l0aCBTdWNjZXNz</Claims>

<AIKPublic>U1NBMQAIAAADAAAAAEEAAAAAAAAAAAAAAAAQABYw9/R0sYTF0SYzKfM7gy2aASjwB/S6L3ztZ+FjEaLifQJ0
77/wVIVLbzI2gB9tVPL5G8q+...../xtRyILLzYSXMDx0mwysTwHhbB3zUx1j51mlI0tuAhRtBbccH1aYW0DjCFJ
MFNPZvCBpa2902E+23zWHz01hqw==</AIKPublic>
</HealthCertificateRequest>
```

##### 3.1.5.1.1.2 Response Body

The response body from the DHA-Service to the TPM-compatible device is an encrypted **blobBLOB** (DHA-Encrypted-Data).

### 3.1.5.1.1.3 Processing Details

The encrypted ~~blob~~BLOB is cached on the client in encrypted format.

### 3.1.6 Timer Events

None.

### 3.1.7 Other Local Events


When the TPM-compatible device is booted or rebooted, it triggers an event that sends the DHA-Boot-Data to the DHA-Service over TLS/SSL protected communication channel.

## 3.2 DHA-Service Details

The DHA-Service consists of two major communication paths:

- The path between the TPM-compatible device and the DHA-Service
- The path between the DHA-Service and the MDM-Server

The following state diagram shows the exchange between the DHA-Service and the TPM-compatible client.

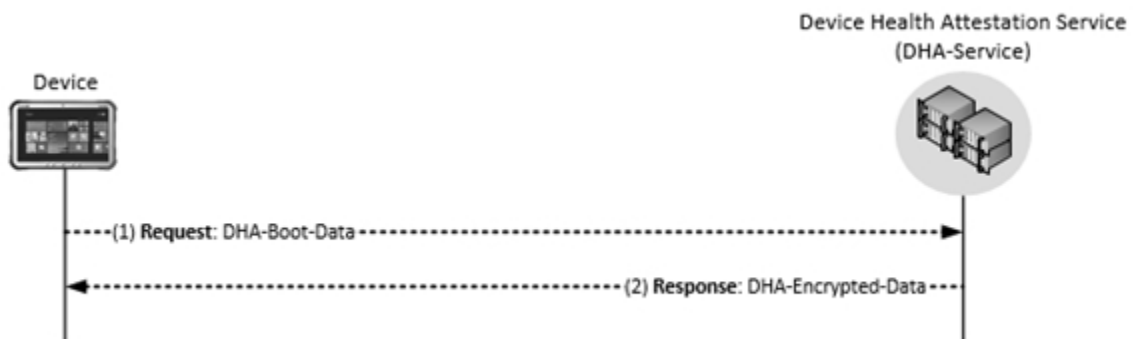

**Figure 8: Device to DHA-Service communication**

### 3.2.1 Abstract Data Model

None.

### 3.2.2 Timers

None.

### 3.2.3 Initialization

None.

### 3.2.4 Higher-Layer Triggered Events

None.

### 3.2.5 Message Processing Events and Sequencing Rules

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
POST	section 3.2.5.1.1	Sends an encrypted <del>blob</del> BLOB (DHA-Encrypted-Data to TPM-compatible device upon request

The responses to all the resources can result in the following status codes.

Status code	Reason phrase	Description
200	HTTP OK	Successful request
400	Bad Request	The server cannot or will not process the request due to something that is perceived to be a client error (e.g., malformed request syntax, invalid request message framing, request mismatch or deceptive request routing, invalid BLOB)
500	Internal Server Error	A generic error message, given when an unexpected condition was encountered and no more specific message is suitable. An issue is preventing the service from issuing certificates

#### 3.2.5.1 DHA-Encrypted-Data

The DHA-Service receives the DHA-Boot-Data from the TPM-compatible device. The DHA-Service reviews the data, creates an Encrypted ~~blob~~BLOB (DHA-Encrypted-Data), and sends it to the TPM-compatible device. When the TPM-compatible device receives the DHA-Encrypted-Data, it caches the data in its local storage.

##### 3.2.5.1.1 POST

This method sends information from the DHA-Service to the TPM-compatible device.

##### 3.2.5.1.1.1 Request Body

The health certificate validation request body is specified in section 3.1.5.1.1.1, Boot Data POST Request body.

```
<HealthCertificateValidationRequest ProtocolVersion='3' xmlns='http://schemas
.microsoft.com/windows/security/healthcertificate/validation/request/v3':
  <Claims>
    AQA AAAQA AAB1AAAABgEAAAAAAD/VENHgBgAIgALotk7Wc9tfgyRIrs7xNqbtRhJQzqrmWa6Y
    NNb/0oqKvwAEAECAwQFBgcICQoLDA0ODxAAAAAALiQchCdiDh7rYJANltqkYJzMLfAAAAAQ
    ALA///wAUQ31e1GTyUKMMGHqqWhQhOCq+TmQAFAAEAQBwMAodpzmBxpW2kdqfsVF15u4y+9S
    65aq6a5LbL8E3DLVa2FFGXmDS0/vy3XNmU8q3UfPNZ99TR+ff7g/IhDLjInGzCEQ04YTP6/V
    L+1Fgt9dJvTe8Cm5BRu4QwdM9g+cGGWu3eeTghRAdsG4OdNknMP2IuAihKJF5xrymWw5TtVpn
    Fc/MjCzrMqAcQmH3GEBMZRstjr0yTcqZaXsca4Ydn7kCAk8HLuV7GVkcuF9s7C8mlKEfqQMXs
    LAF/oyDYWl4QGc4166+anFOFHpvnfA5hYUtBMctOvi0LqCML6yAIJuZnNxI3MdIkVLWAnnOYe
    k/YQ//OKtF9Bitz2pGF0A
  </Claims>
  <HealthCertificateBlob>
    77u/PD94bWwgdMvyc21vbj0iMS4wIiBlbmNvZGluc2Z0idXRmLTgiPz48T3BhcXVlSGVhbHRoQ
```

```

2VydGlmaWNhdGUeG1sbnM6eHNkPSJodHRwOi8vd3d3LnczLm9yZy8yMDAxL1hNTFNjaGVtYS
IgeG1sbnM6eHNkPSJodHRwOi8vd3d3LnczLm9yZy8yMDAxL1hNTFNThrdFNVMFRWYi9KdWlyO
FFySjgvdWw4dU9ibm5DUWVERVhnbC9qVHVXehJYUUVFESUVobHBISis2WStNVEpBMElvZUwxQ
k9sSktZNGxqSDAvOXZvdnppU0pUZXLNLaUI3OGV4RHpHRmtBYjZhb3duWWZxSHBazWZTd2g3Tn
FpZmJPRUhoSVpOz114NmhFLytxMk52c1lUWUgVnW9yK3Vvd3RkMDkwWjRiVytMQT09PC9DZXJ
0aWZpY2F0ZUtleT48SVY+Z3Mr.....5SjhQQk9o0UhhNDUxQTFRwMrNVJTUjVVSUxTNF
EvNktyV1VJN1h6RTU0U0R5cXpST2pXTDdXNVVpb1BNbnJCV0ozWVRQSOVKY250ekRmN1BRTEd
JVmg4dkxqWitadmRBZVZML0tRdHBza0k2NGtZHRM3BVdkIyb0xMTjVlVBRtGFkMGVMOXc5
Ty9sQW9qTXyWv1VQLzJLRjklbkdvTFNUY1Z6QUw3WmNkSENkQWt4MGh4bkFicUh5ZmowTGJoT
FFWNzhNWit2Q1dJdzNwVXBCZEJxUH16aWJzREpoSW9uQTRRYkn2OExnaUpzMzlk5tejk3OU
ovblkxOVVvTjNjUjU0R5cXpST2pXTDdXNVVpb1BNbnJCV0ozWVRQSOVKY250ekRmN1BRTEd
jUVlWQ09PC9TaWduYXR1cmU+PC9PcGFxdWVlZWVsdGhDZXJ0aWZpY2F0ZT4=
</HealthCertificateBlob>
</HealthCertificateValidationRequest>

```

### 3.2.5.1.1.2 Response Body

Response (DHA-Service->MDM-Server): DHA-Service reviews the data, creates a report (DHA-Report), and forwards the report to MDM-Server.

The response body from the DHA-Service to the MDM-Server is an encrypted ~~blob~~**BLOB**. It resembles the following.

```

<?xml version="1.0" encoding="utf-8"?>
<HealthCertificateValidationResponse xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi
="http://www.w3.org/2001/XMLSchema-instance" ErrorCode="0" ProtocolVersion="3" xmlns=
"http://schemas.microsoft.com/windows/security/healthcertificate/validation/response/v3">
<HealthCertificateProperties="">
  <Issued>2016-03-IT02:15:48.2966134Z</Issued>
  <AIKPresent>>false</AIKPresent>
  <ResetCount>3359798816</ResetCount>
  <RestartCount>3790517769</RestartCount>
  <DEPPolicy>0</DEPPolicy>
  <BitlockerStatus>0</BitlockerStatus>
  <BootManagerRevListVersion>0</BootManagerRevListVersion>
  <CodeIntegrityRevListVersion>0</CodeIntegrityRevListVersion>
  <SecureBootEnabled="">>false</SecureBootEnabled>
  <BootDebuggingEnabled>>false</BootDebuggingEnabled>
  <OSKernelDebuggingEnabled>>true</OSKernelDebuggingEnabled>
  <CodeIntegrityEnabled>>true</CodeIntegrityEnabled>
  <TestSigningEnabled>>false</TestSigningEnabled>
  <SafeMode>>false</SafeMode>
  <WinPE>>false</WinPE>
  <ELAMDriverLoaded>>true</ELAMDriverLoaded>
  <VSMEnabled>>false</VSMEnabled>
  <PCRHashAlgorithmID>0</PCRHashAlgorithmID>
  <BootAppSVN>1</BootAppSVN>
  <BootManagerSVN="">1</BootManagerSVN>
  <TpmVersion>2</TpmVersion>
  <PCR0>01C385E2752C20EFBD604143BCB1BDE5AC59FE737DE1833A601B3E8595757B79</PCR0>
  <BootRevListInfo>805C93DDF8FAD00120000000B00C34C19FB857753FBB78B607623F232F8C3BA6AABF862
  B9D6251BB2AD19B4F36D</BootRevListInfo>
  <OSRevListInfo>8073EEA7F8FAD00120000000B00A8285B04DE618ACF4174C59F07AECC002D11DD7D97FA5
  D464F190C9D9E3479BA</OSRevListInfo>
</HealthCertificateProperties>
</HealthCertificateValidationResponse> >

```

### 3.2.5.1.1.3 Processing Details

The Device Management Server (MDM-Server) adds a "Nonce" to the payload, forwards the DHA-Validation-Data to DHA-Service. The TCG log that contains health measurements is validated against the Platform Configuration Registers in the TPM (PCR) table. An ~~encrypted~~**A** report is created.

### **3.2.6 Timer Events**

None.

### **3.2.7 Other Local Events**

None.

## 4 Protocol Examples

## **5 Security**

### **5.1 Security Considerations for Implementers**

None.

### **5.2 Index of Security Parameters**

None.



## 6 Appendix A: Full XML Schema

For ease of implementation, the following are the XML schemas for this protocol.

### 6.1 Health CertificateRequestV1 Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema id="HealthCertificateRequest"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns="http://schemas.microsoft.com/windows/security/healthcertificate/request/v1"
  targetNamespace="http://schemas.microsoft.com/windows/security/healthcertificate/request/v1"
  elementFormDefault="qualified">

  <xs:element name="HealthCertificateRequest" type="HealthCertificateRequest T"/>

  <xs:complexType name="HealthCertificateRequest T">
    <xs:annotation>
      <xs:documentation>A request for a Health Certificate </xs:documentation>
    </xs:annotation>
    <xs:sequence>
      <xs:element name="Claims" type="NonEmptyBase64Binary"/>
      <!-- AIKCertificate and RSASigningKey are mutually exclusive -->
      <xs:element name="AIKCertificate" type="NonEmptyBase64Binary" minOccurs="0"
maxOccurs="1"/>
      <xs:element name="RSASigningKey" type="NonEmptyBase64Binary" minOccurs="0"
maxOccurs="1"/>
    </xs:sequence>
    <xs:attribute name="ProtocolVersion" use="required">
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="1"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:attribute>
  </xs:complexType>

  <xs:simpleType name="NonEmptyBase64Binary">
    <xs:restriction base="xs:base64Binary">
      <xs:minLength value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:schema>
```

### 6.2 Health CertificateRequestV3 Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema id="HealthCertificateRequest"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns="http://schemas.microsoft.com/windows/security/healthcertificate/request/v3"
  targetNamespace="http://schemas.microsoft.com/windows/security/healthcertificate/request/v3"
  elementFormDefault="qualified">

  <xs:element name="HealthCertificateRequest" type="HealthCertificateRequest_T"/>

  <xs:complexType name="HealthCertificateRequest_T">
    <xs:annotation>
      <xs:documentation>
        A request for a Health Certificate.
        AIKCertificate, RSASigningKey and EKCertificates are mutually exclusive.
      </xs:documentation>
    </xs:annotation>
  </xs:complexType>
</xs:schema>
```

```

        Each represents one of the three supported ways of obtaining a Health Certificate
    </xs:documentation>
</xs:annotation>
<xs:sequence>
  <xs:element name="Claims" type="NonEmptyBase64Binary"/>
  <xs:element name="AIKCertificate" type="NonEmptyBase64Binary" minOccurs="0"
maxOccurs="1"/>
  <xs:element name="AIKPublic" type="NonEmptyBase64Binary" minOccurs="0"
maxOccurs="1"/>
  <xs:element name="EKCertificates" type="EKCertificates_T" minOccurs="0"
maxOccurs="1"/>
</xs:sequence>
<xs:attribute name="ProtocolVersion" use="required">
  <xs:simpleType>
    <xs:restriction base="xs:int">
      <xs:minInclusive value="3"/>
    </xs:restriction>
  </xs:simpleType>
</xs:attribute>
</xs:complexType>

<xs:complexType name="EKCertificates_T">
  <xs:annotation>
    <xs:documentation>
      A set of EK certificates (leaf and intermediates) as retrieved from the client TPM.
    </xs:documentation>
  </xs:annotation>
  <xs:sequence>
    <xs:element name="EKCertificate" type="NonEmptyBase64Binary" minOccurs="1"
maxOccurs="1"/>
    <xs:element name="EKIntermediateCA" type="NonEmptyBase64Binary" minOccurs="0"
maxOccurs="10"/>
  </xs:sequence>
  <xs:attribute name="KAClaim" use="required">
    <xs:simpleType>
      <xs:restriction base="NonEmptyBase64Binary"/>
    </xs:simpleType>
  </xs:attribute>
  <xs:attribute name="AIKPublic" use="required">
    <xs:simpleType>
      <xs:restriction base="NonEmptyBase64Binary"/>
    </xs:simpleType>
  </xs:attribute>
</xs:complexType>

<xs:simpleType name="NonEmptyBase64Binary">
  <xs:restriction base="xs:base64Binary">
    <xs:minLength value="1"/>
  </xs:restriction>
</xs:simpleType>
</xs:schema>

```

### 6.3 HealthCertificateResponseV1 Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema id="HealthCertificateResponse"

xmlns="http://schemas.microsoft.com/windows/security/healthcertificate/response/v1"
xmlns:xs="http://www.w3.org/2001/XMLSchema"

targetNamespace="http://schemas.microsoft.com/windows/security/healthcertificate/response/v1"
elementFormDefault="qualified">

  <xs:element name="HealthCertificateResponse" type="HealthCertificateResponse T"/>

  <xs:complexType name="ResponseCommon T">

```

```

        <xs:attribute name="ErrorCode" type="xs:int" use="required"/>
        <xs:attribute name="ErrorMessage" type="xs:string" use="required"/>
    </xs:complexType>

    <xs:group name="HealthCertificateResponseData">
        <xs:annotation>
            <xs:documentation>Health certificate response data</xs:documentation>
        </xs:annotation>
        <xs:sequence>
            <xs:element name="HealthCertificateBlob" minOccurs="1" maxOccurs="1">
                <xs:annotation>
                    <xs:documentation>
                        The base 64 encoded Health Certificate blob. The Health Certificate
                        blob represents a UTF16 XML string of type OpaqueHealthCertificate T
                        defined in OpaqueHealthCertificate.xsd. We do not expose the
                        OpaqueHealthCertificate T explicitly to simplify things for the client.
                    </xs:documentation>
                </xs:annotation>
                <xs:simpleType>
                    <xs:restriction base="NonEmptyBase64Binary">
                        <xs:minLength value="1"/>
                    </xs:restriction>
                </xs:simpleType>
            </xs:element>
        </xs:sequence>
    </xs:group>

    <xs:complexType name="HealthCertificateResponse T" >
        <xs:complexContent>
            <xs:extension base="ResponseCommon T">
                <xs:group ref="HealthCertificateResponseData" minOccurs="0"/>
            </xs:extension>
        </xs:complexContent>
    </xs:complexType>

    <xs:simpleType name="NonEmptyBase64Binary">
        <xs:restriction base="xs:base64Binary">
            <xs:minLength value="1"/>
        </xs:restriction>
    </xs:simpleType>

</xs:schema>

```

## 6.4 HealthCertificateResponseV3 Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema id="HealthCertificateResponse"

xmlns="http://schemas.microsoft.com/windows/security/healthcertificate/response/v3"
    xmlns:xs="http://www.w3.org/2001/XMLSchema"

targetNamespace="http://schemas.microsoft.com/windows/security/healthcertificate/response/v3"
    elementFormDefault="qualified">

    <xs:element name="HealthCertificateResponse" type="HealthCertificateResponse_T"/>

    <xs:complexType name="ResponseCommon_T">
        <xs:attribute name="ErrorCode" type="xs:int" use="required"/>
        <xs:attribute name="ErrorMessage" type="xs:string" use="required"/>
        <xs:attribute name="ProtocolVersion" use="required">
            <xs:simpleType>
                <xs:restriction base="xs:int">
                    <xs:minInclusive value="3"/>
                </xs:restriction>
            </xs:simpleType>
        </xs:attribute>
    </xs:complexType>

```

```

    </xs:attribute>
  </xs:complexType>

  <xs:group name="HealthCertificateResponseData">
    <xs:annotation>
      <xs:documentation>Health certificate response data</xs:documentation>
    </xs:annotation>
    <xs:sequence>
      <xs:element name="HealthCertificateBlob" type="HealthCertificateBlob_T"
minOccurs="1" maxOccurs="1"/>
    </xs:sequence>
  </xs:group>

  <xs:complexType name="HealthCertificateResponse_T" >
    <xs:complexContent>
      <xs:extension base="ResponseCommon_T">
        <xs:group ref="HealthCertificateResponseData" minOccurs="0"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>

  <xs:complexType name="HealthCertificateBlob_T" >
    <xs:simpleContent>
      <xs:extension base="NonEmptyBase64Binary">
        <xs:attribute name="IV" type="NonEmptyBase64Binary" use="optional"/>
        <xs:attribute name="EKChallenge" type="NonEmptyBase64Binary" use="optional"/>
      </xs:extension>
    </xs:simpleContent>
  </xs:complexType>

  <xs:simpleType name="NonEmptyBase64Binary">
    <xs:restriction base="xs:base64Binary">
      <xs:minLength value="1"/>
    </xs:restriction>
  </xs:simpleType>

</xs:schema>

```

## 6.1 HealthCertificateValidationRequestV3 Schema

## 6.5 HealthCertificateValidationRequestV1 Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"

xmlns="http://schemas.microsoft.com/windows/security/healthcertificate/validation/request/v3y
1"

targetNamespace="http://schemas.microsoft.com/windows/security/healthcertificate/validation/r
equest/v3v1"
  elementFormDefault="qualified"
  attributeFormDefault="unqualified">

  <xs:element name="HealthCertificateValidationRequest"
type="HealthCertificateValidationRequest_T"/>

  <xs:complexType name="HealthCertificateValidationRequest_T">
    <xs:annotation>
      <xs:documentation>A request for Health Certificate validation </xs:documentation>
    </xs:annotation>
    <xs:sequence>
      <xs:element name="Nonce" type="xs:hexBinary"/>
      <xs:element name="Claims" type="NonEmptyBase64Binary"/>
      <xs:element name="HealthCertificateBlob" type="NonEmptyBase64Binary"/>
    </xs:sequence>
    <xs:attribute name="ProtocolVersion" use="required">

```

```

    <xs:simpleType>
      <xs:restriction base="xs:int">
        <xs:minInclusive value="31"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:attribute>
</xs:complexType>

<xs:simpleType name="NonEmptyBase64Binary">
  <xs:restriction base="xs:base64Binary">
    <xs:minLength value="1"/>
  </xs:restriction>
</xs:simpleType>
</xs:schema>

```

## 6.6 HealthCertificateValidationRequestV3 Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"

xmlns="http://schemas.microsoft.com/windows/security/healthcertificate/validation/request/v3"

targetNamespace="http://schemas.microsoft.com/windows/security/healthcertificate/validation/r
equest/v3"
  elementFormDefault="qualified"
  attributeFormDefault="unqualified">

  <xs:element name="HealthCertificateValidationRequest"
type="HealthCertificateValidationRequest T"/>

  <xs:complexType name="HealthCertificateValidationRequest T">
    <xs:annotation>
      <xs:documentation>A request for Health Certificate validation </xs:documentation>
    </xs:annotation>
    <xs:sequence>
      <xs:element name="Nonce" type="xs:hexBinary"/>
      <xs:element name="Claims" type="NonEmptyBase64Binary"/>
      <xs:element name="HealthCertificateBlob" type="NonEmptyBase64Binary"/>
    </xs:sequence>
    <xs:attribute name="ProtocolVersion" use="required">
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="3"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:attribute>
  </xs:complexType>

  <xs:simpleType name="NonEmptyBase64Binary">
    <xs:restriction base="xs:base64Binary">
      <xs:minLength value="1"/>
    </xs:restriction>
  </xs:simpleType>
</xs:schema>

```

## 6.7 HealthCertificateValidationResponseV1 Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"

xmlns="http://schemas.microsoft.com/windows/security/healthcertificate/validation/request/v1"

```

```

targetNamespace="http://schemas.microsoft.com/windows/security/healthcertificate/validation/request/v1"
  elementFormDefault="qualified"
  attributeFormDefault="unqualified">

  <xs:element name="HealthCertificateValidationRequest"
type="HealthCertificateValidationRequest_T"/>

  <xs:complexType name="HealthCertificateValidationRequest_T">
    <xs:annotation>
      <xs:documentation>A request for Health Certificate validation </xs:documentation>
    </xs:annotation>
    <xs:sequence>
      <xs:element name="Nonce" type="xs:hexBinary"/>
      <xs:element name="Claims" type="NonEmptyBase64Binary"/>
      <xs:element name="HealthCertificateBlob" type="NonEmptyBase64Binary"/>
    </xs:sequence>
    <xs:attribute name="ProtocolVersion" use="required">
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="1"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:attribute>
  </xs:complexType>

  <xs:simpleType name="NonEmptyBase64Binary">
    <xs:restriction base="xs:base64Binary">
      <xs:minLength value="1"/>
    </xs:restriction>
  </xs:simpleType>

</xs:schema>

```

## 6.8 HealthCertificateValidationResponseV3 Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"

xmlns="http://schemas.microsoft.com/windows/security/healthcertificate/validation/response/v3"

targetNamespace="http://schemas.microsoft.com/windows/security/healthcertificate/validation/response/v3"
  elementFormDefault="qualified">

  <xs:element name="HealthCertificateValidationResponse"
type="HealthCertificateValidationResponse_T"/>

  <xs:complexType name="ResponseCommon_T">
    <xs:attribute name="ErrorCode" type="xs:int" use="required"/>
    <xs:attribute name="ErrorMessage" type="xs:string" use="required"/>
    <xs:attribute name="ProtocolVersion" use="required">
      <xs:simpleType>
        <xs:restriction base="xs:int">
          <xs:minInclusive value="3"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:attribute>
  </xs:complexType>

  <xs:complexType name="HealthCertificatePublicProperties_T">
    <xs:annotation>

```

```

        <xs:documentation>Health certificate non machine identifiable properties
</xs:documentation>
    </xs:annotation>
    <xs:sequence>
        <xs:element name="Issued" type="xs:dateTime"/>
        <xs:element name="AIKPresent" type="Boolean_T" />
        <xs:element name="ResetCount" type="xs:unsignedInt"/>
        <xs:element name="RestartCount" type="xs:unsignedInt"/>
        <xs:element name="DEPPolicy" type="xs:unsignedInt"/>
        <xs:element name="BitlockerStatus" type="xs:unsignedInt"/>
        <xs:element name="BootManagerRevListVersion" type="xs:unsignedInt"/>
        <xs:element name="CodeIntegrityRevListVersion" type="xs:unsignedInt"/>
        <xs:element name="SecureBootEnabled" type="Boolean_T"/>
        <xs:element name="BootDebuggingEnabled" type="Boolean_T"/>
        <xs:element name="OSKernelDebuggingEnabled" type="Boolean_T"/>
        <xs:element name="CodeIntegrityEnabled" type="Boolean_T"/>
        <xs:element name="TestSigningEnabled" type="Boolean_T"/>
        <xs:element name="SafeMode" type="Boolean_T"/>
        <xs:element name="WinPE" type="Boolean_T"/>
        <xs:element name="ELAMDriverLoaded" type="Boolean_T"/>
        <xs:element name="VSMEnabled" type="Boolean_T"/>
        <xs:element name="PCRHashAlgorithmID" type="xs:unsignedInt"/>
        <xs:element name="BootAppSVN" type="xs:unsignedInt"/>
        <xs:element name="BootManagerSVN" type="xs:unsignedInt"/>
        <xs:element name="TpmVersion" type="xs:unsignedInt"/>
        <xs:element name="PCRO" type="xs:hexBinary"/>
        <xs:element name="CIPolicy" type="xs:hexBinary" minOccurs
="0" maxOccurs ="1"/>
        <xs:element name="SBCPHash" type="xs:hexBinary" minOccurs
="0" maxOccurs ="1"/>
        <xs:element name="BootRevListInfo" type="xs:hexBinary" minOccurs
="0" maxOccurs ="1"/>
        <xs:element name="OSRevListInfo" type="xs:hexBinary" minOccurs
="0" maxOccurs ="1"/>

        <!--
            PCR related values are not sent, per design
        <xs:element name="PCRCount" type="xs:unsignedInt"/>
        <xs:element name="PCRSize" type="xs:unsignedShort"/>
        <xs:element name="PCRHashAlgorithmID" type="xs:unsignedShort"/>

        <xs:element name="PCR" type="xs:hexBinary"/>
        -->
    </xs:sequence>
</xs:complexType>

<xs:complexType name="HealthStatusMismatchFlags_T">
    <xs:annotation>
        <xs:documentation>If there's a status mismatch, these flags will be
set</xs:documentation>
    </xs:annotation>
    <xs:sequence>
        <!-- Hibernate/Resume count -->
        <xs:element name="ResumeCount" type="Boolean_T"/>
        <!-- Reboot count -->
        <xs:element name="RebootCount" type="Boolean_T"/>
        <xs:element name="PCR" type="Boolean_T"/>

        <xs:element name="BootAppSVN" type="Boolean_T"/>
        <xs:element name="BootManagerSVNChain" type="Boolean_T"/>
        <xs:element name="BootAppSVNChain" type="Boolean_T"/>

    </xs:sequence>
</xs:complexType>

<xs:complexType name="HealthCertificateValidationResponse_T" >
    <xs:annotation>
        <xs:documentation>Health certificate validation response </xs:documentation>
    </xs:annotation>
    <xs:complexContent>

```

```

    <xs:extension base="ResponseCommon_T">
      <xs:sequence>
        <!--Optional element, present only when the certificate can be verified
and decrypted-->
        <xs:element name="HealthCertificateProperties"
type="HealthCertificatePublicProperties_T" minOccurs="0"/>
        <!--Optional element, present only when the reason for a validation
failure is a mismatch between the
current health state and the certificate health state-->
        <xs:element name="HealthStatusMismatchFlags"
type="HealthStatusMismatchFlags_T" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

  <xs:simpleType name="Boolean_T">
    <xs:restriction base="xs:boolean">
      <xs:pattern value="true|false"/>
    </xs:restriction>
  </xs:simpleType>
</xs:schema>

```



## 7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

- Windows 10 operating system
- Windows Server 2016 operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms "SHOULD" or "SHOULD NOT" implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term "MAY" implies that the product does not follow the prescription.

## 8 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as Major, Minor, or None.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements.
- A document revision that captures changes to protocol functionality.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **None** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the relevant technical content is identical to the last released version.

The changes made to this document are listed in the following table. For more information, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com).

<b>Section</b>	<b>Description</b>	<b>Revision class</b>
<a href="#">1.4 Relationship to Other Protocols</a>	<a href="#">7005 : Clarified relationship with MS-MDM</a>	<a href="#">Major</a>
<a href="#">2.1 Transport</a>	<a href="#">7005 : Added the HTTP endpoints, and clarified the transport mechanism (HTTPS) and defining public standard.</a>	<a href="#">Major</a>
<a href="#">2.2.1 Namespaces</a>	<a href="#">7004 : Added additional namespaces for both versions 1 and 3.</a>	<a href="#">Major</a>
<a href="#">3.2.5.1.1.3 Processing Details</a>	<a href="#">7005 : Clarified the origin of the Nonce element in the payload forwarded to the DHA Service</a>	<a href="#">Major</a>
<a href="#">6.1 Health CertificateRequestV1 Schema</a>	<a href="#">7004 : Added new schema section.</a>	<a href="#">Major</a>
<a href="#">6.3 HealthCertificateResponseV1 Schema</a>	<a href="#">7004 : Added new schema section.</a>	<a href="#">Major</a>
<a href="#">6.5 HealthCertificateValidationRequestV1 Schema</a>	<a href="#">7004 : Added new schema section.</a>	<a href="#">Major</a>
<a href="#">6.7 HealthCertificateValidationResponseV1 Schema</a>	<a href="#">7004 : Added new schema section.</a>	<a href="#">Major</a>

## 9 Index

### A

[Abstract data model](#)  
[\\_DHA-enabled client](#) 17  
[\\_DHA-service](#) 19  
Applicability 9  
[Asynchronous processing flow](#) 14  
[Attributes](#)  
[\\_ErrorCode](#) 12+3  
[\\_ErrorMessage](#) 12+3

### C

Capability negotiation 9  
Change tracking 34  
[Claims](#) 12  
[Common data structures](#) 13  
Common data types 11

### D

[Data model - abstract](#)  
[\\_DHA-enabled client](#) 17  
[\\_DHA-service](#) 19  
[Device Management Server \(MDM\) – defined](#) 7  
[DHA-Boot-Data](#) 18  
Dha-enabled client  
  Abstract data model 17  
  Higher-layer triggered events 17  
  Initialization 17  
  Message processing events and sequencing rules 17  
  Other local events 19  
[\\_overview](#) 14  
  Timer events 19  
  Timers 17  
[DHA-Enabled Device – defined](#) 7  
[Dha-service](#)  
  
[DHA-Service](#)  
  Abstract data model 19  
[\\_communication paths](#) 19  
[\\_defined](#) 7  
  Higher-layer triggered events 19  
  Initialization 19  
  Message processing events and sequencing rules 20  
  Other local events 22  
[\\_overview](#) 19  
  Timer events 22  
  Timers 19  
  
[Diagrams](#)  
[\\_asynchronous processing flows – device health attestation](#) 14  
[\\_device health attestation](#) 7  
[\\_Device to DHA-Service - communication](#) 19  
[\\_device to MDM-Server communication](#) 14  
[\\_device, DHA-service communication](#) 7  
[\\_negotiation exchange - device health attestation](#) 14  
[\\_relationship of DHA protocol to industry-standard protocols](#) 8  
[\\_synchronous processing flows – device health attestation](#) 14

### F

Fields - vendor-extensible 10

Full XML schema 25

## G

Glossary 5

## H

[HealthCertificateBlob](#) 12

[Higher-layer triggered events](#)

[\\_DHA-enabled client](#) 17

[\\_DHA-service](#) 19

HTTP headers 12

HTTP methods 12

[\\_POST - DHA-enabled client details](#) 17

[\\_POST - DHA-service details](#) 20

## I

Implementer - security considerations 24

Index of security parameters 24

Informative references 7

[Initialization](#)

[\\_DHA-enabled client](#) 17

[\\_DHA-service](#) 19

[Initiation of attestation protocol - prerequisite to](#) 14

Introduction 5

## L

[Local events](#)

[\\_DHA-enabled client](#) 19

[\\_DHA-service](#) 22

## M

[Message processing](#)

[\\_DHA-enabled client](#) 17

[\\_DHA-service](#) 20

Messages

[\\_attributes](#) 12-13

[\\_Claims](#) 12

[\\_common data structures](#) 13

[\\_common data types](#) 11

[\\_HealthCertificateBlob](#) 12

[\\_HTTP headers](#) 12

[\\_HTTP methods](#) 12

[\\_namespaces](#) 11

[\\_simple types](#) 12

transport 11

## N

Namespaces 11

Normative references 6

## O

Overview (synopsis) 7

## P

Parameters - security index 24

Preconditions 9

[Prerequisite - before initiation of attestation protocol](#) 14

Prerequisites 9

[Processing flow](#)

[\\_asynchronous](#) 14

[\\_synchronous](#) 14

Product behavior 33

Protocol Details

DHA-Enabled Client 14

DHA-Service 19

## R

References

informative 7

normative 6

Relationship to other protocols 8

[Request body](#)

[\\_DHA-Enabled client - POST](#) 18

[\\_DHA-Encrypted-Data - POST](#) 20

## S

Security

implementer considerations 24

parameter index 24

[Sequencing rules](#)

[\\_DHA-enabled client](#) 17

[\\_DHA-service](#) 20

[Simple types - Boolean\\_T](#) 12

Standards assignments 10

[Status codes for POST \(section 3.1.5 17, section 3.2.5 20\)](#)

[Synchronous processing flow](#) 14

## T

[Timer events](#)

[\\_DHA-enabled client](#) 19

[\\_DHA-service](#) 22

[Timers](#)

[\\_DHA-enabled client](#) 17

[\\_DHA-service](#) 19

Tracking changes 34

Transport 11

common data types 11

HTTP headers 12

HTTP methods 12

namespaces 11

[Triggered events](#)

[\\_DHA-enabled client](#) 17

[\\_DHA-service](#) 19

## V

Vendor-extensible fields 10

Versioning 9

## X

XML schema 25

[\\_HealthCertificateRequestV1](#) 25

[\\_HealthCertificateRequestV3](#) 25

[\\_HealthCertificateResponseV1](#) 26

[\\_HealthCertificateResponseV3](#) 27

[\\_HealthCertificateValidationRequestV1](#) 28

HealthCertificateValidationRequestV3 29  
HealthCertificateValidationResponseV1 29  
HealthCertificateValidationResponseV3 30