

# [MS-GPSB]: Group Policy: Security Protocol Extension

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
03/02/2007	1.0	Major	Updated and revised the technical content.
04/03/2007	1.1	Minor	Updated the technical content.
05/11/2007	2.0	Major	New format
06/01/2007	2.0.1	Editorial	Revised and edited the technical content.
07/03/2007	3.0	Major	Added normative references; updated technical content.
08/10/2007	4.0	Major	Updated and revised the technical content.
09/28/2007	4.0.1	Editorial	Revised and edited the technical content.
10/23/2007	4.0.2	Editorial	Revised and edited the technical content.
01/25/2008	4.0.3	Editorial	Revised and edited the technical content.
03/14/2008	4.0.4	Editorial	Revised and edited the technical content.
06/20/2008	5.0	Major	Updated and revised the technical content.
07/25/2008	5.0.1	Editorial	Revised and edited the technical content.
08/29/2008	5.0.2	Editorial	Revised and edited the technical content.
10/24/2008	5.0.3	Editorial	Revised and edited the technical content.
12/05/2008	5.1	Minor	Updated the technical content.
01/16/2009	5.1.1	Editorial	Revised and edited the technical content.
02/27/2009	5.1.2	Editorial	Revised and edited the technical content.
04/10/2009	5.1.3	Editorial	Revised and edited the technical content.
05/22/2009	6.0	Major	Updated and revised the technical content.
07/02/2009	6.1	Minor	Updated the technical content.
08/14/2009	6.1.1	Editorial	Revised and edited the technical content.
09/25/2009	6.2	Minor	Updated the technical content.
11/06/2009	6.3	Minor	Updated the technical content.
12/18/2009	6.3.1	Editorial	Revised and edited the technical content.
01/29/2010	6.4	Minor	Updated the technical content.
03/12/2010	7.0	Major	Updated and revised the technical content.

<b>Date</b>	<b>Revision History</b>	<b>Revision Class</b>	<b>Comments</b>
04/23/2010	7.0.1	Editorial	Revised and edited the technical content.
06/04/2010	7.0.2	Editorial	Revised and edited the technical content.
07/16/2010	8.0	Major	Significantly changed the technical content.
08/27/2010	9.0	Major	Significantly changed the technical content.
10/08/2010	10.0	Major	Significantly changed the technical content.
11/19/2010	11.0	Major	Significantly changed the technical content.
01/07/2011	11.0	No change	No changes to the meaning, language, or formatting of the technical content.
02/11/2011	12.0	Major	Significantly changed the technical content.
03/25/2011	13.0	Major	Significantly changed the technical content.
05/06/2011	14.0	Major	Significantly changed the technical content.
06/17/2011	15.0	Major	Significantly changed the technical content.
09/23/2011	15.0	No change	No changes to the meaning, language, or formatting of the technical content.
12/16/2011	16.0	Major	Significantly changed the technical content.
03/30/2012	16.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/12/2012	16.0	No change	No changes to the meaning, language, or formatting of the technical content.
10/25/2012	16.0	No change	No changes to the meaning, language, or formatting of the technical content.
01/31/2013	16.0	No change	No changes to the meaning, language, or formatting of the technical content.
08/08/2013	17.0	Major	Significantly changed the technical content.
11/14/2013	18.0	Major	Significantly changed the technical content.

# Contents

<b>1 Introduction</b>	<b>6</b>
1.1 Glossary	6
1.2 References	6
1.2.1 Normative References	7
1.2.2 Informative References	7
1.3 Overview	8
1.3.1 Background	8
1.3.2 Security Extension Overview	8
1.4 Relationship to Other Protocols	9
1.5 Prerequisites/Preconditions	9
1.6 Applicability Statement	9
1.7 Versioning and Capability Negotiation	9
1.8 Vendor-Extensible Fields	10
1.9 Standards Assignments	10
<b>2 Messages</b>	<b>11</b>
2.1 Transport	11
2.2 Message Syntax	11
2.2.1 System Access	12
2.2.1.1 Password Policies	13
2.2.1.2 Account Lockout Policies	14
2.2.1.3 Local Account Policies	15
2.2.2 Kerberos Policy	15
2.2.3 Event Log Policies	16
2.2.4 Event Audit Policies	17
2.2.5 Registry Values	20
2.2.6 Privilege Rights	21
2.2.7 Registry Keys	21
2.2.8 Service General Settings	22
2.2.9 File Security	23
2.2.10 Group Membership	24
2.2.11 User Account Control	25
2.2.11.1 FilterAdministratorToken	25
2.2.11.2 ConsentPromptBehaviorAdmin	25
2.2.11.3 ConsentPromptBehaviorUser	25
2.2.11.4 EnableInstallerDetection	26
2.2.11.5 ValidateAdminCodeSignatures	26
2.2.11.6 EnableLUA	26
2.2.11.7 PromptOnSecureDesktop	27
2.2.11.8 EnableVirtualization	27
<b>3 Protocol Details</b>	<b>28</b>
3.1 Administrative-Side Plug-in Details	28
3.1.1 Abstract Data Model	28
3.1.2 Timers	28
3.1.3 Initialization	28
3.1.4 Higher-Layer Triggered Events	28
3.1.5 Message Processing Events and Sequencing Rules	28
3.1.5.1 Load Policy	29
3.1.5.2 Update Policy	29

3.1.5.3	Delete Setting Value .....	29
3.1.6	Timer Events .....	30
3.1.7	Other Local Events .....	30
3.2	Client-Side Plug-in Details.....	30
3.2.1	Abstract Data Model .....	30
3.2.2	Timers .....	30
3.2.3	Initialization .....	30
3.2.4	Higher-Layer Triggered Events.....	31
3.2.4.1	Process Group Policy .....	31
3.2.5	Message Processing Events and Sequencing Rules.....	31
3.2.5.1	Password Policies.....	32
3.2.5.2	Account Lockout Policies.....	33
3.2.5.3	Local Account Policies.....	38
3.2.5.4	Kerberos Policy.....	41
3.2.5.5	Event Log Policies .....	42
3.2.5.6	Event Audit Policies.....	42
3.2.5.7	Registry Values .....	43
3.2.5.8	Privilege Rights .....	44
3.2.5.9	Registry Keys.....	44
3.2.5.10	Service General Settings.....	46
3.2.5.11	File Security .....	47
3.2.5.12	Group Membership.....	48
3.2.5.13	User Account Control.....	49
3.2.6	Timer Events .....	50
3.2.7	Other Local Events .....	50
<b>4</b>	<b>Protocol Examples.....</b>	<b>51</b>
4.1	Example Involving Password Policy .....	51
4.2	Example Involving Audit Settings.....	51
4.3	Example of Configuring Group Membership .....	51
4.4	Example of Configuring Multiple Types of Settings .....	52
<b>5</b>	<b>Security.....</b>	<b>53</b>
5.1	Security Considerations for Implementers.....	53
5.2	Index of Security Parameters .....	53
5.2.1	Security Parameters Affecting Behavior of the Protocol .....	53
5.2.2	System Security Parameters Carried by the Protocol.....	53
<b>6</b>	<b>Appendix A: Product Behavior.....</b>	<b>54</b>
<b>7</b>	<b>Change Tracking.....</b>	<b>56</b>
<b>8</b>	<b>Index .....</b>	<b>59</b>

# 1 Introduction

This document specifies the Group Policy: Security Protocol Extension to the [Group Policy: Core Protocol](#), as specified in [MS-GPOL].

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

- Active Directory**
- Active Directory object**
- attribute**
- Augmented Backus-Naur Form (ABNF)**
- class**
- client**
- client-side extension GUID (CSE GUID)**
- discretionary access control list (DACL)**
- domain**
- domain controller (DC)**
- globally unique identifier (GUID)**
- Group Policy**
- Group Policy Object (GPO)**
- Lightweight Directory Access Protocol (LDAP)**
- relative identifier (RID)**
- security identifier (SID)**
- security policy**
- security policy settings**
- share**
- system access control list (SACL)**

The following terms are specific to this document:

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as specified in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

A reference marked "(Archived)" means that the reference document was either retired and is no longer being maintained or was replaced with a new document that provides current implementation details. We archive our documents online [\[Windows Protocol\]](#).

## 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-ADSO] Microsoft Corporation, "[Active Directory System Overview](#)".

[MS-DTYP] Microsoft Corporation, "[Windows Data Types](#)".

[MS-GPOL] Microsoft Corporation, "[Group Policy: Core Protocol](#)".

[MS-KILE] Microsoft Corporation, "[Kerberos Protocol Extensions](#)".

[MS-LSAD] Microsoft Corporation, "[Local Security Authority \(Domain Policy\) Remote Protocol](#)".

[MS-SAMR] Microsoft Corporation, "[Security Account Manager \(SAM\) Remote Protocol \(Client-to-Server\)](#)".

[MS-SCMR] Microsoft Corporation, "[Service Control Manager Remote Protocol](#)".

[MS-SMB] Microsoft Corporation, "[Server Message Block \(SMB\) Protocol](#)".

[MS-SMB2] Microsoft Corporation, "[Server Message Block \(SMB\) Protocol Versions 2 and 3](#)".

[MS-RRP] Microsoft Corporation, "[Windows Remote Registry Protocol](#)".

[RFC1510] Kohl, J., and Neuman, C., "The Kerberos Network Authentication Service (V5)", RFC 1510, September 1993, <http://www.ietf.org/rfc/rfc1510.txt>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2251] Wahl, M., Howes, T., and Kille, S., "Lightweight Directory Access Protocol (v3)", RFC 2251, December 1997, <http://www.ietf.org/rfc/rfc2251.txt>

[RFC4234] Crocker, D., Ed., and Overell, P., "Augmented BNF for Syntax Specifications: ABNF", RFC 4234, October 2005, <http://www.ietf.org/rfc/rfc4234.txt>

## 1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MSDN-INF] Microsoft Corporation, "About INF Files", <http://msdn.microsoft.com/en-us/library/aa376858.aspx>

[MSDN-PRIVS] Microsoft Corporation, "Authorization Constants", <http://msdn.microsoft.com/en-us/library/aa375728.aspx>

[MSDN-SDDL] Microsoft Corporation, "Security Descriptor String Format", <http://msdn.microsoft.com/en-us/library/aa379570.aspx>

[TECHNET-AUDITMGMT] Microsoft Corporation, "Audit Management", <http://www.microsoft.com/technet/security/prodtech/windows2000/w2kccadm/auditman/w2kadm23.msp>

## 1.3 Overview

Group Policy: Security Protocol Extension enables **security policies** to be distributed to multiple **client** systems so that these systems can enact the policies in accordance with the intentions of the administrator.

### 1.3.1 Background

The Group Policy: Core Protocol, as specified in [\[MS-GPOL\]](#), enables clients to discover and retrieve policy settings created by administrators of **domains**. These settings are propagated within **Group Policy Objects (GPOs)** that are assigned to policy target accounts in **Active Directory**. Policy target accounts are either computer accounts or user accounts in Active Directory. Each client uses the **Lightweight Directory Access Protocol (LDAP)** to determine what GPOs are applicable to it by consulting the **Active Directory objects** corresponding to each client's computer account and the user accounts of any users logging on to the client computer.

On each client, each GPO is interpreted and acted on by software components known as client-side plug-ins. The client-side plug-ins responsible for a given GPO are specified by using an **attribute** on the GPO. This attribute specifies a list of **globally unique identifier (GUID)** pairs. The first GUID of each pair is referred to as a **client-side extension GUID (CSE GUID)**. The second GUID of each pair is referred to as a tool extension GUID.

For each GPO that is applicable to a client, the client consults the CSE GUIDs listed in the GPO to determine what client-side plug-ins on the client should handle the GPO. The client then invokes the client-side plug-ins to handle the GPO.

A client-side plug-in uses the contents of the GPO to retrieve settings specific to its **class** in a manner specific to its class. After its class-specific settings are retrieved, the client-side plug-in uses these settings to perform class-specific processing.

### 1.3.2 Security Extension Overview

Security policies contain settings (which the protocol configures) that enable underlying security components to enforce the following:

- Password, account lockout, and Kerberos policies.
- System audit settings.
- Privilege and rights assignments.
- Application security configuration data values and security descriptors.
- Event log settings.
- Security group membership.
- Configuration information of long-running processes and programs, and security descriptors on them.
- File and folder security descriptors.

The following major steps are for security configuration:

- Security policy authoring.
- Security policy assignment.

- Security policy distribution.


Security policy authoring is enabled through an administrative tool for the [Group Policy: Core Protocol](#) with an administrative plug-in for behavior specific to this protocol. The plug-in allows an administrator to author security policies within a user interface. The plug-in then saves the security policies into .inf files with a standard format, and stores them on a network location that is accessible by using the [Server Message Block \(SMB\) Protocol](#), as specified in [MS-SMB].

Security policy assignment is performed by the Group Policy: Core Protocol administrative tool, which constructs GPOs, as specified in [MS-GPOL] section 2.2.8.1. Each GPO contains a reference to the network location containing the security policy files generated by the administrative-tool plug-in.

Security policy distribution involves a corresponding protocol-specific **Group Policy** plug-in on the client machine, which is invoked to process any GPO that refers to **security policy settings**. The security protocol client-side plug-in extracts the network location specified in the GPO, transfers the security policy files by using the **SMB** protocol, and then uses the security policy files to configure the client's security settings.

#### 1.4 Relationship to Other Protocols

This protocol depends on Group Policy: Core Protocol as specified in [MS-GPOL]. It also depends on the SMB Protocol, as specified in [MS-SMB], for transmitting Group Policy settings and instructions between the client and the GP server.

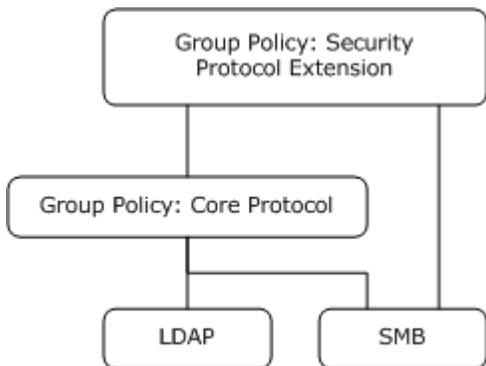

**Figure 1: Group Policy: Host Security Configuration protocol relationship diagram**

#### 1.5 Prerequisites/Preconditions

The prerequisites for the Group Policy: Security Protocol Extension are the same as those for the [Group Policy: Core Protocol](#).

#### 1.6 Applicability Statement

The Group Policy: Security Protocol Extension is only applicable within the Group Policy framework. This protocol is supported on the Windows versions listed in [Appendix A: Product Behavior \(section 6\)](#).

#### 1.7 Versioning and Capability Negotiation

The Group Policy: Security Protocol Extension does not perform any explicit version checking on the received security policy.

## 1.8 Vendor-Extensible Fields

The Group Policy: Security Protocol Extension does not define any vendor-extensible fields.

## 1.9 Standards Assignments

The Group Policy: Security Protocol Extension defines CSE GUID and tool extension GUID, as specified in [\[MS-GPOL\]](#) section 1.8. The following table shows the assignments.

Parameter	Value
CSE GUID	{827D319E-6EAC-11D2-A4EA-00C04F79F83A}
Tool extension GUID (computer policy settings)	{803E14A0-B4FB-11D0-A0D0-00A0C90F574B}

## 2 Messages

### 2.1 Transport

The Group Policy: Security Protocol Extension MUST transport messages (in the form of files) over the Group Policy Protocol over SMB, as specified in [\[MS-SMB\]](#) section 1.3. The client-side plug-in MUST use this protocol's CSE GUID (as specified in [\[MS-DTYP\]](#) section 2.3.4), and the administrative-tool plug-in MUST use the tool extension GUID.

The Group Policy: Core Protocol uses this protocol's CSE GUID and tool extension GUID values (see section [1.9](#)) to invoke this protocol only to access GPOs that require processing by this protocol. [<1>](#)

### 2.2 Message Syntax

Messages exchanged in the Group Policy: Security Protocol Extension correspond to security policy files transferred by using the [SMB Protocol](#). The protocol is driven through the exchange of these messages, as specified in section [3](#).

All security policy files processed by the Group Policy: Security Protocol Extension MUST be encoded in UTF-16LE with Byte Order Mark (0xFFFE). The .inf file syntax is as follows.

```
InfFile = UnicodePreamble VersionPreamble Sections
UnicodePreamble = *("[Unicode]" LineBreak "Unicode=yes"
    LineBreak)
VersionPreamble = "[Version]" LineBreak "signature="
    DQUOTE "$CHICAGO$" DQUOTE LineBreak "Revision=1" LineBreak
Sections = Section / Section Sections
Section = Header Settings
Header = "[" HeaderValue "]" LineBreak
HeaderValue = stringWithSpaces
Settings = Setting / Setting Settings
Setting = Key Wsp "=" Wsp ValueList LineBreak
ValueList = Value / Value Wsp "," Wsp ValueList
Key = String
Value = String / QuotedString
```

The preceding syntax is given in the **Augmented Backus-Naur Form (ABNF)** grammar, as specified in [\[RFC4234\]](#) and as augmented by the following rules.

```
LineBreak = CRLF
String = *(ALPHANUM / %d47 / %d45 / %d58 / %d59)
StringWithSpaces = String / String Wsp stringWithSpaces
QuotedString = DQUOTE *(%x20-21 / %x23-7E) DQUOTE
Wsp = *WSP
ALPHANUM = ALPHA / DIGIT
```

For more information about .inf files and their uses, see [\[MSDN-INF\]](#).

The protocol further restricts the values that can be assigned to HeaderValue. HeaderValue MUST be assigned one of the values listed in the following table.

HeaderValue	Purpose
System Access	MUST contain settings that pertain to account lockout, password policies, and local security options. For more information, see section <a href="#">2.2.1</a> .
Kerberos Policy	MUST contain settings that pertain to the Kerberos policy, as specified in <a href="#">[RFC1510]</a> . For more information, see section <a href="#">2.2.2</a> .
System Log	MUST contain settings that pertain to maximum size, retention policy, and so on for the system log. For more information, see section <a href="#">2.2.3</a> .
Security Log	MUST contain settings that pertain to maximum size, retention policy, and so on for the security log. For more information, see section <a href="#">2.2.3</a> .
Application Log	MUST contain settings that pertain to maximum size, retention policy, and so on for the application log. For more information, see section <a href="#">2.2.3</a> .
Event Audit	MUST contain settings that pertain to audit policy. For more information, see section <a href="#">2.2.4</a> .
Registry Values	MUST contain registry values to be configured. For more information, see section <a href="#">2.2.5</a> .
Privilege Rights	MUST contain a list of privileges to be assigned to specific accounts. For more information, see section <a href="#">2.2.6</a> .
Service General Settings	MUST contain configuration settings that pertain to services. For more information, see section <a href="#">2.2.8</a> .
Registry Keys	MUST contain a list of registry keys and their corresponding security information to be applied. For more information, see section <a href="#">2.2.7</a> .
File Security	MUST contain a list of files, folders, and their corresponding security information to be applied. For more information, see section <a href="#">2.2.9</a> .
Group Membership	MUST contain group membership information, for example, what users should be part of what group. For more information, see section <a href="#">2.2.10</a> .

**Note** The plug-in that implements the client side of the protocol documented here does not understand the semantics of any of the (name, value) pairs it handles. Its operation is to set those named values in client-side stores indicated by the HeaderValue. When that client-side store is the Registry, the plug-in does not need to know the list of possible names for (name, value) pairs. This implies that new security settings stored in registry keys can be created and populated by GP. For other stores, the plug-in maintains a precompiled list of mappings from setting name to the application programming interface (API) used to apply the setting.

### 2.2.1 System Access

The following topics specify various types of system access settings. The ABNF for this section MUST be as follows.

```
Header = "[" HeaderValue "]" LineBreak
HeaderValue = "System Access"
Settings = Setting / Setting Settings
Setting = Key Wsp "=" Wsp Value LineBreak
Key = String
Value = 1*DIGIT
```

### 2.2.1.1 Password Policies

This section defines settings that specify various supported password policies. The ABNF for valid keys that represent such policies MUST be as follows.

```
Key = "MinimumPasswordAge" / "MaximumPasswordAge" /  
      "MinimumPasswordLength" / "PasswordComplexity" /  
      "PasswordHistorySize" / "ClearTextPassword" /  
      "RequireLogonToChangePassword"
```

```
Value = [-]1*10DIGIT
```

The following table provides an explanation for each of the valid key values.

**Note** All numerical values are decimal unless explicitly specified otherwise or preceded by 0x.

Setting key	Explanation
MaximumPasswordAge	Maximum number of days that a password can be used before the client SHOULD require the user to change it. The value MUST be either equal to "-1" or in the range 1 to 2 <sup>64</sup> . The value "-1" indicates that a password never expires. If the maximum password age value is not "-1", the minimum password age MUST be less than the maximum password age.
MinimumPasswordAge	Number of days that a password can be used before the client MUST allow the user to change it from the date the password was changed or reset. This value MUST be between 0 and 2 <sup>64</sup> . The minimum password age MUST be less than the maximum password age, unless the maximum password age is set to 0.
MinimumPasswordLength	Minimum number of characters that a password for a user account MAY contain. This value MUST be between 0 and 2 <sup>16</sup> . A value of 0 indicates that no password is required.
PasswordComplexity	Flag that indicates whether the operating system MUST require that passwords meet complexity requirements. If this flag is set, it indicates that passwords MUST meet a specific minimum requirement. This value MUST be between 0 and 2 <sup>16</sup> . A value of 0 indicates that no password complexity requirements apply. Any other valid value indicates that password complexity requirements apply.  If this policy is enabled, passwords MUST meet the following minimum requirements: <ul style="list-style-type: none"><li>▪ MUST NOT contain the user's account name or parts of the user's full name that exceed two consecutive characters.</li><li>▪ MUST be at least six characters in length.</li><li>▪ MUST contain characters from three of the following categories:<ul style="list-style-type: none"><li>▪ English uppercase characters (A through Z).</li><li>▪ English lowercase characters (a through z).</li><li>▪ Base 10 digits (0 through 9).</li></ul></li></ul>

Setting key	Explanation
	<ul style="list-style-type: none"> <li>Nonalphanumeric characters (for example, !, \$, #, %).</li> </ul> <p>Complexity requirements MUST be enforced when passwords are changed or created.</p>
ClearTextPassword	<p>Flag that indicates whether passwords MUST be stored by using reversible encryption. This value MUST be between 0 and 2<sup>16</sup>. A value of 0 indicates that the password is not stored using reversible encryption. Any other valid value indicates that the password is stored with reversible encryption.</p> <p>Use of this flag is not recommended.</p> <p>This policy provides support for applications that use protocols that require knowledge of the user's password for authentication purposes. Storing passwords by using reversible encryption is essentially the same as storing plain-text versions of the passwords.</p>
PasswordHistorySize	<p>The number of unique new passwords that are required before an old password can be reused in association with a user account. This value MUST be between 0 and 2<sup>16</sup>. A value of 0 indicates that the password history is disabled.</p> <p>This policy enables administrators to enhance security by ensuring that old passwords are not reused continually.</p>
RequireLogonToChangePassword	Setting is ignored. <2>

### 2.2.1.2 Account Lockout Policies

This section defines settings that specify the configuration of account lockout duration. The ABNF for valid keys that represent such policies MUST be as follows.

```
Key = "LockoutBadCount" / "ResetLockoutCount" /
      "LockoutDuration" / "ForceLogoffWhenHourExpire"
```

```
Value = [-]1*10DIGIT
```

The following table provides an explanation for each of the valid key values.

**Note** All numerical values are decimal unless explicitly specified otherwise or preceded by 0x.

Setting key	Explanation
ForceLogoffWhenHourExpire	This setting controls whether SMB client sessions with the SMB server will be forcibly disconnected when the client's logon hours expire. If a nonzero value is specified, the policy is enabled.
LockoutDuration	Number of minutes that a locked-out account MUST remain locked out before automatically becoming unlocked. The value MUST be either "-1" or in the range -2 <sup>32</sup> to 2 <sup>32</sup> . If the account lockout duration value is set to a negative value, the account MUST be locked out until an administrator explicitly unlocks it. If an account lockout threshold is defined, the account lockout duration MUST be greater than or equal to the reset time, ResetLockoutCount. This setting only has meaning when an account lockout threshold is specified.

Setting key	Explanation
LockoutBadCount	Number of failed logon attempts after which a user account MUST be locked out. A locked-out account MUST NOT be allowed to log on until it is reset by an administrator or until the lockout duration for the account has expired. The value MUST be between 0 and 2 <sup>16</sup> . A value of 0 indicates that the account MUST not be locked out.
ResetLockoutCount	Number of minutes after a failed logon attempt that the account MUST be locked out. The value MUST be in the range -2 <sup>32</sup> to 2 <sup>32</sup> . If the value is negative or zero, then no reset time is enforced. If a positive account lockout threshold is defined, this reset time MUST be less than or equal to the account lockout duration, LockoutDuration.

### 2.2.1.3 Local Account Policies

This section defines settings that specify the configuration of local guest and built-in Administrator accounts. The ABNF for valid keys that represent such policies MUST be as follows.

```
Key = " LSAAnonymousNameLookup " / " EnableAdminAccount " /
      " EnableGuestAccount " / " NewAdministratorName" / " NewGuestName"
```

```
Value = 1DIGIT / String
```

The following table provides an explanation for each of the valid key values.

Setting key	Explanation
LSAAnonymousNameLookup	When enabled, this setting allows an anonymous user to query the local LSA policy. If the value element contains a nonzero value, the setting is enabled; otherwise, the setting is disabled.
EnableAdminAccount	This setting specifies whether the Administrator account on the local computer is enabled. If the value element contains a nonzero value, the setting is enabled; otherwise, the setting is disabled.
EnableGuestAccount	This setting specifies whether the Guest account on the local computer is enabled. If the value element contains a nonzero value, the setting is enabled; otherwise, the setting is disabled.
NewAdministratorName	This setting specifies the name of the Administrator account on the local computer.
NewGuestName	This setting specifies the name of the Guest account on the local computer.

### 2.2.2 Kerberos Policy

This section defines settings that enable an administrator to configure user logon restrictions, as specified in [\[RFC1510\]](#).

The ABNF for this section MUST be as follows.

```

Header = "[" HeaderValue "]" LineBreak
HeaderValue = "Kerberos Policy"
Settings = Setting / Setting Settings
Setting = Key Wsp "=" Wsp Value LineBreak
Key = "MaxTicketAge" / "MaxRenewAge" / "MaxServiceAge" /
      "MaxClockSkew" / "TicketValidateClient"

Value = 1*5DIGIT

```

The following table provides an explanation for each of the valid key values.

**Note** All numerical values are decimal unless explicitly specified otherwise or preceded by 0x.  
Group Policy: Security Protocol Extension implementations SHOULD use the specified default values.

Setting key	Explanation
MaxServiceAge	Maximum amount of time (in minutes) that a granted session ticket MUST be valid to access a service or resource by using Kerberos before it expires. An expired ticket MUST NOT be accepted as a valid ticket for service or resource access. Details about Kerberos ticket authentication are as specified in <a href="#">[RFC1510]</a> . The value MUST be greater than or equal to 10 and less than or equal to the setting for MaxTicketAge. The default is 600 minutes (10 hours).
MaxTicketAge	Maximum amount of time (in hours) that a user's ticket-granting ticket (TGT) MAY be used before it expires. An expired TGT MUST NOT be accepted as a valid TGT. The default is 10 hours. The value MUST be between zero and 99,999.
MaxRenewAge	Period of time (in days) during which a user's TGT can be renewed. A TGT MUST NOT be renewed if it is more than MaxRenewAge days old. The default is 7 days. The value MUST be between zero and 99,999.
MaxClockSkew	MUST be the maximum time difference (in minutes) between the client clock time and the clock time of the server that provides Kerberos v5 authentication, as specified in <a href="#">[RFC1510]</a> . The default is 5 minutes. The value MUST be between zero and 99,999.
TicketValidateClient	A flag that determines whether the Kerberos v5 Key Distribution Center (KDC) MUST validate every request for a session ticket against the user rights policy of the user account. Validation of each request for a session ticket is optional because the extra step takes time and may slow network access to services. The default is enabled. A nonzero value indicates the policy is enabled; otherwise, the policy is disabled.

### 2.2.3 Event Log Policies

There are three types of event log policies:

- System log
- Security log
- Application log

The ABNF for each of them MUST be as follows.

```

Header = "[" HeaderValue "]" LineBreak
HeaderValue = "System Log" / "Security Log" / "Application Log"

```

```

Settings = Setting / Setting Settings
Setting = Key Wsp "=" Wsp Value LineBreak
Key = "MaximumLogSize" / "AuditLogRetentionPeriod"
      / "RetentionDays" / "RestrictGuestAccess"

Value = 1*8DIGIT

```

The following table provides an explanation for each of the valid key values.

**Note** All numerical values are decimal unless explicitly specified otherwise, or unless preceded by 0x.

Setting key	Explanation
MaximumLogSize	The log size, in kilobytes, MUST be less than or equal to this value. The value MUST be between 64 and 4194240.
AuditLogRetentionPeriod	Specifies the type of retention period to be applied to the specific log. The retention method MUST be one of the following: <ul style="list-style-type: none"> <li>▪ A value of "0" indicates to overwrite events as needed.</li> <li>▪ A value of "1" indicates to overwrite events as specified by the RetentionDays entry.</li> <li>▪ A value of "2" indicates to never overwrite events (clear log manually).</li> </ul> Any other value is invalid.
RetentionDays	The number of days that System, Security, and Application log events MUST be retained before being overwritten by new events. Only valid if option AuditLogRetentionPeriod = 1. The value MUST be between 1 and 365.
RestrictGuestAccess	A flag that indicates whether or not users with Guest privileges can have access to System, Security, and Application logs. <3> <ul style="list-style-type: none"> <li>▪ A value of "0" indicates that guest access to System, Security, and Application logs is not restricted.</li> <li>▪ A nonzero value indicates that guest access to System, Security, and Application logs is restricted.</li> </ul>

## 2.2.4 Event Audit Policies

This section defines settings that enable an administrator to enforce audit account logon events. The syntax for the entries in this category MUST be as follows.

```

Header = "[" HeaderValue "]" LineBreak
HeaderValue = "Event Audit"
Settings = Setting / Setting Settings
Setting = Key Wsp "=" Wsp Value Linebreak
Key = "AuditSystemEvents" / "AuditLogonEvents" / "AuditPrivilegeUse" /
      "AuditPolicyChange" / "AuditAccountManage" / "AuditProcessTracking" /
      "AuditDSAccess" / "AuditObjectAccess" / "AuditAccountLogon"

Value = 1*DIGIT

```

The following table provides an explanation for the valid keys as specified in [\[MS-LSAD\]](#) section 2.2.4.20.

**Note** All numerical values are decimal unless explicitly specified otherwise, or unless preceded by 0x.

For more information about the format for the audit events, see [\[TECHNET-AUDITMGMT\]](#).

Setting key	Explanation
AuditAccountManage	A flag that indicates whether the operating system MUST audit each event of account management on a computer.
AuditDSAccess	A security setting that determines whether the operating system MUST audit each instance of user attempts to access an Active Directory object that has its own <b>system access control list (SACL)</b> specified, if the type of access request (such as Write, Read, or Modify) and the account making the request, match the settings in the SACL. The administrator can specify to audit only successes, only failures, both successes and failures, or to not audit these events at all (that is, neither successes nor failures). If Success auditing is enabled, an audit entry MUST be logged each time any user successfully accesses an Active Directory object that has a matching SACL specified. If Failure auditing is enabled, an audit entry MUST be logged each time any user unsuccessfully attempts to access an Active Directory object that has a matching SACL specified.
AuditAccountLogon	A security setting that determines whether the operating system MUST audit each time this computer validates the credentials of an account. Account logon events are generated whenever a computer validates the credentials of one of its local accounts. The credential validation can be in support of a local logon, or in the case of an Active Directory domain account on a <b>domain controller (DC)</b> , can be in support of a logon to another computer. Audited events for local accounts MUST be logged on the local security log of the computer. Account log off does not generate an event that can be audited. If this policy setting is defined, the administrator can specify to audit only successes, only failures, both successes and failures, or to not audit these events at all (that is, neither successes nor failures).
AuditLogonEvents	A security setting that determines whether the operating system MUST audit each instance of a user attempt to log on or log off this computer. Logoff events are generated whenever the logon session of a logged-on user account is terminated. If this policy setting is defined, the administrator can specify to audit only successes, only failures, both successes and failures, or to not audit these events at all (that is, neither successes nor failures).
AuditObjectAccess	A security setting that determines whether the operating system MUST audit each instance of user attempts to access a non-Active Directory object that has its own SACL specified, if the type of access request (such as Write, Read, or Modify) and the account making the request, match the settings in the SACL. The administrator can specify to audit only successes, only failures, both successes and failures, or to not audit these events at all (that is, neither successes nor failures). If Success auditing is enabled, an audit entry MUST be logged each time any user successfully accesses a non-Active Directory object that has a matching SACL specified. If Failure auditing is enabled, an audit entry MUST be logged each time any user unsuccessfully attempts to access a non-Active Directory object that has a matching SACL specified.
AuditPolicyChange	A security setting that determines whether the operating system MUST audit each instance of user attempts to change user rights assignment policy, audit policy, account policy, or trust policy. The administrator can specify to audit only

Setting key	Explanation
	successes, only failures, both successes and failures, or to not audit these events at all (that is, neither successes nor failures). If Success auditing is enabled, an audit entry <b>MUST</b> be logged when an attempted change to user rights assignment policy, audit policy, or trust policy is successful. If Failure auditing is enabled, an audit entry <b>MAY</b> be logged when a change to user rights assignment policy, audit policy, or trust policy is attempted by an account that is not authorized to make the requested policy change.<4>
AuditPrivilegeUse	A security setting that determines whether the operating system <b>MUST</b> audit each instance of user attempts to exercise a user right. If this policy setting is defined, the administrator can specify to audit only successes, only failures, both successes and failures, or to not audit these events at all (that is, neither successes nor failures). If Success auditing is enabled, an audit entry <b>MUST</b> be logged each time the exercise of a user right succeeds. If Failure auditing is enabled, an audit entry <b>MUST</b> be logged each time the exercise of a user right fails because the user account is not assigned to the user right.
AuditProcessTracking	A security setting that determines whether the operating system <b>MUST</b> audit process-related events such as process creation, process termination, handle duplication, and indirect object access. If this policy setting is defined, the administrator can specify to audit only successes, only failures, both successes and failures, or to not audit these events at all (that is, neither successes nor failures). If Success auditing is enabled, an audit entry <b>MUST</b> be logged each time the operating system performs one of these process-related activities. If Failure auditing is enabled, an audit entry <b>MAY</b> be logged each time the operating system fails to perform one of these process-related activities.<5>
AuditSystemEvents	<p>A security setting that determines whether the operating system <b>MUST</b> audit any of the following events:</p> <ul style="list-style-type: none"> <li>▪ Attempted system time change.</li> <li>▪ Attempted security system startup or shutdown.</li> <li>▪ Attempt to load extensible authentication components.</li> <li>▪ Loss of audited events due to auditing system failure.</li> <li>▪ Security log size exceeding a configurable warning threshold level.</li> </ul> <p>If this policy setting is defined, the administrator can specify to audit only successes, only failures, both successes and failures, or to not audit these events at all (that is, neither successes nor failures). If Success auditing is enabled, an audit entry <b>MUST</b> be logged each time the operating system performs one of these activities successfully. If Failure auditing is enabled, an audit entry <b>MUST</b> be logged each time the operating system attempts and fails to perform one of these activities.</p>

The following table provides a summary of the valid values. For more details on valid values see [\[MS-LSAD\]](#) section 2.2.4.4.

Setting value	Explanation
0	Indicates that this setting is set to None.
1	Indicates that this setting is set to Success Audits Only.

Setting value	Explanation
2	Indicates that this setting is set to Failure Audits Only.
3	Indicates that this setting is set to Success and Failure Audits.
4	Indicates that this setting is set to None.

## 2.2.5 Registry Values

This section defines settings that enable an administrator to set registry entries. The syntax for the entries in this category **MUST** be as follows.

```
Header = "[" HeaderValue "]" LineBreak
HeaderValue = "Registry Values"
Settings = Setting / Setting Settings
Setting = RegistryValueName "=" RegistryValueType "," RegistryValue
RegistryValueType = 1*DIGIT
RegistryValueName = KeyName / DQUOTE KeyName DQUOTE
KeyName = Key / KeyName "\" Key
Key = 1*IdCharacter
IdCharacter = %x0020-0021 / %x0023-005B / %x005D-007E
RegistryValue = String / QuotedString
```

The following table provides an explanation for each of the parameters listed, and specifies the set of valid values.

**Note** All numerical values are decimal unless explicitly specified otherwise or preceded by 0x.

Setting key	Explanation
RegistryValueName	<b>MUST</b> be the Fully Qualified Name (as specified in <a href="#">[MS-RRP]</a> section 3.1.1.1.1) of the registry value to set.
RegistryValueType	The data type of the registry value <b>MUST</b> be one of the following values. (For more details about the value types, see <a href="#">[MS-RRP]</a> section 3.1.1.5.) <ul style="list-style-type: none"> <li>▪ A value of "1": Indicates that the data type of the registry value is String.</li> <li>▪ A value of "2": Indicates that the data type of the registry value is Expand String.</li> <li>▪ A value of "3": Indicates that the data type of the registry value is Binary.</li> <li>▪ A value of "4": Indicates that the data type of the registry values is <a href="#">DWORD</a>.</li> <li>▪ A value of "7": Indicates that the data type of the registry values is <a href="#">MULTI_SZ</a>.</li> </ul> <p>Although other registry types exist, they are not supported by this protocol.</p>
RegistryValue	A value to be configured. The data type of this value <b>MUST</b> match the type that is specified in the <b>RegistryValueType</b> field.

## 2.2.6 Privilege Rights

This section defines settings that enable an administrator to control what accounts have what privileges. The syntax for the entries in this category **MUST** be as follows.

```
Header = "[" HeaderValue "]" LineBreak
HeaderValue = "Privilege Rights"
Settings = Setting / Setting Settings
Setting = RightName Wsp "=" Wsp SidList LineBreak
SidList = SidEnt / SidEnt Wsp "," Wsp SidList

RightName = "SeNetworkLogonRight" / "SeTcbPrivilege"
           / "SeMachineAccountPrivilege" / "SeIncreaseQuotaPrivilege"
           / "SeRemoteInteractiveLogonRight" / "SeBackupPrivilege"
           / "SeChangeNotifyPrivilege" / "SeCreatePagefilePrivilege"
           / "SeSystemtimePrivilege" / "SeCreateTokenPrivilege"
           / "SeCreateGlobalPrivilege" / "SeCreatePermanentPrivilege"
           / "SeDebugPrivilege" / "SeDenyNetworkLogonRight"
           / "SeDenyBatchLogonRight" / "SeDenyServiceLogonRight"
           / "SeDenyInteractiveLogonRight"
           / "SeDenyRemoteInteractiveLogonRight"
           / "SeEnableDelegationPrivilege"
           / "SeRemoteShutdownPrivilege" / "SeAuditPrivilege"
           / "SeImpersonatePrivilege"
           / "SeIncreaseBasePriorityPrivilege"
           / "SeLoadDriverPrivilege" / "SeLockMemoryPrivilege"
           / "SeBatchLogonRight" / "SeServiceLogonRight"
           / "SeInteractiveLogonRight" / "SeSecurityPrivilege"
           / "SeSystemEnvironmentPrivilege"
           / "SeManageVolumePrivilege"
           / "SeProfileSingleProcessPrivilege"
           / "SeSystemProfilePrivilege" / "SeUndockPrivilege"
           / "SeAssignPrimaryTokenPrivilege" / "SeRestorePrivilege"
           / "SeShutdownPrivilege" / "SeSyncAgentPrivilege"
           / "SeTakeOwnershipPrivilege" / "SeTrustedCredManAccessPrivilege"
           / "SeTimeZonePrivilege" / "SeCreateSymbolicLinkPrivilege"
           / "SeIncreaseWorkingSetPrivilege" / "SeRelabelPrivilege"

SidEnt = %d42 SID / PRINCIPALNAMESTRING

; SID is defined in MS-DTYP section 2.4.2.1

PRINCIPALNAMESTRING = 1*20(ALPHANUM / %d32-33 / %d35-41 / %d45 / %d64 / %d94-96 / %d123 /
%d125 / %d126)
```

For information about each privilege setting, see [\[MSDN-PRIVS\]](#).

The **SID** element in the preceding syntax is a string representation of the security identifiers (SIDs) of accounts or groups and **MUST** conform to the syntax specified in [\[MS-DTYP\]](#) section 2.4.2.1.

## 2.2.7 Registry Keys

This section defines settings that enable an administrator to specify how registry keys on the client machine should be protected. The ABNF syntax for the entries in this category **MUST** be as follows.

```

Header = "[" HeaderValue "]" LineBreak
HeaderValue = "Registry Keys"
Settings = Setting / Setting Settings
Setting = RegistryKeyName "," PermPropagationMode ","
        AclString LineBreak
RegistryKeyName = KeyPath / DQUOTE KeyPath DQUOTE
KeyPath = Key / KeyPath "\" Key
Key = 1*IdCharacter
IdCharacter = %x0020-0021 / %x0023-005B / %x005D-007E
PermPropagationMode = DIGIT
AclString = SDDL / DQUOTE SDDL DQUOTE

```

The ABNF specification for the SDDL element above can be found in [\[MS-DTYP\]](#) section 2.5.1.1.

The following table provides an explanation for each of the parameters listed.

**Note** All numerical values are decimal unless explicitly specified otherwise, or unless preceded by 0x.

Setting key	Explanation
RegistryKeyName	The full name of the registry key that MUST be protected. It MUST be the Fully Qualified Name (as specified in <a href="#">[MS-RRP]</a> section 3.1.1.1.1) of the registry value to set.
PermPropagationMode	Controls whether and how permissions are propagated. It MUST be one of the following values: <ul style="list-style-type: none"> <li>▪ A value of "0": MUST propagate inheritable permissions to all subkeys.</li> <li>▪ A value of "1": MUST replace existing permissions on all subkeys with inheritable permissions.</li> <li>▪ A value of "2": MUST NOT allow permissions on this key to be replaced.</li> </ul>
AclString	A security descriptor that MUST be applied to the registry key. The security descriptor MUST conform to the syntax specified in <a href="#">[MS-DTYP]</a> section 2.5.1.1.

## 2.2.8 Service General Settings

This section defines settings that enable configuration of the startup type and **discretionary access control lists (DACLS)** on services running on the client machine. The syntax for the entries in this category MUST be as follows.

```

Header = "[" HeaderValue "]" LineBreak
HeaderValue = "Service General Setting"
Settings = Setting / Setting Settings
ServiceName = 1*256IdCharacter / DQUOTE 1*256IdCharacter DQUOTE
IdCharacter = ALPHANUM / %d33 / %d35-43 / %d45-46 / %d58-64 / %d91 / %d93-96 / %d123-126
Setting = ServiceName "," StartupMode "," AclString LineBreak
StartupMode = DIGIT
AclString = SDDL / DQUOTE SDDL DQUOTE

```

The ABNF specification for the SDDL element above can be found in [\[MS-DTYP\]](#) section 2.5.1.1.

The following table explains the **ServiceName**, **StartupMode**, and **AclString** fields.

**Note** All numerical values are decimal unless explicitly specified otherwise, or unless preceded by 0x.

Setting key	Explanation
ServiceName	A string that represents the logical service name of the service that <b>MUST</b> be configured. It <b>MUST</b> be an alphanumeric string of 1 to 256 characters as specified in the ABNF.
StartupMode	A startup mode for the process that <b>MUST</b> be one of the following values (the following explanations are a summary; for more details see <a href="#">[MS-SCMR]</a> section 2.2.15): <ul style="list-style-type: none"> <li>▪ A value of "2": Indicates that the startup mode is Automatic.</li> <li>▪ A value of "3": Indicates that the startup mode is Manual.</li> <li>▪ A value of "4": Indicates that the startup mode is Disabled.</li> </ul>
AclString	A security descriptor that, if present, <b>MUST</b> be applied to the service. The security descriptor <b>MUST</b> conform to the syntax specified in <a href="#">[MS-DTYP]</a> section 2.5.1.1.

## 2.2.9 File Security

This section defines how to enable the administrator to specify how files and directories on the client machine should be protected. The ABNF syntax for the entries in this category **MUST** be as follows.

```
Header = "[" HeaderValue "]" LineBreak
HeaderValue = "File Security"
Settings = Setting / Setting Settings
Setting = FileOrDirectoryPath "," PermPropagationMode
        "," AclString LineBreak
FileOrDirectoryPath = String / QuotedString
PermPropagationMode = DIGIT
AclString = SDDL / DQUOTE SDDL DQUOTE
```

The ABNF specification for the SDDL element above can be found in [\[MS-DTYP\]](#) section 2.5.1.1.

The following table explains each of the settings listed.

**Note** All numerical values are decimal unless explicitly specified otherwise, or unless preceded by 0x.

Setting key	Explanation
FileOrDirectoryPath	The path to the file or directory that <b>MUST</b> be protected. It <b>MUST</b> be a string or a string enclosed between double quote characters as specified in the ABNF.
PermPropagationMode	Controls whether and how permissions are propagated. It <b>MUST</b> be one of the following values: <ul style="list-style-type: none"> <li>▪ A value of "0": <b>MUST</b> propagate inheritable permissions to all subfolders and files.</li> <li>▪ A value of "1": <b>MUST</b> replace existing permissions on all subfolders and files with inheritable permissions.</li> </ul>

Setting key	Explanation
	<ul style="list-style-type: none"> <li>A value of "2": MUST NOT allow permissions on this file or folder to be replaced.</li> </ul>
AclString	A security descriptor that MUST be applied to the file or directory. The security descriptor MUST conform to the syntax specified in <a href="#">[MS-DTYP]</a> section 2.5.1.1.

## 2.2.10 Group Membership

This section defines settings that enable the administrator to control the membership of various groups. The ABNF syntax for the entries in this category MUST be as follows.

```
Header = "[" HeaderValue "]" LineBreak
HeaderValue = "Group Membership"
Settings = Setting / Setting Settings
Setting = Key Wsp "=" Wsp ValueList LineBreak
Key = GroupNameMembers / GroupNameMemberOf
GroupNameMembers = (GroupName / (%d42 SID)) "__Members"
GroupNameMemberof = (GroupName / (%d42 SID)) "__Memberof"
GroupName = GROUPNAMESTRING
ValueList = Value / Value Wsp "," Wsp ValueList
Value = %d42 SID / GROUPNAMESTRING

; SID isdefined in MS-DTYP section 2.4.2.1

GROUPNAMESTRING = 1*256(ALPHANUM / %d32-33 / %d35-41 / %d45 / %d64 / %d94-96 / %d123 / %d125 / %d126)
```

The SID element in the preceding syntax has its ABNF specification in [\[MS-DTYP\]](#) section 2.4.2.1.

Note that in the actual security policy, the preceding "GroupName" setting MUST be replaced by the actual name of a group whose members or membership in other groups MUST be configured. For more information, see the example in section [4.3](#).

The following table explains each of the settings listed.

Setting key	Explanation
GroupNameMembers	A string representing a group name to which the string "__Members" has been appended. The specified group's membership is to be set to the valuelist. The string MUST be an alphanumeric string as defined in the ABNF specified here.
GroupNameMemberof	A string representing a group name to which the string "__Memberof" has been appended. The specified group is to be made a member of each group in the valuelist. The string MUST be an alphanumeric string as defined in the ABNF specified here.
Value	For GroupNameMembers, the SIDs or names of users and groups which the group MUST contain. For GroupNameMemberof, the SIDs or names of groups which the group MUST be a member of. Each Value MUST conform to the syntax of the SID as specified in <a href="#">[MS-DTYP]</a>

Setting key	Explanation
	section 2.4.2.1 or to the GROUPNAMESTRING ABNF syntax specified here.

## 2.2.11 User Account Control

This section defines settings that enable the administrator to configure the behavior of the User Account Control feature. For details on how the settings listed in this section SHOULD be defined, see sections [2.2.5](#) and [2.2.7.<6>](#)

### 2.2.11.1 FilterAdministratorToken

**Key:** SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System

**Value:** "FilterAdministratorToken"

**Type:** REG\_DWORD

**Data:** This MUST be a value in the following table.

Value	Meaning
0x00000000	Only the built-in administrator account (RID 500) SHOULD be placed into Full Token mode. <a href="#">&lt;7&gt;</a>
0x00000001	Only the built-in administrator account (RID 500) is placed into Admin Approval Mode. Approval is required when performing administrative tasks.

### 2.2.11.2 ConsentPromptBehaviorAdmin

**Key:** SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System

**Value:** "ConsentPromptBehaviorAdmin"

**Type:** REG\_DWORD

**Data:** This MUST be a value in the following table.

Value	Meaning
0x00000000	This option SHOULD be used to allow the Consent Admin to perform an operation that requires elevation without consent or credentials.
0x00000001	This option SHOULD be used to prompt the Consent Admin to enter his or her user name and password (or another valid admin) when an operation requires elevation of privilege.
0x00000002	This option SHOULD be used to prompt the administrator in Admin Approval Mode to select either "Permit" or "Deny" an operation that requires elevation of privilege. If the Consent Admin selects Permit, the operation will continue with their highest available privilege. "Prompt for consent" removes the inconvenience of requiring that users enter their name and password to perform a privileged task.

### 2.2.11.3 ConsentPromptBehaviorUser

**Key:** SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System

**Value:** "ConsentPromptBehaviorUser"

**Type:** REG\_DWORD

**Data:** This MUST be a value in the following table.

Value	Meaning
0x00000000	This option SHOULD be set to ensure that any operation that requires elevation of privilege will fail as a standard user.
0x00000001	This option SHOULD be set to ensure that a standard user that needs to perform an operation that requires elevation of privilege will be prompted for an administrative user name and password. If the user enters valid credentials, the operation will continue with the applicable privilege.

#### 2.2.11.4 EnableInstallerDetection

**Key:** SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System

**Value:** "EnableInstallerDetection"

**Type:** REG\_DWORD

**Data:** This MUST be a value in the following table.

Value	Meaning
0x00000000	This option SHOULD be used to disable the automatic detection of installation packages that require elevation to install.
0x00000001	This option SHOULD be used to heuristically detect applications that require an elevation of privilege to install.

#### 2.2.11.5 ValidateAdminCodeSignatures

**Key:** SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System

**Value:** "ValidateAdminCodeSignatures"

**Type:** REG\_DWORD

**Data:** This MUST be a value in the following table.

Value	Meaning
0x00000000	Do not enforce cryptographic signatures on interactive applications that require elevation of privilege.
0x00000001	Enforce cryptographic signatures on any interactive application that requests elevation of privilege.

#### 2.2.11.6 EnableLUA

**Key:** SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System

**Value:** "EnableLUA"

**Type:** REG\_DWORD

**Data:** This MUST be a value in the following table.

Value	Meaning
0x00000000	Disabling this policy disables the "administrator in Admin Approval Mode" user type.
0x00000001	This policy enables the "administrator in Admin Approval Mode" user type while also enabling all other User Account Control (UAC) policies.

### 2.2.11.7 PromptOnSecureDesktop

**Key:** SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System

**Value:** "PromptOnSecureDesktop"

**Type:** REG\_DWORD

**Data:** This MUST be a value in the following table.

Value	Meaning
0x00000000	Disabling this policy disables secure desktop prompting. All credential or consent prompting will occur on the interactive user's desktop.
0x00000001	This policy will force all UAC prompts to happen on the user's secure desktop.

### 2.2.11.8 EnableVirtualization

**Key:** SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System

**Value:** "EnableVirtualization"

**Type:** REG\_DWORD

**Data:** This MUST be a value in the following table.

Value	Meaning
0x00000000	Disables data redirection for interactive processes.
0x00000001	This policy enables the redirection of legacy application File and Registry writes that would normally fail as standard user to a user-writable data location. This setting mitigates problems with applications that historically ran as administrator and wrote run-time application data back to locations writable only by an administrator.

## 3 Protocol Details

### 3.1 Administrative-Side Plug-in Details

The administrative-side plug-in participates in the security policy authoring and assignment steps, as specified in section [2](#). The security policy MUST be stored as a text file by using an .inf format, as specified in section [2.2](#). The security policies MUST be stored in a location accessible over the network (such as a network **share**) by using SMB.

#### 3.1.1 Abstract Data Model

The administrative-side plug-in maintains no state. It loads all the settings, as specified in section [2.2](#), in a *<name of setting, value of setting>* pair in memory.

When using the administrative UI, the administrative-side plug-in is used to interact with the Group Policy framework, as specified in [\[MS-GPOL\]](#). It determines the physical location of the security policy wanted based on the abstract data model, creates a new policy or opens an existing policy as appropriate, and displays it to the administrator. After the administrator modifies the policy, the changes are propagated back into the policy at the location wanted.

#### 3.1.2 Timers

None.

#### 3.1.3 Initialization

When the administrative-side plug-in starts, it MUST get a scoped GPO path from the [Group Policy: Core Protocol](#), as specified in [\[MS-GPOL\]](#) section 2.2.4, and perform the processing described in section [3.1.5.1](#), Load Policy.

#### 3.1.4 Higher-Layer Triggered Events

Higher-layer triggered events occur in the following situations:

- An administrator loads a Group Policy: Security Protocol Extension GPO .inf file. See section [3.1.5.1](#), Load Policy.
- An administrator makes a change to any Group Policy: Security Protocol Extension setting value. See section [3.1.5.2](#), Update Policy.
- An administrator deletes any Group Policy: Security Protocol Extension setting value. See section [3.1.5.3](#), Delete Setting Value.

#### 3.1.5 Message Processing Events and Sequencing Rules

The administrative-side plug-in reads extension-specific data from the remote storage location, as specified in section [3.2.5](#), steps 1-3. The administrative-side plug-in passes that information to an implementation-specific tool that provides a graphical user interface to display the current settings to an administrator.

If the administrator makes any changes to the existing configuration, the administrative-side plug-in writes the extension-specific configuration data to the remote storage location, as specified in section [3.1.5.2](#), Update Policy.

After every creation, modification, or deletion that affects the GptTmpl.inf file on SYSVOL, the administrative tool MUST invoke the Group Policy Extension Update task ([\[MS-GPOL\]](#) section 3.3.4.4).

### 3.1.5.1 Load Policy

A Load Policy event occurs when an administrator initiates the administrative-side plug-in. When the administrative-side plug-in starts, it MUST get a scoped GPO path from the [Group Policy: Core Protocol](#), as specified in [\[MS-GPOL\]](#) section 2.2.4. The plug-in MUST attempt to retrieve any existing GptTmpl.inf file from "<gpo path>\Machine\Microsoft\Windows NT\SecEdit\", where "<gpo path>" is the GPO path. File reads MUST be performed, as specified in section [3.2.5](#), steps 1-3. If the attempt to read the file fails, an error MUST be logged and processing stopped.

### 3.1.5.2 Update Policy

To update the policy settings in a GPO using administrative tool plug-ins, the state of that GPO on the Group Policy server MUST be updated with an update policy message. This MUST be accomplished with the following message sequence:

1. SMB file open from client to server:

The plug-in MUST get a GPO path from the [Group Policy: Core Protocol](#), as specified in [\[MS-GPOL\]](#) section 2.2.4 and attempt to write a GptTmpl.inf file to the following location: "<gpo path>\Machine\Microsoft\Windows NT\SecEdit\", where "<gpo path>" is the GPO path.

The SMB file open MUST request write permission and request that the file be created if it does not exist.

If the open request returns a failure status, the Group Policy: Security Protocol Extension sequence MUST be terminated.

2. SMB file write sequences:

The administrative add-in MUST perform a series of SMB file writes to overwrite the contents of the opened file with new settings. These writes MUST continue until the entire file is written or an error is encountered.

If an error is encountered, the protocol sequence MUST be terminated.

3. File close:

The tool MUST then issue an SMB file close operation.

4. The administrative tool invokes the Group Policy Extension Update task ([\[MS-GPOL\]](#) section 3.3.4.4).

File names and paths SHOULD be regarded as case-insensitive. If the write fails, the administrative-side plug-in MUST display to the user that the operation failed.

### 3.1.5.3 Delete Setting Value

A Delete Setting Value event occurs when an administrator removes a setting value. When a setting value is deleted, the setting is removed from memory and the processing described in section [3.1.5.2](#), Update Policy, is performed.

### 3.1.6 Timer Events

None.

### 3.1.7 Other Local Events

None.

## 3.2 Client-Side Plug-in Details

The client-side plug-in interacts with the Group Policy framework, as specified in [\[MS-GPOL\]](#) section 3.2. This plug-in MUST receive the security policy and apply it in accordance with the instructions of the administrator.

### 3.2.1 Abstract Data Model

This section defines a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to explain how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with what is described in this document.

This protocol sets shared Abstract Data Model variables that are defined in other protocol documents. The normative definition for each shared variable is given in the corresponding document as shown here:

This protocol sets the following abstract data variables shared from [\[MS-LSAD\]](#):

- MaxServiceTicketAge ([\[MS-LSAD\]](#) section 3.1.1.1)
- MaxTicketAge ([\[MS-LSAD\]](#) section 3.1.1.1)
- MaxRenewAge ([\[MS-LSAD\]](#) section 3.1.1.1)
- MaxClockSkew ([\[MS-LSAD\]](#) section 3.1.1.1)
- AuthenticationOptions ([\[MS-LSAD\]](#) section 3.1.1.1)

This protocol sets the following abstract data variables shared from [\[MS-EVEN\]](#):

- MaxSize ([\[MS-EVEN\]](#) section 3.1.1.2)
- Retention ([\[MS-EVEN\]](#) section 3.1.1.2)
- RestrictGuestAccess ([\[MS-EVEN\]](#) section 3.1.1.2)

### 3.2.2 Timers

None.

### 3.2.3 Initialization

When invoked by the Group Policy framework with a list of one or more applicable GPOs, the client-side plug-in MUST do the following: locate all the physical security policies within those GPOs, copy the policies to the local machine, read the policies, and apply them as specified in section [3.2.5](#).

Locating physical security policy files MUST be done by using the Group Policy: Core Protocol, as specified in [\[MS-GPOL\]](#) section 3.2.5.1, and the LDAP search protocol, as specified in [\[RFC2251\]](#)

section 4.5. The policy files MUST be copied and read by using standard CopyFile and ReadFile functions, as specified in [\[MS-SMB\].<8>](#)

### 3.2.4 Higher-Layer Triggered Events

The client-side plug-in implements one higher-layer triggered event: Process Group Policy.

#### 3.2.4.1 Process Group Policy

The client-side plug-in implements the Process Group Policy abstract event interface, as specified in [\[MS-GPOL\]](#) section 3.2.4.1. The client-side plug-in does not make use of the **Deleted GPO list**, **SessionFlags**, or **UserToken** arguments. When the event is triggered, the client-side plug-in MUST take the actions described in section [3.2.5](#).

### 3.2.5 Message Processing Events and Sequencing Rules

The client-side plug-in GPOs MUST be triggered by the Group Policy framework whenever applicable GPOs need to be processed. When such an event occurs, the client-side plug-in takes the appropriate actions.

When triggered, the client-side plug-in expects a list of applicable GPOs. It MUST then go through this list and, for each GPO, locate and retrieve the contained security policy.

After all the security policies are retrieved, each policy MUST be opened and the contained security policy settings MUST be extracted and applied.

When the policy application step is completed, an appropriate error code MUST be returned to the Group Policy framework, as specified in [\[MS-GPOL\]](#), to indicate the success or failure of the operation.

The Group Policy: Core Protocol MUST invoke the client-side plug-in for each GPO that it identifies as containing Group Policy: Security Protocol Extension protocol settings. For each of those GPOs, one file with the format (as specified in section [2.2](#)) MUST be copied from the Group Policy: Core Protocol server. If any file cannot be read, the client-side plug-in MUST ignore the failure and continue to copy files for other GPOs.

The Group Policy: Core Protocol client MUST determine a list of GPOs for which this protocol MUST be executed, as specified in [\[MS-GPOL\]](#) section 3.2.5.1.

For each GPO, the client-side plug-in MUST do the following:

1. Perform an SMB File Open on the file specified by `<gpo path>\Machine\Microsoft\Windows NT\SecEdit\GptTmpl.inf` (where `<gpo path>` is the GPO path in the GPO). If an error is encountered while opening the file, an error MUST be indicated to the Group Policy system (as specified in [\[MS-GPOL\]](#) section 2.2.7) on the client machine and processing MUST be stopped.
2. Perform a series of SMB File Reads to read the entire contents of the opened file until the entire file has been read or an error in reading occurs. If an error is encountered while reading the file, an error MUST be indicated to the Group Policy system (as specified in [\[MS-GPOL\]](#)) on the client machine and processing MUST be aborted.
3. Perform an SMB File Close to close the file.

When using SMB to open or read files as described in the preceding steps, the client-side plug-in SHOULD handle error codes returned by the SMB protocol as specified in [\[MS-SMB\]](#) section 2.2.2.4 or [\[MS-SMB2\]](#).

The client-side plug-in MUST parse the file according to the format specified in section 2.2. If the file does not conform to that format, the entire configuration operation MUST be ignored. If the file does conform to that format, the settings MUST be applied to the corresponding security parameters on the system.

In applying security policies, several MS-GPSB setting names correspond to Abstract Data Model shared variables for which the normative definition is provided in other documents (see the "Abstract Data Model" section 3.2.1.) The MS-GPSB setting name and the corresponding Abstract Data Model shared variable are provided in the following tables. For each such setting that is read from a GPO .inf file, the client-side plug-in MUST set the value of the ADM variable in the right-hand column of the table to the value for the setting in the left-hand column.

### 3.2.5.1 Password Policies

Password policies are set by doing the following:

1. If the setting value for the settings key is outside the range of valid values specified in the corresponding Explanation column in the table in section 2.2.1.1, the client SHOULD quit processing Password Policies and log an error.
2. Performing the external behavior consistent with locally invoking **SamrQueryInformationDomain** ([MS-SAMR] section 3.1.5.5.2) to obtain the existing domain password information.
  - The *DomainHandle* MUST be set to a Domain handle opened by performing external behavior consistent with locally invoking **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5) to obtain a handle to the domain of the current machine.
  - The *DomainInformationClass* MUST be set to `DomainPasswordInformation`.
  - The `PSAMPR_DOMAIN_INFO_BUFFER` MUST be a pointer to a `PSAMPR_DOMAIN_INFO_BUFFER` containing allocated memory sufficient to contain a **DOMAIN\_PASSWORD\_INFORMATION** structure.
3. Calling **SamrSetInformationDomain** ([MS-SAMR] section 3.1.5.6.1).
  - The *DomainHandle* MUST be set to a Domain handle opened by performing external behavior consistent with locally invoking **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5) to obtain a handle to the domain of the current machine.
  - The *DomainInformationClass* MUST be set to `DomainPasswordInformation`.
  - The *DomainInformation* MUST be a `PSAMPR_DOMAIN_INFO_BUFFER` containing a **DOMAIN\_PASSWORD\_INFORMATION** structure. The client-side plug-in MUST set each of the password policy values specified in the GPO inf file to a **DOMAIN\_PASSWORD\_INFORMATION** structure member according to the mapping in the following rules.

For the **MinimumPasswordLength**, **PasswordComplexity**, **ClearTextPassword**, and **PasswordHistorySize** settings, the client-side snap-in MUST map the setting name in the GPO inf file to one of the values in the left-hand column of the following table, and set the value of the **DOMAIN\_PASSWORD\_INFORMATION** structure member identified in the corresponding right-hand column to the setting value. For the **PasswordComplexity** and **ClearTextPassword** settings, if the setting in the GPO inf file has a value of "true", then the client-side plug-in MUST set the value of the **DOMAIN\_PASSWORD\_INFORMATION** structure member identified in the right-hand column to the value provide in the right-hand column.

<b>MS-GPSB</b>	<b>DOMAIN_PASSWORD_INFORMATION member</b>
MinimumPasswordLength	MinPasswordLength
PasswordComplexity	PasswordProperties bit DOMAIN_PASSWORD_COMPLEX (0x00000001)
ClearTextPassword	PasswordProperties bit DOMAIN_PASSWORD_STORE_CLEARTEXT (0x00000010)
PasswordHistorySize	PasswordHistoryLength

For the **MaximumPasswordAge** setting, the client-side snap-in MUST map the setting value in the GPO inf file to one of the values in the left-hand column of the following table, and set the **DOMAIN\_PASSWORD\_INFORMATION** structure **MaxPasswordAge** member to the value resulting from the transformation specified in the corresponding right-hand column in the following table.

<b>MaximumPasswordAge value</b>	<b>DOMAIN_PASSWORD_INFORMATION MaxPasswordAge member value</b>
-1	0x8000000000000000
X (any value 1 to 999)	-1*X*24*3600 * 10000000

For the **MinimumPasswordAge** setting, the client-side snap-in MUST set the **DOMAIN\_PASSWORD\_INFORMATION** structure **MinPasswordAge** member to the value resulting from the transformation specified in the right-hand column in the following table.

<b>MinimumPasswordAge value</b>	<b>DOMAIN_PASSWORD_INFORMATION MinPasswordAge member value</b>
X (any value)	-1*X*24*3600 * 10000000

### 3.2.5.2 Account Lockout Policies

Account Lockout policies are set by doing the following:

If the Key name in the GPO inf file is "**LockoutBadCount**", "**ResetLockoutCount**", or "**LockoutDuration**":

- Perform external behavior consistent with locally invoking **SamrQueryInformationDomain** ([\[MS-SAMR\]](#) section 3.1.5.5.2) to obtain the existing domain account lockout information.
  - The *DomainHandle* MUST be set to a Domain handle opened by performing external behavior consistent with locally invoking **SamrOpenDomain** ([\[MS-SAMR\]](#) section 3.1.5.1.5) to obtain a handle to the domain of the current machine.
  - The *DomainInformationClass* MUST be set to `DomainLockoutInformation`.
  - The `PSAMPR_DOMAIN_INFO_BUFFER` MUST be a pointer to a `PSAMPR_DOMAIN_INFO_BUFFER` containing allocated memory sufficient to contain a **SAMPR\_DOMAIN\_LOCKOUT\_INFORMATION** structure ([\[MS-SAMR\]](#) section 2.2.4.15).
- Perform external behavior consistent with locally invoking **SamrSetInformationDomain** ([\[MS-SAMR\]](#) section 3.1.5.6.1).

- The *DomainHandle* MUST be set to a Domain handle opened by performing external behavior consistent with locally invoking **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5) to obtain a handle to the domain of the current machine.
- The *DomainInformationClass* MUST be set to DomainLockoutInformation.
- The *DomainInformation* MUST be a PSAMPR\_DOMAIN\_INFO\_BUFFER containing a **SAMPR\_DOMAIN\_LOCKOUT\_INFORMATION** structure. The client-side plug-in MUST set each of the account lockout policy values specified in the GPO inf file to a **SAMPR\_DOMAIN\_LOCKOUT\_INFORMATION** structure member according to the mapping in the following rules:

For the **LockoutBadCount** setting the client-side snap-in MUST set the **SAMPR\_DOMAIN\_LOCKOUT\_INFORMATION** structure LockoutThreshold member to the setting value.

For the **ResetLockCount** setting, the client-side snap-in MUST set the **SAMPR\_DOMAIN\_LOCKOUT\_INFORMATION** structure LockoutObservationWindow member to the value resulting from the transformation specified in the right-hand column in the following table.

ResetLockCount value	DOMAIN_LOCKOUT_INFORMATION LockoutObservationWindow member value
X (any value)	-1*X*60 * 10000000

For the **LockoutDuration** setting, the client-side snap-in MUST map the setting value in the GPO inf file to one of the values in the left-hand column of the following table, and set the **SAMPR\_DOMAIN\_LOCKOUT\_INFORMATION** structure **LockoutDuration** member to the value resulting from the transformation specified in the corresponding right-hand column in the following table.

LockoutDuration value	DOMAIN_LOCKOUT_INFORMATION LockoutDuration member value
-1	0x8000000000000000
X (any value 1 to 99,999)	-1*X*60 * 10000000

If the Key name is "**ForceLogoffWhenHourExpire**":

1. Perform external behavior consistent with locally invoking **SamrQueryInformationDomain** ([MS-SAMR] section 3.1.5.5.2) to obtain the existing domain account logoff information.
  - The *DomainHandle* MUST be set to a Domain handle opened by performing external behavior consistent with locally invoking **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5) to obtain a handle to the domain of the current machine.
  - The *DomainInformationClass* MUST be set to DomainLogoffInformation.
  - The PSAMPR\_DOMAIN\_INFO\_BUFFER MUST be a pointer to a PSAMPR\_DOMAIN\_INFO\_BUFFER containing allocated memory sufficient to contain a **DOMAIN\_LOGOFF\_INFORMATION** ([MS-SAMR] section 2.2.4.6) structure.
2. Perform external behavior consistent with locally invoking **SamrSetInformationDomain** ([MS-SAMR] section 3.1.5.6.1).

- The *DomainHandle* MUST be set to a Domain handle opened by performing external behavior consistent with locally invoking **SamrOpenDomain** ([\[MS-SAMR\]](#) section 3.1.5.1.5) to obtain a handle to the domain of the current machine.
- The *DomainInformationClass* MUST be set to DomainLogoffInformation.

The *DomainInformation* MUST be a PSAMPR\_DOMAIN\_INFO\_BUFFER containing a **DOMAIN\_LOGOFF\_INFORMATION** structure. The client-side plug-in MUST match the **ForceLogoffWhenHourExpire** setting value to one of the values in the left-hand column of the following table and set the **DOMAIN\_LOGOFF\_INFORMATION** structure member to the corresponding value in the right-hand column of the following table.

ForceLogoffWhenHourExpire value	DOMAIN_LOGOFF_INFORMATION ForceLogoff member value
1	0
0	0x8000000000000000

If the Key name is "**LSAAnonymousNameLookup**":

1. Perform external behavior consistent with locally invoking **LsarQuerySecurityObject** ([\[MS-LSAD\]](#) section 3.1.4.9.1).
  - The *PolicyHandle* MUST be set to a policy handle opened by performing external behavior consistent with locally invoking **LsarOpenPolicy** ([\[MS-LSAD\]](#) section 3.1.4.4.2) with *DesiredAccess* set to MAXIMUM\_ALLOWED ([\[MS-LSAD\]](#) section 2.2.1.1.1).
  - The *SecurityInformation* MUST be set to **DACL\_SECURITY\_INFORMATION** ([\[MS-LSAD\]](#) section 2.2.1.3).
  - The *SecurityDescriptor* MUST be set to an address of a PLSAR\_SR\_SECURITY\_DESCRIPTOR variable.
2. Perform external behavior consistent with locally invoking **LsarSetSecurityObject**.
  - The *PolicyHandle* MUST be set to a policy handle opened by performing external behavior consistent with locally invoking **LsarOpenPolicy** ([\[MS-LSAD\]](#) section 3.1.4.4.2) with *DesiredAccess* set to MAXIMUM\_ALLOWED ([\[MS-LSAD\]](#) section 2.2.1.1.1).
  - The *SecurityInformation* MUST be set to **DACL\_SECURITY\_INFORMATION** ([\[MS-LSAD\]](#) section 2.2.1.3).
  - The *SecurityDescriptor* MUST be a pointer to an **LSAR\_SR\_SECURITY\_DESCRIPTOR** structure in which the DACL ([\[MS-DTYP\]](#) section 2.4.5) MUST be set to the DACL received from the **LsarQuerySecurityObject** method in step 1, with an added **ACCESS\_ALLOWED\_ACE** ([\[MS-DTYP\]](#) section 2.4.4.2) granting the **Anonymous SID** ([\[MS-DTYP\]](#) section 2.4.2.4) an access mask set to POLICY\_LOOKUP\_NAMES ([\[MS-LSAD\]](#) section 2.2.1.1.2).

If the Key name is "**EnableAdminAccount**":

1. Perform external behavior consistent with locally invoking **SamrQueryInformationUser** ([\[MS-SAMR\]](#) section 3.1.5.5.6).
  - The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking **SamrOpenUser** ([\[MS-SAMR\]](#) section 3.1.5.1.9) with a

*DesiredAccess* parameter of `MAXIMUM_ALLOWED`, a *UserId* parameter of `DOMAIN_USER_RID_ADMIN` ([MS-SAMR] section 2.2.1.14), and a *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5).

- The *UserInformationClass* MUST be set to `UserControlInformation` ([MS-SAMR] section 2.2.7.28).
- The *Buffer* MUST be set to the address of a memory buffer large enough to contain a **SAMPR\_USER\_INFO\_BUFFER** structure ([MS-SAMR] section 2.2.7.29).

2. Perform external behavior consistent with locally invoking **SamrSetInformationUser** ([MS-SAMR] section 3.1.5.6.5).

- The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking **SamrOpenUser** ([MS-SAMR] section 3.1.5.1.9) with a *DesiredAccess* parameter of `MAXIMUM_ALLOWED`, a *UserId* parameter of `DOMAIN_USER_RID_ADMIN` ([MS-SAMR] section 2.2.1.14), and a *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5).
- The *UserInformationClass* MUST be set to `UserControlInformation` ([MS-SAMR] section 2.2.7.28).
- The *Buffer* MUST be set to the address of a **SAMPR\_USER\_INFO\_BUFFER** structure whose **Control** member variable is set according to the following table.

EnableAdminAccount setting value	SAMPR_USER_INFO_BUFFER Control member value
1 (Enable Admin Account)	Bitwise AND of <b>Control</b> value received in step 1 and 0xFFFFFFFF
0 (Disable Admin Account)	Bitwise OR of <b>Control</b> value received in step 1 and <code>USER_ACCOUNT_DISABLED</code> ([MS-SAMR] section 3.1.5.14.2)

If the Key name is "**EnableGuestAccount**":

1. Perform external behavior consistent with locally invoking **SamrQueryInformationUser** ([MS-SAMR] section 3.1.5.5.6).

- The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking **SamrOpenUser** ([MS-SAMR] section 3.1.5.1.9) with a *DesiredAccess* parameter of `MAXIMUM_ALLOWED`, a *UserId* parameter of `DOMAIN_USER_RID_GUEST` ([MS-SAMR] section 2.2.1.14), and a *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5).
- The *UserInformationClass* MUST be set to `UserControlInformation` ([MS-SAMR] section 2.2.7.28).
- The *Buffer* MUST be set to the address of a memory buffer large enough to contain a **SAMPR\_USER\_INFO\_BUFFER** structure ([MS-SAMR] section 2.2.7.29).

2. Perform external behavior consistent with locally invoking **SamrSetInformationUser** ([MS-SAMR] section 3.1.5.6.5).

- The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking **SamrOpenUser** ([MS-SAMR] section 3.1.5.1.9) with a *DesiredAccess* parameter of MAXIMUM\_ALLOWED, a *UserId* parameter of DOMAIN\_USER\_RID\_GUEST ([MS-SAMR] section 2.2.1.14), and a *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5).
- The *UserInformationClass* MUST be set to UserControlInformation ([MS-SAMR] section 2.2.7.28).
- The *Buffer* MUST be set to the address of a **SAMPR\_USER\_INFO\_BUFFER** structure whose **Control** member variable is set according to the following table.

EnableGuestAccount setting value	SAMPR_USER_INFO_BUFFER Control member value
1 (Enable Guest Account)	Bitwise AND of <b>Control</b> value received in step 1 and 0xFFFFFFFF
0 (Disable Guest Account)	Bitwise OR of <b>Control</b> value received in step 1 and USER_ACCOUNT_DISABLED ([MS-SAMR] section 3.1.5.14.2)

If the Key name is "**NewAdministratorName**":

Perform external behavior consistent with locally invoking **SamrSetInformationUser** ([MS-SAMR] section 3.1.5.6.5).

- The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking **SamrOpenUser** ([MS-SAMR] section 3.1.5.1.9) with a *DesiredAccess* parameter of MAXIMUM\_ALLOWED, a *UserId* parameter of DOMAIN\_USER\_RID\_ADMIN ([MS-SAMR] section 2.2.1.14), and a *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5).
- The *UserInformationClass* MUST be set to UserNameInformation ([MS-SAMR] section 2.2.7.28).
- The *Buffer* MUST be set to the address of a **SAMPR\_USER\_NAME\_INFORMATION** structure whose **UserName** member variable is set to the value of the **NewAdministratorName** setting.

If the Key name is "**NewGuestName**":

Perform external behavior consistent with locally invoking **SamrSetInformationUser** ([MS-SAMR] section 3.1.5.6.5).

- The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking **SamrOpenUser** ([MS-SAMR] section 3.1.5.1.9) with a *DesiredAccess* parameter of MAXIMUM\_ALLOWED, a *UserId* parameter of DOMAIN\_USER\_RID\_GUEST ([MS-SAMR] section 2.2.1.14), and a *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5).
- The *UserInformationClass* MUST be set to UserNameInformation ([MS-SAMR] section 2.2.7.28).
- The *Buffer* MUST be set to the address of a **SAMPR\_USER\_NAME\_INFORMATION** structure whose **UserName** member variable is set to the value of the **NewGuestName** setting.

### 3.2.5.3 Local Account Policies

Local account policies are set by doing the following:

If the key value is any value other than those listed as valid in the table in section [2.2.1.3](#), an error SHOULD be logged and the client SHOULD stop processing local account policies and log an error.

If the value of the "value" element is not valid for the corresponding key value as specified in the table in section [2.2.1.3](#), an error SHOULD be logged and the client MUST stop processing local account policies.

If the Key name is "LSAAnonymousNameLookup":

1. Perform external behavior consistent with locally invoking [LsarQuerySecurityObject](#) ([MS-LSAD] section 3.1.4.9.1).
  - The *PolicyHandle* MUST be set to a policy handle opened by performing external behavior consistent with locally invoking [LsarOpenPolicy](#) ([MS-LSAD] section 3.1.4.4.2) with *DesiredAccess* set to `MAXIMUM_ALLOWED` ([MS-LSAD] section 2.2.1.1.1).
  - The *SecurityInformation* MUST be set to `DACL_SECURITY_INFORMATION` ([MS-LSAD] section 2.2.1.3).
  - The *SecurityDescriptor* MUST be set to an address of a `PLSAR_SR_SECURITY_DESCRIPTOR` variable.
2. Perform external behavior consistent with locally invoking **LsarSetSecurityObject**.
  - The *PolicyHandle* MUST be set to a policy handle opened by performing external behavior consistent with locally invoking [LsarOpenPolicy](#) ([MS-LSAD] section 3.1.4.4.2) with *DesiredAccess* set to `MAXIMUM_ALLOWED` ([MS-LSAD] section 2.2.1.1.1).
  - The *SecurityInformation* MUST be set to `DACL_SECURITY_INFORMATION` ([MS-LSAD] section 2.2.1.3).
  - The *SecurityDescriptor* MUST be a pointer to an **LSAR\_SR\_SECURITY\_DESCRIPTOR** structure in which the *DACL* ([MS-DTYP] section 2.4.5) MUST be set to the *DACL* received from the [LsarQuerySecurityObject](#) method in step 1, with an added `ACCESS_ALLOWED_ACE` ([MS-DTYP] section 2.4.4.2) granting the *Anonymous SID* ([MS-DTYP] section 2.4.2.4) an access mask set to `POLICY_LOOKUP_NAMES` ([MS-LSAD] section 2.2.1.1.2).

If the Key name is "**EnableAdminAccount**":

1. Perform external behavior consistent with locally invoking [SamrQueryInformationUser](#) ([MS-SAMR] section 3.1.5.5.6).
  - The **UserHandle** MUST be set to a user handle obtained by performing external behavior consistent with locally invoking [SamrOpenUser](#) ([MS-SAMR] section 3.1.5.1.9) with the following parameters:
    - A *DesiredAccess* parameter of `MAXIMUM_ALLOWED`.
    - A *UserId* parameter of `DOMAIN_USER_RID_ADMIN` ([MS-SAMR] section 2.2.1.14).
    - A *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking [SamrOpenDomain](#) ([MS-SAMR] section 3.1.5.1.5).

- The *UserInformationClass* MUST be set to *UserControlInformation* ([\[MS-SAMR\]](#) section 2.2.7.28).
  - The Buffer MUST be set to the address of a memory buffer large enough to contain a **SAMPR\_USER\_INFO\_BUFFER** structure ([\[MS-SAMR\]](#) section 2.2.7.29).
2. Perform external behavior consistent with locally invoking *SamrSetInformationUser* ([\[MS-SAMR\]](#) section 3.1.5.6.5).
- The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking *SamrOpenUser* ([\[MS-SAMR\]](#) section 3.1.5.1.9) with the following parameters:
    - A *DesiredAccess* parameter of *MAXIMUM\_ALLOWED*.
    - A *UserId* parameter of *DOMAIN\_USER\_RID\_ADMIN* ([\[MS-SAMR\]](#) section 2.2.1.14).
    - A *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking *SamrOpenDomain* ([\[MS-SAMR\]](#) section 3.1.5.1.5).
  - The *UserInformationClass* MUST be set to *UserControlInformation* ([\[MS-SAMR\]](#) section 2.2.7.28).
  - The buffer MUST be set to the address of a **SAMPR\_USER\_INFO\_BUFFER** structure whose *Control* member variable is set according to the following table.

<b>EnableAdminAccount setting value</b>	<b>SAMPR_USER_INFO_BUFFER Control member value</b>
1 (Enable Admin Account)	Bitwise AND of Control value received in step 1 and 0xFFFFFFFFE
0 (Disable Admin Account)	Bitwise OR of Control value received in step 1 and <i>USER_ACCOUNT_DISABLED</i> ( <a href="#">[MS-SAMR]</a> section 3.1.5.14.2).

If the Key name is "**EnableGuestAccount**":

1. Perform external behavior consistent with locally invoking *SamrQueryInformationUser* ([\[MS-SAMR\]](#) section 3.1.5.5.6).
- The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking *SamrOpenUser* ([\[MS-SAMR\]](#) section 3.1.5.1.9) with the following parameters:
    - A *DesiredAccess* parameter of *MAXIMUM\_ALLOWED*.
    - A *UserId* parameter of *DOMAIN\_USER\_RID\_GUEST* ([\[MS-SAMR\]](#) section 2.2.1.14).
    - A *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking *SamrOpenDomain* ([\[MS-SAMR\]](#) section 3.1.5.1.5).
  - The *UserInformationClass* MUST be set to *UserControlInformation* ([\[MS-SAMR\]](#) section 2.2.7.28).
  - The buffer MUST be set to the address of a memory buffer large enough to contain a **SAMPR\_USER\_INFO\_BUFFER** structure ([\[MS-SAMR\]](#) section 2.2.7.29).

2. Perform external behavior consistent with locally invoking SamrSetInformationUser ([\[MS-SAMR\]](#) section 3.1.5.6.5).
  - The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking SamrOpenUser ([\[MS-SAMR\]](#) section 3.1.5.1.9) with the following parameters:
    - A *DesiredAccess* parameter of MAXIMUM\_ALLOWED.
    - A *UserId* parameter of DOMAIN\_USER\_RID\_GUEST ([\[MS-SAMR\]](#) section 2.2.1.14).
    - A *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking SamrOpenDomain ([\[MS-SAMR\]](#) section 3.1.5.1.5).
  - The *UserInformationClass* MUST be set to UserControlInformation ([\[MS-SAMR\]](#) section 2.2.7.28).
  - The buffer MUST be set to the address of a **SAMPR\_USER\_INFO\_BUFFER** structure whose Control member variable is set according to the following table.

EnableGuestAccount setting value	SAMPR_USER_INFO_BUFFER Control member value
1 (Enable Guest Account)	Bitwise AND of Control value received in step 1 and 0xFFFFFFFF
0 (Disable Guest Account)	Bitwise OR of Control value received in step 1 and USER_ACCOUNT_DISABLED ( <a href="#">[MS-SAMR]</a> section 3.1.5.14.2)

If the Key name is "**NewAdministratorName**":

Perform external behavior consistent with locally invoking SamrSetInformationUser ([\[MS-SAMR\]](#) section 3.1.5.6.5). If SamrSetInformationUser returns an error, the GPSB client MUST stop processing Local Account policies and log an error.

- The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking SamrOpenUser ([\[MS-SAMR\]](#) section 3.1.5.1.9) with the following parameter values:
  - A *DesiredAccess* parameter of MAXIMUM\_ALLOWED.
  - A *UserId* parameter of DOMAIN\_USER\_RID\_ADMIN ([\[MS-SAMR\]](#) section 2.2.1.14).
  - A *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking SamrOpenDomain ([\[MS-SAMR\]](#) section 3.1.5.1.5).
- The *UserInformationClass* MUST be set to UserNameInformation ([\[MS-SAMR\]](#) section 2.2.7.28).
- The buffer MUST be set to the address of a **SAMPR\_USER\_NAME\_INFORMATION** structure whose UserName member variable is set to the value of the NewAdministratorName setting.

If the Key name is "**NewGuestName**":

Perform external behavior consistent with locally invoking SamrSetInformationUser ([\[MS-SAMR\]](#) section 3.1.5.6.5). If SamrSetInformationUser returns an error, the GPSB client MUST stop processing Local Account policies and log an error.

- The *UserHandle* MUST be set to a user handle obtained by performing external behavior consistent with locally invoking SamrOpenUser ([\[MS-SAMR\]](#) section 3.1.5.1.9) with the following parameter values:
  - A *DesiredAccess* parameter of MAXIMUM\_ALLOWED.
  - A *UserId* parameter of DOMAIN\_USER\_RID\_GUEST ([\[MS-SAMR\]](#) section 2.2.1.14).
  - A *DomainHandle* parameter set to a handle to the domain of the current machine, obtained by performing external behavior consistent with locally invoking SamrOpenDomain ([\[MS-SAMR\]](#) section 3.1.5.1.5).
- The *UserInformationClass* MUST be set to UserNameInformation ([\[MS-SAMR\]](#) section 2.2.7.28).
- The buffer MUST be set to the address of a **SAMPR\_USER\_NAME\_INFORMATION** structure whose *UserName* member variable is set to the value of the NewGuestName setting.

### 3.2.5.4 Kerberos Policy

If the *Key* value is any value other than those listed as valid in the table in section [2.2.2](#), the client MUST stop processing Kerberos policy settings and log an error.

The existing Kerberos Policy MUST be retrieved by performing the external behavior consistent with locally invoking **LsarQueryDomainInformationPolicy** ([\[MS-LSAD\]](#) section 3.1.4.4.7).

- The *PolicyHandle* MUST be set to a policy handle opened by performing external behavior consistent with locally invoking **LsarOpenPolicy** ([\[MS-LSAD\]](#) section 3.1.4.4.2) with *DesiredAccess* set to MAXIMUM\_ALLOWED ([\[MS-LSAD\]](#) section 2.2.1.1.1).
- The *InformationClass* MUST be set to PolicyDomainKerberosTicketInformation ([\[MS-LSAD\]](#) section 2.2.4.15).

Next, the existing Kerberos policy MUST be updated with the settings in Kerberos Policy (section 2.2.2) by performing the external behavior consistent with locally invoking **LsarSetDomainInformationPolicy** ([\[MS-LSAD\]](#) section 3.1.4.4.8).

- The *PolicyHandle* MUST be set to a policy handle opened by performing external behavior consistent with locally invoking **LsarOpenPolicy** ([\[MS-LSAD\]](#) section 3.1.4.4.2) with *DesiredAccess* set to MAXIMUM\_ALLOWED ([\[MS-LSAD\]](#) section 2.2.1.1.1).
- The *InformationClass* MUST be set to PolicyDomainKerberosTicketInformation ([\[MS-LSAD\]](#) section 2.2.4.15).
- The *PolicyDomainInformation* MUST be set to a **POLICY\_DOMAIN\_KERBEROS\_TICKET\_INFO** structure returned by querying existing Kerberos policy and updated using the following mapping table. Each element of the **POLICY\_DOMAIN\_KERBEROS\_TICKET\_INFO** structure in the right column is set, with the settings in Kerberos Policy, to the value assigned to the corresponding key in the left column. If the **TicketValidateClient** setting is set to "true", then the AuthenticationOptions bit POLICY\_KERBEROS\_VALIDATE\_CLIENT MUST be set.

MS-GPSB	MS-LSAD POLICY_DOMAIN_KERBEROS_TICKET_INFO structure
MaxServiceAge	MaxServiceTicketAge
MaxTicketAge	MaxTicketAge
MaxRenewAge	MaxRenewAge

MS-GPSB	MS-LSAD POLICY_DOMAIN_KERBEROS_TICKET_INFO structure
MaxClockSkew	MaxClockSkew
TicketValidateClient	AuthenticationOptions bit POLICY_KERBEROS_VALIDATE_CLIENT

### 3.2.5.5 Event Log Policies

If the Key value is any value other than those listed as valid in the table in section [2.2.3](#), the client SHOULD stop processing Event Log policy settings and log an error.

Settings in Event Log Policies (section 2.2.3) are mapped to the Abstract Data Model as specified in [\[MS-EVEN\]](#) section 3.1.1.2, using the log name, which is the same as the header value (section [2.2.3](#)), to determine the registry key whose values are to be updated:

Log Name	Registry Key
System Log	HKEY_LOCAL_MACHINE\system\currentcontrolset\services\eventlog\System
Security Log	HKEY_LOCAL_MACHINE\system\currentcontrolset\services\eventlog\Security
Application Log	HKEY_LOCAL_MACHINE\system\currentcontrolset\services\eventlog\Application

The registry values in the right column of the following table should be set to the value of the key in the left column specified in the Event Log Policies (section 2.2.3) settings.

MS-GPSB	MS-EVEN
MaximumLogSize	MaxSize
AuditLogRetentionPeriod RetentionDays	Retention: <ul style="list-style-type: none"> <li>▪ AuditLogRetentionPeriod is "0": 0</li> <li>▪ AuditLogRetentionPeriod is "1": RetentionDays value converted to seconds</li> <li>▪ AuditLogRetentionPeriod is "2": 0xFFFFFFFF</li> </ul>
RestrictGuestAccess	RestrictGuestAccess

### 3.2.5.6 Event Audit Policies

If the [DWORD](#) registry value MACHINE\System\CurrentControlSet\Control\LSA\SCENoApplyLegacyAuditPolicy is set to 1 using the mechanism described in section [2.2.5](#), then the client-side plug-in MUST ignore any settings under the Event Audit Policies section and MUST NOT process them. If this registry value is set to 1, it indicates that the Advanced Audit Policies are present on the client. [<9>](#)

The value of the key element MUST be one of the values specified in the table in section [2.2.4](#); otherwise, the client MUST log an error and stop processing Event Audit Policies. The value of the value element must be an integer; otherwise, the client SHOULD log an error and stop processing Event Audit Policies.

Settings in Event Audit Policies (section 2.2.4) MUST be set by performing the external behavior consistent with locally invoking [LsarSetInformationPolicy \(section 3.1.4.4.6\)](#) ([MS-LSAD] section 3.1.4.4.6).

- The *PolicyHandle* MUST be set to a policy handle opened by performing external behavior consistent with locally invoking [LsarOpenPolicy \(section 3.1.4.4.2\)](#) ([MS-LSAD] section 3.1.4.4.2).
- The *InformationClass* MUST be set to *PolicyAuditEventsInformation*.
- The *Buffers* MUST be set with the settings in Event Audit Policies where the keys are mapped to the enumeration ([MS-LSAD] section 2.2.4.20) according to the following table.

MS-GPSB	MS-LSAD
AuditAccountManage	AuditCategoryAccountManagement
AuditDSAccess	AuditCategoryDirectoryServiceAccess
AuditAccountLogon	AuditCategoryAccountLogon
AuditLogonEvents	AuditCategoryLogon
AuditObjectAccess	AuditCategoryObjectAccess
AuditPolicyChange	AuditCategoryPolicyChange
AuditPrivilegeUse	AuditCategoryPrivilegeUse
AuditProcessTracking	AuditCategoryDetailedTracking
AuditSystemEvents	AuditCategorySystem

In addition, the value of each setting (section 2.2.4) is mapped to the values of the *EventAuditingOptions* array ([MS-LSAD] section 2.2.4.4) according to the following table. If either of the two low-order bits of the value are set, then the value is mapped according to the value expressed by those bits. Otherwise, the values are mapped to *POLICY\_AUDIT\_EVENT\_NONE*.

MS-GPSB	MS-LSAD
0	POLICY_AUDIT_EVENT_NONE
1	POLICY_AUDIT_EVENT_SUCCESS   POLICY_AUDIT_EVENT_NONE
2	POLICY_AUDIT_EVENT_FAILURE   POLICY_AUDIT_EVENT_NONE
3	POLICY_AUDIT_EVENT_SUCCESS   POLICY_AUDIT_EVENT_FAILURE  POLICY_AUDIT_EVENT_NONE
4	POLICY_AUDIT_EVENT_NONE

### 3.2.5.7 Registry Values

Settings in [Registry Values \(section 2.2.5\)](#) MUST be set by adding registry values.

If the *Key* value is any value other than those listed as valid in the table in section 2.2.5, an error SHOULD be logged and the client MUST stop processing Registry Value settings.

Registry values MUST be added by performing the external behavior consistent with locally invoking [BaseRegSetValue \(section 3.1.5.22\)](#) ([MS-RRP] section 3.1.5.22) for each setting.

- The *hKey* MUST be set to a registry key handle opened by performing external behavior consistent with locally invoking [BaseRegCreateKey \(section 3.1.5.7\)](#) ([MS-RRP] section 3.1.5.7) using the portion of the RegistryValueName of the Setting prior to the last '\\'.  
▪ The *lpValueName* MUST be set to the final portion of the RegistryValueName of the setting after the last '\\'.  
▪ The *dwType* MUST be set to the RegistryValueType of the setting.  
▪ The *lpData* MUST be set to the RegistryValue of the setting.  
▪ The *cbData* MUST be set to the length in bytes of the RegistryValue of the setting.

### 3.2.5.8 Privilege Rights

Settings in [Privilege Rights \(section 2.2.6\)](#) MUST be set by adding privilege rights.

If a setting or value does not conform to the valid corresponding values as specified in section [2.2.6](#), the client SHOULD stop processing Privilege Rights settings.

Privilege rights are added by performing the external behavior consistent with locally invoking LsarAddAccountRights ([MS-LSAD] section 3.1.4.5.11) for each SidEnt in a RightName setting.

- The *PolicyHandle* MUST be set to a policy handle opened by performing external behavior consistent with locally invoking LsarOpenPolicy ([MS-LSAD] section 3.1.4.4.2).  
▪ The *AccountSid* MUST be set to the value of SidEnt for the setting.  
▪ The *UserRights* MUST be set to the value of the address of a **LSAPR\_USER\_RIGHT\_SET** structure in which the *UserRights* member MUST be set to an array of PRPC\_UNICODE\_STRING elements containing one element that is set to the value of RightName (as specified in [MS-LSAD] section 2.2.5.3). The **LSAPR\_USER\_RIGHT\_SET Entries** member MUST be set to one. The RightName string MUST correspond to the name of a valid privilege or user right as listed in [MS-LSAD] section 3.1.1.2.1 and [3.1.1.2.2](#) respectively.

### 3.2.5.9 Registry Keys

Behavior for writing to registry keys and values is specified in [MS-RRP] section 4.2.

If a RegistryKeyName, ACLString, or PermPropagationMode value is not valid as specified in section [2.2.7](#), the client SHOULD stop processing Registry Keys settings and log an error.

Settings in Registry Keys (section 2.2.7) MUST be set by applying security descriptors on registry keys for each Setting.

Security descriptors SHOULD be read from registry keys by performing the external behavior consistent with locally invoking [BaseRegGetKeySecurity \(section 3.1.5.13\)](#) ([MS-RRP] section 3.1.5.13).

- The *hKey* MUST be set to a registry key handle opened by performing external behavior consistent with locally invoking [BaseRegOpenKey \(section 3.1.5.15\)](#) ([MS-RRP] section 3.1.5.15) using the RegistryKeyName of the registry object.

- The *SecurityInformation* MUST be set to OWNER\_SECURITY\_INFORMATION | GROUP\_SECURITY\_INFORMATION | DACL\_SECURITY\_INFORMATION | SACL\_SECURITY\_INFORMATION ([MS-RRP] section 2.2.10).

Security descriptors SHOULD be applied to registry keys by performing the external behavior consistent with locally invoking [BaseRegSetKeySecurity \(section 3.1.5.21\)](#) ([MS-RRP] section 3.1.5.21).

- The *hKey* MUST be set to a registry key handle opened by performing external behavior consistent with locally invoking **BaseRegOpenKey** (section 3.1.5.15) ([MS-RRP] section 3.1.5.15) using the RegistryKeyName of the registry object.
- The *SecurityInformation* MUST be set to OWNER\_SECURITY\_INFORMATION | GROUP\_SECURITY\_INFORMATION | DACL\_SECURITY\_INFORMATION | SACL\_SECURITY\_INFORMATION ([MS-RRP] section 2.2.10).
- The *pRpcSecurityDescriptor* MUST be set to the security descriptor provided in the "ACLString" setting in the form of a [RPC SECURITY DESCRIPTOR \(section 2.2.9\)](#) ([MS-RRP] section 2.2.9).

Security descriptors SHOULD be applied to registry keys for each registry object corresponds to each Setting.

If PermPropagationMode is "0", the security descriptor of every child registry object SHOULD be recursively updated to allow propagation of inheritable permissions by calling [CreateSecurityDescriptor \(section 2.5.3.4.1\)](#) ([MS-DTYP] section 2.5.3.4.1) and applying the resultant security descriptor to the registry object. The following arguments should be used when calling CreateSecurityDescriptor:

- *ParentDescriptor* is set to the security descriptor of the registry object's parent.
- *CreatorDescriptor* is set to the current security descriptor of the registry object.
- *IsContainerObject* is set to TRUE.
- *ObjectTypes* is set to NULL.
- *AutoInheritFlags* is set to DACL\_AUTO\_INHERIT | SACL\_AUTO\_INHERIT | DEFAULT\_OWNER\_FROM\_PARENT | DEFAULT\_GROUP\_FROMPARENT.
- *Token* is a token containing S-1-5-18 (Local System well known SID).
- *GenericMapping* is the generic mapping for registry objects.

If PermPropagationMode is "1", the security descriptor of every child registry object SHOULD be recursively updated to allow propagation of inheritable permissions by calling CreateSecurityDescriptor (section 2.5.3.4.1) ([MS-DTYP] section 2.5.3.4.1) and applying the resultant security descriptor to the registry object. The following arguments should be used when calling CreateSecurityDescriptor:

- *ParentDescriptor* is set to the security descriptor of the registry object's parent.
- *CreatorDescriptor* is set to NULL.
- *IsContainerObject* is set to TRUE.
- *ObjectTypes* is set to NULL.

- *AutoInheritFlags* is set to DACL\_AUTO\_INHERIT | SACL\_AUTO\_INHERIT | DEFAULT\_OWNER\_FROM\_PARENT | DEFAULT\_GROUP\_FROMPARENT.
- *Token* is a token containing S-1-5-18 (Local System well known SID).
- *GenericMapping* is the generic mapping for registry objects.

If PermPropagationMode is "2", the security descriptor **Control** field bit PD (MS-DTYP section 2.4.6) on the registry object for the Setting should be set to 0.

### 3.2.5.10 Service General Settings

Settings in [Service General Settings \(section 2.2.8\)](#) MUST be set by applying start up configuration and security descriptors on services for each setting.

If a ServiceName, StartupMode, or AclString value is not valid as specified in section [2.2.8](#), the client SHOULD stop processing Service General settings and log an error.

Start up configuration MUST be applied to services by performing external behavior consistent with locally invoking RChangeServiceConfigW ([\[MS-SCMR\]](#) section 3.1.4.11) for each setting.

- The *hService* MUST be set to service handle opened by performing external behavior consistent with locally invoking ROpenServiceW ([\[MS-SCMR\]](#) section 3.1.4.16) using the ServiceName of the setting.
- The *dwServiceType* MUST be set to the service type retrieved by performing external behavior consistent with locally invoking RQueryServiceConfigW ([\[MS-SCMR\]](#) section 3.1.4.17).
- The *dwStartType* MUST be set to the StartupMode of a setting in Service General Settings where the StartupMode are mapped to the dwStartType ([\[MS-SCMR\]](#) section 2.2.15) according to the following table.

[MS-GPSB]	[MS-SCMR]
Value of "2"	SERVICE_AUTO_START ( <a href="#">[MS-SCMR]</a> section 2.2.15)
Value of "3"	SERVICE_DEMAND_START ( <a href="#">[MS-SCMR]</a> section 2.2.15)
Value of "4"	SERVICE_DISABLED ( <a href="#">[MS-SCMR]</a> section 2.2.15)

- The *dwErrorControl* MUST be set to the error control retrieved by performing external behavior consistent with locally invoking RQueryServiceConfigW ([\[MS-SCMR\]](#) section 3.1.4.17).
- The *lpBinaryPathName* MUST be set to the path name retrieved by performing external behavior consistent with locally invoking RQueryServiceConfigW ([\[MS-SCMR\]](#) section 3.1.4.17).
- The *lpLoadOrderGroup* MUST be set to the service group for load ordering retrieved by performing external behavior consistent with locally invoking RQueryServiceConfigW ([\[MS-SCMR\]](#) section 3.1.4.17).
- The *lpdwTagId* MUST be set to NULL.
- The *lpDependencies* MUST be set to the dependencies retrieved by performing external behavior consistent with locally invoking RQueryServiceConfigW ([\[MS-SCMR\]](#) section 3.1.4.17).
- The *dwDependSize* MUST be set to the number of dependencies retrieved by performing external behavior consistent with locally invoking RQueryServiceConfigW ([\[MS-SCMR\]](#) section 3.1.4.17).

- The *IpServiceStartName* MUST be set to NULL.
- The *IpPassword* MUST be set to NULL.
- The *dwPwSize* MUST be set to 0.
- The *IpDisplayName* MUST be set to the display name retrieved by performing external behavior consistent with locally invoking RQueryServiceConfigW ([\[MS-SCMR\]](#) section 3.1.4.17).

Security descriptors MUST be applied to services by performing the external behavior consistent with locally invoking RSetServiceObjectSecurity ([\[MS-SCMR\]](#) section 3.1.4.6) for each setting.

- The *hService* MUST be set to a service handle opened by performing external behavior consistent with locally invoking ROpenServiceW ([\[MS-SCMR\]](#) section 3.1.4.16) using the *ServiceName* of the setting.
- The *dwSecurityInformation* MUST be set to DACL\_SECURITY\_INFORMATION ([\[MS-SCMR\]](#) section 2.2.1).
- The *IpSecurityDescriptor* MUST be set to the security descriptor in the *AclString* of the setting in the form specified in [\[MS-DTYP\]](#) section 2.4.6.
- The *cbBufSize* MUST be set to *Size*, in bytes, of the buffer pointed to by the *IpSecurityDescriptor* parameter.

### 3.2.5.11 File Security

Each File Security setting MUST be set by applying the security descriptors, propagation mode, and security descriptor (*AclString*) for each setting.

If a *FileOrDirectoryPath*, *PermPropagationMode*, or *AclString* value is not valid as specified in section [2.2.9](#), the client SHOULD stop processing File Security settings and log an error.

The security descriptor on a file or subdirectory SHOULD be applied by performing external behavior consistent with locally invoking the "Application Requests Applying File Security" task ([\[MS-SMB2\]](#) section 3.2.4.13) with the following parameters:

- The *Open* MUST be set to an open returned by performing external behavior consistent with locally invoking the "Application Requests Opening a File" task ([\[MS-SMB2\]](#) section 3.2.4.3) using the *FileOrDirectoryPath* of the setting.
- The security information MUST be set to the security descriptor provided in the "*ACLString*" setting. This security descriptor must be in the self-relative form specified in [\[MS-DTYP\]](#) section 2.4.6.
- The security attributes MUST be set to DACL\_SECURITY\_INFORMATION ([\[MS-SMB2\]](#) section 2.2.39).

The security descriptor on a file or subdirectory SHOULD be queried by performing external behavior consistent with locally invoking the "Application Requests Querying File Security" task ([\[MS-SMB2\]](#) section 3.2.4.12) with the following parameters:

- The *Open* MUST be set to an open returned by performing external behavior consistent with locally invoking the "Application Requests Opening a File" task ([\[MS-SMB2\]](#) section 3.2.4.3) using the *FileOrDirectoryPath* of the setting.

- The security attributes MUST be set to DACL\_SECURITY\_INFORMATION ([\[MS-SMB2\]](#) section 2.2.39).

If PermPropagationMode is "0", the security descriptor of every child file object SHOULD be recursively updated to allow propagation of inheritable permissions by calling [CreateSecurityDescriptor](#) ([\[MS-DTYP\]](#) section 2.5.3.4.1) and applying the resultant security descriptor on each corresponding child file object. The following arguments should be used when calling [CreateSecurityDescriptor](#):

- *ParentDescriptor* is set to the security descriptor of the file object's parent.
- *CreatorDescriptor* is set to the current security descriptor of the file object.
- *IsContainerObject* is set to TRUE.
- *ObjectTypes* is set to NULL.
- *AutoInheritFlags* is set to DACL\_AUTO\_INHERIT | DEFAULT\_OWNER\_FROM\_PARENT | DEFAULT\_GROUP\_FROMPARENT.
- *Token* is a token containing S-1-5-18 (Local System well known SID).
- *GenericMapping* is the generic mapping for file objects.

If PermPropagationMode is "1", the security descriptor of every child file object SHOULD be recursively updated to allow propagation of inheritable permissions by calling [CreateSecurityDescriptor](#) ([\[MS-DTYP\]](#) section 2.5.3.4.1) and applying the resultant security descriptor on each corresponding child file object. The following arguments should be used when calling [CreateSecurityDescriptor](#):

- *ParentDescriptor* is set to the security descriptor of the file object's parent.
- *CreatorDescriptor* is set to NULL.
- *IsContainerObject* is set to TRUE.
- *ObjectTypes* is set to NULL.
- *AutoInheritFlags* is set to DACL\_AUTO\_INHERIT | DEFAULT\_OWNER\_FROM\_PARENT | DEFAULT\_GROUP\_FROMPARENT.
- *Token* is a token containing S-1-5-18 (Local System well known SID).
- *GenericMapping* is the generic mapping for file objects.

If PermPropagationMode is "2", the security descriptor control bit PD, on the file object for the Setting, should be set to zero.

### 3.2.5.12 Group Membership

Settings in Group Membership MUST be set by applying members and membership on a group for each setting.

If a *GroupNameMembers*, *GroupNameMemberOf*, or the Value element value is not valid as specified in section [2.2.10](#), the client MUST stop processing Group Membership settings and log an error.

If the group specified by the Key (section [2.2.10](#)) of the setting is a domain local, global, or universal group, then:

- For domain local, global and universal groups in the Values (section [2.2.10](#)) of the setting, members and membership MUST be applied by performing external behavior consistent with locally invoking "Perform an LDAP Operation on an ADConnection" task ([\[MS-ADSO\]](#) section 6.2.6.1.6) with the following parameters for each of the SIDs or Names in the Value (section [2.2.10](#)) in a setting:
  - TaskInputADConnection: An ADConnection handle ( [\[MS-DTYP\]](#) section 2.2.2) based on the client's domain name.
  - TaskInputRequestMessage: An LDAP ModifyRequest ([\[RFC2251\]](#) section 4.6) as follows:
    - **object**: Distinguished name for the group specified by the Key (section [2.2.10](#)) of the setting.
    - The modification sequence has one entry, as follows:
      - operation: add.
      - modification:
        - **type**: member or memberOf.
        - **vals**: Distinguished name for the object specified by a SID or name in the Value (section [2.2.10](#)) of the setting.
- For local groups in the Values (section [2.2.10](#)) of the setting, membership MUST be applied by performing external behavior consistent with locally invoking SamrAddMemberToGroup ([\[MS-SAMR\]](#) section 3.1.5.8.1) for each of the SIDs or names in the Value (section [2.2.10](#)) in a setting:
  - The *GroupHandle* MUST be set to group handle opened by performing external behavior consistent with locally invoking SamrOpenGroup ([\[MS-SAMR\]](#) section 3.1.5.1.7) using the **relative identifier (RID)** of the group specified by the Value (section [2.2.10](#)) of the setting.
  - The *MemberId* MUST be set to the RID of the object specified by the SID or name in the Key (section [2.2.10](#)) of the setting.
  - The Attributes MUST be set to zero.

If the group specified by the Key (section [2.2.10](#)) of the setting is a local group, members MUST be applied by performing external behavior consistent with locally invoking SamrAddMemberToGroup ([\[MS-SAMR\]](#) section 3.1.5.8.1) for each of the SIDs or names in the Value (section [2.2.10](#)) in a setting:

- The *GroupHandle* MUST be set to group handle opened by performing external behavior consistent with locally invoking SamrOpenGroup ([\[MS-SAMR\]](#) section 3.1.5.1.7) using the RID of the group specified by the Key (section [2.2.10](#)) of the setting.
- The *MemberId* MUST be set to the RID of the object specified by the SID or name in the Value (section [2.2.10](#)) of the setting.
- The *Attributes* MUST be set to zero.

### 3.2.5.13 User Account Control

Settings in [User Account Control \(section 2.2.11\)](#) MUST be set by adding a registry value for each setting value tuple (Key, Value, Type, Data.). If the Key, Value, Type, and Data values do not

together conform to one of the valid User Account Control settings value tuples specified in section [2.2.11](#), the client SHOULD quit processing User Account Control settings and log an error.

User Account Control settings must be processed as specified in section [3.2.5.6](#), where:

- The RegistryValueName is the specified Key value with a backslash and the specified Value element value appended to it.
- The RegistryValueType is the Type value.
- The RegistryValue is the Data value.

### **3.2.6 Timer Events**

None.

### **3.2.7 Other Local Events**

None.

## 4 Protocol Examples

### 4.1 Example Involving Password Policy

In the following example, an administrator specifies that, for computers to which a certain GPO applies, a specified password policy is enforced:

- Minimum password length is 8 characters.
- Password complexity checks are turned on.
- Password history of 10 passwords should be remembered and enforced.

```
[Unicode]
Unicode=yes
[Version]
signature="$CHICAGO$"
Revision=1
[System Access]
MinimumPasswordLength = 8
PasswordComplexity = 1
PasswordHistorySize = 10
```

### 4.2 Example Involving Audit Settings

In the following example, an administrator specifies that the designated audit settings be applied for computers to which a certain GPO applies:

1. Audit made successful attempts for account logon.
2. Audit failed attempts for account management.
3. Audit made successful and failed attempts for object access.
4. Audit made successful and failed attempts for process tracking.

```
[Unicode]
Unicode=yes
[Version]
signature="$CHICAGO$"
Revision=1
[Event Audit]
AuditObjectAccess = 3
AuditAccountManage = 2
AuditProcessTracking = 3
AuditAccountLogon = 1
```

### 4.3 Example of Configuring Group Membership

In the following example, an administrator specifies that, for computers to which a certain GPO applies, the group memberships are configured as assigned:

1. Group1 should contain the following members: member1, member2, and member3.
2. Group2 should contain the following members: member1 and member3.

3. Group3 should contain the following member: member4.
4. Group1 should be part of Group3.
5. Group2 should be part of Group1.

```
[Unicode]
Unicode=yes
[Version]
signature="$CHICAGO$"
Revision=1
[Group Membership]
Group1__Memberof = Group3
Group1__Members = member3,member2,member1
Group2__Memberof = Group3
Group2__Members = member3,member1
Group3__Memberof =
Group3__Members = member4
```

#### 4.4 Example of Configuring Multiple Types of Settings

In the following example, an administrator specifies that for computers to which a certain GPO applies, all the settings specified in the previous sections should be configured as designated.

```
[Unicode]
Unicode=yes
[Version]
signature="$CHICAGO$"
Revision=1
[System Access]
MinimumPasswordLength = 8
PasswordComplexity = 1
PasswordHistorySize = 10
[Event Audit]
AuditObjectAccess = 3
AuditAccountManage = 2
AuditProcessTracking = 3
AuditAccountLogon = 1
[Group Membership]
Group1__Memberof = Group3
Group1__Members = member3,member2,member1
Group2__Memberof = Group3
Group2__Members = member3,member1
Group3__Memberof =
Group3__Members = member4
```

## 5 Security

### 5.1 Security Considerations for Implementers

The ClearTextPassword flag, as specified in section [2.2.1.1](#), indicates whether passwords are to be stored by using reversible encryption. This policy provides support for applications that use protocols that require knowledge of the user's password for authentication purposes. Storing passwords by using reversible encryption is essentially the same as storing plain-text versions of the passwords. For this reason, this policy SHOULD never be enabled unless application requirements outweigh the need to protect password information.

### 5.2 Index of Security Parameters

#### 5.2.1 Security Parameters Affecting Behavior of the Protocol

Name of setting	Default value	Explanation of setting
MaxNoGPOListChangesInterval Details are as specified in <a href="#">[MS-GPOL]</a> .	960	Time interval (in minutes) that sets a maximum limit of how long a client can function without reapplying nonchanged GPOs.

#### 5.2.2 System Security Parameters Carried by the Protocol

Settings category	Comments
System Access	For more information, see section <a href="#">2.2.1</a> .
Kerberos Policy	For more information, see section <a href="#">2.2.2</a> .
System Log	For more information, see section <a href="#">2.2.3</a> .
Security Log	For more information, see section <a href="#">2.2.3</a> .
Application Log	For more information, see section <a href="#">2.2.3</a> .
Event Audit	For more information, see section <a href="#">2.2.4</a> .
Registry Values	For more information, see section <a href="#">2.2.5</a> .
Privilege Rights	For more information, see section <a href="#">2.2.6</a> .
Registry Key	For more information, see section <a href="#">2.2.7</a> .
Service General Setting	For more information, see section <a href="#">2.2.8</a> .
File Security	For more information, see section <a href="#">2.2.9</a> .
Group Membership	For more information, see section <a href="#">2.2.10</a> .

## 6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Windows 2000 Server operating system
- Windows XP operating system
- Windows Server 2003 operating system
- Windows Vista operating system
- Windows Server 2008 operating system
- Windows 7 operating system
- Windows Server 2008 R2 operating system
- Windows 8 operating system
- Windows Server 2012 operating system
- Windows 8.1 operating system
- Windows Server 2012 R2 operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.1:](#) If enabled on Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, or Windows Server 2012 R2, the files can also be transported by using the Server Message Block (SMB) Versions 2 and 3 Protocol, as specified in [\[MS-SMB2\]](#).

[<2> Section 2.2.1.1:](#) The RequireLogonToChangepassword setting is ignored in Windows 2000, Windows XP, Windows Server 2003, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, or Windows Server 2012 R2.

[<3> Section 2.2.3:](#) The RestrictGuestAccess setting is ignored in Windows 2000, Windows XP, Windows Server 2003, Windows Vista, Windows Server 2008, Windows 7, and Windows Server 2008 R2.

[<4> Section 2.2.4:](#) Windows does not generate security audit event records for policy change failures.

[<5> Section 2.2.4:](#) Windows does not generate security audit event records for process tracking failures.

<6> [Section 2.2.11](#): The settings are supported in Windows Vista, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, or Windows Server 2012 R2.

<7> [Section 2.2.11.1](#): On Windows, this is also known as Windows XP native mode.

<8> [Section 3.2.3](#): If enabled on Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, or Windows Server 2012 R2, the files can also be transported by using the SMB Protocol Versions 2 and 3, as specified in [\[MS-SMB2\]](#).

<9> [Section 3.2.5.6](#): This setting is supported in Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, and Windows Server 2012 R2. Windows 2000 Server, Windows XP, and Windows Server 2003 ignore this registry setting and will process and apply the settings under the Event Audit Policies section.

## 7 Change Tracking

This section identifies changes that were made to the [MS-GPSB] protocol document between the August 2013 and November 2013 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [protocol@microsoft.com](mailto:protocol@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">2.2.1.1 Password Policies</a>	54795 Updated ABNF for valid password keys and range of values for key settings.	Y	Content updated.
<a href="#">2.2.1.2 Account Lockout Policies</a>	54795 Updated the valid key values.	Y	Content updated.
<a href="#">2.2.1.3 Local Account Policies</a>	54795 Revised the valid key value and specified that the keys must contain a nonzero value to enable the setting.	Y	Content updated.
<a href="#">2.2.2 Kerberos Policy</a>	54795 Revised descriptions of settings keys.	Y	Content updated.
<a href="#">2.2.3 Event Log Policies</a>	54795 Updated values for settings keys.	Y	Content updated.
<a href="#">2.2.4 Event Audit Policies</a>	54795 Added setting value 4 to table of valid values.	Y	Content updated.
<a href="#">2.2.6 Privilege Rights</a>	54795 Revised description of the SID element.	Y	Content updated.
<a href="#">2.2.7 Registry Keys</a>	54795 Revised description of settings keys.	Y	Content updated.

<b>Section</b>	<b>Tracking number (if applicable) and description</b>	<b>Major change (Y or N)</b>	<b>Change type</b>
<a href="#">2.2.8 Service General Settings</a>	54795 Revised description of settings keys.	Y	Content updated.
<a href="#">2.2.9 File Security</a>	54795 Revised description of settings keys.	Y	Content updated.
<a href="#">2.2.10 Group Membership</a>	54795 Revised description of setting keys.	Y	Content updated.
<a href="#">3.2.5.1 Password Policies</a>	54795 Added reference to the valid values for Password Policies.	Y	Content updated.
<a href="#">3.2.5.3 Local Account Policies</a>	54795 Added section.	Y	New content added.
<a href="#">3.2.5.4 Kerberos Policy</a>	54795 Specified behavior when the key value is invalid.	Y	Content updated.
<a href="#">3.2.5.5 Event Log Policies</a>	54795 Specified behavior when the key value is invalid.	Y	Content updated.
<a href="#">3.2.5.6 Event Audit Policies</a>	54795 Specified behavior when the key value is invalid.	Y	Content updated.
<a href="#">3.2.5.7 Registry Values</a>	54795 Specified behavior when the key value is invalid.	Y	Content updated.
<a href="#">3.2.5.8 Privilege Rights</a>	54795 Specified behavior when settings are invalid.	Y	Content updated.
<a href="#">3.2.5.9 Registry Keys</a>	54795 Specified behavior when settings are invalid.	Y	Content updated.
<a href="#">3.2.5.10 Service General Settings</a>	54795 Specified behavior when ServiceName, StartupMode, or AclString is invalid.	Y	Content updated.
<a href="#">3.2.5.11 File Security</a>	54795 Specified behavior when FileOrDirectoryPath, PermPropagationMode, or AclString is invalid.	Y	Content updated.
<a href="#">3.2.5.12 Group Membership</a>	54795 Specified behavior when GroupNameMembers, GroupNameMemberOf, or the Value element is invalid.	Y	Content updated.
<a href="#">3.2.5.13 User Account Control</a>	54795 Added processing for User Account Control settings.	Y	Content updated.

## 8 Index

### A

Abstract data model  
  [administrative](#) 28  
  [client](#) 30  
[Account lockout policies](#) 14  
Administrative  
  [abstract data model](#) 28  
  higher-layer triggered events  
    [overview](#) 28  
  [initialization](#) 28  
  [local events](#) 30  
  message processing  
    [delete setting value](#) 29  
    [load policy](#) 29  
    [overview](#) 28  
    [update policy](#) 29  
  [overview](#) 28  
  sequencing rules  
    [delete setting value](#) 29  
    [load policy](#) 29  
    [overview](#) 28  
    [update policy](#) 29  
    [timer events](#) 30  
    [timers](#) 28  
[Applicability](#) 9  
[Application Log policy](#) 16  
[Audit settings example](#) 51

### B

[Background](#) 8

### C

[Capability negotiation](#) 9  
[Change tracking](#) 56  
Client  
  [abstract data model](#) 30  
  [higher-layer triggered events](#) 31  
  [initialization](#) 30  
  [local events](#) 50  
  message processing  
    [account lockout policies](#) 33  
  event  
    [audit policies](#) 42  
    [log policies](#) 42  
    [file security](#) 47  
    [group membership](#) 48  
    [Kerberos policy](#) 41  
    [local account policies](#) 38  
    [overview](#) 31  
    [password policies](#) 32  
    [privilege rights](#) 44  
  registry  
    [keys](#) 44  
    [values](#) 43  
  [service general settings](#) 46

[user account control](#) 49  
  [overview](#) 30  
  sequencing rules  
    [account lockout policies](#) 33  
  event  
    [audit policies](#) 42  
    [log policies](#) 42  
    [file security](#) 47  
    [group membership](#) 48  
    [Kerberos policy](#) 41  
    [local account policies](#) 38  
    [overview](#) 31  
    [password policies](#) 32  
    [privilege rights](#) 44  
  registry  
    [keys](#) 44  
    [values](#) 43  
    [service general settings](#) 46  
    [user account control](#) 49  
    [timer events](#) 50  
    [timers](#) 30  
[ConsentPromptBehaviorAdmin](#) 25  
[ConsentPromptBehaviorUser](#) 25

### D

Data model - abstract  
  [administrative](#) 28  
  [client](#) 30

### E

[EnableInstallerDetection](#) 26  
[EnableLUA](#) 26  
[EnableVirtualization](#) 27  
Event audit policies  
  
[Event log policies](#) 16  
[Examples](#) 51  
[Extension overview - security](#) 8

### F

[Fields - vendor-extensible](#) 10  
[File security](#) 23  
[FilterAdministratorToken](#) 25

### G

[Glossary](#) 6  
Group membership ([section 2.2.10](#) 24, [section 4.3](#) 51)

### H

Higher-layer triggered events  
  administrative  
    [overview](#) 28

[client](#) 31

## I

[Implementer - security considerations](#) 53

[Index of security parameters](#) 53

[Informative references](#) 7

Initialization

[administrative](#) 28

[client](#) 30

[Introduction](#) 6

## K

[Kerberos policy](#) 15

[Keys - registry](#) 21

## L

[Local account policies](#) 15

Local events

[administrative](#) 30

[client](#) 50

## M

Membership - group ([section 2.2.10](#) 24, [section 4.3](#) 51)

Message processing

administrative

[delete setting value](#) 29

[load policy](#) 29

[overview](#) 28

[update policy](#) 29

client

[account lockout policies](#) 33

event

[audit policies](#) 42

[log policies](#) 42

[file security](#) 47

[group membership](#) 48

[Kerberos policy](#) 41

[local account policies](#) 38

[overview](#) 31

[password policies](#) 32

[privilege rights](#) 44

registry

[keys](#) 44

[values](#) 43

[service general settings](#) 46

[user account control](#) 49

Messages

[syntax](#) 11

[transport](#) 11

## N

[Normative references](#) 7

## O

[Overview \(synopsis\)](#) 8

## P

Parameters - security

[affecting extension](#) 53

[carried by extension](#) 53

[Parameters - security index](#) 53

Password policies ([section 2.2.1.1](#) 13, [section 4.1](#) 51)

Policies

[account lockout](#) 14

[Application Log](#) 16

[event audit](#) 17

[event log](#) 16

[Kerberos](#) 15

[local account](#) 15

password ([section 2.2.1.1](#) 13, [section 4.1](#) 51)

[Security Log](#) 16

[System Log](#) 16

[Preconditions](#) 9

[Prerequisites](#) 9

[Privilege rights](#) 21

[Product behavior](#) 54

[PromptOnSecureDesktop](#) 27

## R

References

[informative](#) 7

[normative](#) 7

Registry

[keys](#) 21

[values](#) 20

[Relationship to other protocols](#) 9

[Rights - privilege](#) 21

## S

Security

[extension overview](#) 8

[file](#) 23

[implementer considerations](#) 53

[parameter index](#) 53

[Security Log policy](#) 16

Sequencing rules

administrative

[delete setting value](#) 29

[load policy](#) 29

[overview](#) 28

[update policy](#) 29

client

[account lockout policies](#) 33

event

[audit policies](#) 42

[log policies](#) 42

[file security](#) 47

[group membership](#) 48

[Kerberos policy](#) 41

[local account policies](#) 38

[overview](#) 31

[password policies](#) 32

[privilege rights](#) 44

- registry
  - [keys](#) 44
  - [values](#) 43
  - [service general settings](#) 46
  - [user account control](#) 49
- [Service general settings](#) 22
- [Settings configurations example](#) 52
- [Standards assignments](#) 10
- [Syntax - message](#) 11
- [System access settings](#) 12
- [System Log policy](#) 16

## T

- Timer events
  - [administrative](#) 30
  - [client](#) 50
- Timers
  - [administrative](#) 28
  - [client](#) 30
- [Tracking changes](#) 56
- [Transport - message](#) 11
- Triggered events - higher-layer
  - administrative
    - [overview](#) 28
    - [client](#) 31

## U

- [User Account Control](#) 25

## V

- [ValidateAdminCodeSignatures](#) 26
- [Vendor-extensible fields](#) 10
- [Versioning](#) 9