

[MS-NCNBI-Diff]:

Network Controller Northbound Interface

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation (“this documentation”) for protocols, file formats, data portability, computer languages, and standards support. Additionally, overview documents cover inter-protocol relationships and interactions.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you can make copies of it in order to develop implementations of the technologies that are described in this documentation and can distribute portions of it in your implementations that use these technologies or in your documentation as necessary to properly document the implementation. You can also distribute in your implementation, with or without modification, any schemas, IDLs, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications documentation.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that might cover your implementations of the technologies described in the Open Specifications documentation. Neither this notice nor Microsoft's delivery of this documentation grants any licenses under those patents or any other Microsoft patents. However, a given Open Specifications document might be covered by the Microsoft [Open Specifications Promise](#) or the [Microsoft Community Promise](#). If you would prefer a written license, or if the technologies described in this documentation are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **License Programs.** To see all of the protocols in scope under a specific license program and the associated patents, visit the [Patent Map](#).
- **Trademarks.** The names of companies and products contained in this documentation might be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events that are depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than as specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications documentation does not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications documents are intended for use in conjunction with publicly available standards specifications and network programming art and, as such, assume that the reader either is familiar with the aforementioned material or has immediate access to it.

Support. For questions and support, please contact dochelp@microsoft.com.

Revision Summary

Date	Revision History	Revision Class	Comments
7/14/2016	1.0	New	Released new document.
9/26/2016	2.0	Major	Significantly changed the technical content.
2/14/2017	3.0	Major	Significantly changed the technical content.
6/1/2017	3.0	None	No changes to the meaning, language, or formatting of the technical content.
9/15/2017	4.0	Major	Significantly changed the technical content.
<u>3/16/2018</u>	<u>5.0</u>	<u>Major</u>	<u>Significantly changed the technical content.</u>

Table of Contents

1	Introduction	21
1.1	Glossary	21
1.2	References	24
1.2.1	Normative References	24
1.2.2	Informative References	25
1.3	Overview	25
1.3.1	Client-Server Interactions.....	25
1.3.1.1	ETag usage	25
1.3.1.2	Idempotency	26
1.3.2	Asynchronous Operations	26
1.3.2.1	POST and DELETE Operations.....	28
1.3.2.2	PUT Operation	29
1.3.2.3	Differences between operations and operationResults.....	29
1.3.2.4	properties.provisioningState usage.....	29
1.3.2.5	State Diagrams for Synchronous Operations.....	30
1.3.2.6	State Diagrams for Asynchronous Operations	30
1.3.3	Concurrent Operations	32
1.3.3.1	Concurrent operations on the same resource.....	32
1.3.3.2	Concurrent operations when there are dependent resources.....	34
1.3.3.3	Network Controller dependent resources.....	34
1.4	Relationship to Other Protocols	35
1.5	Prerequisites/Preconditions	35
1.6	Applicability Statement	35
1.7	Versioning and Capability Negotiation	36
1.8	Vendor-Extensible Fields	36
1.9	Standards Assignments.....	36
2	Messages.....	37
2.1	Transport.....	37
2.2	Common Data Types	37
2.2.1	HTTP Headers	37
2.2.1.1	Content-Type	37
2.2.1.2	Request Headers.....	37
2.2.1.2.1	Accept-Language.....	38
2.2.1.2.2	If-Match	38
2.2.1.2.3	Referrer	38
2.2.1.2.4	x-ms-client-ip-address	38
2.2.1.2.5	x-ms-client-request-id	38
2.2.1.2.6	x-ms-return-client-request-id.....	38
2.2.1.3	Response Headers.....	39
2.2.1.3.1	Azure-AsyncOperation.....	39
2.2.1.3.2	Content-Length	39
2.2.1.3.3	Date	39
2.2.1.3.4	ETag.....	39
2.2.1.3.5	HTTP/1.1 Header	40
2.2.1.3.6	Location	40
2.2.1.3.7	Retry-After	40
2.2.1.3.8	Server.....	40
2.2.1.3.9	x-ms-request-id	40
2.2.2	Common JSON Elements	40
2.2.3	Common URI Parameters	41
2.2.3.1	grandParentResourceId.....	42
2.2.3.2	operationId	42
2.2.3.3	parentResourceId.....	42
2.2.3.4	resourceId	43

2.2.3.5	url.....	44
2.2.4	Data Structures.....	44
3	Protocol Details.....	53
3.1	Server Details.....	53
3.1.1	Abstract Data Model.....	53
3.1.2	Timers	53
3.1.3	Initialization.....	53
3.1.4	Higher-Layer Triggered Events	53
3.1.5	Message Processing Events and Sequencing Rules	54
3.1.5.1	accessControlLists.....	58
3.1.5.1.1	HTTP Methods.....	60
3.1.5.1.1.1	PUT.....	60
3.1.5.1.1.1.1	Request Body.....	60
3.1.5.1.1.1.2	Response Body	61
3.1.5.1.1.1.3	Processing Details	61
3.1.5.1.1.2	GET.....	61
3.1.5.1.1.2.1	Request Body.....	61
3.1.5.1.1.2.2	Response Body	62
3.1.5.1.1.2.3	Processing Details	63
3.1.5.1.1.3	GET ALL.....	64
3.1.5.1.1.3.1	Request Body.....	64
3.1.5.1.1.3.2	Response Body	64
3.1.5.1.1.3.3	Processing Details	78
3.1.5.1.1.4	DELETE.....	78
3.1.5.1.1.4.1	Request Body.....	79
3.1.5.1.1.4.2	Response Body	79
3.1.5.1.1.4.3	Processing Details	79
3.1.5.1.2	aclRules	79
3.1.5.1.2.1	HTTP Methods	81
3.1.5.1.2.1.1	PUT	81
3.1.5.1.2.1.1.1	Request Body.....	81
3.1.5.1.2.1.1.2	Response Body.....	81
3.1.5.1.2.1.1.3	Processing Details.....	81
3.1.5.1.2.1.2	GET	82
3.1.5.1.2.1.2.1	Request Body.....	82
3.1.5.1.2.1.2.2	Response Body.....	82
3.1.5.1.2.1.2.3	Processing Details.....	82
3.1.5.1.2.1.3	GET ALL	83
3.1.5.1.2.1.3.1	Request Body.....	83
3.1.5.1.2.1.3.2	Response Body.....	83
3.1.5.1.2.1.3.3	Processing Details.....	84
3.1.5.1.2.1.4	DELETE	84
3.1.5.1.2.1.4.1	Request Body.....	84
3.1.5.1.2.1.4.2	Response Body.....	84
3.1.5.1.2.1.4.3	Processing Details.....	84
3.1.5.2	credentials	85
3.1.5.2.1	HTTP Methods.....	86
3.1.5.2.1.1	PUT.....	86
3.1.5.2.1.1.1	Request Body.....	86
3.1.5.2.1.1.2	Response Body	87
3.1.5.2.1.1.3	Processing Details	87
3.1.5.2.1.2	GET.....	87
3.1.5.2.1.2.1	Request Body.....	87
3.1.5.2.1.2.2	Response Body	87
3.1.5.2.1.2.3	Processing Details	88
3.1.5.2.1.3	GET ALL.....	88
3.1.5.2.1.3.1	Request Body.....	88

3.1.5.2.1.3.2	Response Body	88
3.1.5.2.1.3.3	Processing Details	89
3.1.5.2.1.4	DELETE.....	89
3.1.5.2.1.4.1	Request Body.....	89
3.1.5.2.1.4.2	Response Body	89
3.1.5.2.1.4.3	Processing Details	90
3.1.5.3	GatewayPools.....	90
3.1.5.3.1	HTTP Methods.....	91
3.1.5.3.1.1	PUT.....	91
3.1.5.3.1.1.1	Request Body.....	92
3.1.5.3.1.1.2	Response Body	92
3.1.5.3.1.1.3	Processing Details	92
3.1.5.3.1.2	GET.....	92
3.1.5.3.1.2.1	Request Body.....	93
3.1.5.3.1.2.2	Response Body	93
3.1.5.3.1.2.3	Processing Details	94
3.1.5.3.1.3	GET ALL.....	94
3.1.5.3.1.3.1	Request Body.....	95
3.1.5.3.1.3.2	Response Body	95
3.1.5.3.1.3.3	Processing Details	96
3.1.5.3.1.4	DELETE.....	96
3.1.5.3.1.4.1	Request Body.....	97
3.1.5.3.1.4.2	Response Body	97
3.1.5.3.1.4.3	Processing Details	97
3.1.5.4	gateways	97
3.1.5.4.1	HTTP Methods.....	98
3.1.5.4.1.1	PUT.....	98
3.1.5.4.1.1.1	Request Body.....	99
3.1.5.4.1.1.2	Response Body	100
3.1.5.4.1.1.3	Processing Details	100
3.1.5.4.1.2	GET.....	100
3.1.5.4.1.2.1	Request Body.....	100
3.1.5.4.1.2.2	Response Body	100
3.1.5.4.1.2.3	Processing Details	106
3.1.5.4.1.3	GET ALL.....	106
3.1.5.4.1.3.1	Request Body.....	107
3.1.5.4.1.3.2	Response Body	107
3.1.5.4.1.3.3	Processing Details	112
3.1.5.4.1.4	DELETE.....	112
3.1.5.4.1.4.1	Request Body.....	113
3.1.5.4.1.4.2	Response Body	113
3.1.5.4.1.4.3	Processing Details	113
3.1.5.5	loadBalancers	113
3.1.5.5.1	HTTP Methods.....	115
3.1.5.5.1.1	PUT.....	115
3.1.5.5.1.1.1	Request Body.....	115
3.1.5.5.1.1.2	Response Body	117
3.1.5.5.1.1.3	Processing Details	117
3.1.5.5.1.2	GET.....	117
3.1.5.5.1.2.1	Request Body.....	117
3.1.5.5.1.2.2	Response Body	118
3.1.5.5.1.2.3	Processing Details	121
3.1.5.5.1.3	GET ALL.....	121
3.1.5.5.1.3.1	Request Body.....	121
3.1.5.5.1.3.2	Response Body	122
3.1.5.5.1.3.3	Processing Details	127
3.1.5.5.1.4	DELETE.....	127
3.1.5.5.1.4.1	Request Body.....	128

3.1.5.5.1.4.2	Response Body	128
3.1.5.5.1.4.3	Processing Details	128
3.1.5.5.2	backendAddressPools.....	128
3.1.5.5.2.1	HTTP Methods	129
3.1.5.5.2.1.1	PUT	129
3.1.5.5.2.1.1.1	Request Body	129
3.1.5.5.2.1.1.2	Response Body	130
3.1.5.5.2.1.1.3	Processing Details.....	130
3.1.5.5.2.1.2	GET	130
3.1.5.5.2.1.2.1	Request Body	130
3.1.5.5.2.1.2.2	Response Body	131
3.1.5.5.2.1.2.3	Processing Details.....	131
3.1.5.5.2.1.3	GET ALL	131
3.1.5.5.2.1.3.1	Request Body	132
3.1.5.5.2.1.3.2	Response Body	132
3.1.5.5.2.1.3.3	Processing Details.....	132
3.1.5.5.2.1.4	DELETE	132
3.1.5.5.2.1.4.1	Request Body	133
3.1.5.5.2.1.4.2	Response Body	133
3.1.5.5.2.1.4.3	Processing Details.....	133
3.1.5.5.3	frontendIPConfigurations.....	133
3.1.5.5.3.1	HTTP Methods	134
3.1.5.5.3.1.1	PUT	134
3.1.5.5.3.1.1.1	Request Body	135
3.1.5.5.3.1.1.2	Response Body	135
3.1.5.5.3.1.1.3	Processing Details.....	136
3.1.5.5.3.1.2	GET	136
3.1.5.5.3.1.2.1	Request Body	136
3.1.5.5.3.1.2.2	Response Body	136
3.1.5.5.3.1.2.3	Processing Details.....	137
3.1.5.5.3.1.3	GET ALL	137
3.1.5.5.3.1.3.1	Request Body	137
3.1.5.5.3.1.3.2	Response Body	137
3.1.5.5.3.1.3.3	Processing Details.....	138
3.1.5.5.3.1.4	DELETE	138
3.1.5.5.3.1.4.1	Request Body	139
3.1.5.5.3.1.4.2	Response Body	139
3.1.5.5.3.1.4.3	Processing Details.....	139
3.1.5.5.4	inboundNatRules	139
3.1.5.5.4.1	HTTP Methods	140
3.1.5.5.4.1.1	PUT	140
3.1.5.5.4.1.1.1	Request Body	141
3.1.5.5.4.1.1.2	Response Body	141
3.1.5.5.4.1.1.3	Processing Details.....	141
3.1.5.5.4.1.2	GET	141
3.1.5.5.4.1.2.1	Request Body	142
3.1.5.5.4.1.2.2	Response Body	142
3.1.5.5.4.1.2.3	Processing Details.....	142
3.1.5.5.4.1.3	GET ALL	142
3.1.5.5.4.1.3.1	Request Body	143
3.1.5.5.4.1.3.2	Response Body	143
3.1.5.5.4.1.3.3	Processing Details.....	144
3.1.5.5.4.1.4	DELETE	144
3.1.5.5.4.1.4.1	Request Body	144
3.1.5.5.4.1.4.2	Response Body	144
3.1.5.5.4.1.4.3	Processing Details.....	145
3.1.5.5.5	loadBalancingRules	145
3.1.5.5.5.1	HTTP Methods	146

3.1.5.5.5.1.1	PUT	146
3.1.5.5.5.1.1.1	Request Body	147
3.1.5.5.5.1.1.2	Response Body	147
3.1.5.5.5.1.1.3	Processing Details	147
3.1.5.5.5.1.2	GET	148
3.1.5.5.5.1.2.1	Request Body	148
3.1.5.5.5.1.2.2	Response Body	148
3.1.5.5.5.1.2.3	Processing Details	149
3.1.5.5.5.1.3	GET ALL	149
3.1.5.5.5.1.3.1	Request Body	149
3.1.5.5.5.1.3.2	Response Body	149
3.1.5.5.5.1.3.3	Processing Details	150
3.1.5.5.5.1.4	DELETE	150
3.1.5.5.5.1.4.1	Request Body	150
3.1.5.5.5.1.4.2	Response Body	150
3.1.5.5.5.1.4.3	Processing Details	150
3.1.5.5.6	outboundNatRules	150
3.1.5.5.6.1	HTTP Methods	151
3.1.5.5.6.1.1	PUT	151
3.1.5.5.6.1.1.1	Request Body	152
3.1.5.5.6.1.1.2	Response Body	152
3.1.5.5.6.1.1.3	Processing Details	152
3.1.5.5.6.1.2	GET	152
3.1.5.5.6.1.2.1	Request Body	153
3.1.5.5.6.1.2.2	Response Body	153
3.1.5.5.6.1.2.3	Processing Details	153
3.1.5.5.6.1.3	GET ALL	153
3.1.5.5.6.1.3.1	Request Body	154
3.1.5.5.6.1.3.2	Response Body	154
3.1.5.5.6.1.3.3	Processing Details	154
3.1.5.5.6.1.4	DELETE	155
3.1.5.5.6.1.4.1	Request Body	155
3.1.5.5.6.1.4.2	Response Body	155
3.1.5.5.6.1.4.3	Processing Details	155
3.1.5.5.7	probes	155
3.1.5.5.7.1	HTTP Methods	156
3.1.5.5.7.1.1	PUT	156
3.1.5.5.7.1.1.1	Request Body	157
3.1.5.5.7.1.1.2	Response Body	157
3.1.5.5.7.1.1.3	Processing Details	157
3.1.5.5.7.1.2	GET	157
3.1.5.5.7.1.2.1	Request Body	158
3.1.5.5.7.1.2.2	Response Body	158
3.1.5.5.7.1.2.3	Processing Details	158
3.1.5.5.7.1.3	GET ALL	158
3.1.5.5.7.1.3.1	Request Body	159
3.1.5.5.7.1.3.2	Response Body	159
3.1.5.5.7.1.3.3	Processing Details	159
3.1.5.5.7.1.4	DELETE	159
3.1.5.5.7.1.4.1	Request Body	160
3.1.5.5.7.1.4.2	Response Body	160
3.1.5.5.7.1.4.3	Processing Details	160
3.1.5.6	loadBalancerManager	160
3.1.5.6.1	HTTP Methods	161
3.1.5.6.1.1	PUT	161
3.1.5.6.1.1.1	Request Body	162
3.1.5.6.1.1.2	Response Body	162
3.1.5.6.1.1.3	Processing Details	162

3.1.5.6.1.2	GET	162
3.1.5.6.1.2.1	Request Body	163
3.1.5.6.1.2.2	Response Body	163
3.1.5.6.1.2.3	Processing Details	163
3.1.5.7	loadBalancerMuxes	163
3.1.5.7.1	HTTP Methods	165
3.1.5.7.1.1	PUT	165
3.1.5.7.1.1.1	Request Body	165
3.1.5.7.1.1.2	Response Body	166
3.1.5.7.1.1.3	Processing Details	167
3.1.5.7.1.2	GET	167
3.1.5.7.1.2.1	Request Body	167
3.1.5.7.1.2.2	Response Body	167
3.1.5.7.1.2.3	Processing Details	168
3.1.5.7.1.3	GET ALL	169
3.1.5.7.1.3.1	Request Body	170
3.1.5.7.1.3.2	Response Body	170
3.1.5.7.1.3.3	Processing Details	171
3.1.5.7.1.4	DELETE	171
3.1.5.7.1.4.1	Request Body	171
3.1.5.7.1.4.2	Response Body	171
3.1.5.7.1.4.3	Processing Details	171
3.1.5.8	logicalNetworks	171
3.1.5.8.1	HTTP Methods	172
3.1.5.8.1.1	PUT	172
3.1.5.8.1.1.1	Request Body	173
3.1.5.8.1.1.2	Response Body	173
3.1.5.8.1.1.3	Processing Details	173
3.1.5.8.1.2	GET	174
3.1.5.8.1.2.1	Request Body	174
3.1.5.8.1.2.2	Response Body	174
3.1.5.8.1.2.3	Processing Details	175
3.1.5.8.1.3	GET ALL	175
3.1.5.8.1.3.1	Request Body	176
3.1.5.8.1.3.2	Response Body	176
3.1.5.8.1.3.3	Processing Details	177
3.1.5.8.1.4	DELETE	177
3.1.5.8.1.4.1	Request Body	177
3.1.5.8.1.4.2	Response Body	178
3.1.5.8.1.4.3	Processing Details	178
3.1.5.8.2	subnets	178
3.1.5.8.2.1	HTTP Methods	179
3.1.5.8.2.1.1	PUT	179
3.1.5.8.2.1.1.1	Request Body	179
3.1.5.8.2.1.1.2	Response Body	180
3.1.5.8.2.1.1.3	Processing Details	180
3.1.5.8.2.1.2	GET	180
3.1.5.8.2.1.2.1	Request Body	180
3.1.5.8.2.1.2.2	Response Body	180
3.1.5.8.2.1.2.3	Processing Details	181
3.1.5.8.2.1.3	GET ALL	181
3.1.5.8.2.1.3.1	Request Body	182
3.1.5.8.2.1.3.2	Response Body	182
3.1.5.8.2.1.3.3	Processing Details	183
3.1.5.8.2.1.4	DELETE	183
3.1.5.8.2.1.4.1	Request Body	183
3.1.5.8.2.1.4.2	Response Body	183
3.1.5.8.2.1.4.3	Processing Details	183

3.1.5.8.2.2	ipPools	183
3.1.5.8.2.2.1	HTTP Methods.....	184
3.1.5.8.2.2.1.1	PUT.....	184
3.1.5.8.2.2.1.1.1	Request Body	185
3.1.5.8.2.2.1.1.2	Response Body	185
3.1.5.8.2.2.1.1.3	Processing Details	185
3.1.5.8.2.2.1.2	GET	185
3.1.5.8.2.2.1.2.1	Request Body	186
3.1.5.8.2.2.1.2.2	Response Body	186
3.1.5.8.2.2.1.2.3	Processing Details	186
3.1.5.8.2.2.1.3	GET ALL	186
3.1.5.8.2.2.1.3.1	Request Body	187
3.1.5.8.2.2.1.3.2	Response Body	187
3.1.5.8.2.2.1.3.3	Processing Details	187
3.1.5.8.2.2.1.4	DELETE	187
3.1.5.8.2.2.1.4.1	Request Body	188
3.1.5.8.2.2.1.4.2	Response Body	188
3.1.5.8.2.2.1.4.3	Processing Details	188
3.1.5.8.2.3	routes	188
3.1.5.8.2.3.1	HTTP Methods.....	189
3.1.5.8.2.3.1.1	PUT.....	189
3.1.5.8.2.3.1.1.1	Request Body	190
3.1.5.8.2.3.1.1.2	Response Body	190
3.1.5.8.2.3.1.1.3	Processing Details	190
3.1.5.8.2.3.1.2	GET	190
3.1.5.8.2.3.1.2.1	Request Body	190
3.1.5.8.2.3.1.2.2	Response Body	190
3.1.5.8.2.3.1.2.3	Processing Details	191
3.1.5.8.2.3.1.3	GET ALL	191
3.1.5.8.2.3.1.3.1	Request Body	191
3.1.5.8.2.3.1.3.2	Response Body	191
3.1.5.8.2.3.1.3.3	Processing Details	192
3.1.5.8.2.3.1.4	DELETE	192
3.1.5.8.2.3.1.4.1	Request Body	192
3.1.5.8.2.3.1.4.2	Response Body	193
3.1.5.8.2.3.1.4.3	Processing Details	193
3.1.5.9	macPools	193
3.1.5.9.1	HTTP Methods.....	194
3.1.5.9.1.1	PUT.....	194
3.1.5.9.1.1.1	Request Body.....	195
3.1.5.9.1.1.2	Response Body	195
3.1.5.9.1.1.3	Processing Details	195
3.1.5.9.1.2	GET.....	195
3.1.5.9.1.2.1	Request Body.....	195
3.1.5.9.1.2.2	Response Body	195
3.1.5.9.1.2.3	Processing Details	196
3.1.5.9.1.3	GET ALL.....	196
3.1.5.9.1.3.1	Request Body.....	196
3.1.5.9.1.3.2	Response Body	196
3.1.5.9.1.3.3	Processing Details	197
3.1.5.9.1.4	DELETE.....	197
3.1.5.9.1.4.1	Request Body.....	198
3.1.5.9.1.4.2	Response Body	198
3.1.5.9.1.4.3	Processing Details	198
3.1.5.10	routeTables.....	198
3.1.5.10.1	HTTP Methods.....	199
3.1.5.10.1.1	PUT.....	199
3.1.5.10.1.1.1	Request Body.....	199

3.1.5.10.1.1.2	Response Body	200
3.1.5.10.1.1.3	Processing Details	200
3.1.5.10.1.2	GET.....	200
3.1.5.10.1.2.1	Request Body.....	200
3.1.5.10.1.2.2	Response Body	200
3.1.5.10.1.2.3	Processing Details	201
3.1.5.10.1.3	GET ALL.....	201
3.1.5.10.1.3.1	Request Body.....	202
3.1.5.10.1.3.2	Response Body	202
3.1.5.10.1.3.3	Processing Details	202
3.1.5.10.1.4	DELETE.....	202
3.1.5.10.1.4.1	Request Body.....	203
3.1.5.10.1.4.2	Response Body	203
3.1.5.10.1.4.3	Processing Details	203
3.1.5.10.2	routes.....	203
3.1.5.10.2.1	HTTP Methods	204
3.1.5.10.2.1.1	PUT	204
3.1.5.10.2.1.1.1	Request Body.....	204
3.1.5.10.2.1.1.2	Response Body.....	205
3.1.5.10.2.1.1.3	Processing Details.....	205
3.1.5.10.2.1.2	GET	205
3.1.5.10.2.1.2.1	Request Body.....	205
3.1.5.10.2.1.2.2	Response Body.....	205
3.1.5.10.2.1.2.3	Processing Details.....	206
3.1.5.10.2.1.3	GET ALL	206
3.1.5.10.2.1.3.1	Request Body.....	206
3.1.5.10.2.1.3.2	Response Body.....	206
3.1.5.10.2.1.3.3	Processing Details.....	207
3.1.5.10.2.1.4	DELETE	207
3.1.5.10.2.1.4.1	Request Body.....	208
3.1.5.10.2.1.4.2	Response Body.....	208
3.1.5.10.2.1.4.3	Processing Details.....	208
3.1.5.11	networkInterfaces	208
3.1.5.11.1	HTTP Methods.....	211
3.1.5.11.1.1	PUT.....	211
3.1.5.11.1.1.1	Request Body.....	211
3.1.5.11.1.1.2	Response Body	212
3.1.5.11.1.1.3	Processing Details	212
3.1.5.11.1.2	GET.....	212
3.1.5.11.1.2.1	Request Body.....	212
3.1.5.11.1.2.2	Response Body	213
3.1.5.11.1.2.3	Processing Details	214
3.1.5.11.1.3	GET ALL.....	214
3.1.5.11.1.3.1	Request Body.....	215
3.1.5.11.1.3.2	Response Body	215
3.1.5.11.1.3.3	Processing Details	228
3.1.5.11.1.4	DELETE.....	228
3.1.5.11.1.4.1	Request Body.....	228
3.1.5.11.1.4.2	Response Body	228
3.1.5.11.1.4.3	Processing Details	228
3.1.5.11.2	ipConfigurations	228
3.1.5.11.2.1	HTTP Methods	230
3.1.5.11.2.1.1	PUT	230
3.1.5.11.2.1.1.1	Request Body.....	231
3.1.5.11.2.1.1.2	Response Body.....	232
3.1.5.11.2.1.1.3	Processing Details.....	232
3.1.5.11.2.1.2	GET	232
3.1.5.11.2.1.2.1	Request Body.....	232

3.1.5.11.2.1.2.2	Response Body.....	232
3.1.5.11.2.1.2.3	Processing Details.....	233
3.1.5.11.2.1.3	GET ALL.....	233
3.1.5.11.2.1.3.1	Request Body.....	233
3.1.5.11.2.1.3.2	Response Body.....	233
3.1.5.11.2.1.3.3	Processing Details.....	234
3.1.5.11.2.1.4	DELETE.....	234
3.1.5.11.2.1.4.1	Request Body.....	234
3.1.5.11.2.1.4.2	Response Body.....	235
3.1.5.11.2.1.4.3	Processing Details.....	235
3.1.5.12	operations.....	235
3.1.5.12.1	HTTP Methods.....	236
3.1.5.12.1.1	GET.....	236
3.1.5.12.1.1.1	Request Body.....	236
3.1.5.12.1.1.2	Response Body.....	236
3.1.5.12.1.1.3	Processing Details.....	236
3.1.5.13	operationResults.....	237
3.1.5.13.1	HTTP Methods.....	238
3.1.5.13.1.1	GET.....	238
3.1.5.13.1.1.1	Request Body.....	238
3.1.5.13.1.1.2	Response Body.....	238
3.1.5.13.1.1.3	Processing Details.....	239
3.1.5.14	publicIPAddresses.....	239
3.1.5.14.1	HTTP Methods.....	241
3.1.5.14.1.1	PUT.....	241
3.1.5.14.1.1.1	Request Body.....	241
3.1.5.14.1.1.2	Response Body.....	242
3.1.5.14.1.1.3	Processing Details.....	242
3.1.5.14.1.2	GET.....	242
3.1.5.14.1.2.1	Request Body.....	242
3.1.5.14.1.2.2	Response Body.....	242
3.1.5.14.1.2.3	Processing Details.....	243
3.1.5.14.1.3	GET ALL.....	243
3.1.5.14.1.3.1	Request Body.....	243
3.1.5.14.1.3.2	Response Body.....	243
3.1.5.14.1.3.3	Processing Details.....	244
3.1.5.14.1.4	DELETE.....	244
3.1.5.14.1.4.1	Request Body.....	244
3.1.5.14.1.4.2	Response Body.....	244
3.1.5.14.1.4.3	Processing Details.....	245
3.1.5.15	servers.....	245
3.1.5.15.1	HTTP Methods.....	246
3.1.5.15.1.1	PUT.....	246
3.1.5.15.1.1.1	Request Body.....	246
3.1.5.15.1.1.2	Response Body.....	247
3.1.5.15.1.1.3	Processing Details.....	247
3.1.5.15.1.2	GET.....	247
3.1.5.15.1.2.1	Request Body.....	248
3.1.5.15.1.2.2	Response Body.....	248
3.1.5.15.1.2.3	Processing Details.....	249
3.1.5.15.1.3	GET ALL.....	249
3.1.5.15.1.3.1	Request Body.....	250
3.1.5.15.1.3.2	Response Body.....	250
3.1.5.15.1.3.3	Processing Details.....	251
3.1.5.15.1.4	DELETE.....	251
3.1.5.15.1.4.1	Request Body.....	252
3.1.5.15.1.4.2	Response Body.....	252
3.1.5.15.1.4.3	Processing Details.....	252

3.1.5.15.2	networkInterfaces	252
3.1.5.15.2.1	HTTP Methods	253
3.1.5.15.2.1.1	PUT	253
3.1.5.15.2.1.1.1	Request Body	254
3.1.5.15.2.1.1.2	Response Body	254
3.1.5.15.2.1.1.3	Processing Details	254
3.1.5.15.2.1.2	GET	254
3.1.5.15.2.1.2.1	Request Body	255
3.1.5.15.2.1.2.2	Response Body	255
3.1.5.15.2.1.2.3	Processing Details	255
3.1.5.15.2.1.3	GET ALL	255
3.1.5.15.2.1.3.1	Request Body	256
3.1.5.15.2.1.3.2	Response Body	256
3.1.5.15.2.1.3.3	Processing Details	256
3.1.5.15.2.1.4	DELETE	256
3.1.5.15.2.1.4.1	Request Body	257
3.1.5.15.2.1.4.2	Response Body	257
3.1.5.15.2.1.4.3	Processing Details	257
3.1.5.16	serviceInsertions	257
3.1.5.16.1	HTTP Methods	259
3.1.5.16.1.1	PUT	259
3.1.5.16.1.1.1	Request Body	259
3.1.5.16.1.1.2	Response Body	260
3.1.5.16.1.1.3	Processing Details	260
3.1.5.16.1.2	GET	260
3.1.5.16.1.2.1	Request Body	261
3.1.5.16.1.2.2	Response Body	261
3.1.5.16.1.2.3	Processing Details	262
3.1.5.16.1.3	GET ALL	262
3.1.5.16.1.3.1	Request Body	262
3.1.5.16.1.3.2	Response Body	262
3.1.5.16.1.3.3	Processing Details	264
3.1.5.16.1.4	DELETE	264
3.1.5.16.1.4.1	Request Body	265
3.1.5.16.1.4.2	Response Body	265
3.1.5.16.1.4.3	Processing Details	265
3.1.5.17	VirtualGateways	265
3.1.5.17.1	HTTP Methods	267
3.1.5.17.1.1	PUT	267
3.1.5.17.1.1.1	Request Body	267
3.1.5.17.1.1.2	Response Body	271
3.1.5.17.1.1.3	Processing Details	271
3.1.5.17.1.2	GET	271
3.1.5.17.1.2.1	Request Body	272
3.1.5.17.1.2.2	Response Body	272
3.1.5.17.1.2.3	Processing Details	278
3.1.5.17.1.3	GET ALL	278
3.1.5.17.1.3.1	Request Body	279
3.1.5.17.1.3.2	Response Body	279
3.1.5.17.1.3.3	Processing Details	317
3.1.5.17.1.4	DELETE	317
3.1.5.17.1.4.1	Request Body	318
3.1.5.17.1.4.2	Response Body	318
3.1.5.17.1.4.3	Processing Details	318
3.1.5.17.2	bgpRouters	318
3.1.5.17.2.1	HTTP Methods	319
3.1.5.17.2.1.1	PUT	319
3.1.5.17.2.1.1.1	Request Body	320

3.1.5.17.2.1.1.2	Response Body	321
3.1.5.17.2.1.1.3	Processing Details	321
3.1.5.17.2.1.2	GET	321
3.1.5.17.2.1.2.1	Request Body	321
3.1.5.17.2.1.2.2	Response Body	321
3.1.5.17.2.1.2.3	Processing Details	324
3.1.5.17.2.1.3	GET ALL	324
3.1.5.17.2.1.3.1	Request Body	325
3.1.5.17.2.1.3.2	Response Body	325
3.1.5.17.2.1.3.3	Processing Details	327
3.1.5.17.2.1.4	DELETE	328
3.1.5.17.2.1.4.1	Request Body	328
3.1.5.17.2.1.4.2	Response Body	328
3.1.5.17.2.1.4.3	Processing Details	328
3.1.5.17.2.2	bgpPeers	328
3.1.5.17.2.2.1	HTTP Methods	331
3.1.5.17.2.2.1.1	PUT	331
3.1.5.17.2.2.1.1.1	Request Body	331
3.1.5.17.2.2.1.1.2	Response Body	331
3.1.5.17.2.2.1.1.3	Processing Details	332
3.1.5.17.2.2.1.2	GET	332
3.1.5.17.2.2.1.2.1	Request Body	332
3.1.5.17.2.2.1.2.2	Response Body	332
3.1.5.17.2.2.1.2.3	Processing Details	333
3.1.5.17.2.2.1.3	GET ALL	333
3.1.5.17.2.2.1.3.1	Request Body	333
3.1.5.17.2.2.1.3.2	Response Body	334
3.1.5.17.2.2.1.3.3	Processing Details	336
3.1.5.17.2.2.1.4	DELETE	336
3.1.5.17.2.2.1.4.1	Request Body	336
3.1.5.17.2.2.1.4.2	Response Body	337
3.1.5.17.2.2.1.4.3	Processing Details	337
3.1.5.17.3	policyMaps	337
3.1.5.17.3.1	HTTP Methods	338
3.1.5.17.3.1.1	PUT	338
3.1.5.17.3.1.1.1	Request Body	339
3.1.5.17.3.1.1.2	Response Body	339
3.1.5.17.3.1.1.3	Processing Details	339
3.1.5.17.3.1.2	GET	339
3.1.5.17.3.1.2.1	Request Body	340
3.1.5.17.3.1.2.2	Response Body	340
3.1.5.17.3.1.2.3	Processing Details	341
3.1.5.17.3.1.3	GET ALL	341
3.1.5.17.3.1.3.1	Request Body	341
3.1.5.17.3.1.3.2	Response Body	341
3.1.5.17.3.1.3.3	Processing Details	342
3.1.5.17.3.1.4	DELETE	342
3.1.5.17.3.1.4.1	Request Body	342
3.1.5.17.3.1.4.2	Response Body	342
3.1.5.17.3.1.4.3	Processing Details	342
3.1.5.17.4	networkConnections	343
3.1.5.17.4.1	HTTP Methods	347
3.1.5.17.4.1.1	PUT	347
3.1.5.17.4.1.1.1	Request Body	347
3.1.5.17.4.1.1.2	Response Body	348
3.1.5.17.4.1.1.3	Processing Details	349
3.1.5.17.4.1.2	GET	349
3.1.5.17.4.1.2.1	Request Body	349

3.1.5.17.4.1.2.2	Response Body	349
3.1.5.17.4.1.2.3	Processing Details	351
3.1.5.17.4.1.3	GET ALL	352
3.1.5.17.4.1.3.1	Request Body	352
3.1.5.17.4.1.3.2	Response Body	352
3.1.5.17.4.1.3.3	Processing Details	354
3.1.5.17.4.1.4	DELETE	354
3.1.5.17.4.1.4.1	Request Body	354
3.1.5.17.4.1.4.2	Response Body	354
3.1.5.17.4.1.4.3	Processing Details	355
3.1.5.18	virtualNetworks	355
3.1.5.18.1	HTTP Methods	356
3.1.5.18.1.1	PUT	356
3.1.5.18.1.1.1	Request Body	356
3.1.5.18.1.1.2	Response Body	357
3.1.5.18.1.1.3	Processing Details	357
3.1.5.18.1.2	GET	357
3.1.5.18.1.2.1	Request Body	358
3.1.5.18.1.2.2	Response Body	358
3.1.5.18.1.2.3	Processing Details	360
3.1.5.18.1.3	GET ALL	360
3.1.5.18.1.3.1	Request Body	360
3.1.5.18.1.3.2	Response Body	361
3.1.5.18.1.3.3	Processing Details	364
3.1.5.18.1.4	DELETE	364
3.1.5.18.1.4.1	Request Body	365
3.1.5.18.1.4.2	Response Body	365
3.1.5.18.1.4.3	Processing Details	365
3.1.5.18.2	subnets	365
3.1.5.18.2.1	HTTP Methods	366
3.1.5.18.2.1.1	PUT	366
3.1.5.18.2.1.1.1	Request Body	367
3.1.5.18.2.1.1.2	Response Body	368
3.1.5.18.2.1.1.3	Processing Details	368
3.1.5.18.2.1.2	GET	368
3.1.5.18.2.1.2.1	Request Body	368
3.1.5.18.2.1.2.2	Response Body	368
3.1.5.18.2.1.2.3	Processing Details	369
3.1.5.18.2.1.3	GET ALL	369
3.1.5.18.2.1.3.1	Request Body	369
3.1.5.18.2.1.3.2	Response Body	369
3.1.5.18.2.1.3.3	Processing Details	371
3.1.5.18.2.1.4	DELETE	371
3.1.5.18.2.1.4.1	Request Body	371
3.1.5.18.2.1.4.2	Response Body	371
3.1.5.18.2.1.4.3	Processing Details	371
3.1.5.19	virtualNetworkManager	371
3.1.5.19.1	HTTP Methods	372
3.1.5.19.1.1	PUT	372
3.1.5.19.1.1.1	Request Body	373
3.1.5.19.1.1.2	Response Body	373
3.1.5.19.1.1.3	Processing Details	373
3.1.5.19.1.2	GET	373
3.1.5.19.1.2.1	Request Body	374
3.1.5.19.1.2.2	Response Body	374
3.1.5.19.1.2.3	Processing Details	374
3.1.5.20	virtualServers	374
3.1.5.20.1	HTTP Methods	375

3.1.5.20.1.1	PUT	375
3.1.5.20.1.1.1	Request Body	376
3.1.5.20.1.1.2	Response Body	376
3.1.5.20.1.1.3	Processing Details	376
3.1.5.20.1.2	GET	376
3.1.5.20.1.2.1	Request Body	377
3.1.5.20.1.2.2	Response Body	377
3.1.5.20.1.2.3	Processing Details	378
3.1.5.20.1.3	GET ALL	378
3.1.5.20.1.3.1	Request Body	378
3.1.5.20.1.3.2	Response Body	378
3.1.5.20.1.3.3	Processing Details	380
3.1.5.20.1.4	DELETE	380
3.1.5.20.1.4.1	Request Body	380
3.1.5.20.1.4.2	Response Body	380
3.1.5.20.1.4.3	Processing Details	380
3.1.5.21	Diagnostics	380
3.1.5.21.1	Diagnostics ConnectivityCheck	380
3.1.5.21.1.1	HTTP Methods	381
3.1.5.21.1.1.1	PUT	381
3.1.5.21.1.1.1.1	Request Body	382
3.1.5.21.1.1.1.2	Response Body	382
3.1.5.21.1.1.1.3	Processing Details	383
3.1.5.21.2	Diagnostics ConnectivityCheckResults	383
3.1.5.21.2.1	HTTP Methods	385
3.1.5.21.2.1.1	GET	385
3.1.5.21.2.1.1.1	Request Body	386
3.1.5.21.2.1.1.2	Response Body	386
3.1.5.21.2.1.1.3	Processing Details	387
3.1.5.21.2.1.2	GET ALL	387
3.1.5.21.2.1.2.1	Request Body	387
3.1.5.21.2.1.2.2	Response Body	387
3.1.5.21.2.1.2.3	Processing Details	388
3.1.5.21.3	Diagnostics SlibState	389
3.1.5.21.3.1	HTTP Methods	389
3.1.5.21.3.1.1	PUT	389
3.1.5.21.3.1.1.1	Request Body	390
3.1.5.21.3.1.1.2	Response Body	390
3.1.5.21.3.1.1.3	Processing Details	390
3.1.5.21.4	Diagnostics SlibStateResults	390
3.1.5.21.4.1	HTTP Methods	392
3.1.5.21.4.1.1	GET	392
3.1.5.21.4.1.1.1	Request Body	392
3.1.5.21.4.1.1.2	Response Body	392
3.1.5.21.4.1.1.3	Processing Details	394
3.1.5.21.4.1.2	GET ALL	395
3.1.5.21.4.1.2.1	Request Body	395
3.1.5.21.4.1.2.2	Response Body	395
3.1.5.21.4.1.2.3	Processing Details	397
3.1.5.21.5	Diagnostics NetworkControllerState	397
3.1.5.21.5.1	HTTP Methods	397
3.1.5.21.5.1.1	PUT	397
3.1.5.21.5.1.1.1	Request Body	398
3.1.5.21.5.1.1.2	Response Body	398
3.1.5.21.5.1.1.3	Processing Details	398
3.1.5.22	networkControllerStatistics	398
3.1.5.22.1	HTTP Methods	399
3.1.5.22.1.1	GET	399

3.1.5.22.1.1.1	Request Body.....	400
3.1.5.22.1.1.2	Response Body	400
3.1.5.22.1.1.3	Processing Details	401
3.1.5.23	internalResourceInstances	401
3.1.5.23.1	HTTP Methods.....	401
3.1.5.23.1.1	GET.....	401
3.1.5.23.1.1.1	Request Body.....	402
3.1.5.23.1.1.2	Response Body	402
3.1.5.23.1.1.3	Processing Details	402
3.1.5.23.1.2	GET ALL.....	402
3.1.5.23.1.2.1	Request Body.....	403
3.1.5.23.1.2.2	Response Body	403
3.1.5.23.1.2.3	Processing Details	403
3.1.5.24	iDnsServer.....	403
3.1.5.24.1	HTTP Methods.....	404
3.1.5.24.1.1	PUT.....	404
3.1.5.24.1.1.1	Request Body.....	404
3.1.5.24.1.1.2	Response Body	405
3.1.5.24.1.1.3	Processing Details	405
3.1.5.24.1.2	GET.....	405
3.1.5.24.1.2.1	Request Body.....	405
3.1.5.24.1.2.2	Response Body	405
3.1.5.24.1.2.3	Processing Details	406
3.1.5.25	virtualSwitchManager	406
3.1.5.25.1	HTTP Methods.....	407
3.1.5.25.1.1	PUT.....	407
3.1.5.25.1.1.1	Request Body.....	407
3.1.5.25.1.1.2	Response Body	407
3.1.5.25.1.1.3	Processing Details	408
3.1.5.25.1.2	GET.....	408
3.1.5.25.1.2.1	Request Body.....	408
3.1.5.25.1.2.2	Response Body	408
3.1.5.25.1.2.3	Processing Details	408
3.1.5.26	networkControllerBackup	409
3.1.5.26.1	HTTP Methods.....	409
3.1.5.26.1.1	PUT.....	409
3.1.5.26.1.1.1	Request Body.....	410
3.1.5.26.1.1.2	Response Body	410
3.1.5.26.1.1.3	Processing Details	410
3.1.5.26.1.2	GET.....	410
3.1.5.26.1.2.1	Request Body.....	411
3.1.5.26.1.2.2	Response Body	411
3.1.5.26.1.2.3	Processing Details	412
3.1.5.27	networkControllerRestore.....	412
3.1.5.27.1	HTTP Methods.....	413
3.1.5.27.1.1	PUT.....	413
3.1.5.27.1.1.1	Request Body.....	413
3.1.5.27.1.1.2	Response Body	413
3.1.5.27.1.1.3	Processing Details	414
3.1.5.27.1.2	GET.....	414
3.1.5.27.1.2.1	Request Body.....	414
3.1.5.27.1.2.2	Response Body	414
3.1.5.27.1.2.3	Processing Details	415
3.1.5.28	SubnetEgressReset	415
3.1.5.28.1	PUT	416
3.1.5.28.1.1	Request Body	416
3.1.5.28.1.2	Response Body	416
3.1.5.28.1.3	Processing Details	416

3.1.5.28.2	GET	416
3.1.5.28.2.1	Request Body	417
3.1.5.28.2.2	Response Body	417
3.1.5.28.2.3	Processing Details	417
3.1.5.29	Response Content for Errors	417
3.1.6	Timer Events.....	424
3.1.7	Other Local Events.....	424
4	Protocol Examples	425
4.1	Example of the JSON used to create a default ACL for both inbound and outbound ..	425
4.2	macPools usage	425
5	Security	426
5.1	Security Considerations for Implementers	426
5.2	Index of Security Parameters	426
6	Appendix A: Full JSON Schema	427
6.1	accessControlLists	427
6.1.1	PUT Schema	427
6.1.2	GET Schema	429
6.1.3	GET ALL schema	432
6.1.4	aclRules.....	436
6.1.4.1	PUT schema	436
6.1.4.2	GET schema	437
6.1.4.3	GET ALL schema	439
6.2	credentials	441
6.2.1	PUT schema	441
6.2.2	GET schema v1	442
6.2.3	GET schema v2	444
6.2.4	GET ALL schema v1	446
6.2.5	GET ALL schema v2	448
6.3	GatewayPools	450
6.3.1	PUT schema	450
6.3.2	GET schema.....	452
6.3.3	GET ALL schema.....	454
6.4	gateways	456
6.4.1	PUT schema	456
6.4.2	GET schema.....	458
6.4.3	GET ALL schema.....	462
6.5	loadBalancers	466
6.5.1	PUT schema	466
6.5.2	GET schema.....	471
6.5.3	GET ALL schema.....	477
6.5.4	backendAddressPools	484
6.5.4.1	PUT schema	484
6.5.4.2	GET schema	485
6.5.4.3	GET ALL schema	486
6.5.5	frontendIPConfigurations	488
6.5.5.1	PUT schema	488
6.5.5.2	GET schema	489
6.5.5.3	GET ALL schema	490
6.5.6	inboundNatRules	492
6.5.6.1	PUT schema	492
6.5.6.2	GET schema	493
6.5.6.3	GET ALL schema	495
6.5.7	loadBalancingRules	496
6.5.7.1	PUT schema	496
6.5.7.2	GET schema	497
6.5.7.3	GET ALL schema	499

6.5.8	outboundNatRules	501
6.5.8.1	PUT schema	501
6.5.8.2	GET schema	502
6.5.8.3	GET ALL schema	503
6.5.9	probes.....	504
6.5.9.1	PUT schema	504
6.5.9.2	GET schema	505
6.5.9.3	GET ALL schema	507
6.6	loadBalancerManager.....	508
6.6.1	PUT schema	508
6.6.2	GET schema	509
6.7	loadBalancerMuxes.....	511
6.7.1	PUT schema	511
6.7.2	GET schema.....	513
6.7.3	GET ALL schema.....	516
6.8	logicalNetworks.....	519
6.8.1	PUT schema	519
6.8.2	GET schema.....	521
6.8.3	GET ALL schema.....	526
6.8.4	subnets	531
6.8.4.1	ipPools.....	531
6.8.4.1.1	PUT schema	531
6.8.4.1.2	GET schema	531
6.8.4.1.3	GET ALL schema	532
6.9	macPools	532
6.9.1	PUT schema	532
6.9.2	GET schema.....	533
6.9.3	GET ALL schema.....	535
6.10	routeTables	537
6.10.1	PUT schema	537
6.10.2	GET schema.....	538
6.10.3	GET ALL schema.....	540
6.10.4	routes	542
6.10.4.1	PUT schema	542
6.10.4.2	GET schema	543
6.10.4.3	GET ALL schema	545
6.11	networkInterfaces	546
6.11.1	PUT schema	546
6.11.2	GET schema.....	549
6.11.3	GET ALL schema.....	553
6.11.4	ipConfigurations	558
6.11.4.1	GET schema	558
6.11.4.2	GET ALL schema	559
6.12	publicIPAddresses	561
6.12.1	PUT schema	561
6.12.2	GET schema.....	562
6.12.3	GET ALL schema.....	564
6.13	servers	565
6.13.1	PUT schema	565
6.13.2	GET schema v1	568
6.13.3	GET schema v2	572
6.13.4	GET ALL schema v1	577
6.13.5	GET ALL schema v2	582
6.14	serviceInsertions.....	587
6.14.1	PUT schema	587
6.14.2	GET schema.....	589
6.14.3	GET ALL schema.....	592
6.15	VirtualGateways.....	596

6.15.1	PUT schema	596
6.15.2	GET schema	603
6.15.3	GET ALL schema	614
6.15.4	bgpRouters	626
6.15.4.1	PUT schema	626
6.15.4.2	GET schema	627
6.15.4.3	GET ALL schema	631
6.15.4.4	bgpPeers	636
6.15.4.4.1	PUT schema	636
6.15.4.4.2	GET schema	636
6.15.4.4.3	GET ALL schema	639
6.15.5	policyMaps	643
6.15.5.1	PUT schema	643
6.15.5.2	GET schema	644
6.15.5.3	GET ALL schema	645
6.16	virtualNetworks	647
6.16.1	PUT schema v1	647
6.16.2	PUT schema v2	649
6.16.3	GET schema v1	651
6.16.4	GET schema v2	655
6.16.5	GET ALL schema v1	659
6.16.6	GET ALL schema v2	662
6.16.7	subnets	667
6.16.7.1	PUT schema v1	667
6.16.7.2	PUT schema v2	667
6.16.7.3	GET schema v1	668
6.16.7.4	GET schema v2	670
6.16.7.5	GET ALL schema v1	671
6.16.7.6	GET ALL schema v2	673
6.17	virtualNetworkManager	675
6.17.1	PUT schema v1	675
6.17.2	PUT schema v2	675
6.17.3	GET schema v1	676
6.17.4	GET schema v2	677
6.18	virtualServers	678
6.18.1	PUT schema	678
6.18.2	GET schema	679
6.18.3	GET ALL schema	681
6.19	Diagnostics	683
6.19.1	Diagnostics ConnectivityCheck	683
6.19.1.1	PUT Schema Request	683
6.19.1.2	PUT Schema Response	684
6.19.2	Diagnostics ConnectivityCheckResults	685
6.19.2.1	GET Schema	685
6.19.2.2	GET ALL Schema	687
6.19.3	Diagnostics SlbState	690
6.19.3.1	PUT Schema	690
6.19.4	Diagnostics SlbStateResults	691
6.19.4.1	GET Schema	691
6.19.4.2	GET ALL Schema	693
6.19.5	Diagnostics NetworkControllerState	695
6.19.5.1	PUT Schema	695
6.20	networkControllerStatistics	696
6.20.1	GET Schema	696
6.21	internalResourceInstances	698
6.21.1	GET schema	698
6.21.2	GET ALL schema	699
6.22	iDnsServer	700

6.22.1	PUT schema	700
6.22.2	GET schema	701
6.23	virtualSwitchManager	702
6.23.1	PUT Schema	702
6.23.2	GET Schema	703
6.24	networkControllerBackup	705
6.24.1	PUT Schema	705
6.24.2	GET Schema	706
6.25	networkControllerRestore	707
6.25.1	PUT Schema	707
6.25.2	GET Schema	709
6.26	SubnetEgressReset	710
6.26.1	PUT Schema	710
6.26.2	GET Schema	711
6.27	Schema for Error Response	712
7	Appendix B: Product Behavior	713
8	Change Tracking	715
9	Index	725

1 Introduction

This document specifies the Northbound API (NBI) definition of the Microsoft Network Controller. The NBI is a RESTful API using JSON as the message format. The first sections of this document provide an overview of the API and common usage of it. The bulk of this document is the design of the resources that make up the NBI. The resources are in order of the top-level resources with their respective descendant resources defined in conjunction with their ancestor resource.

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative. All other sections and examples in this specification are informative.

1.1 Glossary

This document uses the following terms:

access control list (ACL): A list of access control entries (ACEs) that collectively describe the security rules for authorizing access to some resource; for example, an object or set of objects.

ancestor: In a tree structure, an element from which other elements inherit attributes.

asynchronous operation: An operation executed on the server side. The client continues executing and does not check whether a response is available from the server.

autonomous system number (ASN): A unique number allocated to each autonomous system for use in the BGP routing protocol.

Border Gateway Protocol (BGP): An interautonomous system routing protocol designed for TCP/IP routing.

~~**certification authority (CA):** A third party that issues public key certificates. Certificates serve to bind public keys to a user identity. Each user and certification authority (CA) can decide whether to trust another user or CA for a specific purpose, and whether this trust should be transitive. For more information, see [RFC3280].~~

classless inter-domain routing (CIDR): An alternate method for allocating IP addresses and routing IP packets, known as supernetting, that organizes IP addresses into subnetworks that are independent of the address values. It enables multiple subnets to be grouped together for network routing to reduce the growth of Internet routing tables and preserve available IPv4 addresses.

create retrieve update delete (CRUD): The four basic functions of persistent storage. The "C" stands for create, the "R" for retrieve, the "U" for update, and the "D" for delete. CRUD is used to denote these conceptual actions and does not imply the associated meaning in a particular technology area (such as in databases, file systems, and so on) unless that associated meaning is explicitly stated.

descendant: A member that is below the current member in a hierarchy.

Domain Name System (DNS): A hierarchical, distributed database that contains mappings of domain names to various types of data, such as IP addresses. DNS enables the location of computers and services by user-friendly names, and it also enables the discovery of other information stored in the database.

Dynamic Host Configuration Protocol (DHCP): A protocol that provides a framework for passing configuration information to hosts on a TCP/IP network, as described in [RFC2131].

~~**Encapsulating Security Payload (ESP):** An Internet Protocol security (IPsec) encapsulation mode that provides authentication, data confidentiality, and message integrity. For more information, see [RFC4303] section 1.~~

encryption: In cryptography, the process of obscuring information to make it unreadable without special knowledge.

Hypertext Transfer Protocol (HTTP): An application-level protocol for distributed, collaborative, hypermedia information systems (text, graphic images, sound, video, and other multimedia files) on the World Wide Web.

Hypertext Transfer Protocol Secure (HTTPS): An extension of HTTP that securely encrypts and decrypts web page requests. In some older protocols, "Hypertext Transfer Protocol over Secure Sockets Layer" is still used (Secure Sockets Layer has been deprecated). For more information, see [SSL3] and [RFC5246].

inbound: The network traffic flowing from the client to the server.

Internet Protocol security (IPsec): A framework of open standards for ensuring private, secure communications over Internet Protocol (IP) networks through the use of cryptographic security services. IPsec supports network-level peer authentication, data origin authentication, data integrity, data confidentiality (encryption), and replay protection. ~~The Microsoft implementation of IPsec is based on standards developed by the Internet Engineering Task Force (IETF) IPsec working group.~~

Internet Protocol version 4 (IPv4): An Internet protocol that has 32-bit source and destination addresses. IPv4 is the predecessor of IPv6.

Internet Protocol version 6 (IPv6): A revised version of the Internet Protocol (IP) designed to address growth on the Internet. Improvements include a 128-bit IP address size, expanded routing capabilities, and support for authentication and privacy.

JavaScript Object Notation (JSON): A text-based, data interchange format that is used to transmit structured data, typically in Asynchronous JavaScript + XML (AJAX) web applications, as described in [RFC7159]. The JSON format is based on the structure of ECMAScript (Jscript, JavaScript) objects.

Media Access Control (MAC) address: A hardware address provided by the network interface vendor that uniquely identifies each interface on a physical network for communication with other interfaces, as specified in [IEEE802.3]. It is used by the media access control sublayer of the data link layer of a network connection.

multiplexer (MUX): A software component that processes inbound traffic according to configured mapping rules.

NetBIOS: A particular network transport that is part of the LAN Manager protocol suite. NetBIOS uses a broadcast communication style that was applicable to early segmented local area networks. A protocol family including name resolution, datagram, and connection services. For more information, see [RFC1001] and [RFC1002].

network address translation (NAT): The process of converting between IP addresses used within an intranet, or other private network, and Internet IP addresses.

opaque: Data that the client does not use and data (or, more often, a handle) for use on the server on behalf of the client. Opaque data is sent to the client and returned to the server and used to access data or state information needed to process client calls/requests.

outbound: Network traffic flowing from the server to the client.

Representational State Transfer (REST): A class of web services that is used to transfer domain-specific data by using HTTP, without additional messaging layers or session tracking, and returns textual data, such as XML.

resource: An entity that can be identified by a URI. This term is used as specified in [RFC2616] section 1.3.

Secure Sockets Layer (SSL): A security protocol that supports confidentiality and integrity of messages in client and server applications that communicate over open networks. ~~SSL uses two keys to encrypt data—a public key known to everyone and a private or secret key known only to the recipient of the message.~~ SSL supports server and, optionally, client authentication using X.509 certificates. ~~For more information, see [X509]. The] and [RFC5280].~~ SSL ~~protocol is precursor to~~superseded by Transport Layer Security (TLS). ~~The~~ TLS version 1.0 ~~specification~~ is based on SSL version 3.0 [SSL3].

security association (SA): A simplex "connection" that provides security services to the traffic carried by it. See [RFC4301] for more information.

Singleton SAO: An SAO that is created the first time a method on its server type is called; subsequent calls to the remote methods on the server type reuse the existing SAO unless it expires. For shorter-lived SAOs, see single-call SAO.

top-level resource: A resource that has no ancestors.

~~tracing: A mechanism used to write out diagnostic information.~~

Transmission Control Protocol (TCP): A protocol used with the Internet Protocol (IP) to send data in the form of message units between computers over the Internet. TCP handles keeping track of the individual units of data (called packets) that a message is divided into for efficient routing through the Internet.

Transport Layer Security (TLS): A security protocol that supports confidentiality and integrity of messages in client and server applications communicating over open networks. TLS supports server and, optionally, client authentication by using X.509 certificates (as specified in [X509]). TLS is standardized in the IETF TLS working group.

Uniform Resource Identifier (URI): A string that identifies a resource. The URI is an addressing mechanism defined in Internet Engineering Task Force (IETF) Uniform Resource Identifier (URI): Generic Syntax [RFC3986].

Uniform Resource Locator (URL): A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [RFC1738].

~~User Datagram Protocol (UDP): The connectionless protocol within TCP/IP that corresponds to the transport layer in the ISO/OSI reference model.~~

Virtual Filtering Platform (VFP): A component that runs on a host and processes network traffic according to a configuration that is comprised of a set of programmable rules.

virtual private network (VPN): A network that provides secure access to a private network over public infrastructure.

web service: A software system designed to support interoperable machine-to-machine interaction over a network, using XML-based standards and open transport protocols.

Windows Management Instrumentation (WMI): The Microsoft implementation of Common Information Model (CIM), as specified in [DMTF-DSP0004]. WMI allows an administrator to manage local and remote machines and models computer and network objects using an extension of the CIM standard.

XML: The Extensible Markup Language, as described in [XML1.0].

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the Errata.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[ECMA-404] Ecma International, "The JSON Data Interchange Format", Standard ECMA-404 1st Edition / October 2013, <http://www.ecma-international.org/publications/files/ECMA-ST/ECMA-404.pdf>

[JSON-Schema] Internet Engineering Task Force (IETF), "JSON Schema and Hyper-Schema", January 2013, <http://json-schema.org/>

[MSKB-3216755] Microsoft Corporation, "January 26, 2017—KB 3216755 (OS Build 14393.726)", <https://support.microsoft.com/en-us/help/4011347/windows-10-update-kb3216755>

[RFC1123] Braden, R., "Requirements for Internet Hosts - Application and Support", RFC 1123, October 1989, <http://www.ietf.org/rfc/rfc1123.txt>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2409] Harkins, D. and Carrel, D., "The Internet Key Exchange (IKE)", RFC 2409, November 1998, <http://www.ietf.org/rfc/rfc2409.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2784] Farinacci, D., Li T., Hanks, S., et al., "Generic Routing Encapsulation (GRE)", RFC 2784, March 2000, <https://www.rfc-editor.org/info/rfc2784>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[RFC4301] Kent, S. and Seo, K., "Security Architecture for the Internet Protocol", RFC 4301, December 2005, <http://www.ietf.org/rfc/rfc4301.txt>

[RFC4306] Kaufman, C., "Internet Key Exchange (IKEv2) Protocol", RFC 4306, December 2005, <http://www.ietf.org/rfc/rfc4306.txt>

[RFC5996] Kaufman, C., Hoffman, P., Nir, Y., and Eronen, P., "Internet Key Exchange Protocol Version 2 (IKEv2)", RFC 5996, September 2010, <http://tools.ietf.org/html/rfc5996>

[RFC7231] Fielding, R., and Reschke, J., Eds., "Hypertext Transfer Protocol -- HTTP/1.1: Semantics and Content", RFC7231, June 2014, <http://www.rfc-editor.org/rfc/rfc7231.txt>

[RFC7348] Mahalingam, M., Dutt, D., Duda, K., et al., "Virtual eXtensible Local Area Network (VXLAN): A Framework for Overlaying Virtualized Layer 2 Networks over Layer 3 Networks", RFC 7348, August 2014, <https://www.rfc-editor.org/info/rfc7348>

[RFC7637] Garg, P. and Wang, Y. Eds., "NVGRE: Network Virtualization Using Generic Routing Encapsulation", RFC 7637, September 2015, <https://www.rfc-editor.org/info/rfc7637>

[RFC792] Postel, J., "Internet Control Message Protocol", RFC 792, September 1981, <http://www.ietf.org/rfc/rfc792.txt>

[X509] ITU-T, "Information Technology - Open Systems Interconnection - The Directory: Public-Key and Attribute Certificate Frameworks", Recommendation X.509, August 2005, <http://www.itu.int/rec/T-REC-X.509/en>

1.2.2 Informative References

[RFC1034] Mockapetris, P., "Domain Names - Concepts and Facilities", STD 13, RFC 1034, November 1987, <http://www.ietf.org/rfc/rfc1034.txt>

1.3 Overview

This document provides the Northbound API (NBI) definition of the Microsoft Network Controller. The NBI is a **Representational State Transfer (REST) (1) (RESTful) web services API using that uses JavaScript Object Notation (JSON)** as the message format, as specified in [ECMA-404] and [JSON-Schema]. The first sections of this document provide an overview of the API and common usage of it. The bulk of this document is the design of the resources that make up the NBI.

1.3.1 Client-Server Interactions

This section details the client-server interactions between the Network Controller (as the server) and any clients that call into its Northbound REST APIs.

1.3.1.1 ETag usage

The ETag (**entity-tag**) is an HTTP/1.1 response header field that is defined by the W3C organization (See [RFC2616] section 14.19). The Network Controller supports the behavior of ETag as defined by W3C. In addition, the following section outlines the behavior of the **ETagetag** element that a client can expect from the Network Controller when nested resources are updated.

Case 1: A parent resource is updated.

- **ETagThe etag** of the parent is updated.
- **ETagThe etag** of all child resources are updated.
- Recursively the **ETagetag** of all child resources of the parent's child resources are updated.

Example 1: If a **networkslogicalNetworks** resource is updated then its **ETagetag** is updated along with all **logicalSubnetssubnets** resources under it and all **ipPools** resources under all **logicalSubnetssubnets** resources under the original **networkslogicalNetworks** resource.

Case 2: A child resource is updated.

- Recursively the **ETagetag** of the parent resource of the child resource is updated.
- **ETagThe etag** of the child resource is updated.
- **ETagThe etag** of all child resources of the specific child resource are updated.
- **ETagThe etag** of any other child resources of the parent are not updated.

Example 1: If a **logicalSubnetssubnets** resource is updated then its **ETagetag** is updated along with the **ETagetag** of the parent **networkslogicalNetworks** resource and all **ipPools** resources under the specific **logicalSubnetssubnets** resource. Any other **logicalSubnetssubnets** resources under the original **networkslogicalNetworks** resource will not have their **ETagetag** updated.

Example 2: If an **ipPools** resource is updated then its **Etag** is updated along with the **Etag** of the parent **logicalSubnets** resource and the **Etag** of the **logicalSubnets'** parent **networks** resource. But if there are any other **logicalSubnets** resources under the **networks** resource and **ipPools** resources under these **logicalSubnets** resources their **Etag** will not be updated.

Case 3: A resource with dependencies is updated

- **Etag** of the resource is updated.
- **Etag** of the dependent resource is not updated.

Example 3: A **gateways** resource takes a dependency on a **gatewayPools** resource. Then the **gatewayPools** resource is updated. The **gatewayPools** resource's **Etag** is updated but the **gateways** resource's **Etag** is not updated.

This is the table of **HTTP/1.1** response codes related to **Etags**.

PUT	Resource does not exist	Resource exists
If-Match = "" / absent	201 Created	200 OK
If-Match = "*"	412 Precondition Failed	200 OK
If-Match = "xyz"	412 Precondition Failed	200 OK / 412 Precondition Failed
If-None-Match = "*"	201 Created	412 Precondition Failed

PATCH	Resource does not exist	Resource exists
If-Match = "" / absent	404 Not Found	200 OK
If-Match = "*"	404 Not Found	200 OK
If-Match = "xyz"	404 Not Found	200 OK / 412 Precondition Failed

DELETE	Resource does not exist	Resource exists
If-Match = "" / absent	204 No Content	200 OK
If-Match = "*"	204 No Content	200 OK
If-Match = "xyz"	204 No Content	200 OK / 412 Precondition Failed

1.3.1.2 Idempotency

All requests coming from clients are expected to contain an **x-ms-client-request-id** header. If the client needs to retry a request due to intermittent network issues, the same value will be sent in the header. This allows the Network Controller to ignore the retry if it has already been processed. Note that even if the request is ignored, the same response will be returned, since the client needs the values in the response.

If the retry arrives while the original request is still being processed, the Network Controller is responsible for identifying the situation and handling it by either cancelling the original request, waiting until it completes or returning 202 (Accepted) in case of asynchronous operations.

1.3.2 Asynchronous Operations

All operations that mutate resources can potentially take a long time to complete. The Network Controller provides the **operations** and **operationsResults** resources for determining the status of any asynchronous operations.

Because the Network Controller is a distributed service made up of ~~a number of~~ several services, it handles transient failures internally. It does this by having a retry loop that will continue retrying the operation several times while keeping the resource in the Updating state. If the operation succeeded, the retry loop will be stopped and the resource will be put in the Succeeded state. If after the retry limit is reached in the retry loop, then the retries will stop and the resource will be put in the Failed state.

For understanding the current state of the specific resource (as opposed to the state of a specific operation on the resource) the **properties.provisioningState** element is used.

For asynchronous operations, the valid states are Deleting, Failed, Succeeded, and Updating. In the following state diagram, the client makes a **PUT** operation on an asynchronous resource, and receives an **operationId**, which is used to monitor the provisioning state of the operation, including failure details if a failure occurs.

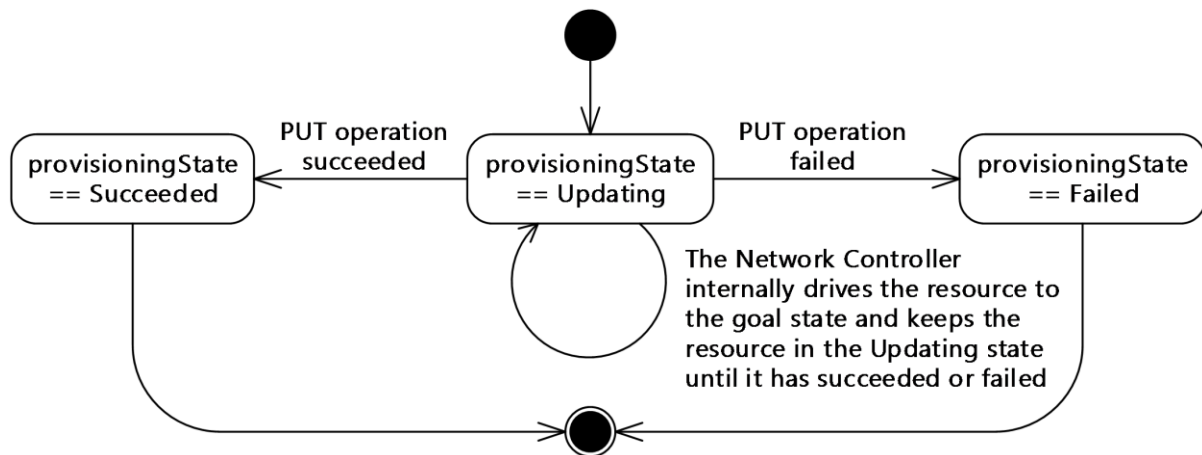


Figure 1: State diagram for asynchronous PUT operations

In the following state diagram, the client makes a **DELETE** operation on an asynchronous resource, and receives back the **operationId**, location, and **Retry-After**, which are used to monitor the state of the operation, including failure details if a failure occurs.

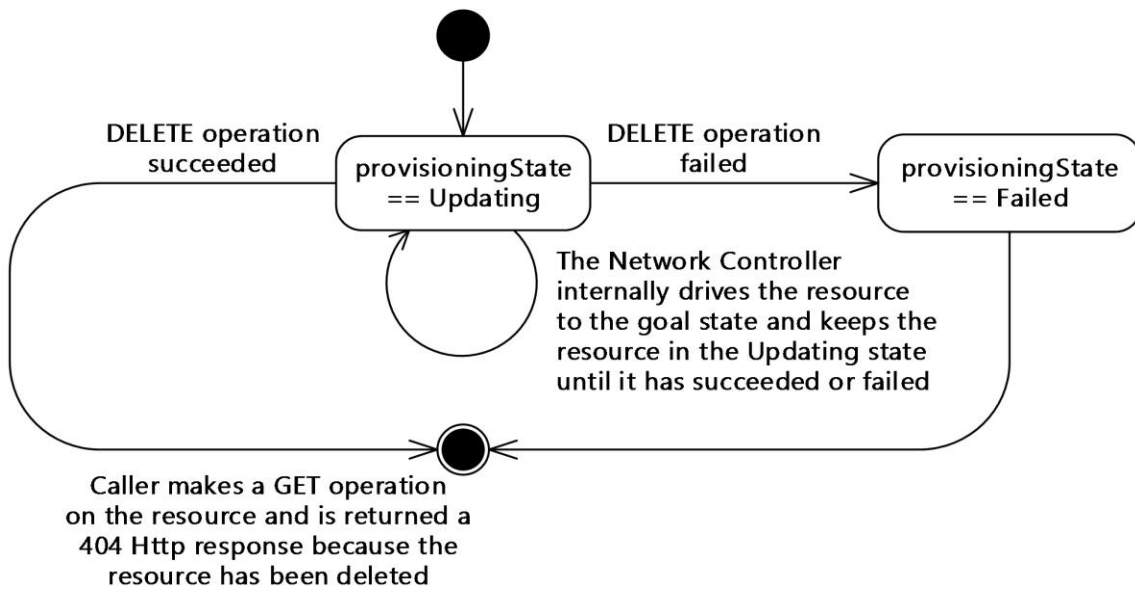


Figure 2: State diagram for asynchronous DELETE operations

1.3.2.1 POST and DELETE Operations

For **POST** and **DELETE** operations, the following pattern is to be used to execute the operation asynchronously:

1. The client initiates a **POST** or **DELETE** operation.
2. The Network Controller returns HTTP code 202 (Accepted) with a **Location** header, an **Azure-AsyncOperation** header, and, optionally, a **Retry-After** header. The time interval in the **Retry-After** header can only be specified in seconds, with a minimum of 15 seconds and a maximum of 15 minutes.
3. The client waits for the **Retry-After** interval, if it was specified, or the default of 60 seconds if it wasn't, as specified in section 2.2.1.3.7.
4. Client invokes the [URI Uniform Resource Identifier \(URI\)](#) specified in the **Location** header using the **GET** verb.
5. If the operation is not complete, the Network Controller returns 202 (Accepted) again, optionally with a **Retry-After** header.
6. If the operation is complete, the Network Controller returns the exact same response that would have been returned had the operation been executed synchronously.
7. As per the protocol for [asynchronous operations](#) **Asynchronous Operations** described in section 1.3.2, a consumer can query the status of an asynchronous operation by initiating **GET** requests on the HTTP resource as specified in the **Location** header or **Azure-AsyncOperation** header. The **Location** header returned by the Network Controller is of the following form, where **operation-idoperationId** is the value of the **x-ms-request-id** header returned by the resource provider.

```
https://<url>/networking/v1/operationResults/{operation-idoperationId}
```

1.3.2.2 PUT Operation

The following process executes the **PUT** operation asynchronously:

1. The client initiates a **PUT** operation.
2. The Network Controller returns HTTP code 200 (OK) or 201 (Created) with an **Azure-AsyncOperation** and the **provisioningState** element of the resource is set to "Updating".
Note If the **provisioningState** is set to "Succeeded" or "Failed" in the Http response to the original **PUT** operation, then the operation was not an asynchronous operation.
3. The client periodically polls the **operations** resource to determine the state of the operation.
 - If the **operations** resource returns "InProgress" in the status element and a **GET** operation is performed on the actual resource will show the **provisioningState** element set to "Updating".
 - If the **operations** resource returns "Succeeded" in the status element, then the operation has succeeded. Performing a **GET** operation on the actual resource will show the **provisioningState** element set to "Succeeded" if no additional operations have been started on the resource.
 - If the **operations** resource returns "Failed" in the **status** element, then client knows the operation has failed and the response also includes the error message related to the failure. Performing a **GET** operation on the actual resource will show the **provisioningState** element set to "Failed" if no additional operations have been started on the resource.

Note For **PUT** operations, the **operations** resource is used to determine the state of the operations and not the **provisioningState** element on the actual resource, because concurrent operations could change the **provisioningState** while the **operations** resource will always return the state of the specific operation. See section 1.3.3, Concurrent Operations, for more details on how the client handles concurrent operations.

PUT operations do not return the **Location** header because the result of the operation is returned synchronously. The **Azure-AsyncOperation** header value has the following format:

```
https://<url>/networking/v1/operations/{operation-idoperationId}
```

1.3.2.3 Differences between operations and operationResults

The **GET** <location header value> returns either HTTP code 202 (Accepted) if operation did not complete yet, or 204 (No Content) and no body (if succeeded), or HTTP status indicating an error (for example, 500 (Internal Server Error)) and a body containing error information.

The **GET** <AsyncOperation header value> always returns HTTP code 200 (OK) and "AsyncOperation" an **AsyncOperation** resource.

The **Location** header is more common, but is ambiguous because when **GET** <Location> returns status code 500 (Internal Server Error), it is not clear if **DELETE** or **GET** failed.

The **Azure-AsyncOperation** header is better in that regard because it does not return HTTP Status for the asynchronous part of the **DELETE** operation.

1.3.2.4 properties.provisioningState usage

For asynchronous operations, the **operations** and **operationsResults** resources are the recommended approach to determining the state of a specific operation. For understanding the current

state of the specific resource (as opposed to the state of a specific operation on the resource) the **properties.provisioningState** element is used. This section describes the state machine that underlies transitioning between provisioningStates and how the Network Controller makes changes to the **properties.provisioningState** element of parent/child resources or dependent resources. The valid provisioning states are the following (see Common JSON Elements, section 2.2.2, for a detailed definition of each):

- Deleting
- Failed
- Succeeded
- Updating

There are two valid state diagrams: one for synchronous and one for asynchronous operations.

1.3.2.5 State Diagrams for Synchronous Operations

For synchronous operations, the only valid states are Failed or Succeeded. In the following state diagrams, the caller makes a **PUT** operation, or a **DELETE** operation on a synchronous resource until it succeeds or fails and then is moved to the appropriate final state.

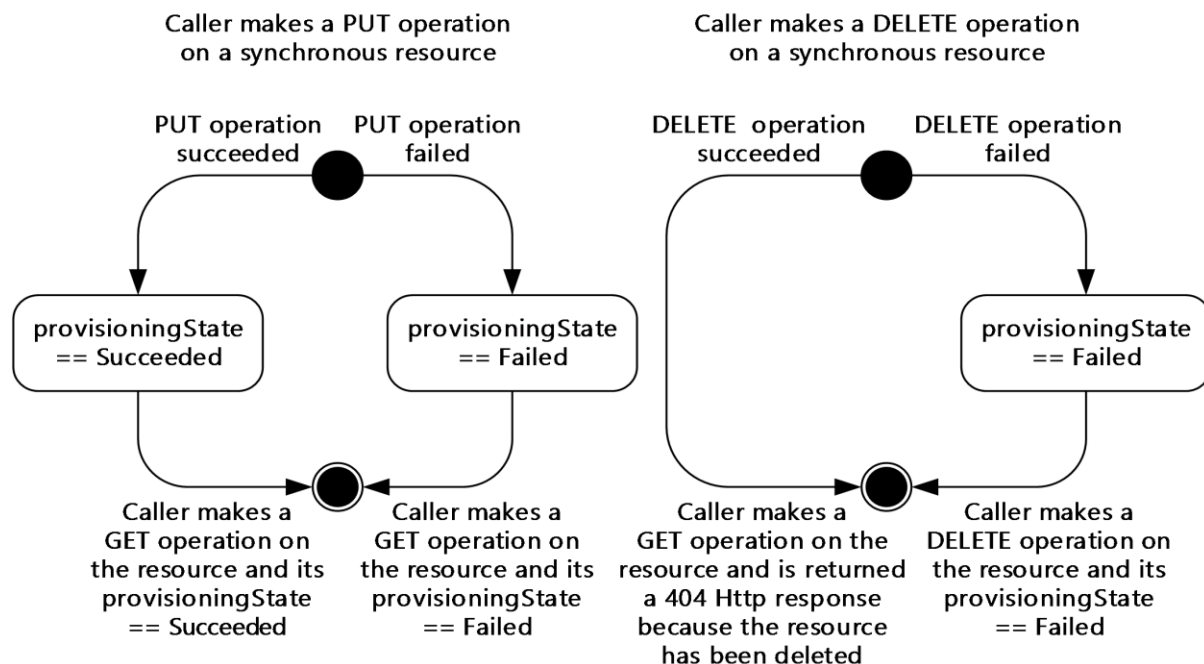


Figure 3: State diagrams for synchronous operations

1.3.2.6 State Diagrams for Asynchronous Operations

For asynchronous operations, the valid states are Deleting, Failed, Succeeded, and Updating. In the following state diagram, the caller makes a **PUT** operation on an asynchronous resource and receives an **operationId**, which is used to monitor the state of the operation including failure details if a failure occurs.

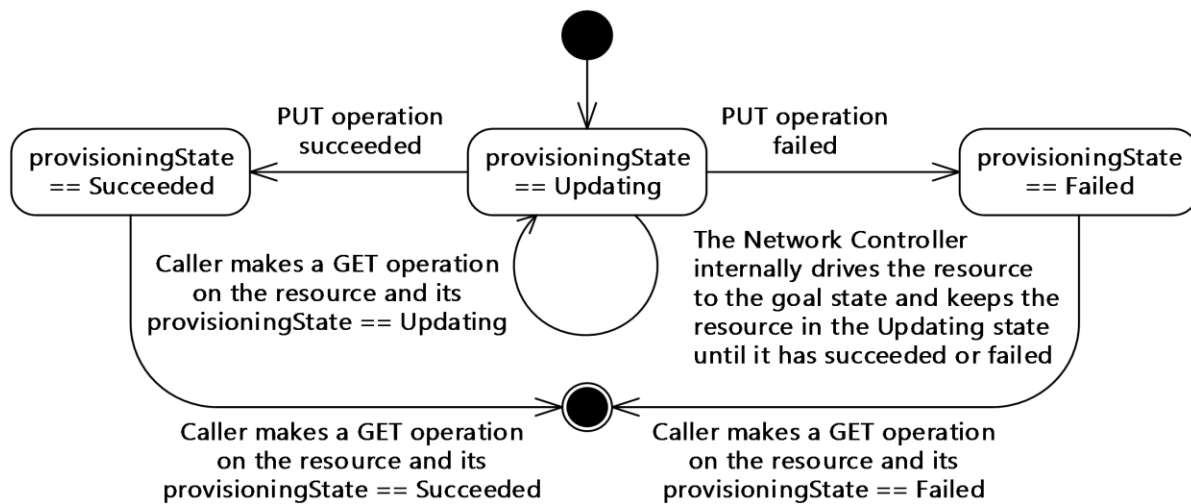


Figure 4: State diagram for asynchronous PUT and GET operations

In the following state diagram, the caller makes a **DELETE** operation on an asynchronous resource and receives back the **operationId**, location, and **Retry-After**, which are used to monitor the state of the operation including failure details if a failure occurs.

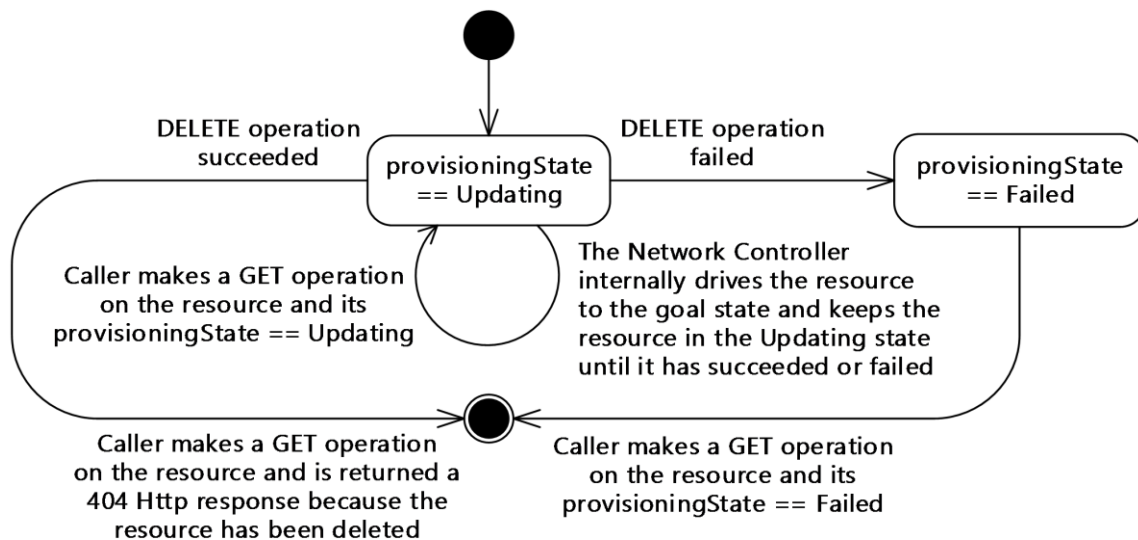


Figure 5: State diagram for asynchronous DELETE operations

Provisioning State changes for Parent/Child resources or dependent resources

Case 1: A parent resource is updated.

- The **property.provisioningState** element of the ancestor resource is in the Updating state until it succeeds or fails, and then is moved to the appropriate final state.
- The **property.provisioningState** element of all descendant resources will be in the same state.
- Recursively the **property.provisioningState** element of all descendant resources of the parent's child resources are updated.

Example 1: If a **networksLogicalNetworks** resource is updated then its **property.provisioningState** element is updated along with all **logicalSubnetsSubnets** resources under it and all **ipPools** resources under all **logicalSubnetsSubnets** resources under the original **networksLogicalNetworks** resource.

Case 2: A descendant resource is updated.

- Recursively the **property.provisioningState** element of the ancestor resource of the descendant resource is updated.
- The **property.provisioningState** element of the descendant resource is updated.
- The **property.provisioningState** element of all descendant resources of the specific descendant resource are updated.
- The **property.provisioningState** element of any other descendant resources of the parent are not updated.

Example 1: If a **logicalSubnetsSubnets** resource is updated then its **property.provisioningState** element is updated along with the **property.provisioningState** element of the parent **networksLogicalNetworks** resource and all **ipPools** resources under the specific **logicalSubnetsSubnets** resource. Any other **logicalSubnetsSubnets** under the original **networksLogicalNetworks** resource will not have their **property.provisioningState** element updated.

Example 2: If an **ipPools** resource is updated then its **property.provisioningState** element is updated along with the **property.provisioningState** element of the parent **logicalSubnetsSubnets** resource and the **property.provisioningState** element of the **logicalSubnetsSubnets**' parent **networksLogicalNetworks** resource. But if there are any other **logicalSubnetsSubnets** resources under the **networksLogicalNetworks** resource and **ipPools** resources under these **logicalSubnetsSubnets** resources, their **property.provisioningState** elements will not be updated.

Note Deleting a child resource is a special case because the child object will have its **property.provisioningState** element set to Deleting state while its ancestor resource will be set to Updating state until the **DELETE** operation has succeeded or failed.

Case 3: An asynchronous operation on a resource with dependencies is updated

- The **property.provisioningState** element of the resource is in the Updating state until it succeeds or fails and then is moved to the appropriate final state.
- The **property.provisioningState element** of the dependent resource is not updated.

Example 1: A **gateways** resource takes a dependency on a **gatewayPoolsGatewayPools** resource. Then the **gatewayPoolsGatewayPools** resource is updated. The **gatewayPoolsGatewayPools** resource's **property.provisioningState** element will be in the updating state until the asynchronous operation has succeeded or failed but the **gateways** resource's **property.provisioningState** is not changed from the current state.

1.3.3 Concurrent Operations

1.3.3.1 Concurrent operations on the same resource

The Network Controller allows for concurrent operations on the same resource. Clients of the Network Controller's Northbound Interface have to be aware that concurrent operations from different clients will happen and therefore interactions with the Network Controller have to be developed with this assumption in mind.

Because the Network Controller is a distributed service made up of several services, it handles transient failures internally. It does this by having a retry loop that the Software-Defined Networking API (SDNAPI) service uses for communicating with the other services. The SDNAPI service is the component in the network controller that listens for HTTP/HTTPS web requests, parses them and forwards them on to the appropriate service module for handling. This retry loop will continue retrying the operation several times while keeping the resource in the Updating state. If the operation succeeded, the retry loop will be stopped and the resource will be put in the Succeeded state. If after the retry limit is reached in the retry loop, then the retries will stop and the resource will be put in the Failed state. The Network Controller internally handles asynchronous operations when there aren't concurrent operations on the same resource.

The Network Controller can have only one operation in progress at a time for all resources in a parent-child tree. The rules for concurrent operations on the same resource are as follows:

1. **PUT** on top-level resource moves parent and all children (descendants) into ~~updating~~Updating state
2. **PUT** on top-level resource cancels **PUT** on itself and any **PUT/DELETE** on its children (descendants)
3. **DELETE** on top-level resource moves top level resource and its entire set of descendants into ~~deleting~~Deleting state.
4. **DELETE** of top-level resources cancels **PUT/DELETE** on itself and any descendants.
5. **PUT** on a descendant resource moves ancestor state to Updating.
6. **PUT** on descendant resource cancels **PUT** on any parent or a **PUT** on itself. It does not cancel **PUT** on its sibling.
7. **DELETE** of descendant resource moves ancestors to ~~updating~~Updating state and itself to ~~deleting~~Deleting state.
8. **DELETE** of descendant resource cancels **PUT** of ancestors or **PUT/DELETE** on itself.

For synchronous operations, the only valid states are Failed or Succeeded. The following diagrams show states for synchronous **PUT** or **DELETE** operations.

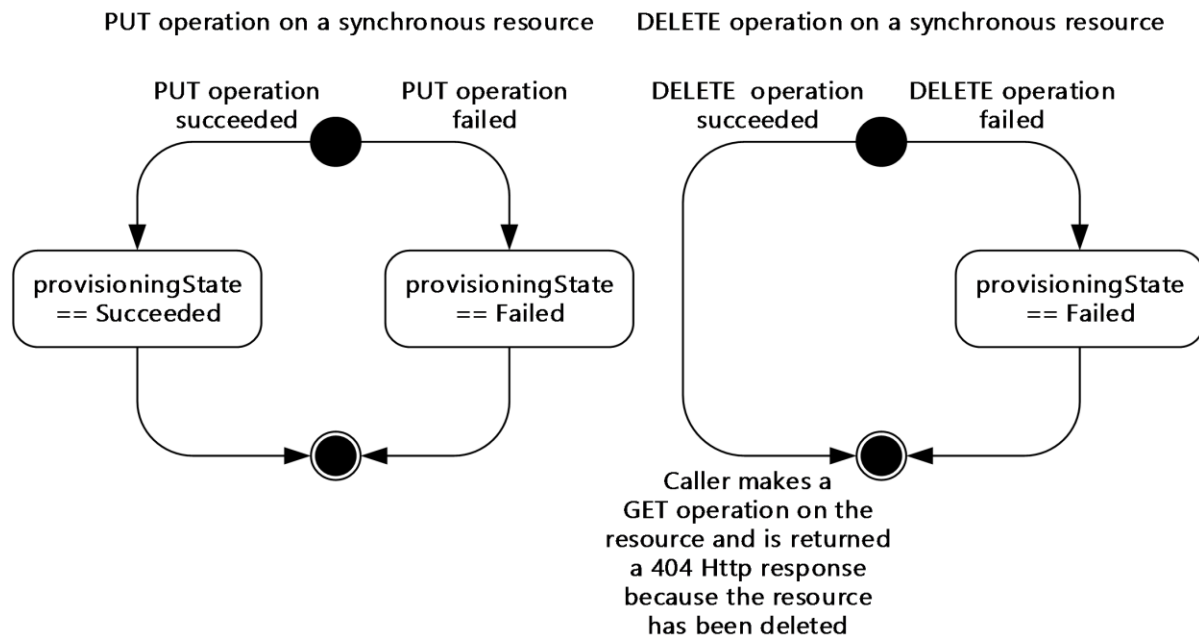


Figure 6: State diagrams for synchronous operations

If an operation cannot cancel another operation in progress on the resource, its child, sibling, or parent, the request is rejected with HTTP code 409 (Conflict) response. The error details are as follows:

Error code: AnotherOperationInProgress

Error message: Another operation on this or dependent resource is in progress. To retrieve the status of the operation, use uri: {0}.

Note PUT or DELETE of descendant resource updates **Etag** the etag of itself and the ancestors. PUT on top-level resource updates **Etag** the etags of all descendants.

For more information about how the Network Controller internally handles asynchronous operations, see section 1.3.2.

1.3.3.2 Concurrent operations when there are dependent resources

In the Network Controller's Northbound API there are several resources that depend on other resources. This occurs when a resource has a required or optional element that is a **resourceRef** to a different resource. One example is that a **gateways** resource is dependent on a **gatewayPools** resource.

1.3.3.3 Network Controller dependent resources

This section provides a complete list of all the dependencies between resources and how concurrent operations are handled. In addition, the sections on each resource provides its dependency information.

Read-only elements that are a **resourceRef** to a different resource will indicate that the resource has a different resource that has taken a dependency on it (~~ex. gatewayPools~~ for example, **GatewayPools** has a read-only **resourceRef** to one or more **gateways** resources).

There are 4 scenarios that are relevant for concurrent operations when there are dependent resources.

DELETE descendant resource: When a **DELETE** operation is performed on a descendant resource while its **property.provisioningState** is in the ~~updating, deleting~~ **Updating, Deleting**, or ~~failed~~ **Failed** state, that the **DELETE** operation will be processed.

PUT descendant resource: When a **PUT** operation is performed on a descendant resource while its **property.provisioningState** is in the ~~updating, deleting~~ **Updating, Deleting**, or ~~failed~~ **Failed** state, the **PUT** operation returns an HTTP code 409 (Conflict) response. See the error code section in each resource for error response content details.

DELETE dependent resource: When a **DELETE** operation is performed on a dependent resource that has resources depending on it, the **DELETE** operation will return an HTTP code 409 (Conflict) response. See the error code section in each resource for error response content details.

PUT dependent resource: When a **PUT** operation is performed on a resource while there are dependent resources, the **PUT** operation will be processed.

1.4 Relationship to Other Protocols

The following figure illustrates the relationship of this protocol to industry-standard protocols.

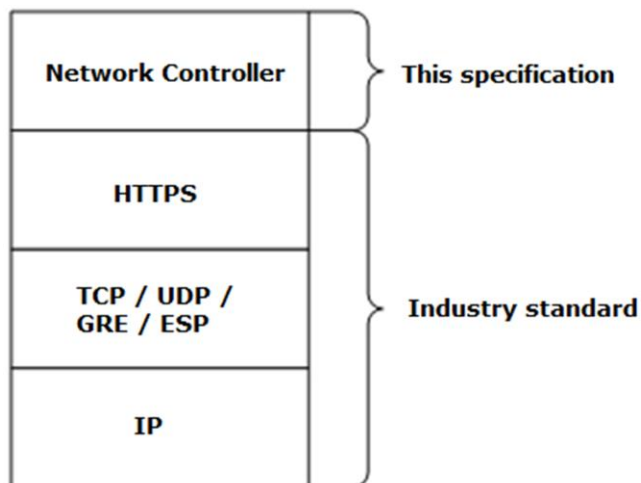


Figure 7: Relationship of the Network Controller to industry-standard protocols

1.5 Prerequisites/Preconditions

The certificate that allows communications between the Network Controller and the client **MUST** be present on the Network Controller.

1.6 Applicability Statement

This protocol defines a set of **APIs for** server and REST-**APIs**. This protocol is applicable to both Internet and intranet client-server scenarios.

1.7 Versioning and Capability Negotiation

This protocol supports versioning. Currently 2 versions are supported: v1 and v2. <1> The URL must include the "v1" or "v2" token. Each API that supports additional properties in v2 compared to v1 will be contained in a description of the behavior in the sections following Protocol Details (section 3).

The 2 prefixes supported are as follows:

```
https://<url>/networking/v1/
```

```
https://<url>/networking/v2/
```

This protocol does not provide any mechanism for capability negotiation.

1.8 Vendor-Extensible Fields

This protocol does not provide any vendor-extensible fields.

1.9 Standards Assignments

This protocol has not been assigned any standard parameters.

2 Messages

2.1 Transport

This protocol consists of a set of RESTful (representational state transfer) web services:

and HTTPS over TCP/IP, as specified in [RFC2616]. All client messages to the server MUST use HTTPS.

Protocol messages MUST be formatted as specified either in XML or in ~~JavaScript Object Notation (JSON)-JSON~~. Protocol server faults MUST be returned by using HTTP status codes as specified in [RFC2616], section 10, "Status Code Definitions".

2.2 Common Data Types

2.2.1 HTTP Headers

The methods in this protocol use the following HTTP/1.1 headers as part of the information exchanged, prior to any requests or responses that are included in the exchange.

2.2.1.1 Content-Type

The ~~content-type~~**Content-Type** header is a response header that is common to all requests and responses. It contains the content type of the payload. This header is provided by clients in HTTP/1.1 requests to the Network Controller, and it is also provided by the provided by the Network Controller in HTTP responses to the client. This header is optional for responses that do not contain content, otherwise it is required. The only valid type is:

```
application/json
```

The following error will be returned if the ~~content-type~~**Content-Type header** does not contain the appropriate value.

```
{
  "Message": "The request entity's media type 'application/text' is not supported for this resource.",
  "ExceptionMessage": "No MediaTypeFormatter is available to read an object of type 'NetworkInterface' from content with media type 'application/text'.",
  "ExceptionType": "System.Net.Http.UnsupportedMediaTypeException",
  "StackTrace": " at System.Net.Http.HttpContentExtensions.ReadAsAsync[T](HttpContent content, Type type, IEnumerable`1 formatters, IFormatterLogger formatterLogger, CancellationToken cancellationToken)\r\n at System.Web.Http.ModelBinding.FormatterParameterBinding.ReadContentAsync(HttpRequestMessage request,
}
```

2.2.1.2 Request Headers

The following HTTP/1.1 headers are provided by clients in HTTP requests to the Network Controller, in addition to the existing set of standard HTTP headers.

Header	Section	Type	Description
Accept-Language	2.2.1.2.1	Optional	The language in which error messages are returned.

Header	Section	Type	Description
Content-Type	2.2.1.1		The content type of the payload.
if-match	2.2.1.2.2	Optional	An etag that can be obtained by executing a GET command on a resource or collection of resources, or an etag that is contained in the output of a PUT or PATCH command.
Referrer	2.2.1.2.3	Optional	Specifies the hostname of the computer of the end user.
x-ms-client-ip-address	2.2.1.2.4	Optional	IP address of the client. This is recorded in the tracing logs for every Network Controller Northbound operation for audit.
x-ms-client-request-id	2.2.1.2.5	Optional	A unique ID provided by the client that the service uses to identify the specific request.
x-ms-return-client-request-id	2.2.1.2.6	Optional	Determines whether the Network Controller will echo the x-ms-client-request-id .

2.2.1.2.1 Accept-Language

Optional. Specifies language in which error messages are returned. The default is en-us.

2.2.1.2.2 if-match

2.2.1.2.2 If-Match

Optional. The client can provide this header in **PUT** and **PATCH** requests. Specifies an **etag** that can be obtained by executing a **GET** command on a resource or collection of resources, or from the output of a **PUT** or **PATCH** command.

2.2.1.2.3 Referrer

Optional. Specifies the hostname of the client, or the hostname of the computer of the end user.

2.2.1.2.4 x-ms-client-ip-address

Optional. Specifies IP address of the client. This is recorded in the trace logs for every Network Controller Northbound operation.

2.2.1.2.5 x-ms-client-request-id

Optional. Contains a unique ID provided by the client to identify the specific request. If two subsequent write requests (two **PUTs**, **POSTs**, or **DELETEs**) have the same id, the Network Controller assumes that last request is a retry and returns the same result it returned for the previous request. The Network Controller also returns the same **x-ms-client-request-id** value with the response⁷ unless the response is explicitly disabled by using request header **x-ms-return-client-request-id** and setting the value to **falseFALSE**.

This value is echoed in the response if the **x-ms-return-client-request-id** header is set to **"true".TRUE**.

2.2.1.2.6 x-ms-return-client-request-id

Optional. Specifies whether the Network Controller will return the **x-ms-client-request-id** to the client. Valid values are TRUE and FALSE. The default value is TRUE.

2.2.1.3 Response Headers

The following HTTP headers are provided by the Network Controller in HTTP responses to the client in addition to the existing set of standard HTTP headers.

Header	Section	Description
Azure-AsyncOperation	2.2.1.3.1	Contains the URL to enable monitoring of asynchronous operations.
Content-Length	2.2.1.3.2	The length of the content that is returned.
Content-Type	2.2.1.1	Required. The content type of the payload. This header is not required in responses that do not contain content.
Date	2.2.1.3.3	The date that the request was processed, in [RFC1123] format.
ETag	2.2.1.3.4	An opaque string representing the state of the resource at the time the response was generated.
HTTP/1.1	2.2.1.3.5	Indicates the HTTP status code of the request.
Location	2.2.1.3.6	Header for long-running operations. Contains the URL where the status of the long running operation can be checked.
Retry-After	2.2.1.3.7	Header for long-running operations. Set to the delay that the client uses when checking for the status of the operation.
Server	2.2.1.3.8	Indicates the HTTP server that is returning the Http HTTP response. For the Network Controller, the value will be "Microsoft-HTTPAPI/2.0".
x-ms-request-id	2.2.1.3.9	A unique identifier for the current operation, service generated.

2.2.1.3.1 Azure-AsyncOperation

This is a common response header that contains the URL that can be used to monitor the progress of asynchronous operations. See section 1.3.2, for more details.

2.2.1.3.2 Content-Length

This contains the length of the content that is returned, as a byte value.

2.2.1.3.3 Date

This contains the date that the request was processed, in [RFC1123] format.

2.2.1.3.4 ETag

This is a common response header that contains an opaque string representing the state of the resource at the time the response was generated. This header is returned for requests that target a single entity. The Network Controller will also always return an **etag** in the response body, as the **etag** property of an entity.

If the request does not include an **if-match**~~If-Match~~ request header, then the Network Controller returns an error response code. Other status codes that are associated with the **etag** header are as follows.

Status code	Description
200 (OK)	Operation completed successfully.
201 (Created)	Resource completed successfully.
204 (No Content)	Resource to delete does not exist
412 (Precondition Failed)	Parent resource is unavailable
404 (Not Found)	Resource was not found.

2.2.1.3.5 HTTP/1.1 Header

This is a common response header that contains the HTTP status code of the request. The Network Controller will return the appropriate status code.

2.2.1.3.6 Location

This specifies that the operation is a long-running operation. It is set to the URL that contains the status of the long running operation.

2.2.1.3.7 Retry-After

Header for long-running operations. Set to the delay that the client uses when checking for the status of the operation. This value is an integer and represents the seconds. By default, this is set for all delete operations.

2.2.1.3.8 Server

This contains a reference to the [HttpHTTP](#) server that is returning the HTTP response. For the Network Controller, the value is "Microsoft-HTTPAPI/2.0".

2.2.1.3.9 x-ms-request-id

This is a common response header that contains a unique identifier for the current operation, service generated.

2.2.2 Common JSON Elements

Every resource that supports CRUD operations uses common JSON elements in any request or response. The following table summarizes the set of common URI parameters defined by this specification.

JSON Element	Type	Description
resourceId		The resource ID is the identifier for the resource. The value MUST be unique in the context of the resource if it is a top-level resource, or in the context of the direct parent resource if it is a child resource.
resourceRef		A relative URI to an associated resource.
instanceId	Read-only	This is the globally unique Id generated and used internally by the Network Controller. This value is a GUID in the form of "XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXX". It is possible to do a reverse mapping from instanceId to resourceId with the internalResourceInstances resource, section 3.1.5.23. The <i>instanceId</i> element cannot

JSON Element	Type	Description
		be used directly in the API.
tags	Optional	Key-value pairs of arbitrary data that the client stores with the resource on the controller.
resourceMetadata	Optional	Structured data that the client provides to the server. This is an optional element, but it is suggested that all clients fill in the data that is applicable to them.
resourceMetadata.client	Optional	Indicates the client that creates or updates the resource. Although this element is optional, it is strongly recommended that it contain an appropriate value.
resourceMetadata.tenantId	Optional	The identifier of the tenant in the client environment. Provides linkage between the resource in the Network Controller and the tenant in the client network.
resourceMetadata.groupId	Optional	The identifier of the group that the tenant belongs to within the client environment. This is usually used in environments that contain multiple tenants that are aggregated into groups that the client manages. This provides linkage between the resource in the Network Controller and the group that the tenant belongs to in the client network.
resourceMetadata.resourceName	Optional	Indicates the globally unique name of the resource. If it is not assigned a value, then it will be blank.
resourceMetadata.originalHref	Optional	Optional for resourceMetadata. The original URI of the resource if the client uses a URI based system to organize resources.
properties	Optional	Optional array Array of structured data. The structure of this data is unique to each resource except two common read-only elements - etag and provisioningState .
properties.etag		An opaque string representing the state of the resource at the time the response was generated. This header is returned for requests that target a single entity. The Network Controller will also always return an etag in the response body. The etag is updated every time the resource is updated.
properties.provisioningState		Indicates the various states of the resource. Valid values are Deleting, Failed, Succeeded, and Updating.

2.2.3 Common URI Parameters

Every resource that supports CRUD operations uses common JSON elements in any request or response. The following table summarizes the set of common URI parameters defined by this specification.

URI parameter	Section	Description
<code><url></code>	2.2.3.5	The URL of the Network Controller.

URI parameter	Section	Description
<i>grandParentResourceId</i>	2.2.3.1	The user-defined resource ID of the network resource that is the ancestor of the resource that is the ancestor of the descendant resource.
<i>operationId</i>	2.2.3.2	The value of the x-ms-request-id header returned by the resource provider.
<i>parentResourceId</i>	2.2.3.3	The user-defined resource ID of the network resource that is the ancestor of the descendant resource. Depending on the type of resource, it can be: <ul style="list-style-type: none"> User-defined, system-defined, or both Unique across all resources of the same type Unique across all resources of the same type in the context of the specific grandparent resource.
<i>resourceId</i>	2.2.3.4	The resource ID of the network resource to create, retrieve, update or delete. Depending on the type of resource, it can be: <ul style="list-style-type: none"> User-defined, system-defined, or both Unique across all resources of the same type Unique across all resources of the same type in the context of the specific ancestor resource. When the <i>resourceId</i> is optional for an ancestor resource, it is required for the descendant resources.
<i>instanceId</i>	3.1.5.23	The globally unique Id generated and used internally by the Network Controller. The mapping resource that enables the client to map between the instanceId and the resourceId .

2.2.3.1 grandParentResourceId

The *grandParentResourceId* parameter contains the resource ID that is associated with network objects that are ancestors of the parent of the necessary resource. When the relationship is specified on the Network Controller, it is created as a top-level resource prior to its usage as the parent of another resource.

It is user-defined for the following grandchild resources: **ipPools**, **routes**.

The *grandParentResourceId* is user-defined as the parent of the following descendant resources: the **logicalSubnets** resource when it is parent for the **ipPools** resource, the **logicalSubnets** resource when it is parent for the **routes** resource, the **logicalNetworks** resource when it is parent ~~for~~to the **logicalSubnets** resource.

2.2.3.2 operationId

The *operationId* parameter contains the resource ID that is associated with network objects that contain or point to the necessary resource.

2.2.3.3 parentResourceId

The *parentResourceId* parameter contains the resource ID that is associated with network objects that are ancestors of the necessary resource. When the relationship is specified on the Network Controller, it is created as a top-level resource prior to its usage as the parent of another resource.

The *parentResourceId* is user-defined for the following descendant resources: **aclRules**, **backendAddressPools**, **bgpPeers**, **bgpRouters**, **frontendIPConfigurations**, **networkInterfaces**, **inboundNatRules**, **ipConfigurations**, **ipPools**, **loadBalancingRules**,

logicalSubnets, **networkConnections**, **outboundNatRules**, **policyMaps**, **probes**, **routes**, and **subnets**.

2.2.3.4 resourceId

The *resourceId* parameter contains the resource ID that is associated with various network resources and containers. The value cannot be changed after the resource is created. It is a constant for singleton resources and other specific resources. The resources that use constants and their values are as follows.

Resource	Value
diagnostics	connectivityCheck
diagnostics	slbState
diagnostics	networkcontrollerstate
iDnsServer	configuration
loadBalancerManager	config
monitoring	NetworkControllerStatistics
virtualNetworkManager	configuration
virtualSwitchManager	configuration

The *resourceId* parameter is user-defined for the following resources: **accessControlLists**, **aclRules**, **backendAddressPools**, **bgpPeers**, **bgpRouters**, **credentials**, **frontendIPConfigurations**, **gatewayPoolsGatewayPools**, **gateways**, **inboundNatRules**, **ipConfigurations**, **ipPools**, **loadBalancerMuxloadBalancerMuxes**, **loadBalancers**, **loadBalancingRules**, **logicalNetworks**, **logicalSubnetssubnets**, **macPools**, **networkConnections**, **outboundNatRules**, **networkInterfaces**, **policyMaps**, **probes**, **publicIpAddresses**, **routes**, **routeTables**, **servers**, **serviceInsertions**, **virtualGatewaysVirtualGateways**, **virtualNetworks**, and **virtualServers**.

The *resourceId* parameter is system-defined for the following resources: **Diagnostics**, **connectivityChecksResults**, **Diagnostics slbStateResults**, **operations**, and **operationResults**.

The *resourceId* parameter is user-defined or system generated for the following resource: **subnets**.

The *resourceId* parameter MUST be unique within its context if it is a top-level resource. The server will send an error response of 400 (Bad Request) to the client if there are conflicts in the uniqueness of the *resourceId*. This means that the *resourceId* parameter MUST be unique across all of the resources of the same type for the following resources: **accessControlLists**, **bgpPeers**, **credentials**, **gatewayPoolsGatewayPools**, **gateways**, **loadBalancerMuxloadBalancerMuxes**, **loadBalancers**, **logicalNetworks**, **macPools**, **policyMaps**, **publicIpAddresses**, **routeTables**, **servers**, **serviceInsertions**, **virtualGatewaysVirtualGateways**, **virtualNetworks**, and **virtualServers**.

A resource that is the child within a parent-child relationship MUST be unique within the context of the specific ancestor **interfacesresource:interfaces resource**. For example, two **aclRules** resources can have the same *resourceId* if their parent **accessControlLists** resources are different; however, two **aclRules** resources can not have the same *resourceId* if they have the same parent.

The resources that MUST be unique in the context of the parent are:

- **loadBalancers** ancestor resource: **backendAddressPools**, **frontendIPConfigurations**, **inboundNatRules**, **loadBalancingRules**, **outboundNatRules**, **probes**

- **logicalSubnets** ancestor resource: **ipPools, routes**
- **networkInterfaces** ancestor resource: **ipConfigurations**
- **logicalNetworks** ancestor resource: **logicalSubnets**
- **servers** ancestor resource: **networkInterfaces**
- **virtualGateways** ancestor resource: **bgpPeers, bgpRouters, networkConnections, policyMaps**
- **virtualNetworks** ancestor resource: **subnets**

The parent resource of a **PUT** request is an optional element and can be retrieved from the URL in cases where it is not supplied. For all descendant resources this is a required element. If it is not supplied, the server sends a 400 (Bad Request) response to the client.

2.2.3.5 url

The *url* parameter contains the **universal resource locator** **Uniform Resource Locator (URL)** for the Network Controller. It identifies the server that is running the Network Controller. It MUST be **one of** the **values** in the following table.

Value	Meaning
networkController	
<url>/networking	The URL MUST be the remainder of the address of the computer on which the Network Controller is running, in addition to other services.

2.2.4 Data Structures

The following table summarizes the set of common data structures that are consumed or produced by this protocol. Common structure definitions are included in this section, whereas those that are specific to a particular request/response body are defined within its corresponding sections.

Data structure	Section	Description
accessControlLists	The In the networkInterfaces resource, the ipConfigurations resource, section 3.1.5.5-11.2. In the virtualNetworks resource, the subnets resource section 3.1.5.18.2.	Contains an accessControlLists resource that defines the access control lists (ACLs) in and out of the IP Configuration.
aclRules	The aclRules resource, section 3.1.5.1.2.	Indicates the rules in an access control list, Indicates the action the ACL Rule will take.
addressPrefixes	The addressSpace resource in the virtualNetworks resource, section 3.1.5.18.	Indicates the valid list of address prefixes that can make up this virtual network.
addressSpace	The virtualNetworks resource, section 3.1.5.18.	Required. Indicates the address space of the virtual network.
backendAddressPools	The outboundNatRules resource, section 3.1.5.5.6.	Indicates an array of references to a backendAddressPools resource.

Data structure	Section	Description
	The loadBalancingRules resource, section 3.1.5.5.5.	Inbound traffic is randomly load balanced across IPs in the backend pool. Indicates a reference to the pool of IP addresses where outbound traffic originates.
backendIPConfigurations	The backendAddress Pools backendAddressPools resource, section 3.1.5.5.2.	An array of references to ipConfiguration Resources ipConfigurations resources . There is no restriction on having the same IP configurations in multiple backendAddressPools .
bgpNetworks	In the VirtualGateways resource, the bgpRouters resource, section 3.1.5.17.2	Collection of network prefixes in IP address/prefix format that identifies the networks that are to be announced by the router.
bgpPeers	The In the VirtualGateways resource, in the bgpPeers resource in the bgpRouters resource in the virtualGateways resource, section 3.1.5.17.2.2.	A collection of Border Gateway Protocol (BGP) peers associated with the BGP bgpRouters resource.
bgpRouters	The virtualGateways VirtualGateways resource, section 3.1.5.17.	An array of bgpRouters on the physical switch.
connections	The gateways resource, section 3.1.5.4.	A collection of all the connections on the gateway.
connections	The servers resource, section 3.1.5.15. The loadBalancerMux loadBalancerMuxes resource, section 3.1.5.7. The iDnsServers resource, section 3.1.5.24. The virtualServers resource, section 3.1.5.20.	An array of connections that specify the information needed to connect to the specific device to manage and control it.
destinationSubnets	The rules resource in the serviceInsertions resource, section 3.1.5.16.	An array of subnets to match as the destination subnet.
details	The operations resource, section 3.1.5.12. The operationResults resource, section 3.1.5.13.	Contains detailed information about the error.
dhcpOptions	The virtualNetworks resource, section 3.1.5.18.	Indicates the DHCP options used by servers in the virtual network.
dnsRecord	The publicIpAddresses publicIPAddresses resource, section 3.1.5.14.	Properties of a DNS record associated with this public IP address. This field is not supported.
dnsServers	The logicalSubnets subnets resource, section 3.1.5.8.2. The dhcpOptions resource in In the	An an array of IP Addresses for the DNS servers that this resource uses to resolve DNS queries by devices

Data structure	Section	Description
	virtualNetworks resource, the dhcpOptions resource section 3.1.5.18.	or hosts.
dnsSettings	The virtualNetworks InterfacesnetworkInterfaces resource, section 3.1.5. 13 -11	Indicates the DNS settings of this network interface.
error	The operations resource, section 3.1.5.12. The operationResults resource, section 3.1.5.13.	A group of elements that contain information about an error and its cause when the request was in error or could not be processed.
eTagetag	The Etagetag header, section 2.2.1.3.4	The Network Controller returns an etag in the response body as the etag property of the resource.
externalIPAddress	The gateways resource, section 3.1.5.4.	A collection of IP address information.
frontendIPConfigurations	The loadBalancers resource, section 3.1.5.5. The frontEndIP ConfigurationsfrontendIPConfigurations resource, section 3.1.5.5.3.	Indicates the frontend IP addresses of the load balancer.
frontendIPConfigurations	The inboundNatRules resource, section 3.1.5.5.4. The outboundNatRules , section 3.1.5.5.6. The loadBalancingRules resource, section 3.1.5.5.5.	Indicates an array of references to frontendIPConfigurations resources.
frontendIpPools	The loadBalancerManager resource, section 3.1.5.6.	An array of references to ipPools resources to use for the frontend IP Addresses.
gatewayCapacityKiloBits PerSecondgatewayCapacityKiloBitsPerSecond	The gatewayPoolsGatewayPools resource, section 3.1.5.3.	Indicates the total capacity of the gateway pool in kilobits per second.
GatewayPools	The virtualGatewaysVirtualGateways resource, section 3.1.5.17.	The collection of references to gatewayPoolsGatewayPools resources in which connections can be created. This information is populated at the time of subscription and can be changed only by using the Service administrator portal.
gateways	The gatewayPoolsGatewayPools resource, section 3.1.5.3.	An array that contains references to the gateways resources in the gateway pool.
gatewaySubnets	The virtualGatewaysVirtualGateways resource, section 3.1.5.17.	Indicates collection of references to IPv4/IPv6 subnet of the Virtual Subnet Identifier (VSID) /gateway subnet that contains the specified gateway.
greConfiguration	The networkConnections resource, section 3.1.5.17.4.	Indicates details of Generic Routing Encapsulation (GRE) configuration.

Data structure	Section	Description
		GRE is defined in [RFC2784].
IcmpProtocolConfig	The Diagnostics ConnectivityCheck resource, section 3.1.5.21.1. The Diagnostics ConnectivityCheckResults resource, section 3.1.5.21.2.	Contains the details of an Internet Control Message Protocol (ICMP) Protocol specific configuration, as specified in [RFC792] .
iDnsServer	The iDnsServer resource, section 3.1.5.24.	Indicates the configuration details for the DNS server in the internal DNS service.
inboundNatRules	The loadBalancers resource, section 3.1.5.5. The inboundNatRules resource, section 3.1.5.5.4.	Indicates an array of inbound network address translation (NAT) rules configured for the load balancer.
internalIpAddresses	The networkConnections resource, section 3.1.5.17.4.	Indicates collection of Internal IP Addresses of the connection.
internalPeerIpAddresses	The networkConnections resource, section 3.1.5.17.4.	Indicates collection of Internal IP Addresses of the peer.
IPConfigurationipConfiguration	The network InterfacesnetworkInterfaces resource, section 3.1.5.15.2.	Indicates an array of IP configurations.
ipConfigurations	The accessControlLists resource, section 3.1.5.1.	Indicates references to the IP addresses of networkInterfaces resources that are associated with an accessControlLists resource.
ipConfigurations	The subnets resource in the virtualNetworks resource, section 3.1.5.18.2.	Indicates an array of references of networkInterfaces resources that are connected to the subnet.
ipPools	The ipPools resource, section 3.1.5.8.2.2. The logicalSubnetssubnets resource, section 3.1.5.8.2.	Indicates the IP Pools that are contained in the logical subnet.
ipsecConfiguration	The networkConnections resource, section 3.1.5.17.4.	Details of IPsec configuration.
IPv4AddressPrefixes	The vpnConfiguration in the virtualGateways resource, section 3.1.5.17.	Indicates collection of IPv4 address pools from which virtual private network (VPN) clients are assigned addresses.
I3Configuration	The networkConnections resource, section 3.1.5.17.4.	Indicates details of L3 configuration.
loadBalancerMuxloadBalancer Muxes	The virtualServers resource, section 3.1.5.20.	Indicates the Loadbalancer loadBalancer multiplexer (MUX) running on this virtualServer.
loadBalancers	The loadBalancer resource, section 3.1.5.5.	Contains information about the frontend and backend configurations for load balancing.
loadBalancing	The loadBalancer resource, section	Contains a list of load balancing

Data structure	Section	Description
Rules <u>loadBalancingRules</u>	3.1.5.5.	configurations.
loadBalancingRules <u>loadBalancingRules</u>	The backendAddressPools <u>backendAddressPools</u> resource, section 3.1.5.5.2. The probes resource, section 3.1.5.5.7.	an An array of references to loadBalancingRules resources.
logicalSubnets <u>localVpnTrafficSelector</u>	The networkInterfaces <u>ipsecConfiguration</u> resource in the networkConnections resource, section 3.1.5. 15.2.17.4	Indicates an array collection of logicalSubnets resource that IPSec TrafficSelectors on the network interface is connected to host side .
mainMode <u>logicalSubnets</u>	The ipsecConfiguration resource in the networkConnections <u>networkInterfaces</u> resource, section 3.1.5. 17.4.15.2.	in the networkConnections resource. Main mode IPsec configuration details Indicates an array of subnets resource that the network interface is connected to.
ManagementAddresses <u>mainMode</u>	The loadBalancerMux <u>ipsecConfiguration</u> resource in the networkConnections resource, section 3.1.5. 17.4.	The management address used to connect to the server. In the networkConnections resource. Main mode IPsec configuration details, as specified in [RFC2409].
networkConnections <u>ManagementAddresses</u>	The networkConnections <u>loadBalancerMuxes</u> resource, section 3.1.5. 17.4. The virtualGateways resource, section 3.1.5. 17.	Indicates list of network connections that are configured for this virtualGateways resource. The management address used to connect to the server.
networkInterfaces <u>networkConnections</u>	The gateways <u>networkConnections</u> resource, section 3.1.5. 17.4. The logicalSubnets <u>VirtualGateways</u> resource, section 3.1.5. 8.217.	An array of references to networkInterfaces resources that are used by a gateway or a logical subnet. Indicates list of network connections that are configured for this VirtualGateways resource.
networkInterfaces <u>[]</u>	The networkInterfaces resource in the servers <u>gateways</u> resource, section 3.1.5. 15.4. The subnets resource, section 3.1.5. 8.2.	An array of references to networkInterfaces resources that represent the physical network interface cards of the server. These resources are automatically created are used by a gateway or a logical subnet.
networks <u>networkInterfaces[]</u>	The bgpRouters In the servers resource in, the virtualGateways <u>networkInterfaces</u> resource, section 3.1.5. 15.2.	Collection of network prefixes in "IP address/prefix" format that identifying the networks that are to be announced by the router . An array of references to networkInterfaces resources that represent the physical network interface cards (NICs) of the server. These resources are automatically created.
outboundNatRules	The backendAddressPools <u>backendAddressPools</u> resource, section 3.1.5.5.2.	An array of references to the outboundNatRules resources.

Data structure	Section	Description
	The loadBalancers resource, section 3.1.5.5.	
output.DataGroups	The Diagnostics slbStateResults resource, section 3.1.5.21.4.	The hierarchical output of this diagnostics operation. Data group as level 1, data section as level 2 and data unit as level 3.
peerIpAddressespeerIPAddresses	The networkConnections resource, section 3.1.5.17.4.	Array of IP Addresses of the destination (S2S IP).
peerRouterConfigurationspeerRouterConfigurations	The routerConfiguration structure in the loadBalancerMuxloadBalancerMuxes resource, section 3.1.5.7.	The BGP settings that are used to establish and maintain BGP peering with one or more peers.
peerTrafficSelector	The ipsecConfiguration resource in the networkConnections resource, section 3.1.5.17.4.	Indicates collection of IPsec TrafficSelectors on the enterprise side.
policyMaps	The virtualGatewaysVirtualGateways resource, section 3.1.5.17.	A collection of policyMaps resources for the virtualGatewaysVirtualGateway resource.
probes	The probes resource, section 3.1.5.5.7. The loadBalancers resource, section 3.1.5.5.	Indicates an array of probes configured for the load balancer.
properties	The Properties in Common JSON Elements, section 2.2.2.	An array of structured data. The structure of this data is unique to each resource except two common read-only elements: etag and provisioningState . If properties is not included this will cause the resource to be created but have no properties.
publicIpAddressespublicIPAddresses	The gatewayPoolsGatewayPools resource, section 3.1.5.3.	A collection of public IP address to which external connections connect.
portSettings	The networkInterfaces resource, section 3.1.5.11.	Contains a reference to quality of service settings to apply to virtual network interface.
redundantGatewayCount	The gatewayPoolsGatewayPools resource, section 3.1.5.4.	Indicates the number of redundant gateway VMs that will be used for each virtualGatewaysVirtualGateway instance to ensure its availability.
remoteVpnTrafficSelector	The ipsecConfiguration resource in the networkConnections resource, section 3.1.5.17.4.	Indicates collection of IPsec TrafficSelectors on the host side.
resourceMetadata	Specified in Common JSON Elements, section 2.2.2.	An array of structured data that client sends to the server.
routerConfiguration	The loadBalancerMuxloadBalancerMuxes resource, section 3.1.5.7.	Provides the BGP router configuration to the MUX to ensure that it peers with the datacenter routing infrastructure and properly

Data structure	Section	Description
		advertises routes.
routerIpAddress <u>routerIPAddresses</u>	The bgpRouters resource in the virtualGateways <u>VirtualGateways</u> resource, section 3.1.5.17.2	Indicates IP addresses to which BGP peering can be established.
routes	The routeTables resource, section 3.1.5.10.	The routes that are contained in a route table.
routes	The routes resource in the logicalSubnets <u>subnets</u> resource, section 3.1.5.8.2.3.	The routes that are contained in the logical subnet.
routes	The networkConnections resource, section 3.1.5.17.4.	All the routes (static and those learned via BGP) on the network Interface. Traffic that matches the routes is transmitted on the network Interface.
rules	The serviceInsertions resource, section 3.1.5.16.	Indicates an array of rules that define what traffic goes through the service insertion.
configurationState	<p>This is a common data structure that can be present on resources. Currently the networkInterface, VirtualNetwork, LoadBalancerMux<u>virtualNetwork</u>, <u>loadBalancerMuxes</u> and Server<u>servers</u> resources contain an instance of this structure.</p> <p>The networkInterface resource, The virtualNetwork resource, The gateways resource, section 3.1.5.4.</p> <p>The virtualGateways<u>VirtualGateways</u> resource, section 3.1.5.17.</p> <p>The bgpRouters resource in the virtualGateways<u>VirtualGateways</u> resource, section 3.1.5.17.2.</p> <p>The bgpPeers resource in the bgpRouters resource in the virtualGateways<u>VirtualGateways</u> resource, section 3.1.5.17.2.2.</p> <p>The networkConnections resource in the virtualGateways<u>VirtualGateways</u> resource, section 3.1.5.17.4.</p> <p>The LoadBalancerMux<u>loadBalancerMuxes</u> resource, section 3.1.5.7.</p>	<p>Configuration state indicates any failures in processing goal state corresponding to the resource it is contained in. In absence of failures it can note that the configuration corresponding to the resource was successful.</p> <p>Multiple failures can be noted against the same resource. The overall severity of these failures is reflected on the status field of the configurationState structure.</p> <p>Information pertaining to each failure is collected in the detailedInfo field. Please see definition of detailedInfo field.</p> <p>Running state update time is noted within the running state structure. The LastUpdatedTime stores this information.</p>
configurationState.detailedInfo	configurationState structures can contain one or more detailedInfo fields to reflect fine-grained success or failure information in processing operations related to the resource which the configuration state field is contained in.	The detailedInfo has 3 fields: 0. Source: The source field identifies the component within the SDN stack that encountered a failure while processing this resource. Possible values are: ResourceGlobal,

Data structure	Section	Description
		<p>SoftwareLoadBalancerManager, VirtualNetwork, VirtualSwitch, Firewall.</p> <ol style="list-style-type: none"> Code: This field contains somewhat fine-grained classification of the error encountered while processing this resource. Message: A friendly message that describes the encountered error. <p>Note Some codes and Messages correspond to success cases as well.</p>
configurationState.status	Resources where configurationState might be present.	<p>The value MUST be one of the following: Uninitialized, InProgress, Success, Warning, Failure.</p> <p>Note configurationState.status contains Uninitialized until the initial configurationState has been calculated.</p>
configurationState.lastUpdatedTime	Resources where configurationState might be present.	A timestamp that is used to order the sequence of events. The representation is implementation-specific.
configurationState.id	Resources where configurationState might be present.	Certain resources use the id field. It is discussed in the section where it is applicable. The id is an instance ID for a resource. See the following sections for definitions of instance IDs.
serviceInsertionElements	The networkInterfaces resource, section 3.1.5.11.	Indicates an array of serviceInsertions resources that contains this networkInterfaces resource.
serviceInsertionElements	The serviceInsertions resource, section 3.1.5.16.	Indicates an array of service insertion elements through which to send packets that match the rules.
sourceSubnets	The rules resource in the serviceInsertions resource, section 3.1.5.16.	Indicates an array of subnets to match as source subnet. For a single source ipIP address match specify as a /32 subnet.
statistics	<p>The networkConnections resource, section 3.1.5.17.4.</p> <p>The bgpPeers resource in the bgpRouters resource in the virtualGatewaysVirtualGateways resource, section 3.1.5.17.2.2.</p>	Statistics of the connection.
subnets	The accessControlLists resource, section 3.1.5.1.	An array of references to subnets resources that are associated with the access control list.
subnets	The logicalNetworks resource,	Indicates the subnets that are on

Data structure	Section	Description
	section 3.1.5.8. The virtualNetworks resource, section 3.1.5.18.	the virtual network or are contained in the logical network.
subnets	The serviceInsertions resource, section 3.1.5.16.	Indicates an array of references to subnets resources this serviceInsertions resource is associated with.
subnets	The routeTables resource, section 3.1.5.10.	Indicates an array of references to subnets resources this routeTables configuration is associated with.
tags	most Most resources.	Key-value pairs of arbitrary data that the client stores with the resource.
TrafficSelector	The ipseecConfiguration resource in the networkConnections resource, section 3.1.5.17.4.	Indicates collection of IPSee TrafficSelectors on the hoster side.
usage	The ipPools resource, section 3.1.5.8.2.2. The macPools resource, section 3.1.5.9.	Indicates the usage statistics of the IP pool or the MAC address pool.
vipIpPools	<u>The loadBalancerManager resource, section 3.1.5.6.</u>	<u>An array of references to ipPools resources to use for the frontend IP Addresses.</u>
virtualGatewaysVirtualGateway ays	The gateways resource, section 3.1.5.4. The gatewayPoolsGatewayPools resource, section 3.1.5.3.	A collection of virtual gateways for a tenant. This enumerates the tenants that are dependent on this gateway.
virtualNetworks	The logicalNetworks resource, section 3.1.5.8.	An array of virtualNetworks resources that are using the network.
virtualServers[]	The virtualServer resource.	Indicates an array of virtual servers that are on the server and being managed by the Network Controller.
vlanIds	The network InterfacesIn the servers resource, section 3.1.5.11.5. under the networkInterfaces resource, section 3.1.5.15.2.	Indicates the ID of the VLANs to which the network interface <u>of a server</u> is connected.
vlan	The IpConfigurations resource in the network Interfaces resource, section 3.1.5.11.	Vlan IDs associated with the IP address on the interface
vpnConfiguration	The virtualGatewaysVirtualGateways resource, section 3.1.5.17.	Indicates details of remote access for VPN client configuration.

3 Protocol Details

3.1 Server Details

Besides **PUT/GET/DELETE** operations on resources, the server supports the ability to enumerate all resources of a certain kind if these resources are not singletons. For example, `virtualnetworkmanager/configuration` is a singleton. Details about the **GET ALL** enumerations are provided in the subsections of each resource. In general, the response for **GET ALL** follows this pattern.

```
{
  "value": [
    resource1,
    resource2,
    resourceN
  ],
  "nextLink": ""
}
```

Resource1 to ResourceN are valid resources of the same kind. "The value" is a JSON array of objects. "The nextLink" is a link for the client to retrieve the next page of the response, in case the server paginates the response.<2>

Error response

The server **MUST** return the error response as JSON content in the response when it fails to complete the **GET/PUT/DELETE** operation. There is commonality of responses for the various resources, so this topic is treated in detail in section 3.1.5.29.

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

3.1.2 Timers

None.

3.1.3 Initialization

The Network Controller **MUST** be installed and configured prior to using the **macPools** resource. The **macPools** resource **SHOULD** be created prior to the creation of any **servers**.

The certificate that allows communications between the NC and the client **MUST** be present on the NC.

3.1.4 Higher-Layer Triggered Events

None.

3.1.5 Message Processing Events and Sequencing Rules

The following resources are required to create and maintain a proper network configuration between the [Network Controller \(NC\)](#) and its clients. A policy or policies is a synonym for network configuration settings such as IP or MAC addresses.

Resources are processed one at a time. However, the **GET** method can act on all the resources at once when the **resourceId** is omitted. The following table lists all the resources.

Resource	Section	Description
accessControlLists	3.1.5.1	Contains a list of access control list (ACL) rules that can be assigned to subnets or individual NICs and IP addresses.
aclRules	3.1.5.1.2	Describes the network traffic that is allowed or denied for a network interface of a virtual machine.
backendAddressPools	3.1.5.5.2	This resource represents the list of IPs that can receive network traffic that comes via the front-end IPs. The Load Balancing multiplexer (MUX) handles incoming traffic via the front-end IPs and distributes them to backend IPs based on load balancing configuration.
bgpPeers	3.1.5.17.2.2	The bgpPeers resource of the bgpRouters resource of the virtualGatewaysVirtualGateways resource. Configures Border Gateway Protocol (BGP) peers of the virtualGatewaysVirtualGateways resource.
bgpRouters	3.1.5.17.2	The bgpRouters resource of the virtualGatewaysVirtualGateways resource. Contains the configuration for the Border Gateway Protocol (BGP) router in the virtual gateway.
credentials	3.1.5.2	Contains the credential information needed to connect to a southbound device, with the appropriate permissions to manage the device, or enabling the Network Controller to connect to and configure a device in the network.
diagnostics/ConnectivityCheck	3.1.5.21.1	This resource initiates a diagnostics actionAction to check data path connectivity between two endpoints.
diagnostics/ConnectivityCheckResults	3.1.5.21.2	This resource queries the result of a previously initiated diagnostics actionAction between two endpoints.
diagnostics/NetworkControllerState	3.1.5.21.5	This resource creates a dump of internal server data that can be used for troubleshooting.
diagnostics/SlbState	3.1.5.21.3	This resource initiates a diagnostics actionAction to collect internal state for

Resource	Section	Description
		the software load balancer <u>Balancer</u> .
diagnostics/SlbStateResults	3.1.5.21.4	This resource queries the result of a previously initiated diagnostics slbState action.
frontendIpConfigurations <u>frontendIPConfigurations</u>	3.1.5.5.3	This resource represents the frontend IP addresses of the load balancer <u>Balancer</u> .
gatewayPools <u>GatewayPools</u>	3.1.5.3	Contains an array of gateways that provide the infrastructure for virtualGateways <u>VirtualGateways</u> resources for tenant virtual networks.
gateways	3.1.5.4	Provides gateway services to one or more virtualNetworks resources.
iDnsServer	3.1.5.24	Contains the configuration details for the DNS server in the internal DNS (<u>iDNS</u>) service.
inboundNatRules	3.1.5.5.4	This resource is used to configure the load balancer to apply Network Address Translation (<u>NAT</u>) of inbound traffic.
internalResourceInstances	3.1.5.23	This resource provides a means to map instance IDs to resource IDs or to get all the mappings.
ipConfigurations	3.1.5.11.2	This resource represents configuration information for IP addresses: allocation method, actual IP address, membership of a logical or virtual subnet, load balancing and access control information.
ipPools	3.1.5.8.2.2	The ipPools resource represents the range from which IP addresses will be allocated for nodes within a subnet. The start and end IP addresses of the pool for a virtual subnet are based on the IP prefix of the virtual subnet.
loadBalancerManager	3.1.5.6	The loadBalancerManager resource is a singleton resource that configures the load balancing service of the Network Controller.
loadBalancerMux <u>loadBalancerMuxes</u>	3.1.5.7	The loadBalancerMux <u>loadBalancerMuxes</u> resource represents a MUX VM deployed in the Network Controller's stamp.
loadBalancers	3.1.5.5	Consists of a frontend and a backend configuration. The frontend configuration exposes the IP address of the load balancer <u>Balancer</u> . The backend configuration specifies the distribution of traffic across VM instances and how to determine the health of VM instances or endpoints.

Resource	Section	Description
loadBalancingRules	3.1.5.5.5	This resource is used to configure load balancing policies. The policies dictate the kind of traffic that is load-balanced, and port mapping between frontend IPs and backend ips IPs.
logicalNetworks	3.1.5.8	A collection of logical subnets or a logical partition of physical network that is dedicated for a specific purpose.
logicalSubnets subnets	3.1.5.8.2	A logicalSubnets subnets resource consists of a subnet/VLAN pair. The vlan vlanId resource is required; however, it MAY contain a value of zero if the subnet is not associated with a vlan.
macPools	3.1.5.9	Specifies a range The macPools resource specifies one or more ranges of MAC addresses, which are used internally by the Network Controller service modules for various service modules in both CA and PA space including VNET, VSM, and GWM. Specifically, these MAC Pools addresses are used for the PAHost vNIC(s), the HNV Distributed Router (DR) Host vNIC (used for health probes), and the HNV Virtual MAC (to route traffic to the HNV Distributed Router). both overlay and underlay needs.
monitoring/NetworkControllerStatistics	3.1.5.22	This resource provides a means to get usage and health information for a few resources.
networkConnections	3.1.5.17.4	Specifies a connection from a virtual network to external networks.
networkInterfaces	3.1.5.11	Specifies the configuration of either a host virtual network interface card (host vNIC) or a virtual server NIC (VMNIC).
operationResults	3.1.5.13	Provides the status of a specific asynchronous operation. The URL for a specific operations resource is returned in the location Location header of that operation.
operations	3.1.5.12	Provides the status of a specific asynchronous operation. The URL for a specific operations resource is returned in the Azure- AsyncOperation header of that operation.
outboundNatRules	3.1.5.5.6	This resource is used to configure the load balancer Balancer to apply Network Address Translation of (NAT) to outbound traffic.

Resource	Section	Description
policyMaps	3.1.5.17.3	The policyMaps resource of the virtualGateways VirtualGateways resource. Contains the routing policies that enable the Border Gateway Protocol (BGP) routers in the virtual gateway to exchange information as specified with peers. A routing policy consists of match criteria and actions that are executed when the conditions specified in the match criteria are satisfied.
probes	3.1.5.5.7	Configures the mechanism of detection of connectivity issues with load balanced IPs.
publicIpAddresses publicIPAddresses	3.1.5.14	Specifies an IP Address that can be used to communicate with the virtual network from outside it. This address is publically available for use by the virtualGateways VirtualGateways resource and the loadBalancer resource.
routes	3.1.5.10.2	Create routes under a tenant's Route Table.
routes	3.1.5.8.2.3	Represents a provider route that the host uses to route traffic to a specific destination. If a host connects to a logical subnet as part of hosting a virtual network, then all routes in that logical subnet are applied to the host.
routeTables	3.1.5.10	Contains a list of tenant routes that can be assigned to virtual subnets to control routing within a virtual network.
servers	3.1.5.15	Represents a physical server that is being controlled by the Network Controller.
serviceInsertions	3.1.5.16	Specifies the relationship between the service insertion and the service insertion rule.
subnets	3.1.5.18.2	Contains the Virtual Subnets Subnet IDs (VSIDs) under a tenant's Virtual Network Routing Domain ID (RDID). User can specify the addressPrefix to use for the subnets , the accessControl Lists accessControlLists to protect the subnets , the routeTable to apply to the subnet, and optionally service insertions serviceInsertions to use within the subnet.
virtualGateways VirtualGateways	3.1.5.17	A logical entity that runs on multiple gateways in the gatewayPools GatewayPools resource, the virtualGateways VirtualGateways resource describes the gateway used

Resource	Section	Description
		for cross-premises connectivity from the virtual network.
virtualNetworkManager	3.1.5.19	A singleton resource that configures the virtual network service of the Network Controller. The properties in this resource are global for all virtual networks managed by the Network Controller.
virtualNetworks	3.1.5.18	Creates a Virtual Network using Hyper-V Network Virtualization (HNV) for tenant overlays.
virtualServers	3.1.5.20	A resource that corresponds to a Virtual Machine-VM . Such resources need to be created for VMs that correspond to gatewaygateways (section 3.1.5.4) and MUXloadBalancerMuxes resources (section 3.1.5.7).
virtualSwitchManager	3.1.5.25	Configures the virtual switch properties on every server managed by the Network Controller.

The responses to all the resources can result in the following status codes.

Status Code	Description
200 (OK)	Indicates that the operation was successful. The server MUST return this status code when the operation was performed on an existing REST resource.
201 (Created)	Indicates that the operation was successful. The server MUST return this status code when a new REST resource was created on the server due to execution and completion of the operation.
202 (Accepted)	Indicates that the request has been accepted and is being processed. See Asynchronous Operations , section 1.3.2, to understand how the client handles responses with 202 (Accepted).
204 (No Content)	Indicates that the resource with the specified resourceId could not be found.
404 (Not Found)	Indicates that the resource does not exist.
409 (Conflict)	An operation cannot cancel another operation in progress on the resource, its child, sibling, or parent.
412 (Precondition Failed)	Indicates that the resource's Etag doesn't match one specified in the If-Match header.
500 (Internal Server Error)	Indicates that the validation on the resource has failed. See the message body of the response for more details.

3.1.5.1 accessControlLists

An **accessControlLists** resource contains a list of [access control list \(ACL\)](#) rules. Access control list resources can be assigned to virtual subnets or IP configurations.

An ACL can be associated with:

- Subnets of a virtual or logical network. This means that all network ~~interfaces~~[interface cards](#) (NICs) with IP configurations created in the subnet inherit the ACL rules in the Access Control List. Often, subnets are used for a specific architectural tier (frontend, middle tier, backend) in more complex applications. Assigning an ACL to subnets can thus be used to control the network flow between the different tiers.
- IP configuration of a NIC. This means that the ACL will be applied to the parent network interface of the specified IP configuration.

It is invoked through the following URI.

```
https://<URLurl>/networking/v1/accessControlLists/{resourceId}
```

url: the address of the computer on which the Network Controller is running.

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, **resourceId**.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.1.1.1	Create a new accessControlLists resource or update an existing accessControlLists resource.
GET	3.1.5.1.1.2	Get one accessControlLists resource.
GET (All)ALL	3.1.5.1.1.3	List all accessControlLists resources in the Network Controller.
DELETE	3.1.5.1.1.4	Delete an accessControlLists resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
aclRules	Optional	Indicates the rules in an access control list. See section 3.1.5.1.2, for full details on this element.
inboundDefaultAction	Optional	Indicates the default action for Inbound Rules- inbound rules . Valid values are Permit or Deny. The default value is Permit.
ipConfigurations	Read-only	Indicates references to IP addresses of network interfaces networkInterfaces resources this access control list is associated with.
outboundDefaultAction	Optional	Indicates the default action for Outbound Rules- outbound rules . Valid values are Permit or Deny. The default value is Permit.
subnets	Read-only	Indicates an array of references to subnets resources this access control list is associated with.
configurationState	Optional Read-only	See configurationState in section 2.2.4.
configurationState.id		This is the instance ID of the access control list.

Element name	Type	Description
virtualNetworkInterfaceErrors		An array of configurationState objects as defined in section 2.2.4.

3.1.5.1.1 HTTP Methods

3.1.5.1.1.1 PUT

This method creates a new **accessControlLists** resource or updates an existing **accessControlLists** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/accessControlLists/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.1.1.1.1 Request Body

The format for the request body for the **accessControlLists PUT** method is as follows.

```
{
  "properties": {
    "aclRules": [
      {
        "resourceId": "port2003",
        "properties": {
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "2003",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "13.168.100.21",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ]
  }
}
```

```

    "resourceId": "port5100",
    "properties": {
      "description": "Port 5100 over tcp",
      "protocol": "Tcp",
      "sourcePortRange": "0-65535",
      "destinationPortRange": "5100",
      "action": "Allow",
      "sourceAddressPrefix": "*",
      "destinationAddressPrefix": "13.168.100.22",
      "priority": "201",
      "type": "Inbound",
      "logging": "Enabled"
    }
  ]
}

```

The JSON schema for the **accessControlLists PUT** method is located in section 6.1.1.

3.1.5.1.1.1.2 Response Body

The format for the **accessControlLists PUT** response body is the same as the format for the **accessControlLists GET** response body (section 3.1.5.1.1.2.2). The JSON schema is located in section 6.1.2.

3.1.5.1.1.1.3 Processing Details

This method creates a new **accessControlLists** resource or updates an existing **accessControlLists** resource.

3.1.5.1.1.2 GET

This method retrieves an **accessControlLists** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/accessControlLists/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.1.1.2.1 Request Body

None.

3.1.5.1.1.2.2 Response Body

The format for the response body for the **accessControlLists GET** method is as follows.

```
{
  "resourceRef": "/accessControlLists/ff285019-45d6-4afa-a109-9faca0fda415",
  "resourceId": "ff285019-45d6-4afa-a109-9faca0fda415",
  "etag": "W/\"9b5305e6-3cf4-45d6-a108-6bce0411f0ab\"",
  "instanceId": "99d5c41e-fba5-4bbd-aa63-2c6ba3da7553",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/ff285019-45d6-4afa-a109-9faca0fda415/aclRules/b5bfc35d-423a-4c2f-9cf0-5f2c5aa4482e",
        "resourceId": "b5bfc35d-423a-4c2f-9cf0-5f2c5aa4482e",
        "etag": "W/\"9b5305e6-3cf4-45d6-a108-6bce0411f0ab\"",
        "instanceId": "4a36c357-33df-41bd-b5a4-a7fdc57af257",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "2003",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "13.168.100.23",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled",
          "description": "CTS rule"
        }
      }
    ],
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/6ebf2132-2871-4535-b412-b6e255bcafa2/ipConfigurations/74fe0850-09a0-4526-9d43-906cd4e6f52a"
      }
    ],
    "subnets": [ ],
    "configurationState": {
      "status": "Failure",
      "lastUpdatedTime": "2016-06-14T19:11:54.416138-07:00",
      "id": "c08b3aec-be27-4be2-ab5e-19e1705ca555",
      "virtualNetworkInterfaceErrors": [
        {
          "status": "Failure",
          "detailedInfo": [
            {
              "source": "Firewall",
              "message": "The Firewall Service encountered an error in pushing the rules to the Virtual machine host, through Ovsdb protocol. Error Code : 80131500",
              "code": "PolicyConfigurationFailure"
            }
          ]
        }
      ],
      "lastUpdatedTime": "2016-06-14T19:11:54.416138-07:00",
      "id": "4058b793-6c28-43d4-a957-937d453075d7"
    }
  ]
},
  "tags": {
    "good": "0",
    "full": "empty"
  }
}
```

The JSON schema for the **accessControlLists GET** method is located in section 6.1.2.

3.1.5.1.1.2.3 Processing Details

The server uses the **resourceId** contained in the body of the message to locate the **accessControlList** resource to send to the client. The server MUST return a status code of 200 (OK) if the operation succeeds, and the server MUST return a status code of 404 (Not Found) if the resource does not exist.

The properties that are associated with the **accessControlList** resource are in section 3.1.5.1.

The server returns configuration state only if it has already attempted to configure settings according to the REST resource properties that were created or updated by using the **PUT** method. **configurationState.id** MUST be set to the access control list resource identifier. **configurationState.lastUpdatedTime** is set to a value that is implementation-specific.

The server returns a configuration state property **configurationState.status** set to "Success" if there were no errors. The following is an example.

```
"configurationState": {
  "status": "Success",
  "lastUpdatedTime": "2016-12-01T13:58:11.8350187-08:00",
  "id": "98a05ec0-62ef-45ce-9540-da8dc6ffddde"
}
```

The server returns a configuration state property **configurationState.status** set to "Failure" if there were errors during configuration of settings. The property **configurationState.virtualNetworkInterfaceErrors** MUST contain **configurationState** content as defined in section 2.2.4. Acceptable code values for this inner **configurationState** are in the following table.

configurationState.status	Code	Description
Failure	Unknown	An unknown error occurred while configuring policies.
Failure	PolicyConfigurationFailure	The server failed to send settings to lower layer components.
Failure	PolicyConfigurationFailureOnVfp	The server sent settings to the lower layer components, but they could not be configured.

The following is an example of failures.

```
"configurationState": {
  "status": "Failure",
  "lastUpdatedTime": "2016-12-01T13:58:11.8350187-08:00",
  "id": "98a05ec0-62ef-45ce-9540-da8dc6ffddde",
  "virtualNetworkInterfaceErrors": [
    {
      "status": "Failure",
      "detailedInfo": [
        {
          "source": "Firewall",
          "message": "The Firewall Service encountered an error in adding the
rules to the Virtual Network Interface. Error Code : 80070002",
          "code": "PolicyConfigurationFailureOnVfp"
        }
      ]
    }
  ]
}
```

```

    ],
    "lastUpdatedTime": "2016-12-01T13:58:11.8350187-08:00",
    "id": "aaebdfd8-ed06-43fd-96be-1773ad6fc750"
  }
]
}

```

3.1.5.1.1.3 GET ~~(All)~~ALL

This operation retrieves a list of all **accessControlLists** resources in the Network Controller.

It is invoked through the following URI.

```
https://<url>/networking/v1/accessControlLists
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

3.1.5.1.1.3.1 Request Body

None.

3.1.5.1.1.3.2 Response Body

The format for the **accessControlLists GET ALL** response body is as follows.

```

{
  "value": [
    {
      "resourceRef": "/accessControlLists/049460a0-3d29-48a5-92fe-1b418287f2a1",
      "resourceId": "049460a0-3d29-48a5-92fe-1b418287f2a1",
      "etag": "W/\"736b0e54-7976-42fd-a89e-c7d00e9fbcf0\"",
      "instanceId": "12053554-2e17-4389-8667-c3b9c7eb4d6f",
      "properties": {
        "provisioningState": "Succeeded",
        "aclRules": [
          {
            "resourceRef": "/accessControlLists/049460a0-3d29-48a5-92fe-1b418287f2a1/aclRules/1d62b477-9992-400b-bfbb-411c8c91ed9d",
            "resourceId": "1d62b477-9992-400b-bfbb-411c8c91ed9d",
            "etag": "W/\"736b0e54-7976-42fd-a89e-c7d00e9fbcf0\"",
            "instanceId": "985c5ee5-e275-4006-8cba-5fd704ef4c62",
            "properties": {
              "provisioningState": "Succeeded",
              "protocol": "All",
              "sourcePortRange": "0-65535",
              "destinationPortRange": "31267",
              "action": "Allow",
              "sourceAddressPrefix": "*",
              "destinationAddressPrefix": "20.169.0.22",
            }
          }
        ]
      }
    }
  ]
}

```



```

    ],
    "subnets": [
    ]
  }
},
{
  "resourceRef": "/accessControlLists/1253aa5c-6de6-41ef-b4cf-a36a2ac8abb1",
  "resourceId": "1253aa5c-6de6-41ef-b4cf-a36a2ac8abb1",
  "etag": "W/\\"6a4601fd-e427-44cc-87b3-403e7d434c65\"",
  "instanceId": "f22df31d-822d-479c-9fb6-30f4237b39d4",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/1253aa5c-6de6-41ef-b4cf-
a36a2ac8abb1/aclRules/bd36daaa-e337-4185-838f-dae07e251e8b",
        "resourceId": "bd36daaa-e337-4185-838f-dae07e251e8b",
        "etag": "W/\\"6a4601fd-e427-44cc-87b3-403e7d434c65\"",
        "instanceId": "99588a06-08c7-468e-acf7-1c76e62a514a",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "31267",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "20.168.0.26",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ],
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/2325bf87-8f25-4187-9796-
3a568946cf13/ipConfigurations/14c78c28-7104-417b-b57c-068a431c9649"
      }
    ],
    "subnets": [
    ]
  }
},
{
  "resourceRef": "/accessControlLists/14604ca7-8079-4c0a-a5f7-91a460b7e547",
  "resourceId": "14604ca7-8079-4c0a-a5f7-91a460b7e547",
  "etag": "W/\\"77daffcc-dc38-4fc4-9c08-2d111a40941f\"",
  "instanceId": "31c647f3-72ec-4947-8e8d-d4d023f63b5e",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/14604ca7-8079-4c0a-a5f7-
91a460b7e547/aclRules/df034f28-6492-4577-a80f-0a7009c55c97",
        "resourceId": "df034f28-6492-4577-a80f-0a7009c55c97",
        "etag": "W/\\"77daffcc-dc38-4fc4-9c08-2d111a40941f\"",
        "instanceId": "af13fd31-79a0-432c-97cd-339c6be0bfb1",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "31267",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "20.170.0.21",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ]
  }
}

```

```

    }
  ],
  "ipConfigurations": [
    {
      "resourceRef": "/networkInterfaces/24599f61-01ef-484d-98d3-
dcbb81d2d076/ipConfigurations/bdc7dbe5-bb40-44c4-ae9e-6d37c2558647"
    }
  ],
  "subnets": [
  ]
}
},
{
  "resourceRef": "/accessControlLists/162ac5f0-7b18-4aee-a470-1764aa9e068f",
  "resourceId": "162ac5f0-7b18-4aee-a470-1764aa9e068f",
  "etag": "W/\"3db28c51-0c6d-48f8-bfal-14263ef3f17b\"",
  "instanceId": "a7c0b162-46ef-4c5c-bbc3-266cd7c8d4cb",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/162ac5f0-7b18-4aee-a470-
1764aa9e068f/aclRules/f15507e8-5d46-45d3-9efb-30c28a78dc9c",
        "resourceId": "f15507e8-5d46-45d3-9efb-30c28a78dc9c",
        "etag": "W/\"3db28c51-0c6d-48f8-bfal-14263ef3f17b\"",
        "instanceId": "df2d3959-e471-4a14-9f56-071058dbd5ff",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "31267",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "20.168.0.21",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ]
  },
  "ipConfigurations": [
    {
      "resourceRef": "/networkInterfaces/c088c35a-cd91-4352-a33a-
e513bfd6f169/ipConfigurations/4cbf96c7-56d3-4aea-a2b0-617ea3c45d42"
    }
  ],
  "subnets": [
  ]
}
},
{
  "resourceRef": "/accessControlLists/1e05607b-7524-491f-a703-4399a6799090",
  "resourceId": "1e05607b-7524-491f-a703-4399a6799090",
  "etag": "W/\"9bad685c-42eb-4497-a0b9-dbca466e0cb9\"",
  "instanceId": "483b4be9-f338-4517-81f9-219fb018ef45",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/1e05607b-7524-491f-a703-
4399a6799090/aclRules/1fe29735-e639-459c-bc53-5dc1a7129039",
        "resourceId": "1fe29735-e639-459c-bc53-5dc1a7129039",
        "etag": "W/\"9bad685c-42eb-4497-a0b9-dbca466e0cb9\"",
        "instanceId": "4ab0800e-e776-46a0-a093-863c4a66940e",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",

```

```

        "sourcePortRange": "0-65535",
        "destinationPortRange": "31267",
        "action": "Allow",
        "sourceAddressPrefix": "*",
        "destinationAddressPrefix": "20.169.0.21",
        "priority": "200",
        "type": "Inbound",
        "logging": "Enabled"
    }
},
    "ipConfigurations": [
        {
            "resourceRef": "/networkInterfaces/6c28c3f6-0a1e-42a6-bec7-fdec4885c52f/ipConfigurations/ba2f6b90-c63e-4203-9199-e6cffa41986c"
        }
    ],
    "subnets": [
    ]
}
},
{
    "resourceRef": "/accessControlLists/28ecc664-74e0-41fc-81f8-b38a4c6975c7",
    "resourceId": "28ecc664-74e0-41fc-81f8-b38a4c6975c7",
    "etag": "W/\"c3562a19-9845-428d-9609-f9ea0995e72a\"",
    "instanceId": "523fc8ce-503f-41c3-9c85-de506192afd2",
    "properties": {
        "provisioningState": "Succeeded",
        "aclRules": [
            {
                "resourceRef": "/accessControlLists/28ecc664-74e0-41fc-81f8-b38a4c6975c7/aclRules/d9f12865-ec9a-4b64-9ba1-899bc0c17b72",
                "resourceId": "d9f12865-ec9a-4b64-9ba1-899bc0c17b72",
                "etag": "W/\"c3562a19-9845-428d-9609-f9ea0995e72a\"",
                "instanceId": "2c2137e6-b9f1-4fb8-a96c-d28299a76240",
                "properties": {
                    "provisioningState": "Succeeded",
                    "protocol": "All",
                    "sourcePortRange": "0-65535",
                    "destinationPortRange": "31267",
                    "action": "Allow",
                    "sourceAddressPrefix": "*",
                    "destinationAddressPrefix": "20.168.0.27",
                    "priority": "200",
                    "type": "Inbound",
                    "logging": "Enabled"
                }
            }
        ]
    },
    "ipConfigurations": [
        {
            "resourceRef": "/networkInterfaces/4e435410-a0e6-450a-a582-40fa7382d474/ipConfigurations/5c4c0c3c-336b-4a49-8566-8b861f4dcb49"
        }
    ],
    "subnets": [
    ]
}
},
{
    "resourceRef": "/accessControlLists/2d151145-53f0-49a1-b980-7f68adc79c89",
    "resourceId": "2d151145-53f0-49a1-b980-7f68adc79c89",
    "etag": "W/\"756ac992-bf88-4329-bf46-676b630400f8\"",
    "instanceId": "0018cb4e-596e-4503-8847-5c1c871b4fda",
    "properties": {
        "provisioningState": "Succeeded",
        "aclRules": [
            {

```

```

        "resourceRef": "/accessControlLists/2d151145-53f0-49a1-b980-7f68adc79c89/aclRules/de76ee71-6749-4c5b-bcf6-651a697f1fa4",
        "resourceId": "de76ee71-6749-4c5b-bcf6-651a697f1fa4",
        "etag": "W/\"756ac992-bf88-4329-bf46-676b630400f8\"",
        "instanceId": "b8bac4d9-6b5e-400b-8a4d-45f0ef83b94f",
        "properties": {
            "provisioningState": "Succeeded",
            "protocol": "All",
            "sourcePortRange": "0-65535",
            "destinationPortRange": "0-65535",
            "action": "Allow",
            "sourceAddressPrefix": "*",
            "destinationAddressPrefix": "*",
            "priority": "200",
            "type": "Inbound",
            "logging": "Enabled"
        }
    },
    "ipConfigurations": [
    ],
    "subnets": [
        {
            "resourceRef": "/virtualNetworks/b1fdf9f9-a2a9-49e2-a207-0e210fac77ba/subnets/2010829e-7c10-4b6a-aab8-0332f9bb6fb7"
        }
    ]
},
{
    "resourceRef": "/accessControlLists/44870ad0-cf6d-4c0b-9eb2-1de4b0b45342",
    "resourceId": "44870ad0-cf6d-4c0b-9eb2-1de4b0b45342",
    "etag": "W/\"94dbc080-32a3-40a7-aa51-fe1a8cd026c1\"",
    "instanceId": "be445606-97cb-43af-a961-9afed9ecd85a",
    "properties": {
        "provisioningState": "Succeeded",
        "aclRules": [
            {
                "resourceRef": "/accessControlLists/44870ad0-cf6d-4c0b-9eb2-1de4b0b45342/aclRules/3ec50e18-a66d-4daf-b70f-2cf1ce997a45",
                "resourceId": "3ec50e18-a66d-4daf-b70f-2cf1ce997a45",
                "etag": "W/\"94dbc080-32a3-40a7-aa51-fe1a8cd026c1\"",
                "instanceId": "09a7e3c7-6f51-43ea-be31-f25174eb4066",
                "properties": {
                    "provisioningState": "Succeeded",
                    "protocol": "All",
                    "sourcePortRange": "0-65535",
                    "destinationPortRange": "31267",
                    "action": "Allow",
                    "sourceAddressPrefix": "*",
                    "destinationAddressPrefix": "20.170.0.26",
                    "priority": "200",
                    "type": "Inbound",
                    "logging": "Enabled"
                }
            }
        ],
        "ipConfigurations": [
            {
                "resourceRef": "/networkInterfaces/3b2f21f0-fd38-40b4-8c53-e6f648f1ba25/ipConfigurations/ff715733-de86-4dd1-a3ee-70afedf49b38"
            }
        ],
        "subnets": [
        ]
    }
},
{

```

```

"resourceRef": "/accessControlLists/47ad53ea-cf60-4266-8e89-1e8be8234f61",
"resourceId": "47ad53ea-cf60-4266-8e89-1e8be8234f61",
"etag": "W/\"e92706a1-717a-4c8c-9c04-96ed5ad47b45\"",
"instanceId": "8849536d-5460-419f-a036-370846ef410e",
"properties": {
  "provisioningState": "Succeeded",
  "aclRules": [
    {
      "resourceRef": "/accessControlLists/47ad53ea-cf60-4266-8e89-1e8be8234f61/aclRules/dba8f86e-25ea-4702-9628-962732cb4984",
      "resourceId": "dba8f86e-25ea-4702-9628-962732cb4984",
      "etag": "W/\"e92706a1-717a-4c8c-9c04-96ed5ad47b45\"",
      "instanceId": "585efbff-d269-465e-8a49-85b018f01466",
      "properties": {
        "provisioningState": "Succeeded",
        "protocol": "All",
        "sourcePortRange": "0-65535",
        "destinationPortRange": "31267",
        "action": "Allow",
        "sourceAddressPrefix": "*",
        "destinationAddressPrefix": "20.170.0.24",
        "priority": "200",
        "type": "Inbound",
        "logging": "Enabled"
      }
    }
  ],
  "ipConfigurations": [
    {
      "resourceRef": "/networkInterfaces/1a5800e4-bd4e-474a-bfe9-b154e7174dc9/ipConfigurations/e011114a-b631-4eb3-9422-d4c7e3f1e959"
    }
  ],
  "subnets": [
  ]
}
},
{
  "resourceRef": "/accessControlLists/4e387fd0-a83d-46f1-af14-257f2676a7b7",
  "resourceId": "4e387fd0-a83d-46f1-af14-257f2676a7b7",
  "etag": "W/\"bbf3cf36-14c7-42f3-97a6-2437818f48ae\"",
  "instanceId": "61e5e84a-e205-43ec-9e92-ebd8571e98d6",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/4e387fd0-a83d-46f1-af14-257f2676a7b7/aclRules/f0f5f438-09ac-4acd-958d-586d5fe0230c",
        "resourceId": "f0f5f438-09ac-4acd-958d-586d5fe0230c",
        "etag": "W/\"bbf3cf36-14c7-42f3-97a6-2437818f48ae\"",
        "instanceId": "39e68201-4d43-44ed-befc-f1be6a0e736a",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "0-65535",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "*",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ]
  },
  "ipConfigurations": [
  ],
  "subnets": [

```

```

    {
      "resourceRef": "/virtualNetworks/fccclc28-6e3a-4d9f-b32a-4d460d0bf21f/subnets/227326db-f68e-40c6-8f7b-d2c5a15695f3"
    }
  ]
},
{
  "resourceRef": "/accessControlLists/507106e7-36cf-42d5-b831-0114de8e6ac2",
  "resourceId": "507106e7-36cf-42d5-b831-0114de8e6ac2",
  "etag": "W/\"68668a39-27aa-45a3-a578-b6e285529483\"",
  "instanceId": "a8842acd-f995-4a54-b659-76dc31d99d44",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/507106e7-36cf-42d5-b831-0114de8e6ac2/aclRules/442c895c-8013-4cb2-b96f-4f6b9b90924b",
        "resourceId": "442c895c-8013-4cb2-b96f-4f6b9b90924b",
        "etag": "W/\"68668a39-27aa-45a3-a578-b6e285529483\"",
        "instanceId": "446443c0-9d06-4cf6-8ec4-2efe8a97602a",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "0-65535",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "*",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ]
  },
  "ipConfigurations": [
  ],
  "subnets": [
    {
      "resourceRef": "/virtualNetworks/1b04d9e5-c435-4aea-8ea3-365250e9ff7b/subnets/18cd3cf0-5507-4876-8232-3175f3f020af"
    }
  ]
},
{
  "resourceRef": "/accessControlLists/5a7e4538-43fd-4519-9305-ed3e51a4449d",
  "resourceId": "5a7e4538-43fd-4519-9305-ed3e51a4449d",
  "etag": "W/\"6c029bf6-94b3-429c-9714-218aca49b06a\"",
  "instanceId": "626a1625-4ae2-42a9-8c4e-5f97d3dcbc3d",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/5a7e4538-43fd-4519-9305-ed3e51a4449d/aclRules/933b7d87-fde0-413e-b387-2e843a4080ff",
        "resourceId": "933b7d87-fde0-413e-b387-2e843a4080ff",
        "etag": "W/\"6c029bf6-94b3-429c-9714-218aca49b06a\"",
        "instanceId": "9ff29ca5-a86c-4365-a8f5-17ca1072c1b1",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "31267",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "20.170.0.25",
          "priority": "200",
          "type": "Inbound",
        }
      }
    ]
  }
}

```

```

        "logging": "Enabled"
    }
}
],
"ipConfigurations": [
{
    "resourceRef": "/networkInterfaces/57f32f39-07d8-4f6c-9014-270d5af96b50/ipConfigurations/eed8e42e-17e7-46b8-80fd-c580f7a37d54"
}
],
"subnets": [
]
}
},
{
    "resourceRef": "/accessControlLists/5cd7c188-a510-40de-ae59-d8f338f638eb",
    "resourceId": "5cd7c188-a510-40de-ae59-d8f338f638eb",
    "etag": "W/\"a47e550c-526f-4dba-9b58-a650500f489c\"",
    "instanceId": "31305b92-68bc-473f-a91c-cc6efc743b44",
    "properties": {
        "provisioningState": "Succeeded",
        "aclRules": [
            {
                "resourceRef": "/accessControlLists/5cd7c188-a510-40de-ae59-d8f338f638eb/aclRules/bab91fb0-ce4a-4fff-a0b7-a545d7ed41cb",
                "resourceId": "bab91fb0-ce4a-4fff-a0b7-a545d7ed41cb",
                "etag": "W/\"a47e550c-526f-4dba-9b58-a650500f489c\"",
                "instanceId": "73f052fc-96e9-4a5d-992b-f16ad5f766c2",
                "properties": {
                    "provisioningState": "Succeeded",
                    "protocol": "All",
                    "sourcePortRange": "0-65535",
                    "destinationPortRange": "31267",
                    "action": "Allow",
                    "sourceAddressPrefix": "*",
                    "destinationAddressPrefix": "20.169.0.25",
                    "priority": "200",
                    "type": "Inbound",
                    "logging": "Enabled"
                }
            }
        ]
    },
    "ipConfigurations": [
        {
            "resourceRef": "/networkInterfaces/1c4f0be6-0ba9-417c-9f66-c4a4c1163029/ipConfigurations/28ba9be8-4d21-4829-91dd-dc88f964507c"
        }
    ],
    "subnets": [
    ]
}
},
{
    "resourceRef": "/accessControlLists/673519cb-f22d-432e-bae0-e8d5f3da5a17",
    "resourceId": "673519cb-f22d-432e-bae0-e8d5f3da5a17",
    "etag": "W/\"2885d50c-8053-46e1-9350-dfe9241c4f34\"",
    "instanceId": "0df2783a-0f30-46dc-a133-faad53335a1c",
    "properties": {
        "provisioningState": "Succeeded",
        "aclRules": [
            {
                "resourceRef": "/accessControlLists/673519cb-f22d-432e-bae0-e8d5f3da5a17/aclRules/3d2080b2-2fca-4ccb-8b97-3337e92aeb5e",
                "resourceId": "3d2080b2-2fca-4ccb-8b97-3337e92aeb5e",
                "etag": "W/\"2885d50c-8053-46e1-9350-dfe9241c4f34\"",
                "instanceId": "5a25bbbd-df7a-4cbd-8c2a-55736dbdc4cd",
                "properties": {
                    "provisioningState": "Succeeded",

```



```

        "protocol": "All",
        "sourcePortRange": "0-65535",
        "destinationPortRange": "31267",
        "action": "Allow",
        "sourceAddressPrefix": "*",
        "destinationAddressPrefix": "20.169.0.23",
        "priority": "200",
        "type": "Inbound",
        "logging": "Enabled"
    }
}
],
"ipConfigurations": [
    {
        "resourceRef": "/networkInterfaces/80f93684-4711-4319-beac-
dfb81c2cef23/ipConfigurations/cdcedf7f-e216-406a-971a-cbd553e3020e"
    }
],
"subnets": [
]
}
},
{
    "resourceRef": "/accessControlLists/782332ab-9736-49c7-a5a2-71e31bd7c898",
    "resourceId": "782332ab-9736-49c7-a5a2-71e31bd7c898",
    "etag": "W/\"225175df-cddf-4752-88e0-94bf2f302ce2\"",
    "instanceId": "9e26e2f7-32c6-4f29-85a8-344660df17b1",
    "properties": {
        "provisioningState": "Succeeded",
        "aclRules": [
            {
                "resourceRef": "/accessControlLists/782332ab-9736-49c7-a5a2-
71e31bd7c898/aclRules/1eb3767c-40fd-4ef4-bcb5-b6e40e3d4eb9",
                "resourceId": "1eb3767c-40fd-4ef4-bcb5-b6e40e3d4eb9",
                "etag": "W/\"225175df-cddf-4752-88e0-94bf2f302ce2\"",
                "instanceId": "1163eda6-c64a-4f8d-8490-6609bfc3e6fb",
                "properties": {
                    "provisioningState": "Succeeded",
                    "protocol": "All",
                    "sourcePortRange": "0-65535",
                    "destinationPortRange": "31267",
                    "action": "Allow",
                    "sourceAddressPrefix": "*",
                    "destinationAddressPrefix": "20.168.0.22",
                    "priority": "200",
                    "type": "Inbound",
                    "logging": "Enabled"
                }
            }
        ],
        "ipConfigurations": [
            {
                "resourceRef": "/networkInterfaces/9aca78f4-dbdb-4201-8199-
1e530a38b1c2/ipConfigurations/4a1870d8-6c53-4e6c-afdb-9f490e9a8f18"
            }
        ],
        "subnets": [
        ]
    }
}
},
{
    "resourceRef": "/accessControlLists/942b2145-982f-47d1-b360-e65d589c200c",
    "resourceId": "942b2145-982f-47d1-b360-e65d589c200c",
    "etag": "W/\"6b22baf8-ac18-4fd9-b468-8efc4c8bc684\"",
    "instanceId": "f9bf6580-e1a0-4fd7-a32d-ee55f13e7998",
    "properties": {
        "provisioningState": "Succeeded",
        "aclRules": [

```

```

    {
      "resourceRef": "/accessControlLists/942b2145-982f-47d1-b360-
e65d589c200c/aclRules/8bb9cd37-ed88-4486-bff1-57ff54d86cd0",
      "resourceId": "8bb9cd37-ed88-4486-bff1-57ff54d86cd0",
      "etag": "W/\"6b22bafe-ac18-4fd9-b468-8efc4c8bc684\"",
      "instanceId": "07818909-bba2-4500-8d93-852e33332ea6",
      "properties": {
        "provisioningState": "Succeeded",
        "protocol": "All",
        "sourcePortRange": "0-65535",
        "destinationPortRange": "31267",
        "action": "Allow",
        "sourceAddressPrefix": "*",
        "destinationAddressPrefix": "20.169.0.24",
        "priority": "200",
        "type": "Inbound",
        "logging": "Enabled"
      }
    }
  ],
  "ipConfigurations": [
    {
      "resourceRef": "/networkInterfaces/bb78e9a2-3949-4d93-81e8-
8ba5bd01c0d1/ipConfigurations/d8685944-e3f5-45e5-ac4b-162a9431b70f"
    }
  ],
  "subnets": [
  ]
}
},
{
  "resourceRef": "/accessControlLists/969e7826-44ef-4a11-baa9-98cd6414fb45",
  "resourceId": "969e7826-44ef-4a11-baa9-98cd6414fb45",
  "etag": "W/\"9a819856-6e87-46d6-92e8-e92e3b114b86\"",
  "instanceId": "9a5e1f25-0cbc-43b4-b185-7f84c2291205",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/969e7826-44ef-4a11-baa9-
98cd6414fb45/aclRules/a5b6bf1d-91ce-4879-ad35-e783a20e88a1",
        "resourceId": "a5b6bf1d-91ce-4879-ad35-e783a20e88a1",
        "etag": "W/\"9a819856-6e87-46d6-92e8-e92e3b114b86\"",
        "instanceId": "764ac2e7-9fa7-4c33-b6cd-d0b84b553476",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "31267",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "20.170.0.27",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ]
  },
  "ipConfigurations": [
    {
      "resourceRef": "/networkInterfaces/7d855a76-7be7-4681-8710-
cff77f67fbcd/ipConfigurations/8f26861a-3a97-4564-8fc0-7b40553c954a"
    }
  ],
  "subnets": [
  ]
}
},

```

```

{
  "resourceRef": "/accessControlLists/994ea3d0-43a5-4bbf-baae-fa72bc87a7b5",
  "resourceId": "994ea3d0-43a5-4bbf-baae-fa72bc87a7b5",
  "etag": "W/\"ba590e2a-3ba9-4964-b2d4-9bfce3fc1f71\"",
  "instanceId": "4dded1f2-af8f-4c2b-9400-357f73fadd96",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/994ea3d0-43a5-4bbf-baae-fa72bc87a7b5/aclRules/ef188f68-79d6-4e37-8cbc-2e55e0554167",
        "resourceId": "ef188f68-79d6-4e37-8cbc-2e55e0554167",
        "etag": "W/\"ba590e2a-3ba9-4964-b2d4-9bfce3fc1f71\"",
        "instanceId": "9c4f2ed9-9ec5-4c31-b0b3-12f32474f83b",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "31267",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "20.169.0.26",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ],
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/10ad4e45-26a5-4dc1-85a5-618525b940df/ipConfigurations/e016f4e6-766e-4ac7-a9d8-ef1881d4e824"
      }
    ],
    "subnets": [
    ]
  }
},
{
  "resourceRef": "/accessControlLists/b3430b40-f6ab-4bb7-9587-17adfc8d258f",
  "resourceId": "b3430b40-f6ab-4bb7-9587-17adfc8d258f",
  "etag": "W/\"8804d8e1-b8e2-4581-a132-4e66997a8780\"",
  "instanceId": "bda54313-903f-4623-92c7-7923e1984f91",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/b3430b40-f6ab-4bb7-9587-17adfc8d258f/aclRules/7cb584e8-a018-4061-a95b-1263fef7c861",
        "resourceId": "7cb584e8-a018-4061-a95b-1263fef7c861",
        "etag": "W/\"8804d8e1-b8e2-4581-a132-4e66997a8780\"",
        "instanceId": "38737310-2a72-454e-a7f3-aedc56bae055",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "31267",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "20.168.0.23",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ],
    "ipConfigurations": [
    ]
  }
}

```

```

        "resourceRef": "/networkInterfaces/f2a23d03-ea52-43a9-8c1f-7921b4621ddf/ipConfigurations/9a9b2039-f578-43bd-b761-2de4f5b10e18"
    }
  ],
  "subnets": [
  ]
}
},
{
  "resourceRef": "/accessControlLists/bd8ae3b4-5f4b-4a1d-ab58-b30e15932af0",
  "resourceId": "bd8ae3b4-5f4b-4a1d-ab58-b30e15932af0",
  "etag": "W/\"f841ece6-95de-4390-8c5a-da803c179cb1\"",
  "instanceId": "35ff4cd3-f4c2-446b-a8d6-dddd81d37231",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/bd8ae3b4-5f4b-4a1d-ab58-b30e15932af0/aclRules/e37cbf9a-83f5-4f2b-831a-c316cf71f3a5",
        "resourceId": "e37cbf9a-83f5-4f2b-831a-c316cf71f3a5",
        "etag": "W/\"f841ece6-95de-4390-8c5a-da803c179cb1\"",
        "instanceId": "1458c402-bb13-4a6a-a551-7bc464db60ba",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "31267",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "20.169.0.27",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ]
  },
  "ipConfigurations": [
    {
      "resourceRef": "/networkInterfaces/c996e4c2-d062-4e8f-a9b9-30f63cc36fffb/ipConfigurations/6e3bcf32-5af0-4b33-b6f6-1b8f902ea0e3"
    }
  ],
  "subnets": [
  ]
}
},
{
  "resourceRef": "/accessControlLists/dd2481a6-51b7-42d8-b22d-b87c191c7c70",
  "resourceId": "dd2481a6-51b7-42d8-b22d-b87c191c7c70",
  "etag": "W/\"cb1703c4-9a53-4989-b843-23f2790db01b\"",
  "instanceId": "8ec4262d-62f7-4970-b931-f53acd198678",
  "properties": {
    "provisioningState": "Succeeded",
    "aclRules": [
      {
        "resourceRef": "/accessControlLists/dd2481a6-51b7-42d8-b22d-b87c191c7c70/aclRules/35479197-05fb-4292-a88f-e02f74ce5133",
        "resourceId": "35479197-05fb-4292-a88f-e02f74ce5133",
        "etag": "W/\"cb1703c4-9a53-4989-b843-23f2790db01b\"",
        "instanceId": "3bd79d27-8791-4149-b88d-a856e2ddcaa0",
        "properties": {
          "provisioningState": "Succeeded",
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "31267",
          "action": "Allow",
          "sourceAddressPrefix": "*",
          "destinationAddressPrefix": "20.170.0.23",

```

```

        "priority": "200",
        "type": "Inbound",
        "logging": "Enabled"
    }
},
"ipConfigurations": [
    {
        "resourceRef": "/networkInterfaces/balb152b-2671-4dd1-9069-763eb77ae259/ipConfigurations/3980df14-989b-4f0c-adaa-1be54b78b5e1"
    }
],
"subnets": [
]
}
},
{
    "resourceRef": "/accessControlLists/e8920953-c894-4eac-9cf7-ca79ee8412dc",
    "resourceId": "e8920953-c894-4eac-9cf7-ca79ee8412dc",
    "etag": "W/\"7fa32fec-62bb-4659-a6b8-48951f615ecc\"",
    "instanceId": "6d641dab-a2a4-44fb-871c-e286ebb4ae95",
    "properties": {
        "provisioningState": "Succeeded",
        "aclRules": [
            {
                "resourceRef": "/accessControlLists/e8920953-c894-4eac-9cf7-ca79ee8412dc/aclRules/e4f6b8a9-a8d8-46a3-b5f6-4c6948edcdd3",
                "resourceId": "e4f6b8a9-a8d8-46a3-b5f6-4c6948edcdd3",
                "etag": "W/\"7fa32fec-62bb-4659-a6b8-48951f615ecc\"",
                "instanceId": "196dc2b8-c44c-4627-acb4-f600e9bbfcaa",
                "properties": {
                    "provisioningState": "Succeeded",
                    "protocol": "All",
                    "sourcePortRange": "0-65535",
                    "destinationPortRange": "31267",
                    "action": "Allow",
                    "sourceAddressPrefix": "*",
                    "destinationAddressPrefix": "20.170.0.22",
                    "priority": "200",
                    "type": "Inbound",
                    "logging": "Enabled"
                }
            }
        ],
        "ipConfigurations": [
            {
                "resourceRef": "/networkInterfaces/fe79110d-7075-478c-975c-79f362791a88/ipConfigurations/268203d3-bffc-4d82-a402-6e274d3dce28"
            }
        ],
        "subnets": [
        ]
    }
},
{
    "resourceRef": "/accessControlLists/eae828ec-2c50-426f-90db-97449b187d3f",
    "resourceId": "eae828ec-2c50-426f-90db-97449b187d3f",
    "etag": "W/\"1c2e4e25-7b2c-48f5-b9a2-660351e17097\"",
    "instanceId": "3dab675e-62f6-42c9-a929-a31dfe28c3c0",
    "properties": {
        "provisioningState": "Succeeded",
        "aclRules": [
            {
                "resourceRef": "/accessControlLists/eae828ec-2c50-426f-90db-97449b187d3f/aclRules/dafb0eaf-446d-4d22-a05d-b4fc6182a419",
                "resourceId": "dafb0eaf-446d-4d22-a05d-b4fc6182a419",
                "etag": "W/\"1c2e4e25-7b2c-48f5-b9a2-660351e17097\"",
                "instanceId": "530ea20d-95d3-43a4-83f0-053a556ed638",

```

```

    "properties": {
      "provisioningState": "Succeeded",
      "protocol": "All",
      "sourcePortRange": "0-65535",
      "destinationPortRange": "31267",
      "action": "Allow",
      "sourceAddressPrefix": "*",
      "destinationAddressPrefix": "20.168.0.24",
      "priority": "200",
      "type": "Inbound",
      "logging": "Enabled"
    }
  ],
  "ipConfigurations": [
    {
      "resourceRef": "/networkInterfaces/6a5e50b8-9662-4645-b5cc-f4bb19e14202/ipConfigurations/5092e884-f118-453a-842b-9c0242e55588"
    }
  ],
  "subnets": [
  ]
}
],
"nextLink": ""
}

```

The JSON schema for the **accessControlLists GET ALL** method is located in section 6.1.3.

3.1.5.1.1.3.3 Processing Details

The server locates the **accessControlLists** resource. The server MUST return a status code of 200 (OK) if the operation succeeds. If no **accessControlListaccessControlLists** resources are defined, the server MUST return the result as an empty array.

3.1.5.1.1.4 DELETE

This method deletes an **accessControlLists** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/accessControlLists/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.1.1.4.1 Request Body

None.

3.1.5.1.1.4.2 Response Body

None.

3.1.5.1.1.4.3 Processing Details

Deletes an **accessControlList** resource.

3.1.5.1.2 aclRules

The **aclRules** resource describes the network traffic that is allowed or denied for a network interface of a virtual machine. Currently, only inbound rules are expressed.

It is invoked through the following URI.

```
https://<url>/networking/v1/accessControlLists/{parentResourceId}/aclRules/{resourceId}
```

url: the address of the computer on which the Network Controller is running.

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.1.2.1.1	Create a new aclRules resource or update an existing aclRules resource.
GET	3.1.5.1.2.1.2	Get one aclRules resource.
GET (All) ALL	3.1.5.1.2.1.3	List all aclRules resources in the Network Controller.
DELETE	3.1.5.1.2.1.4	Delete an aclRules resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
action	Required	Indicates the action the ACL Rule will take. Valid values are Allow or Deny. There is no default value since it is a required element.
description	Optional	Indicates a description of the ACL rule.
destinationAddressPrefix	Required	Indicates the classless inter-domain routing (CIDR) value of destination IP or a pre-defined tag to which traffic is destined. You

Element name	Type	Description
		<p>can specify 0.0.0.0/0 for IPv4 all and ::/0 for IPv6 all traffic. <u>The asterisk (*) can be specified for all the IPv4 and IPv6 traffic combined.</u></p> <p>Pre-defined tags can also be used within aclRules which are being applied to virtual subnets or ipIP configurations of virtual subnets. Pre-defined tags cannot be applied to ipIP configurations of logical subnets. Valid pre-defined TAG values are VIRTUALNETWORK+ INTERNET+ or AZURELOADBALANCER+.</p> <p>VIRTUALNETWORK - This tag denotes all your virtual network address space.</p> <p>INTERNET - This tag denotes the IP address space that is outside the virtual network and reachable by public Internet.</p> <p>AZURELOADBALANCER -- This tag denotes the datacenter IP addresses from which the load balancer health probes originate.</p>
destinationPortRange	Required	<p>Indicates the destination ports that will trigger this ACL rule. Valid values include a single port, port range (separated by hyphen "-"), or asterisk "*" for all ports. All numbers are inclusive.</p> <p>Example: 80, 80-80, 80-81, *</p> <p>The port value MUST be between 1 and 65535.</p>
logging	Required	<p>Indicates whether logging will be turned on for when this rule gets triggered. Valid values are enableEnabled or Disabled. The default value is enabledEnabled.</p>
priority	Required	<p>Indicates the priority of the rule relative to the priority of other ACL rules. This is a unique numeric value in the context of an accessControlLists resource. Value from 101 – 65000 are user defined. Values 1- 100 and 65001 – 65535 are reserved.</p>
protocol	Required	<p>Indicates the protocol to which the ACL rule will apply. Valid values are TCP +or UDP.</p>
sourceAddressPrefix	Required	<p>Indicates the CIDR value of source IP or a pre-defined TAG from which traffic is originating. You can specify 0.0.0.0/0 for IPv4 all and ::/0 for IPv6 all traffic. <u>The asterisk (*) can be specified for all the IPv4 and IPv6 traffic combined.</u></p> <p>Valid pre-defined TAG values are VIRTUALNETWORK+ INTERNET+ or AZURELOADBALANCER+.</p> <p>VIRTUALNETWORK - This tag denotes all your virtual network address space.</p> <p>INTERNET - This tag denotes the IP address space that is outside the virtual network and reachable by public Internet.</p> <p>AZURELOADBALANCER -- This tag denotes the datacenter IP addresses from which the load balancer health probes originate.</p>
sourcePortRange	Required	<p>Indicates the source ports that will trigger this ACL rule. Valid values include a single port, port range (separated by hyphen "-"), or asterisk "*" for all ports. All numbers are inclusive.</p> <p>Example: 80, 80-80, 80-81, *</p> <p>The value MUST be between 1 and 65535.</p>
type	Required	<p>Indicates whether the rule is to be evaluated against ingress traffic (Inbound) or egress traffic (Outbound). Valid values are Inbound+or Outbound. There is no default value since it is a required element.</p>

3.1.5.1.2.1 HTTP Methods

3.1.5.1.2.1.1 PUT

This method creates a new **aclRules** resource or updates an existing **aclRules** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/accessControlLists/{parentResourceId}/aclRules/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.1.2.1.1.1 Request Body

The format for the response body for the **aclRules PUT** method is as follows.

```
{
  "resourceId": "1d62b477-9992-400b-bfbb-411c8c91ed9d",
  "resourceMetadata": {
  },
  "properties": {
    "provisioningState": "Succeeded",
    "protocol": "All",
    "sourcePortRange": "0-65535",
    "destinationPortRange": "31267",
    "action": "Allow",
    "sourceAddressPrefix": "*",
    "destinationAddressPrefix": "20.169.0.22",
    "priority": "200",
    "type": "Inbound",
    "logging": "Enabled"
  }
}
```

The JSON schema for the **aclRules PUT** method is located in section 6.1.4.1.

3.1.5.1.2.1.1.2 Response Body

The format for the **PUT aclRules** response body is the same as the format for the **GET aclRules** response body (section 3.1.5.1.2.1.2). The JSON schema is located in section 6.1.4.2.

3.1.5.1.2.1.1.3 Processing Details

Describes the network traffic that is allowed or denied for a network interface of a virtual machine.

3.1.5.1.2.1.2 GET

This method retrieves an **aclRules** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/accessControlLists/{parentResourceId}/aclRules/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.1.2.1.2.1 Request Body

None.

3.1.5.1.2.1.2.2 Response Body

The format for the response body for the **aclRules GET** method is as follows.

```
{
  "resourceRef": "/accessControlLists/049460a0-3d29-48a5-92fe-1b418287f2a1/aclRules/1d62b477-9992-400b-bfbb-411c8c91ed9d",
  "resourceId": "1d62b477-9992-400b-bfbb-411c8c91ed9d",
  "etag": "W/\"736b0e54-7976-42fd-a89e-c7d00e9fbcf0\"",
  "instanceId": "985c5ee5-e275-4006-8cba-5fd704ef4c62",
  "properties": {
    "provisioningState": "Succeeded",
    "protocol": "All",
    "sourcePortRange": "0-65535",
    "destinationPortRange": "31267",
    "action": "Allow",
    "sourceAddressPrefix": "*",
    "destinationAddressPrefix": "20.169.0.22",
    "priority": "200",
    "type": "Inbound",
    "logging": "Enabled"
  }
}
```

The JSON schema for the **aclRules GET** method is located in section 6.1.4.2.

3.1.5.1.2.1.2.3 Processing Details

This method retrieves an **aclRules** resource.

3.1.5.1.2.1.3 GET ~~(All)~~ALL

This method retrieves all **aclRules** resources that belong to an **accessControlLists** resource. It is invoked through the following URI.

```
https://<url>/networking/v1/accessControlLists/{parentResourceId}/aclRules
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.1.2.1.3.1 Request Body

None.

3.1.5.1.2.1.3.2 Response Body

The format for the response body for the **aclRules GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/accessControlLists/049460a0-3d29-48a5-92fe-1b418287f2a1/aclRules/1d62b477-9992-400b-bfbb-411c8c91ed9d",
      "resourceId": "1d62b477-9992-400b-bfbb-411c8c91ed9d",
      "etag": "W/\"736b0e54-7976-42fd-a89e-c7d00e9fbcf0\"",
      "instanceId": "985c5ee5-e275-4006-8cba-5fd704ef4c62",
      "properties": {
        "provisioningState": "Succeeded",
        "protocol": "All",
        "sourcePortRange": "0-65535",
        "destinationPortRange": "31267",
        "action": "Allow",
        "sourceAddressPrefix": "*",
        "destinationAddressPrefix": "20.169.0.22",
        "priority": "200",
        "type": "Inbound",
        "logging": "Enabled"
      }
    },
    {
      "resourceRef": "/accessControlLists/049460a0-3d29-48a5-92fe-1b418287f2a1/aclRules/1d62b477-9992-400b-bfbb-411c8c91ed9d",
      "resourceId": "1d62b477-9992-400b-bfbb-411c8c91ed9d",
      "etag": "W/\"736b0e54-7976-42fd-a89e-c7d00e9fbcf0\"",
      "instanceId": "985c5ee5-e275-4006-8cba-5fd704ef4c62",
      "properties": {
        "provisioningState": "Succeeded",
        "protocol": "All",
        "sourcePortRange": "0-65535",
        "destinationPortRange": "31267",
```

```

        "action": "Allow",
        "sourceAddressPrefix": "*",
        "destinationAddressPrefix": "20.169.0.22",
        "priority": "200",
        "type": "Inbound",
        "logging": "Enabled"
    }
}
],
"nextLink": ""
}

```

The JSON schema for the **aclRules GET** method is located in section 6.1.4.3.

3.1.5.1.2.1.3.3 Processing Details

Retrieves all **aclRules** resources that belong to an **accessControlLists** resource.

3.1.5.1.2.1.4 DELETE

This method deletes an **aclRules** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/accessControlLists/{parentResourceId}/aclRules/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.1.2.1.4.1 Request Body

None.

3.1.5.1.2.1.4.2 Response Body

None.

3.1.5.1.2.1.4.3 Processing Details

Deletes an **aclRules** resource.

3.1.5.2 credentials

The **credentials** resource contains the credential information needed to connect to a southbound device with the appropriate permissions to manage the device. This resource is referenced by one or more southbound device resources combining the credential information with the connection information, therefore allowing the network controller to connect to and configure a device in the network.

A **credentials** resource can be referenced by one or more resources. **Credentials** resources are stored in encrypted form. Encryption is done using the [Secure Sockets Layer \(SSL\)/Transport Layer Security \(TLS\)](#) certificate provisioned on the Network Controller nodes, as specified in [\[RFC2818\]](#) and [\[X509\]](#). If the credential type is usernamepassword, the credentials value (password) is not provided in the **GET** response. If a **credentials** resource is referenced by one or more devices and is deleted, the reference will be removed from all devices.

~~The URI for~~It is invoked through the **credentials** resource is as followsfollowing URIs.

`https://<url>/networking/v1/credentials/{resourceId}`

`https://<url>/networking/v2/credentials/{resourceId}`

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.2.1.1	Create a new credentials resource or update an existing credentials resource.
GET	3.1.5.2.1.2	Get one credentials resource.
GET (All)ALL	3.1.5.2.1.3	List all credentials resources in the Network Controller.
DELETE	3.1.5.2.1.4	Delete a credentials resource.

The following property elements are valid: <3>

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
type	Required	Indicates the type of the credential. Valid values are: usernamePassword x509Certificate snmpCommunityString GroupManagedServiceAccount
userName	Optional	If the credentialcredentials resource is of type usernamePassword, then this username used for the credential. If the credential resource is of type GroupManagedServiceAccount, this contains the name of the account. For all other types, this field will be ignored.
value	Required	Indicates the value of the credentials resources type. The actual value will depend on the type field: UsernamePassword: this element represents the password.

Element name	Type	Description
		X509Certificate: this element represents the certificate subject name thumbprint. SNMPCommunityString: this element represents the community string. GroupManagedServiceAccount: this element is expected to be empty.
networks	Optional Read-only	Indicates an array of references to the virtual networks that use this credential to encrypt virtualized traffic.

3.1.5.2.1 HTTP Methods

3.1.5.2.1.1 PUT

This method creates a new **credentials** resource or updates an existing **credentials** resource.

It is invoked through the following **URI**s.

```
https://<url>/networking/v1/credentials/{resourceId}
```

```
https://<url>/networking/v2/credentials/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.2.1.1.1 Request Body

The format for the request body for the **credentials PUT** method is as follows.

```
{
  "properties": {
    "type": "usernamePassword",
    "userName": "localhost\\administrator",
    "value": "SeMmFelbh3f2ZgGRs6XHR+"
  }
}
```

The JSON schema for the **credentials PUT** method is located in section 6.2.1.

3.1.5.2.1.1.2 Response Body

The format for the **credentials PUT** response body is the same as the format for the **credentials GET** response body (section 3.1.5.2.1.2.2). The JSON schema is located in section 6.2.2.

3.1.5.2.1.1.3 Processing Details

Creates a new **credentials** resource or updates an existing **credentials** resource. For **credentials** resources of type **GroupManagedServiceAccount**, (**GMSA**), **PUT** is not allowed. When Network Controller is deployed using **Install-NetworkController** cmdlet, the **GMSA** account provided there will automatically be added to the **credentials** resource.

3.1.5.2.1.2 GET

This method retrieves a **credentials** resource.

It is invoked through the following **URI**s.

```
https://<url>/networking/v1/credentials/{resourceId}
```

```
https://<url>/networking/v2/credentials/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.2.1.2.1 Request Body

None.

3.1.5.2.1.2.2 Response Body

The format for the response body for the **credentials GET** method is as follows.

```
{
  "etag": "W/\"858c6520-f861-4ab0-9e18-8a11822bbafd\"",
  "instanceId": "0a83672d-08d1-4ce3-92f8-8cb3efcaf60e",
  "properties": {
    "provisioningState": "Succeeded",
    "type": "X509Certificate",
    "value": "DED5163DBA00F32C842B35B6250B852464BA7978"
  },
  "resourceId": "5eda8dd3-9fad-4f73-bb46-fa696b2ca894",
  "resourceRef": "/credentials/5eda8dd3-9fad-4f73-bb46-fa696b2ca894"
}
```

The JSON schema for the **credentials GET** method is located in section 6.2.2.

3.1.5.2.1.2.3 Processing Details

Retrieves a **credentials** resource.

3.1.5.2.1.3 GET ~~(All)~~ALL

This method retrieves all **credentials** resources.

It is invoked through the following **URIs**.

```
https://<url>/networking/v1/credentials/
```

```
https://<url>/networking/v2/credentials/
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.2.1.3.1 Request Body

None.

3.1.5.2.1.3.2 Response Body

The format for the response body for the **credentials GET ALL** method is as follows.

```
"value": [  
  {  
    "resourceRef": "/credentials/5eda8dd3-9fad-4f73-bb46-fa696b2ca894",  
    "resourceId": "5eda8dd3-9fad-4f73-bb46-fa696b2ca894",  
    "etag": "W/\"858c6520-f861-4ab0-9e18-8a11822bbafd\"",  
    "instanceId": "0a83672d-08d1-4ce3-92f8-8cb3efcaf60e",  
    "properties": {  
      "provisioningState": "Succeeded",  
      "type": "X509Certificate",  
      "value": "DED5163DBA00F32C842B35B6250B852464BA7978"  
    }  
  },  
  {  
    "resourceRef": "/credentials/SA21n28-3-credentials",  
    "resourceId": "SA21n28-3-credentials",  
    "etag": "W/\"e5bc80c8-7013-42ce-b1e9-c2df34f73999\"",  
    "instanceId": "3dcf5684-63b4-4577-b6da-ffbf46f435d",  
    "properties": {  
      "provisioningState": "Succeeded",  
      "type": "usernamePassword",  
      "userName": "localhost\\localadminuser",  
    }  
  }  
]
```



```

    "value": "VZZfCgilTXfcM7axGvzpUztMsPnKQTPn152CFcxKmFk="
  },
  {
    "resourceRef": "/credentials/SA21n28-4-credentials",
    "resourceId": "SA21n28-4-credentials",
    "etag": "W/\"dd2d880b-8dd5-4f44-b0d1-0e32f2027c9d\"",
    "instanceId": "6c5d30d4-dce4-47c8-b9f3-8ad2b233c1d6",
    "properties": {
      "provisioningState": "Succeeded",
      "type": "usernamePassword",
      "userName": "localhost\\localadminuser",
      "value": "tpmR2o32hkahVfw4VchYkReo3I9gfuhGQQwOCZkgBw="
    }
  }
],
"nextLink": ""
}

```

The JSON schema for the **credentials GET ALL** method is located in section 6.2.4.

3.1.5.2.1.3.3 Processing Details

This method retrieves all **credentials** resources.

3.1.5.2.1.4 DELETE

This method deletes a **credentials** resource.

It is invoked through the following [URI/URIs](#).

`https://<url>/networking/v1/credentials/{resourceId}`

<https://<url>/networking/v2/credentials/{resourceId}>

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.2.1.4.1 Request Body

None.

3.1.5.2.1.4.2 Response Body

None.

3.1.5.2.1.4.3 Processing Details

Deletes a **credentials** resource.

3.1.5.3 **gatewayPoolsGatewayPools**

The **gatewayPoolsGatewayPools** resource aggregates a set of **gateways** resources into a single pool. It contains an array of **gateways** that provide the infrastructure needed to service **virtualGatewaysVirtualGateways** instances with differentiated services for tenant virtual networks.

A gateway pool usually consists of gateways that provide services, such as IPsec, [Generic Routing Encapsulation \(GRE\) \(\[RFC2784\]\)](#) or a [Forwarding \(L3\)](#) gateway. A gateway pool can also be created for different categories of customers or resellers. After a gateway pool is created, **gateways** of identical type and capacity can be added to the pool. Each tenant can be assigned one or more gateway pools from which its connections are serviced. **Gateways** in a gateway pool can service multiple tenants.

The URI for **It is invoked through** the resource is as follows [following URI](#).

```
https://<url>/networking/v1/gatewayPoolsGatewayPools/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.3.1.1	Create a new gatewayPoolsGatewayPools resource or update an existing gatewayPoolsGatewayPools resource.
GET	3.1.5.3.1.2	Get one gatewayPoolsGatewayPools resource.
GET (All) ALL	3.1.5.3.1.3	List all gatewayPoolsGatewayPools resources in the Network Controller.
DELETE	3.1.5.3.1.4	Delete a gatewayPoolsGatewayPools resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
Type	Required	Indicates the type of the role of gateway VMs in the pool. The following are valid string values: "s2sIPsec" "s2sGre" "forwarding" "ALL"
greVipSubnets	Read/write. Required if	Indicates the logical subnet from which VIPs for gateways providing "GRE"-based network

Element name	Type	Description
	Type is equal to "s2sGre" or "ALL".	connections.
publicIpAddresses	Read/write Optional	Indicates collection of public IP address references. These are the IPs to which external connections connect to. This is optional in case Type is "s2sGre".
redundantGatewayCount	Read/write	Indicates the number of redundant gateway VMs that will be used for each virtualGateways instance to ensure its availability. For example, in a 3+1 gateway deployment, 1 will be redundant gateway count.
gatewayCapacityKiloBitsPerSecond	Read/write	Indicates the total capacity of each gateway in the pool in kilobits per second.
Gateways	Read-only	Indicates references to collection of gateways that comprise the gateway pool.
VirtualGateways	Read-only	Indicate references to collection of VirtualGateways (that contains subscription connection information) that are dependent on the pool.

3.1.5.3.1 HTTP Methods

3.1.5.3.1.1 PUT

This method creates a new **gatewayPools** resource or updates an existing **gatewayPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/gatewayPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.3.1.1.1 Request Body

The format for the request body for the **gatewayPoolsGatewayPools** **PUT** method is as follows.

```
{
  "resourceId": "default",
  "properties": {
    "ipConfiguration": {
      "greVipSubnets": [
        {
          "resourceRef": "/LogicalNetworkslogicalNetworks/00000000-2222-0000-9999-000000000000/Subnets/00000000-2222-1111-9999-000000000003"
        }
      ],
      "publicIPAddresses": [
        {
          "resourceRef": "/PublicIpAddressespublicIPAddresses/00000000-5555-0000-0001-000000000000"
        }
      ]
    },
    "redundantGatewayCount": 0,
    "gatewayCapacityKiloBitsPerSecond": 104857600,
    "RadiusServer": "1.2.3.4",
    "RadiusSecret": "111_aaa",
    "type": "All"
  }
}
```

The JSON schema for the **gatewayPoolsGatewayPools** **PUT** method is located in section 6.3.1.

3.1.5.3.1.1.2 Response Body

The same as the format for the **gatewayPoolsGatewayPools** **GET** response body (section 3.1.5.3.1.2.2). The JSON schema is located in section 6.3.2.

3.1.5.3.1.1.3 Processing Details

Creates a new **gatewayPoolsGatewayPools** resource or updates an existing **gatewayPoolsGatewayPools** resource.

3.1.5.3.1.2 GET

This method retrieves a **gatewayPoolsGatewayPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/gatewayPoolsGatewayPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

Status code

404 (Not Found)

3.1.5.3.1.2.1 Request Body

None.

3.1.5.3.1.2.2 Response Body

The format for the **gatewayPoolsGatewayPools** **GET** response body is as follows.

```
{
  "resourceRef": "/GatewayPools/default",
  "resourceId": "default",
  "etag": "W/\"0800327a-f275-4fb7-a8ac-9db9f9b74dfa\"",
  "instanceId": "d3bc394b-0779-4e87-a5c2-44f48091ecc2",
  "properties": {
    "provisioningState": "Succeeded",
    "type": "All",
    "ipConfiguration": {
      "greVipSubnets": [
        {
          "resourceRef": "/logicalnetworkslogicalNetworks/00000000-2222-0000-9999-000000000000/subnets/00000000-2222-1111-9999-000000000003"
        }
      ],
      "publicIPAddresses": [
        {
          "resourceRef": "/publicIPAddresses/00000000-5555-0000-0001-000000000000"
        }
      ]
    },
    "redundantGatewayCount": 0,
    "gatewayCapacityKiloBitsPerSecond": 104857600,
    "gateways": [
      {
        "resourceRef": "/Gateways/CloudGw1"
      }
    ],
    "virtualGatewaysVirtualGateways": [
      {
        "resourceRef": "/VirtualGateways/VirtualGateway_1"
      },
      {
        "resourceRef": "/VirtualGateways/VirtualGateway_2"
      },
      {
        "resourceRef": "/VirtualGateways/VirtualGateway_3"
      },
      {
        "resourceRef": "/VirtualGateways/VirtualGateway_4"
      },
      {
        "resourceRef": "/VirtualGateways/VirtualGateway_5"
      },
      {
        "resourceRef": "/VirtualGateways/VirtualGateway_6"
      },
      {
        "resourceRef": "/VirtualGateways/VirtualGateway_7"
      },
      {
        "resourceRef": "/VirtualGateways/VirtualGateway_8"
      }
    ]
  }
}
```

```

    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_9"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_10"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_11"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_12"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_13"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_14"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_15"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_16"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_17"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_18"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_19"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_20"
    }
  ]
}
}

```

The JSON schema for the **gatewayPoolsGatewayPools** GET method is located in section 6.3.2.

3.1.5.3.1.2.3 Processing Details

Retrieves a **gatewayPoolsGatewayPools** resource.

3.1.5.3.1.3 GET ~~(All)~~ALL

This method retrieves all **gatewayPoolsGatewayPools** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/gatewayPoolsGatewayPools
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.3.1.3.1 Request Body

None.

3.1.5.3.1.3.2 Response Body

The format for the **gatewayPoolsGatewayPools GET ALL** response body is as follows.

```
{
  "value": [
    {
      "resourceRef": "/GatewayPools/default",
      "resourceId": "default",
      "etag": "W/\"0800327a-f275-4fb7-a8ac-9db9f9b74dfa\"",
      "instanceId": "d3bc394b-0779-4e87-a5c2-44f48091ecc2",
      "properties": {
        "provisioningState": "Succeeded",
        "type": "All",
        "ipConfiguration": {
          "greVipSubnets": [
            {
              "resourceRef": "/logicalnetworkslogicalNetworks/00000000-2222-0000-9999-000000000000/subnets/00000000-2222-1111-9999-000000000003"
            }
          ],
          "publicIPAddresses": [
            {
              "resourceRef": "/publicIPAddresses/00000000-5555-0000-0001-000000000000"
            }
          ]
        },
        "redundantGatewayCount": 0,
        "gatewayCapacityKiloBitsPerSecond": 104857600,
        "gateways": [
          {
            "resourceRef": "/Gateways/CloudGw1"
          }
        ],
        "virtualGatewaysVirtualGateways": [
          {
            "resourceRef": "/VirtualGateways/VirtualGateway_1"
          },
          {
            "resourceRef": "/VirtualGateways/VirtualGateway_2"
          },
          {
            "resourceRef": "/VirtualGateways/VirtualGateway_3"
          },
          {
            "resourceRef": "/VirtualGateways/VirtualGateway_4"
          },
          {
            "resourceRef": "/VirtualGateways/VirtualGateway_5"
          },
          {
            "resourceRef": "/VirtualGateways/VirtualGateway_6"
          },
          {
            "resourceRef": "/VirtualGateways/VirtualGateway_7"
          }
        ]
      }
    }
  ]
}
```

```

    {
      "resourceRef": "/VirtualGateways/VirtualGateway_8"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_9"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_10"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_11"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_12"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_13"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_14"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_15"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_16"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_17"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_18"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_19"
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_20"
    }
  ]
}
],
"nextLink": ""
}

```

The JSON schema for the **gatewayPoolsGatewayPools GET ALL** method is located in section 6.3.3.

3.1.5.3.1.3.3 Processing Details

Retrieves all **gatewayPoolsGatewayPools** resources.

3.1.5.3.1.4 DELETE

This method deletes a **gatewayPoolsGatewayPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/gatewayPoolsGatewayPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.3.1.4.1 Request Body

None.

3.1.5.3.1.4.2 Response Body

None.

3.1.5.3.1.4.3 Processing Details

Deletes a ~~gatewayPools~~GatewayPools resource.

3.1.5.4 gateways

A **gateways** resource is the computing resource that provides gateway services to one or more **virtualNetworks** resources. The configuration in this resource is the generic configuration that provides gateway services to the virtualNetwork resources.

~~The URI for a **gateways** resource is as follows.~~

It is invoked through the following URI.

`https://<url>/networking/v1/gateways/{resourceId}`

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.4.1.1	Create a new gateways resource or update an existing gateways resource.
GET	3.1.5.4.1.2	Get one gateways resource.
GET ALL	3.1.5.4.1.3	List all gateways resources in the Network Controller.
DELETE	3.1.5.4.1.4	Delete a gateways resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.

Element name	Type	Description
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
virtualGateways VirtualGateways	Read-only	Reference to collection of tenants' virtual gateways. This helps in enumerating the tenants that are dependent on this gateway.
configurationState	Optional Read-only	Indicates the last known running state of this gateway. See configurationState specification in section 2.2.4. More details are given in the section for the GET operation section 3.1.5.4.1.2.
virtualServer	Read-only	Reference to the virtual server that acts as a gateway.
totalCapacity	Read-only	Indicates total bandwidth capacity of the gateway when it was provisioned. This value indicates plain-text processing capacity. For example, for a 6-core VM the value will be 6 Gbps.
connections	Read/write	Indicates a reference to collection of all the connections on the gateway.
pool	Required	Indicates a reference to the gatewayPoolsGatewayPools resource the gateway is part of.
networkInterfaces	Required Read/write	Indicates the external and internal network interfaces that the gateways resource operates on. Both references MUST be present on both read and write. The references cannot be changed after the gateways resource is created.
networkInterfaces.externalNetworkInterface	Read/Write	A resource reference to a network interface with precisely one IP configuration on a logical network.
networkInterfaces.internalNetworkInterface	Read/Write	A resource reference to a network interface without any IP configurations.
type	Read-only	Indicates the type of pool - All , IKEv2 , GRE , or forwarding .
bgpConfig	Read/write	Indicates the BGP peering information required for peering with Top-of-Rack (ToR) router for GRE Gateway.
bgpConfig.extASNumber	Read/write	Extended (4-byte) Autonomous System Number (ASN) of the local BGP Router in XX.YY format.
bgpConfig.bgpPeer	Read/write	Indicates information of the BGP peer.
bgpConfig.bgpPeer.peerIP	Read/write	IP address of the peer, in this case the ToR.
bgpConfig.bgpPeer.peerExtAsNumber	Read/write	Extended (4-byte) ASN of the peer BGP router in XX.YY format.

3.1.5.4.1 HTTP Methods

3.1.5.4.1.1 PUT

This method creates a new **gateways** resource or updates an existing **gateways** resource.

It is invoked through the following URI.

https://<url>/networking/v1/gateways/{resourceId}

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.4.1.1.1 Request Body

The format for the request body for the **gateways PUT** method is as follows.

```
{
  "resourceId": "CloudGw1",
  "properties": {
    "pool": {
      "resourceRef": "/GatewayPools/default"
    },
    "types": [
      "s2sipsec",
      "s2sgre",
      "forwarding",
      "vpn"
    ],
    "virtualServer": {
      "resourceRef": "/VirtualServers/CloudGw1"
    },
    "networkInterfaces": {
      "externalNetworkInterface": {
        "resourceRef": "/NetworkInterfaces/00000000-3333-0000-1111-000000000001"
      },
      "internalNetworkInterface": {
        "resourceRef": "/NetworkInterfaces/00000000-3333-0000-0000-000000000001"
      }
    },
    "bgpConfig": {
      "extASNumber": "0.1",
      "bgpPeer": [
        {
          "peerIP": "11.0.1.100",
          "peerExtAsNumber": "0.1"
        }
      ]
    }
  }
}
```

The JSON schema for the **gateways PUT** method is located in section 6.4.1.

3.1.5.4.1.1.2 Response Body

The same as the format for the **gateways GET** response body (section 3.1.5.4.1.2.2). The JSON schema is located in section 6.4.2.

3.1.5.4.1.1.3 Processing Details

Creates or updates a **gateways** resource.

3.1.5.4.1.2 GET

This method retrieves a **gateways** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/gateways/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.4.1.2.1 Request Body

None.

3.1.5.4.1.2.2 Response Body

The format for the **gateways GET** response body is as follows.

```
{
  "resourceRef": "/Gatewaysgateways/CloudGw1",
  "resourceId": "CloudGw1",
  "etag": "W/\"367c9147-5186-4ff5-99f6-712d9b73d022\"",
  "instanceId": "956d2556-57db-4f53-ac05-cd4f01563a6e",
  "properties": {
    "provisioningState": "Succeeded",
    "virtualGatewaysVirtualGateways": [
      {
        "virtualGateway": {
          "resourceRef": "/VirtualGateways/VirtualGateway_1"
        },
        "networkConnections": [
          {
            "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_IPSEC_1"
          },
          {

```

```

        "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_Gre_1"
    },
    {
        "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_L3_1"
    }
],
"bgpRouter": {
    "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1"
}
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_2"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_2/NetworkConnections/VirtualGateway_2_IPSEC_1"
        }
    ],
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_2/BgpRouters/BGP_VirtualGateway_2_83e43f34-c516-46ac-ad48-755ee9clf665"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_3"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_3/NetworkConnections/VirtualGateway_3_IPSEC_1"
        }
    ],
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_3/BgpRouters/BGP_VirtualGateway_3_366d5a41-19c9-4ec8-bd82-01a2fb9fef37"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_4"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_4/NetworkConnections/VirtualGateway_4_IPSEC_1"
        }
    ],
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_4/BgpRouters/BGP_VirtualGateway_4_b73ef149-6db2-4d60-abfc-1fc7bf6c2271"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_5"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_5/NetworkConnections/VirtualGateway_5_IPSEC_1"
        }
    ]
},

```

```

      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_5/BgpRouters/BGP_VirtualGateway_5_7d561f64-09e0-4338-be20-49d5e812c94d"
      },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_6"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_6/NetworkConnections/VirtualGateway_6_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_6/BgpRouters/BGP_VirtualGateway_6_78c53fcf-ac05-4e8b-ae03-775d4875fad4"
      },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_7"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_7/NetworkConnections/VirtualGateway_7_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_7/BgpRouters/BGP_VirtualGateway_7_351ddc6d-d68c-40b1-94db-d2a5939c4eb0"
      },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_8"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_8/NetworkConnections/VirtualGateway_8_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_8/BgpRouters/BGP_VirtualGateway_8_f4c1d9a5-b3b8-4aa0-8b7e-c7cec321a0de"
      },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_9"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_9/NetworkConnections/VirtualGateway_9_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_9/BgpRouters/BGP_VirtualGateway_9_6c2433ae-410f-4eb2-bd38-3c6a4c170079"
      },
    },
  ],

```

```

    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_10"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_10/NetworkConnections/VirtualGateway_10_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_10/BgpRouters/BGP_VirtualGateway_10_b04b21a5-eab4-49e2-9770-
d98a63662c17"
      }
    },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_11"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_11/NetworkConnections/VirtualGateway_11_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_11/BgpRouters/BGP_VirtualGateway_11_6e83f798-f561-4f45-844e-
e6a0585930d8"
      }
    },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_12"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_12/NetworkConnections/VirtualGateway_12_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_12/BgpRouters/BGP_VirtualGateway_12_ef8630d4-8aac-46df-b037-
0d93eb8b6a82"
      }
    },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_13"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_13/NetworkConnections/VirtualGateway_13_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_13/BgpRouters/BGP_VirtualGateway_13_d6efc0cd-c388-475c-b3ae-
45ce38d213c9"
      }
    },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_14"
      },
      "networkConnections": [
        {

```

```

        "resourceRef":
"/VirtualGateways/VirtualGateway_14/NetworkConnections/VirtualGateway_14_IPSEC_1"
    },
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_14/BgpRouters/BGP_VirtualGateway_14_424d5a1c-654d-4279-ae22-
bd2e61d050ca"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_15"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_15/NetworkConnections/VirtualGateway_15_IPSEC_1"
        }
    ],
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_15/BgpRouters/BGP_VirtualGateway_15_8f4ea52f-b2b1-4641-b554-
454ef27ae9e3"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_16"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_16/NetworkConnections/VirtualGateway_16_IPSEC_1"
        }
    ],
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_16/BgpRouters/BGP_VirtualGateway_16_42df86d7-6a36-42fc-a558-
9f9110b8288d"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_17"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_17/NetworkConnections/VirtualGateway_17_IPSEC_1"
        }
    ],
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_17/BgpRouters/BGP_VirtualGateway_17_6ec56965-4f32-4146-9413-
aeacfdel8626"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_18"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_18/NetworkConnections/VirtualGateway_18_IPSEC_1"
        }
    ],
    "bgpRouter": {

```



```

        "resourceRef":
"/VirtualGateways/VirtualGateway_18/BgpRouters/BGP_VirtualGateway_18_0d2b38e7-79fd-4eb2-a445-8214c0da5d05"
    },
    {
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_19"
        },
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_19/NetworkConnections/VirtualGateway_19_IPSEC_1"
            }
        ],
        "bgpRouter": {
            "resourceRef":
"/VirtualGateways/VirtualGateway_19/BgpRouters/BGP_VirtualGateway_19_19b87991-6ec7-4e79-8b25-b5bbac60baf6"
        }
    },
    {
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_20"
        },
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_20/NetworkConnections/VirtualGateway_20_IPSEC_1"
            }
        ],
        "bgpRouter": {
            "resourceRef":
"/VirtualGateways/VirtualGateway_20/BgpRouters/BGP_VirtualGateway_20_557cfc53-e621-4559-bcb1-e1f2045fbe56"
        }
    }
],
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T21:34:32.1843967-07:00"
},
"virtualServer": {
    "resourceRef": "/virtualServers/CloudGw1"
},
"networkInterfaces": {
    "externalNetworkInterface": {
        "resourceRef": "/networkInterfaces/00000000-3333-0000-1111-000000000001"
    },
    "internalNetworkInterface": {
        "resourceRef": "/networkInterfaces/00000000-3333-0000-0000-000000000001"
    }
},
"type": "All",
"state": "Active",
"healthState": "Healthy",
"totalCapacity": 104857600,
"availableCapacity": 18636800,
"bgpConfig": {
    "extASNumber": "0.1",
    "bgpPeer": [
        {
            "peerIP": "11.0.1.100",
            "peerExtAsNumber": "0.1"
        }
    ]
},
"connections": [],
"externalIPAddress": [
    {

```

```

        "ipAddress": "27.1.1.15",
        "prefixLength": 24
    }
  ],
  "pool": {
    "resourceRef": "/GatewayPools/default"
  }
}
}

```

The JSON schema for the **gateways GET** method is located in section 6.4.2.

3.1.5.4.1.2.3 Processing Details

Retrieves a **gateways** resource.

The server returns a configuration state only if it has already attempted to configure settings according to the REST resource properties that were created or updated by using the **PUT** method. **configurationState.lastUpdatedTime** is set to a value that is implementation-specific.

The server MUST return a configuration state property **configurationState.status** set to **"Success"** if there were no errors. The server MUST return a configuration state property **configurationState.status** set to **"Failure"** if there were errors during the configuration of settings. **The configurationState.detailedInfo** contains an array of objects per the definition in section 2.2.4. The following table contains acceptable values in the response.

configurationState.status	Code inside the configurationState.detailedInfo array	Description
Failure	Failure	Unable to fetch properties from the virtual switch.
InProgress	HostUnreachable	Gateway cleanup is in progress.
Failure	HostUnreachable	Could not connect to the gateway.
Failure	PolicyConfigurationFailure	Could not configure policies on the gateway.

3.1.5.4.1.3 GET ~~(All)~~ALL

Retrieves all **gatewaygateways** resources. Lists all **gatewaygateways** resources in the Network Controller.

It is invoked through the following URI.

```
https://<url>/networking/v1/gateways
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.4.1.3.1 Request Body

None.

3.1.5.4.1.3.2 Response Body

The format for the **gateways GET ALL** response body is as follows.

```
{
  "value": [
    {
      "resourceRef": "/Gateways/gateways/CloudGw1",
      "resourceId": "CloudGw1",
      "etag": "W/\"367c9147-5186-4ff5-99f6-712d9b73d022\"",
      "instanceId": "956d2556-57db-4f53-ac05-cd4f01563a6e",
      "properties": {
        "provisioningState": "Succeeded",
        "virtualGatewaysVirtualGateways": [
          {
            "virtualGateway": {
              "resourceRef": "/VirtualGateways/VirtualGateway_1"
            },
            "networkConnections": [
              {
                "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_IPSEC_1"
              },
              {
                "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_Gre_1"
              },
              {
                "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_L3_1"
              }
            ],
            "bgpRouter": {
              "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1"
            }
          },
          {
            "virtualGateway": {
              "resourceRef": "/VirtualGateways/VirtualGateway_2"
            },
            "networkConnections": [
              {
                "resourceRef":
"/VirtualGateways/VirtualGateway_2/NetworkConnections/VirtualGateway_2_IPSEC_1"
              }
            ],
            "bgpRouter": {
              "resourceRef":
"/VirtualGateways/VirtualGateway_2/BgpRouters/BGP_VirtualGateway_2_83e43f34-c516-46ac-ad48-755ee9clf665"
            }
          },
          {
            "virtualGateway": {
              "resourceRef": "/VirtualGateways/VirtualGateway_3"
            }
          }
        ]
      }
    }
  ]
}
```

```

        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_3/NetworkConnections/VirtualGateway_3_IPSEC_1"
            },
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_3/BgpRouters/BGP_VirtualGateway_3_366d5a41-19c9-4ec8-bd82-01a2fb9fef37"
            },
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_4/NetworkConnections/VirtualGateway_4_IPSEC_1"
            },
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_4/BgpRouters/BGP_VirtualGateway_4_b73ef149-6db2-4d60-abfc-1fc7bf6c2271"
            },
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_5/NetworkConnections/VirtualGateway_5_IPSEC_1"
            },
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_5/BgpRouters/BGP_VirtualGateway_5_7d561f64-09e0-4338-be20-49d5e812c94d"
            },
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_6/NetworkConnections/VirtualGateway_6_IPSEC_1"
            },
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_6/BgpRouters/BGP_VirtualGateway_6_78c53fcf-ac05-4e8b-ae03-775d4875fad4"
            },
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_7/NetworkConnections/VirtualGateway_7_IPSEC_1"
            }
        ],
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_3"
        },
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_4"
        },
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_5"
        },
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_6"
        },
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_7"
        }
    },
    {
        "resourceRef": "/VirtualGateways/VirtualGateway_3"
    },
    {
        "resourceRef": "/VirtualGateways/VirtualGateway_4"
    },
    {
        "resourceRef": "/VirtualGateways/VirtualGateway_5"
    },
    {
        "resourceRef": "/VirtualGateways/VirtualGateway_6"
    },
    {
        "resourceRef": "/VirtualGateways/VirtualGateway_7"
    }
]

```

```

        "bgpRouter": {
            "resourceRef":
"/VirtualGateways/VirtualGateway_7/BgpRouters/BGP_VirtualGateway_7_351ddc6d-d68c-40b1-94db-
d2a5939c4eb0"
        }
    },
    {
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_8"
        },
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_8/NetworkConnections/VirtualGateway_8_IPSEC_1"
            }
        ],
        "bgpRouter": {
            "resourceRef":
"/VirtualGateways/VirtualGateway_8/BgpRouters/BGP_VirtualGateway_8_f4c1d9a5-b3b8-4aa0-8b7e-
c7cec321a0de"
        }
    },
    {
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_9"
        },
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_9/NetworkConnections/VirtualGateway_9_IPSEC_1"
            }
        ],
        "bgpRouter": {
            "resourceRef":
"/VirtualGateways/VirtualGateway_9/BgpRouters/BGP_VirtualGateway_9_6c2433ae-410f-4eb2-bd38-
3c6a4c170079"
        }
    },
    {
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_10"
        },
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_10/NetworkConnections/VirtualGateway_10_IPSEC_1"
            }
        ],
        "bgpRouter": {
            "resourceRef":
"/VirtualGateways/VirtualGateway_10/BgpRouters/BGP_VirtualGateway_10_b04b21a5-eab4-49e2-9770-
d98a63662c17"
        }
    },
    {
        "virtualGateway": {
            "resourceRef": "/VirtualGateways/VirtualGateway_11"
        },
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_11/NetworkConnections/VirtualGateway_11_IPSEC_1"
            }
        ],
        "bgpRouter": {
            "resourceRef":
"/VirtualGateways/VirtualGateway_11/BgpRouters/BGP_VirtualGateway_11_6e83f798-f561-4f45-844e-
e6a0585930d8"
        }
    }
},

```

```

    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_12"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_12/NetworkConnections/VirtualGateway_12_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_12/BgpRouters/BGP_VirtualGateway_12_ef8630d4-8aac-46df-b037-0d93eb8b6a82"
      }
    },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_13"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_13/NetworkConnections/VirtualGateway_13_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_13/BgpRouters/BGP_VirtualGateway_13_d6efc0cd-c388-475c-b3ae-45ce38d213c9"
      }
    },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_14"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_14/NetworkConnections/VirtualGateway_14_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_14/BgpRouters/BGP_VirtualGateway_14_424d5a1c-654d-4279-ae22-bd2e61d050ca"
      }
    },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_15"
      },
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_15/NetworkConnections/VirtualGateway_15_IPSEC_1"
        }
      ],
      "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_15/BgpRouters/BGP_VirtualGateway_15_8f4ea52f-b2b1-4641-b554-454ef27ae9e3"
      }
    },
    {
      "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_16"
      },
      "networkConnections": [
        {

```

```

        "resourceRef":
"/VirtualGateways/VirtualGateway_16/NetworkConnections/VirtualGateway_16_IPSEC_1"
    },
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_16/BgpRouters/BGP_VirtualGateway_16_42df86d7-6a36-42fc-a558-9f9110b8288d"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_17"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_17/NetworkConnections/VirtualGateway_17_IPSEC_1"
        }
    ],
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_17/BgpRouters/BGP_VirtualGateway_17_6ec56965-4f32-4146-9413-aeacfde18626"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_18"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_18/NetworkConnections/VirtualGateway_18_IPSEC_1"
        }
    ],
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_18/BgpRouters/BGP_VirtualGateway_18_0d2b38e7-79fd-4eb2-a445-8214c0da5d05"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_19"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_19/NetworkConnections/VirtualGateway_19_IPSEC_1"
        }
    ],
    "bgpRouter": {
        "resourceRef":
"/VirtualGateways/VirtualGateway_19/BgpRouters/BGP_VirtualGateway_19_19b87991-6ec7-4e79-8b25-b5bbac60baf6"
    }
},
{
    "virtualGateway": {
        "resourceRef": "/VirtualGateways/VirtualGateway_20"
    },
    "networkConnections": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_20/NetworkConnections/VirtualGateway_20_IPSEC_1"
        }
    ],
    "bgpRouter": {

```

```

        "resourceRef":
"/VirtualGateways/VirtualGateway_20/BgpRouters/BGP_VirtualGateway_20_557cfc53-e621-4559-bcb1-
elf2045fbc56"
    }
  },
  "configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T21:34:32.1843967-07:00"
  },
  "virtualServer": {
    "resourceRef": "/virtualServers/CloudGw1"
  },
  "networkInterfaces": {
    "externalNetworkInterface": {
      "resourceRef": "/networkInterfaces/00000000-3333-0000-1111-000000000001"
    },
    "internalNetworkInterface": {
      "resourceRef": "/networkInterfaces/00000000-3333-0000-0000-000000000001"
    }
  },
  "type": "All",
  "state": "Active",
  "healthState": "Healthy",
  "totalCapacity": 104857600,
  "availableCapacity": 18636800,
  "bgpConfig": {
    "extASNumber": "0.1",
    "bgpPeer": [
      {
        "peerIP": "11.0.1.100",
        "peerExtAsNumber": "0.1"
      }
    ]
  },
  "connections": [],
  "externalIPAddress": [
    {
      "ipAddress": "27.1.1.15",
      "prefixLength": 24
    }
  ],
  "pool": {
    "resourceRef": "/GatewayPools/default"
  }
}
],
"nextLink": ""
}

```

The JSON schema for the **gateways GET ALL** method is located in section 6.4.3.

3.1.5.4.1.3.3 Processing Details

Retrieves all **gateways** resources.

3.1.5.4.1.4 DELETE

This method deletes a **gateways** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/gateways/{resourceId}
```


The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.4.1.4.1 Request Body

None.

3.1.5.4.1.4.2 Response Body

None.

3.1.5.4.1.4.3 Processing Details

Deletes a **gateways** resource.

3.1.5.5 loadBalancers

The **loadBalancers** resource allows fine-grained configuration of the distribution of incoming traffic across VM instances that are hosted in the environment managed by the server. This resource has two main parts: a frontend and a backend configuration.

The frontend configuration exposes the IP address of the load balancer. For example, this address can be a reserved public or private IP address previously provided to the client, or it can be an IP address that is dynamically allocated from a subnet of a virtual network.

The backend configuration identifies the tenant workload VMs to which the traffic will be delivered.

Probes define how the loadBalancer determines the health of a specific VM instance or endpoint of that instance. The loadBalancer sends traffic to a VM instance or endpoint only if the VM instance or endpoint was determined to be healthy.

A load balancing rule refers to a frontend configuration, a backend configuration and optionally to a **probe** resource to create a mapping between Virtual IP and a set of workload VMs. Traffic directed to the VIP is then load-balanced onto one of the workload VMs.

The loadBalancer uses a distribution algorithm to map traffic to available servers. The algorithm is a 5-tuple hash based on source IP, source port, destination IP, destination port, and protocol type. It provides stickiness only within a transport session, which is a feature that routes the requests for a specific session to the same physical machine that serviced the first request for that session.

Packets in the same TCP or UDP session will be directed to the same datacenter IP instance behind the load balanced endpoint. When the client closes and re-opens the connection or starts a new session

from the same source IP, the source port changes and causes the traffic to go to a different datacenter IP endpoint.

The loadBalancer can be configured to use a 2-tuple (Source IP, Destination IP) or 3-tuple (Source IP, Destination IP, Protocol) to map traffic to the available servers. By using SourceIPProtocol, connections initiated from the same client computer go to the same datacenter IP endpoint.

Linkage to Other Resources

When a port of a specific frontend IP address sends traffic to the **loadBalancers** resource, the **loadBalancers** resource distributes the traffic to a specific port of a set of backend IP addresses. The backend IP addresses are associated with network interface cards (NICs) of VMs. Backend IP addresses in the **loadBalancers** resource are specified as references to these private IPs.

A public IP address can be associated with the private frontend IP of the **loadBalancers** resource by setting an ipConfigurationRef on the **publicIPAddresses** resource.

The resources that MUST be unique in the context of the parent **loadBalancers** resource are: **backendAddressPools**, **frontendIPConfigurations**, **inboundNatRules**, **loadBalancingRules**, **outboundNatRules**, **probe**.

The ~~URI for the~~ **loadBalancers** resource is ~~as follows~~[invoked through the following URI](#).

```
https://<url>/networking/v1/loadBalancers/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.5.1.4	Create a new loadBalancers resource or update an existing loadBalancers resource.
GET	3.1.5.5.1.2	Get one loadBalancers resource
GET (All) ALL	3.1.5.5.1.3	List all loadBalancers resources in the Network Controller.
DELETE	3.1.5.5.1.1	Delete a loadBalancers resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
backendAddressPools	Optional	Indicates the backend Address Pool of the load balancer, see section 3.1.5.5.2, for full details on this element.
frontendIPConfigurations	Required	Indicates the frontend IP addresses of the load balancer, see section 3.1.5.5.3, for full details on this element.
loadBalancingRules	Optional	A list of load balancing configurations. Each configuration describes what traffic and how it gets load balanced between backend ips IPs .
inboundNatRules	Optional	Indicates an array of inbound NAT rules configured for the load

Element name	Type	Description
		balancer, see section 3.1.5.5.4, for full details on this element.
outboundNatRules	Optional	Indicates an array of outbound NAT rules configured for the load balancer, see section 3.1.5.5.6, for full details on this element.
probes	Optional	Indicates an array of probes configured for the load balancer, see section 3.1.5.5.7, for full details on this element.

3.1.5.5.1 HTTP Methods

3.1.5.5.1.1 PUT

This method creates a new **loadBalancers** resource or updates an existing **loadBalancers** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.5.1.1.1 Request Body

The format for the request body for the **loadBalancers PUT** method is as follows.

```
{
  "resourceRef": "/loadBalancers/",
  "resourceId": "ee396509-27d3-44f9-849c-f6ed28d59f66",
  "instanceId": "00000000-0000-0000-0000-000000000000",
  "properties": {
    "provisioningState": "Succeeded",
    "frontendIPConfigurations": [
      {
        "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-
f6ed28d59f66/frontendIPConfigurations/30951b82-73dc-4223-9fd6-c11676fdcd0",
        "resourceId": "30951b82-73dc-4223-9fd6-c11676fdcd0",
        "instanceId": "60fff655-907b-41f7-9ea4-623cdb261137",
        "properties": {
          "provisioningState": "Succeeded",
```

```

    "privateIPAddress": "10.0.21.22",
    "privateIPAllocationMethod": "Static",
    "subnet": {
      "resourceRef": "/logicalnetworks/4b14f3a1-ed8d-4647-b370-2ae3ff227b9a/subnets/6d290ba5-f642-49bc-9cab-1478d76a8565"
    },
    "loadBalancingRules": [],
    "inboundNatRules": [],
    "outboundNatRules": []
  }
},
"backendAddressPools": [
  {
    "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-f6ed28d59f66/backendAddressPools/ab3e87bd-6d7a-4204-b895-5953cc52edd7",
    "resourceId": "ab3e87bd-6d7a-4204-b895-5953cc52edd7",
    "instanceId": "85ae7f16-8e2d-430c-88f0-5f77e4209098",
    "properties": {
      "provisioningState": "Succeeded",
      "backendIPConfigurations": [],
      "outboundNatRules": [],
      "loadBalancingRules": []
    }
  }
],
"loadBalancingRules": [
  {
    "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-f6ed28d59f66/loadBalancingRules/2ea746ea-968f-41f2-8bfa-71d2391ef752",
    "resourceId": "2ea746ea-968f-41f2-8bfa-71d2391ef752",
    "instanceId": "2844edde-b297-429f-927a-f2de89e0ff3b",
    "properties": {
      "provisioningState": "Succeeded",
      "frontendIPConfigurations": [
        {
          "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-f6ed28d59f66/frontendIPConfigurations/30951b82-73dc-4223-9fd6-c11676fdcd0"
        }
      ],
      "protocol": "Tcp",
      "frontendPort": 2003,
      "backendPort": 2003,
      "enableFloatingIP": false,
      "idleTimeoutInMinutes": 4,
      "backendAddressPool": {
        "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-f6ed28d59f66/backendAddressPools/ab3e87bd-6d7a-4204-b895-5953cc52edd7"
      },
      "loadDistribution": "Default"
    }
  }
],
"probes": [
  {
    "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-f6ed28d59f66/probes/9a73ea99-99be-4ca6-8f20-f9b070477742",
    "resourceId": "9a73ea99-99be-4ca6-8f20-f9b070477742",
    "instanceId": "0ca5aae2-ec9a-4fdc-9bd1-963f609e5ff7",
    "properties": {
      "provisioningState": "Succeeded",
      "protocol": "Tcp",
      "port": 55555,
      "intervalInSeconds": 30,
      "numberOfProbes": 1,
      "loadBalancingRules": []
    }
  }
],
"outboundNatRules": [

```

```

    {
      "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-
f6ed28d59f66/outboundNatRules/5cf81a74-9922-4f0d-8a05-b3a9d6f0db9d",
      "resourceId": "5cf81a74-9922-4f0d-8a05-b3a9d6f0db9d",
      "instanceId": "429ea927-d1c0-4e10-9ce7-c27fb57302a5",
      "properties": {
        "provisioningState": "Succeeded",
        "frontendIPConfigurations": [
          {
            "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-
f6ed28d59f66/frontendIPConfigurations/30951b82-73dc-4223-9fd6-c11676fdcde0"
          }
        ],
        "protocol": "All",
        "backendAddressPool": {
          "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-
f6ed28d59f66/backendAddressPools/ab3e87bd-6d7a-4204-b895-5953cc52edd7"
        }
      }
    }
  ]
}

```

The JSON schema for the **loadBalancers PUT** method is located in section 6.5.1.

3.1.5.5.1.1.2 Response Body

The format for the PUT **loadBalancers** response body is the same as the format for the **GET loadBalancers** response body (section 3.1.5.5.1.2.2). The JSON schema is located in section 6.5.2.

3.1.5.5.1.1.3 Processing Details

Create a new **loadBalancers** resource or update an existing **loadBalancers** resource.

3.1.5.5.1.2 GET

This method retrieves a **loadBalancers** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.5.1.2.1 Request Body

None.

3.1.5.5.1.2.2 Response Body

The format for the response body for the **loadBalancers GET** method is as follows.

```
{
  "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098",
  "resourceId": "0cac5f8a-9d5c-455a-a971-2682d597e098",
  "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
  "instanceId": "d91f4951-faf7-4a15-a84a-8a9f6dffaff8",
  "properties": {
    "provisioningState": "Succeeded",
    "frontendIPConfigurations": [
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57",
        "resourceId": "5187779d-c61c-44d2-87be-fa69ac2d9d57",
        "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
        "instanceId": "3902a530-9639-4759-9bbf-9bab6675593a",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "22.0.0.22",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworkslogicalNetworks/ccb732ec-a3b5-4755-99ff-fddb91d50884/subnets/262b479f-0952-49b9-ad20-3d6732729389"
          },
          "loadBalancingRules": [
            {
              "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-f6ed28d59f66/loadBalancingRules/2ea746ea-968f-41f2-8bfa-71d2391ef752"
            }
          ],
          "inboundNatRules": [
            {
              "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/fc44af15-be82-46c5-b75a-3e89ccd792a9"
            }
          ],
          "outboundNatRules": [
            {
              "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160"
            }
          ]
        }
      },
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/94c568d8-d839-431a-aed4-a5c178356018",
        "resourceId": "94c568d8-d839-431a-aed4-a5c178356018",
        "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
        "instanceId": "d896da12-37f2-4e36-b229-7278a672a0ac",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "22.0.0.23",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworkslogicalNetworks/ccb732ec-a3b5-4755-99ff-fddb91d50884/subnets/262b479f-0952-49b9-ad20-3d6732729389"
          },
          "loadBalancingRules": [ ],
          "inboundNatRules": [
            {
              "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/0e5ed8cf-60fb-40f4-b02a-90932d4de000"
            }
          ]
        }
      }
    ]
  }
}
```

```

    ],
    "outboundNatRules": [
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160"
      }
    ]
  },
  ],
  "backendAddressPools": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/backendAddressPools/b32b5ef0-5332-49a8-b383-f91090135f71",
      "resourceId": "b32b5ef0-5332-49a8-b383-f91090135f71",
      "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
      "instanceId": "f980604c-258c-4d60-8be4-559edd085384",
      "properties": {
        "provisioningState": "Succeeded",
        "backendIPConfigurations": [
          {
            "resourceRef": "/networkInterfaces/97c69782-f173-4793-a408-64074e601dd1/ipConfigurations/1b94ce74-b012-49a7-8e93-9315252c6ab2"
          },
          {
            "resourceRef": "/networkInterfaces/e5ea0c14-ce85-4eb7-909a-993f0477f5ac/ipConfigurations/45af7ff3-555f-43b0-ae74-7fcce88c5197"
          }
        ],
        "outboundNatRules": [
          {
            "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160"
          }
        ],
        "loadBalancingRules": [
          {
            "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-f6ed28d59f66/loadBalancingRules/2ea746ea-968f-41f2-8bfa-71d2391ef752"
          }
        ]
      }
    }
  ],
  "probes": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/probes/9f940e29-1d25-44fc-88d3-c81151a0344e",
      "resourceId": "9f940e29-1d25-44fc-88d3-c81151a0344e",
      "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
      "instanceId": "0da65588-247b-475b-bd1a-7ead0bala182",
      "properties": {
        "provisioningState": "Succeeded",
        "protocol": "Tcp",
        "port": 55555,
        "intervalInSeconds": 30,
        "numberOfProbes": 1,
        "loadBalancingRules": [ ]
      }
    }
  ],
  "inboundNatRules": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/fc44af15-be82-46c5-b75a-3e89ccd792a9",
      "resourceId": "fc44af15-be82-46c5-b75a-3e89ccd792a9",
      "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
      "instanceId": "a748c5db-e2fd-4335-8c89-280b78d2511c",
      "properties": {
        "provisioningState": "Succeeded",

```

```

    "frontendIPConfigurations": [
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57"
      }
    ],
    "protocol": "Tcp",
    "frontendPort": 2003,
    "backendPort": 2003,
    "enableFloatingIP": false,
    "idleTimeoutInMinutes": 4,
    "backendIPConfiguration": {
      "resourceRef": "/networkInterfaces/e5ea0c14-ce85-4eb7-909a-993f0477f5ac/ipConfigurations/45af7ff3-555f-43b0-ae74-7fcce88c5197"
    }
  },
  {
    "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/0e5ed8cf-60fb-40f4-b02a-90932d4de000",
    "resourceId": "0e5ed8cf-60fb-40f4-b02a-90932d4de000",
    "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
    "instanceId": "e8c59538-e641-4796-968d-50c4e11225e7",
    "properties": {
      "provisioningState": "Succeeded",
      "frontendIPConfigurations": [
        {
          "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/94c568d8-d839-431a-aed4-a5c178356018"
        }
      ],
      "protocol": "Tcp",
      "frontendPort": 2003,
      "backendPort": 2003,
      "enableFloatingIP": false,
      "idleTimeoutInMinutes": 4,
      "backendIPConfiguration": {
        "resourceRef": "/networkInterfaces/97c69782-f173-4793-a408-64074e601dd1/ipConfigurations/1b94ce74-b012-49a7-8e93-9315252c6ab2"
      }
    }
  },
  "outboundNatRules": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160",
      "resourceId": "49053c15-2d0f-45a2-8148-be8615282160",
      "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
      "instanceId": "c4000c95-7f90-4bb4-b68d-b2bc9c1dfc3e",
      "properties": {
        "provisioningState": "Succeeded",
        "frontendIPConfigurations": [
          {
            "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57"
          },
          {
            "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/94c568d8-d839-431a-aed4-a5c178356018"
          }
        ],
        "protocol": "All",
        "backendAddressPool": {
          "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/backendAddressPools/b32b5ef0-5332-49a8-b383-f91090135f71"
        }
      }
    }
  ],

```



```

    "loadBalancingRules": [
      {
        "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-
        f6ed28d59f66/loadBalancingRules/2ea746ea-968f-41f2-8bfa-71d2391ef752",
        "resourceId": "2ea746ea-968f-41f2-8bfa-71d2391ef752",
        "instanceId": "2844edde-b297-429f-927a-f2de89e0ff3b",
        "properties": {
          "provisioningState": "Succeeded",
          "frontendIPConfigurations": [
            {
              "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-
              2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57"
            }
          ],
          "protocol": "Tcp",
          "frontendPort": 2003,
          "backendPort": 2003,
          "enableFloatingIP": false,
          "idleTimeoutInMinutes": 4,
          "backendAddressPool": {
            "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-
            2682d597e098/backendAddressPools/b32b5ef0-5332-49a8-b383-f91090135f71"
          },
          "loadDistribution": "Default"
        }
      }
    ]
  }
}

```

The JSON schema for the **loadBalancers GET** method is located in section 6.5.2.

3.1.5.5.1.2.3 Processing Details

Retrieves a **loadBalancers** resource.

3.1.5.5.1.3 GET ~~(All)~~ALL

This method retrieves all **loadBalancers** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.5.1.3.1 Request Body

None.


```

    ]
  }
}
],
"backendAddressPools": [
  {
    "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/backendAddressPools/b32b5ef0-5332-49a8-b383-f91090135f71",
    "resourceId": "b32b5ef0-5332-49a8-b383-f91090135f71",
    "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
    "instanceId": "f980604c-258c-4d60-8be4-559edd085384",
    "properties": {
      "provisioningState": "Succeeded",
      "backendIPConfigurations": [
        {
          "resourceRef": "/networkInterfaces/97c69782-f173-4793-a408-64074e601dd1/ipConfigurations/1b94ce74-b012-49a7-8e93-9315252c6ab2"
        },
        {
          "resourceRef": "/networkInterfaces/e5ea0c14-ce85-4eb7-909a-993f0477f5ac/ipConfigurations/45af7ff3-555f-43b0-ae74-7fcce88c5197"
        }
      ],
      "outboundNatRules": [
        {
          "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160"
        }
      ],
      "loadBalancingRules": []
    }
  }
],
"probes": [
  {
    "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/probes/9f940e29-1d25-44fc-88d3-c81151a0344e",
    "resourceId": "9f940e29-1d25-44fc-88d3-c81151a0344e",
    "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
    "instanceId": "0da65588-247b-475b-bd1a-7ead0bala182",
    "properties": {
      "provisioningState": "Succeeded",
      "protocol": "Tcp",
      "port": 55555,
      "intervalInSeconds": 30,
      "numberOfProbes": 1,
      "loadBalancingRules": []
    }
  }
],
"inboundNatRules": [
  {
    "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/fc44af15-be82-46c5-b75a-3e89ccd792a9",
    "resourceId": "fc44af15-be82-46c5-b75a-3e89ccd792a9",
    "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
    "instanceId": "a748c5db-e2fd-4335-8c89-280b78d2511c",
    "properties": {
      "provisioningState": "Succeeded",
      "frontendIPConfigurations": [
        {
          "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57"
        }
      ],
      "protocol": "Tcp",
      "frontendPort": 2003,
      "backendPort": 2003,
      "enableFloatingIP": false,
      "idleTimeoutInMinutes": 4,

```

```

        "backendIPConfiguration": {
            "resourceRef": "/networkInterfaces/e5ea0c14-ce85-4eb7-909a-
993f0477f5ac/ipConfigurations/45af7ff3-555f-43b0-ae74-7fcce88c5197"
        }
    },
    {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-
2682d597e098/inboundNatRules/0e5ed8cf-60fb-40f4-b02a-90932d4de000",
        "resourceId": "0e5ed8cf-60fb-40f4-b02a-90932d4de000",
        "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
        "instanceId": "e8c59538-e641-4796-968d-50c4e11225e7",
        "properties": {
            "provisioningState": "Succeeded",
            "frontendIPConfigurations": [
                {
                    "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-
2682d597e098/frontendIPConfigurations/94c568d8-d839-431a-aed4-a5c178356018"
                }
            ],
            "protocol": "Tcp",
            "frontendPort": 2003,
            "backendPort": 2003,
            "enableFloatingIP": false,
            "idleTimeoutInMinutes": 4,
            "backendIPConfiguration": {
                "resourceRef": "/networkInterfaces/97c69782-f173-4793-a408-
64074e601dd1/ipConfigurations/1b94ce74-b012-49a7-8e93-9315252c6ab2"
            }
        }
    }
],
"outboundNatRules": [
    {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-
2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160",
        "resourceId": "49053c15-2d0f-45a2-8148-be8615282160",
        "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
        "instanceId": "c4000c95-7f90-4bb4-b68d-b2bc9c1dfc3e",
        "properties": {
            "provisioningState": "Succeeded",
            "frontendIPConfigurations": [
                {
                    "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-
2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57"
                },
                {
                    "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-
2682d597e098/frontendIPConfigurations/94c568d8-d839-431a-aed4-a5c178356018"
                }
            ],
            "protocol": "All",
            "backendAddressPool": {
                "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-
2682d597e098/backendAddressPools/b32b5ef0-5332-49a8-b383-f91090135f71"
            }
        }
    }
]
},
{
    "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-e0fe1f42cce1",
    "resourceId": "d2251a0d-32d2-457e-b3aa-e0fe1f42cce1",
    "etag": "W/\"72fdafa3d-34f4-4c90-ae94-d97ed73c9cf7\"",
    "instanceId": "b32d0db3-13db-431a-a265-32185aa5a905",
    "properties": {
        "provisioningState": "Succeeded",
        "frontendIPConfigurations": [
            {

```

```

        "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/frontendIPConfigurations/9f37a479-7d60-489a-aab6-d7eb2200306f",
        "resourceId": "9f37a479-7d60-489a-aab6-d7eb2200306f",
        "etag": "W/\\"72fdfa3d-34f4-4c90-ae94-d97ed73c9cf7\\"",
        "instanceId": "51b57d2a-80da-464a-988a-4a805bd1d875",
        "properties": {
            "provisioningState": "Succeeded",
            "privateIPAddress": "21.0.0.23",
            "privateIPAllocationMethod": "Static",
            "subnet": {
                "resourceRef": "/logicalnetworksLogicalNetworks/9c1b2b61-dec2-49e3-b573-
c2ecff57893d/subnets/a4f7c90b-6056-4dff-97fb-f46211ecdc10"
            },
            "loadBalancingRules": [],
            "inboundNatRules": [
                {
                    "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/inboundNatRules/d076eae7-926a-457a-a60c-0a713a02977d"
                }
            ],
            "outboundNatRules": [
                {
                    "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/outboundNatRules/f3f3291d-b26c-44d3-8d55-99b644b70388"
                }
            ]
        }
    },
    {
        "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/frontendIPConfigurations/ab5ccbe7-2ce9-4cdf-a0da-e4e5d81479d8",
        "resourceId": "ab5ccbe7-2ce9-4cdf-a0da-e4e5d81479d8",
        "etag": "W/\\"72fdfa3d-34f4-4c90-ae94-d97ed73c9cf7\\"",
        "instanceId": "fe6adbed-8b73-4fc2-82cd-191143753c4a",
        "properties": {
            "provisioningState": "Succeeded",
            "privateIPAddress": "21.0.0.24",
            "privateIPAllocationMethod": "Static",
            "subnet": {
                "resourceRef": "/logicalnetworksLogicalNetworks/9c1b2b61-dec2-49e3-b573-
c2ecff57893d/subnets/a4f7c90b-6056-4dff-97fb-f46211ecdc10"
            },
            "loadBalancingRules": [],
            "inboundNatRules": [
                {
                    "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/inboundNatRules/425eea91-5a9e-4777-b2c3-0442dfc20344"
                }
            ],
            "outboundNatRules": [
                {
                    "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/outboundNatRules/f3f3291d-b26c-44d3-8d55-99b644b70388"
                }
            ]
        }
    }
],
"backendAddressPools": [
    {
        "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/backendAddressPools/db1fa644-bd00-4c05-b11b-f5f07bfed86b",
        "resourceId": "db1fa644-bd00-4c05-b11b-f5f07bfed86b",
        "etag": "W/\\"72fdfa3d-34f4-4c90-ae94-d97ed73c9cf7\\"",
        "instanceId": "b638b320-5569-444f-9adf-78a683072269",
        "properties": {
            "provisioningState": "Succeeded",
            "backendIPConfigurations": [

```

```

        "resourceRef": "/networkInterfaces/add9dac6-ddcc-4108-8543-
e167c0a8d9dc/ipConfigurations/2e8a0316-66a6-4a3e-bd86-89b0e43b080f"
    },
    {
        "resourceRef": "/networkInterfaces/b3dc7295-7144-4f6e-8235-
35d88b917482/ipConfigurations/581ab448-8e6f-436c-9dec-43366a9817dd"
    }
],
"outboundNatRules": [
    {
        "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/outboundNatRules/f3f3291d-b26c-44d3-8d55-99b644b70388"
    }
],
"loadBalancingRules": []
}
},
],
"probes": [
    {
        "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/probes/ddb4dab8-b1eb-4476-90ca-948697240317",
        "resourceId": "ddb4dab8-b1eb-4476-90ca-948697240317",
        "etag": "W/\"72fdfa3d-34f4-4c90-ae94-d97ed73c9cf7\"",
        "instanceId": "18336b2f-8b2e-4bf2-a196-99009ec8feb8",
        "properties": {
            "provisioningState": "Succeeded",
            "protocol": "Tcp",
            "port": 55555,
            "intervalInSeconds": 30,
            "numberOfProbes": 1,
            "loadBalancingRules": []
        }
    }
],
"inboundNatRules": [
    {
        "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/inboundNatRules/d076eae7-926a-457a-a60c-0a713a02977d",
        "resourceId": "d076eae7-926a-457a-a60c-0a713a02977d",
        "etag": "W/\"72fdfa3d-34f4-4c90-ae94-d97ed73c9cf7\"",
        "instanceId": "4be2c156-cbcb-466d-a8fe-865bc9f0045d",
        "properties": {
            "provisioningState": "Succeeded",
            "frontendIPConfigurations": [
                {
                    "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/frontendIPConfigurations/9f37a479-7d60-489a-aab6-d7eb2200306f"
                }
            ],
            "protocol": "Tcp",
            "frontendPort": 2003,
            "backendPort": 2003,
            "enableFloatingIP": false,
            "idleTimeoutInMinutes": 4,
            "backendIPConfiguration": {
                "resourceRef": "/networkInterfaces/b3dc7295-7144-4f6e-8235-
35d88b917482/ipConfigurations/581ab448-8e6f-436c-9dec-43366a9817dd"
            }
        }
    }
],
    {
        "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/inboundNatRules/425eea91-5a9e-4777-b2c3-0442dfc20344",
        "resourceId": "425eea91-5a9e-4777-b2c3-0442dfc20344",
        "etag": "W/\"72fdfa3d-34f4-4c90-ae94-d97ed73c9cf7\"",
        "instanceId": "ae841775-a3b2-454e-bd69-b78a298ca7bf",
        "properties": {
            "provisioningState": "Succeeded",
            "frontendIPConfigurations": [

```

```

        {
          "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/frontendIPConfigurations/ab5ccbe7-2ce9-4cdf-a0da-e4e5d81479d8"
        }
      ],
      "protocol": "Tcp",
      "frontendPort": 2003,
      "backendPort": 2003,
      "enableFloatingIP": false,
      "idleTimeoutInMinutes": 4,
      "backendIPConfiguration": {
        "resourceRef": "/networkInterfaces/add9dac6-ddcc-4108-8543-
e167c0a8d9dc/ipConfigurations/2e8a0316-66a6-4a3e-bd86-89b0e43b080f"
      }
    }
  ],
  "outboundNatRules": [
    {
      "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/outboundNatRules/f3f3291d-b26c-44d3-8d55-99b644b70388",
      "resourceId": "f3f3291d-b26c-44d3-8d55-99b644b70388",
      "etag": "W/\"72fdfa3d-34f4-4c90-ae94-d97ed73c9cf7\"",
      "instanceId": "f5065c75-ab45-4e5b-bb76-fb69667bf5d6",
      "properties": {
        "provisioningState": "Succeeded",
        "frontendIPConfigurations": [
          {
            "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/frontendIPConfigurations/9f37a479-7d60-489a-aab6-d7eb2200306f"
          },
          {
            "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/frontendIPConfigurations/ab5ccbe7-2ce9-4cdf-a0da-e4e5d81479d8"
          }
        ],
        "protocol": "All",
        "backendAddressPool": {
          "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/backendAddressPools/db1fa644-bd00-4c05-b11b-f5f07bfed86b"
        }
      }
    }
  ]
},
"nextLink": ""
}

```

The JSON schema for the **loadBalancers GET ALL** method is located in section 6.5.3.

3.1.5.5.1.3.3 Processing Details

Retrieves all **loadBalancers** resources.

3.1.5.5.1.4 DELETE

This method deletes a **loadBalancers** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
204 (No Content)
412 (Precondition Failed)

3.1.5.5.1.4.1 Request Body

None.

3.1.5.5.1.4.2 Response Body

None.

3.1.5.5.1.4.3 Processing Details

Deletes a **loadBalancers** resource.

3.1.5.5.2 backendAddressPools

A **backendAddressPools** resource represents the list of IPs that can receive network traffic that comes via the front-end IPs. The **Loadload** Balancing MUX handles incoming traffic via the front-end IPs and distributes them to backend IPs based on load balancing configuration.

The URI for the resource is as follows.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/backendAddressPools/{resourceId}
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.5.2.1.1	Create a new backendAddressPools resource or update an existing backendAddressPools resource.
GET	3.1.5.5.2.1.2	Get one backendAddressPools resource.
GET (All)ALL	3.1.5.5.2.1.3	List all backendAddressPools resources in the Network Controller.
DELETE	3.1.5.5.2.1.4	Delete a backendAddressPools resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
backendIPConfigurations	Read-only	Indicates an array of references to ipConfiguration-Resources- ipConfigurations resources. There is no restriction on having the same IP-configurations ipConfigurations in multiple backendAddressPools . An IpConfiguration IP_configuration can become a part of a backendAddressPool by setting a reference to a backendAddressPool backendAddressPools resource in the loadBalancerBackendAddressPools array field on the IpConfiguration ipConfigurations resource.
loadBalancingRules	Read-only	Indicates an array of references to the set of loadBalancingRules resources that use this backend address pool.
outboundNatRules	Read-only	Indicates an array of references to the set of outboundNatRules resources that use this backend address pool.

3.1.5.5.2.1 HTTP Methods

3.1.5.5.2.1.1 PUT

This method creates a new **backendAddressPools** resource or updates an existing **backendAddressPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/backendAddressPoolbackendAddressPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.5.2.1.1.1 Request Body

The format for the request body for the **backendAddressPools PUT** method is as follows.

```

{
  "resourceId": "b32b5ef0-5332-49a8-b383-f91090135f71",
  "properties": {
    "backendIPConfigurations": [],
    "outboundNatRules": [
      {
        "resourceRef": "/loadBalancers/6fb51980-ae9f-40c0-a0a0-
bccdea506b0f/outboundNatRules/b056293e-8bf0-4de4-b51c-497422b81433"
      }
    ],
    "loadBalancingRules": [
      {
        "resourceRef": "/loadBalancers/6fb51980-ae9f-40c0-a0a0-
bccdea506b0f/loadBalancingRules/36c02dfc-9462-4484-b539-cb2dfd317f86"
      }
    ]
  }
}

```

The JSON schema for the **backendAddressPools PUT** method is located in section 6.5.4.1.

3.1.5.5.2.1.1.2 Response Body

The format for the **backendAddressPools PUT** response body is the same as the format for the **backendAddressPools GET** response body (section 3.1.5.5.2.1.2.2). The JSON schema is located in section 6.5.4.2.

3.1.5.5.2.1.1.3 Processing Details

Create a new **backendAddressPools** resource or update an existing backendAddressPools resource.

3.1.5.5.2.1.2 GET

This method retrieves a **backendAddressPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/backendAddressPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.5.2.1.2.1 Request Body

None.

3.1.5.5.2.1.2.2 Response Body

The format for the response body for the **backendAddressPools GET** method is as follows.

```
{
  "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/backendAddressPools/b32b5ef0-5332-49a8-b383-f91090135f71",
  "resourceId": "b32b5ef0-5332-49a8-b383-f91090135f71",
  "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
  "instanceId": "f980604c-258c-4d60-8be4-559edd085384",
  "properties": {
    "provisioningState": "Succeeded",
    "backendIPConfigurations": [
      {
        "resourceRef": "/networkInterfaces/97c69782-f173-4793-a408-64074e601dd1/ipConfigurations/1b94ce74-b012-49a7-8e93-9315252c6ab2"
      },
      {
        "resourceRef": "/networkInterfaces/e5ea0c14-ce85-4eb7-909a-993f0477f5ac/ipConfigurations/45af7ff3-555f-43b0-ae74-7fcce88c5197"
      }
    ],
    "outboundNatRules": [
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160"
      }
    ],
    "loadBalancingRules": []
  }
}
```

The JSON schema for the **backendAddressPools GET** method is located in section 6.5.4.2.

3.1.5.5.2.1.2.3 Processing Details

Retrieves a **backendAddressPools** resource.

3.1.5.5.2.1.3 GET ~~(All)~~ALL

This method retrieves all **backendAddressPools** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/backendAddressPools
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.5.2.1.3.1 Request Body

None.

3.1.5.5.2.1.3.2 Response Body

The format for the response body for the **backendAddressPools GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/backendAddressPools/b32b5ef0-5332-49a8-b383-f91090135f71",
      "resourceId": "b32b5ef0-5332-49a8-b383-f91090135f71",
      "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
      "instanceId": "f980604c-258c-4d60-8be4-559edd085384",
      "properties": {
        "provisioningState": "Succeeded",
        "backendIPConfigurations": [
          {
            "resourceRef": "/networkInterfaces/97c69782-f173-4793-a408-64074e601dd1/ipConfigurations/1b94ce74-b012-49a7-8e93-9315252c6ab2"
          },
          {
            "resourceRef": "/networkInterfaces/e5ea0c14-ce85-4eb7-909a-993f0477f5ac/ipConfigurations/45af7ff3-555f-43b0-ae74-7fcce88c5197"
          }
        ],
        "outboundNatRules": [
          {
            "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160"
          }
        ],
        "loadBalancingRules": []
      }
    }
  ],
  "nextLink": ""
}
```

The JSON schema for the **backendAddressPools GET ALL** method is located in section 6.5.4.3.

3.1.5.5.2.1.3.3 Processing Details

Retrieves all **backendAddressPools** resources.

3.1.5.5.2.1.4 DELETE

This method deletes a **backendAddressPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/backendAddressPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.5.2.1.4.1 Request Body

None.

3.1.5.5.2.1.4.2 Response Body

None.

3.1.5.5.2.1.4.3 Processing Details

Deletes a **backendAddressPools** resource.

3.1.5.5.3 ~~frontendIpConfigurations~~frontendIPConfigurations

The ~~frontendIpConfigurations~~frontendIPConfigurations resource represents the frontend IP addresses of the load balancer. Either a **publicIPAddress** or a **privateIPAddress** and subnet MUST be configured.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/frontendIpConfigurationsfrontendIPConfigurations/resourceId
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.5.3.1.1	Create a new frontendIpConfigurations <u>frontendIPConfigurations</u> resource or update an existing frontendIpConfigurations <u>frontendIPConfigurations</u> resource.
GET	3.1.5.5.3.1.2	Get one frontendIpConfigurations <u>frontendIPConfigurations</u> resource.
GET (All)ALL	3.1.5.5.3.1.3	List all frontendIpConfigurations <u>frontendIPConfigurations</u> resources in the Network Controller.
DELETE	3.1.5.5.3.1.4	Deletes a frontendIpConfigurations <u>frontendIPConfigurations</u> resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
inboundNatRules	Read-only	Indicates a reference to the inboundNatRules resource used by the frontEndIpConfiguration frontEndIPConfigurations resource .
loadBalancingRules	Read-only	Indicates a reference to the loadBalancingRules resource used by the frontEndIpConfiguration frontendIPConfigurations resource .
outboundNatRules	Read-only	Indicates a reference to the outboundNatRules resource used by the frontEndIpConfiguration frontendIPConfigurations resource .
publicIPAddress	Optional	Indicates a reference to the publicIPAddresses resource used by the frontEndIpConfiguration frontendIPConfigurations resource . If a publicIPAddress is specified, then a privateIPAddress is not specified. When a publicIPAddress is specified, the privateIpAllocationMethod privateIPAllocationMethod is set to Dynamic.
privateIPAddress	Optional	This is only specified if a specific private IP address identifies an IP address which is statically configured for use with this frontEndIpConfiguration frontendIPConfigurations resource . The privateIPAllocationMethod MUST be allocated static for this case. If a privateIPAddress is specified, a reference to a publicIPaddress cannot be specified at the same time. The private IP address can be either from the infrastructure address space or from a tenant address space, in either case they MUST be accompanied with a valid subnet specified in the subnet element reference.
privateIPAllocationMethod	Optional	Static or Dynamic
subnet	Optional	Indicates a reference to the subnet resource used by the frontEndIpConfiguration frontendIPConfigurations resource . MUST be specified if a privateIPaddress is specified. A subnet reference to a logical network subnet is needed if the privateIPaddress privateIPaddress is from the infrastructure address space. A subnet reference to a virtual network subnet is needed if the privateIPaddress privateIPaddress is from a tenant address space. The subnet MUST include the IP address specified in privateIPaddress privateIPaddress .

Either a **privateIPAddress** or a reference to a **PublicIPAddresses****publicIPAddresses** MUST be specified – both these represent VIPs. A **privateIPAddress** can specify a VIP in either the infrastructure space or in the tenant space (depending on the subnet reference). A public IP reference can only specify a VIP in the infrastructure address space. VIPs in the infrastructure space MUST be contained within a VIP pool configured on the **loadbalancerManager** object.

3.1.5.5.3.1 HTTP Methods

3.1.5.5.3.1.1 PUT

This method creates a new **frontendIpConfigurationsfrontendIPConfigurations** resource or updates an existing **frontendIpConfigurationsfrontendIPConfigurations** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/frontendIpConfigurationsfrontendIPConfigurations/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.5.3.1.1.1 Request Body

The format for the request body for the **frontendIpConfigurationsfrontendIPConfigurations** PUT method is as follows.

```
{
  "properties": {
    "privateIPAllocationMethod": "Dynamic",
    "publicIPAddress": {
      "resourceRef": "/publicIPAddresses/c13bf350-858e-4aa5-9b76-97e3f471d5d8"
    },
    "loadBalancingRules": [
      {
        "resourceRef": "/loadBalancers/0df23cd2-633f-4322-a9e6-c4388c023e32/loadBalancingRules/de525f1a-8714-4b73-af18-5461703529d2"
      }
    ],
    "inboundNatRules": [],
    "outboundNatRules": [
      {
        "resourceRef": "/loadBalancers/0df23cd2-633f-4322-a9e6-c4388c023e32/outboundNatRules/18894e88-0238-4e7b-9680-9af237a18bf0"
      }
    ]
  }
}
```

The JSON schema for the **frontendIpConfigurationsfrontendIPConfigurations** PUT method is located in section 6.5.5.1.

3.1.5.5.3.1.1.2 Response Body

The format for the **frontendIpConfigurationsfrontendIPConfigurations** PUT response body is the same as the format for the **frontendIpConfigurationsfrontendIPConfigurations** GET response body (section 3.1.5.5.3.1.2.2). The JSON schema is located in section 6.5.5.2.

3.1.5.5.3.1.1.3 Processing Details

Create a new **frontendIpConfigurationsfrontendIPConfigurations** resource or update an existing **frontendIpConfigurationsfrontendIPConfigurations** resource.

3.1.5.5.3.1.2 GET

This method retrieves a **frontendIpConfigurationfrontendIPConfigurations** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/frontendIpConfigurationsfrontendIPConfigurations/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.5.3.1.2.1 Request Body

None.

3.1.5.5.3.1.2.2 Response Body

The format for the response body for the **frontendIpConfigurationsfrontendIPConfigurations** GET method is as follows.

```
{
  "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/94c568d8-d839-431a-aed4-a5c178356018",
  "resourceId": "94c568d8-d839-431a-aed4-a5c178356018",
  "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
  "instanceId": "d896da12-37f2-4e36-b229-7278a672a0ac",
  "properties": {
    "provisioningState": "Succeeded",
    "privateIPAddress": "22.0.0.23",
    "privateIPAllocationMethod": "Static",
    "subnet": {
      "resourceRef": "/logicalnetworkslogicalNetworks/ccb732ec-a3b5-4755-99ff-fddb91d50884/subnets/262b479f-0952-49b9-ad20-3d6732729389"
    },
    "loadBalancingRules": [],
    "inboundNatRules": [
      {

```



```

        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/0e5ed8cf-60fb-40f4-b02a-90932d4de000"
      }
    ],
    "outboundNatRules": [
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160"
      }
    ]
  }
}

```

The JSON schema for the **frontendIpConfigurationsfrontendIPConfigurations** GET method is located in section 6.5.5.2.

3.1.5.5.3.1.2.3 Processing Details

Retrieves a **frontendIpConfigurationsfrontendIPConfigurations** resource.

3.1.5.5.3.1.3 GET ~~(All)~~ALL

This method retrieves all **frontendIpConfigurationsfrontendIPConfigurations** resources.

It is invoked through the following URI.

```

https://<url>/networking/v1/loadBalancers/{parentResourceId}/frontendIpConfigurationsfrontendIPConfigurations

```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.5.3.1.3.1 Request Body

None.

3.1.5.5.3.1.3.2 Response Body

The format for the response body for the **frontendIpConfigurationsfrontendIPConfigurations** GET ALL method is as follows.

```

{
  "value": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57",
      "resourceId": "5187779d-c61c-44d2-87be-fa69ac2d9d57",
    }
  ]
}

```

```

"etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
"instanceId": "3902a530-9639-4759-9bbf-9bab6675593a",
"properties": {
  "provisioningState": "Succeeded",
  "privateIPAddress": "22.0.0.22",
  "privateIPAllocationMethod": "Static",
  "subnet": {
    "resourceRef": "/logicalnetworkslogicalNetworks/ccb732ec-a3b5-4755-99ff-fddb91d50884/subnets/262b479f-0952-49b9-ad20-3d6732729389"
  },
  "loadBalancingRules": [],
  "inboundNatRules": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/fc44af15-be82-46c5-b75a-3e89ccd792a9"
    }
  ],
  "outboundNatRules": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160"
    }
  ]
}
},
{
  "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/94c568d8-d839-431a-aed4-a5c178356018",
  "resourceId": "94c568d8-d839-431a-aed4-a5c178356018",
  "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
  "instanceId": "d896dal2-37f2-4e36-b229-7278a672a0ac",
  "properties": {
    "provisioningState": "Succeeded",
    "privateIPAddress": "22.0.0.23",
    "privateIPAllocationMethod": "Static",
    "subnet": {
      "resourceRef": "/logicalnetworkslogicalNetworks/ccb732ec-a3b5-4755-99ff-fddb91d50884/subnets/262b479f-0952-49b9-ad20-3d6732729389"
    },
    "loadBalancingRules": [],
    "inboundNatRules": [
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/0e5ed8cf-60fb-40f4-b02a-90932d4de000"
      }
    ],
    "outboundNatRules": [
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160"
      }
    ]
  }
}
],
"nextLink": ""
}

```

The JSON schema for the **frontendIpConfigurations** **frontendIPConfigurations** **GET ALL** method is located in section 6.5.5.3.

3.1.5.5.3.1.3 Processing Details

Retrieves all **frontendIpConfigurations** **frontendIPConfigurations** resources.

3.1.5.5.3.1.4 DELETE

This method deletes a ~~frontendIpConfigurations~~**frontendIPConfigurations** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/frontendIpConfigurationsfrontendIPConfigurations/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.5.3.1.4.1 Request Body

None.

3.1.5.5.3.1.4.2 Response Body

None.

3.1.5.5.3.1.4.3 Processing Details

Deletes a ~~frontendIpConfigurations~~**frontendIPConfigurations** resource.

3.1.5.5.4 inboundNatRules

The **inboundNatRules** resource is used to configure the load balancer to apply Network Address Translation ([NAT](#)) of inbound traffic.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/inboundNatRules/{resourceId}
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.5.4.1.1	Create a new inboundNatRules resource or update an existing inboundNatRules resource.
GET	3.1.5.5.4.1.2	Get one inboundNatRules resource
GET (All)ALL	3.1.5.5.4.1.3	List all inboundNatRules resources in the Network Controller
DELETE	3.1.5.5.4.1.4	Deletes a inboundNatRules resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
backendIPConfiguration	Optional	Indicates a reference to backendAddressPools resource. Traffic sent to frontendPort of each of the frontendIPConfigurations is forwarded to the backend IP.
backendPort	Optional	Indicates a port used for internal connections on the endpoint. The localPort attribute maps the external port on the endpoint to an internal port on a role. This is useful in scenarios where a role has to communicate to an internal component on a port that different from the one that is exposed externally. Possible values range between 1 and 65535, inclusive. This parameter is required if the protocol is TCP or UDP.
frontendIPConfigurations	Required	Indicates an array of references to frontendIPConfigurations resources.
frontendPort	Optional	The port for the external endpoint. Any port number can be specified, but the port numbers specified for each role in the service MUST be unique. Possible values range between 1 and 65535, inclusive. This parameter MUST be specified if protocol is TCP or UDP.
protocol	Required	Indicates the inbound transport protocol for the external endpoint. Valid values include UDP+TCP+GRE+ESP+or ALL. ALL indicates a wildcard.

3.1.5.5.4.1 HTTP Methods

3.1.5.5.4.1.1 PUT

This method creates a new **inboundNatRules** resource or updates an existing **inboundNatRules** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/inboundNatRules/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.5.4.1.1.1 Request Body

The format for the request body for the **inboundNatRules PUT** method is as follows.

```
{
  "properties": {
    "frontendIPConfigurations": [
      {
        "resourceRef": "/loadBalancers/0df23cd2-633f-4322-a9e6-
c4388c023e32/frontendIPConfigurations/046e56a4-9dca-422f-b3ad-42d4d1174259"
      }
    ],
    "protocol": "Tcp",
    "frontendPort": 36921,
    "backendPort": 56921,
    "backendAddressPool": {
      "resourceRef": "/loadBalancers/0df23cd2-633f-4322-a9e6-
c4388c023e32/backendAddressPools/0a4e1f96-1a82-497e-8979-38b96bf9344a"
    }
  }
}
```

The JSON schema for the **inboundNatRules PUT** method is located in section 6.5.6.1.

3.1.5.5.4.1.1.2 Response Body

The format for the PUT **inboundNatRules** response body is the same as the format for the **GET inboundNatRules** response body (section 3.1.5.5.4.1.2.2). The JSON schema is located in section 6.5.6.2.

3.1.5.5.4.1.1.3 Processing Details

Create a new **inboundNatRules** resource or update an existing inboundNatRules resource.

3.1.5.5.4.1.2 GET

This method retrieves an **inboundNatRules** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/inboundNatRules/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

3.1.5.5.4.1.2.1 Request Body

None.

3.1.5.5.4.1.2.2 Response Body

The format for the response body for the **inboundNatRules GET** method is as follows.

```
{
  "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/fc44af15-be82-46c5-b75a-3e89ccd792a9",
  "resourceId": "fc44af15-be82-46c5-b75a-3e89ccd792a9",
  "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
  "instanceId": "a748c5db-e2fd-4335-8c89-280b78d2511c",
  "properties": {
    "provisioningState": "Succeeded",
    "frontendIPConfigurations": [
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57"
      }
    ],
    "protocol": "Tcp",
    "frontendPort": 2003,
    "backendPort": 2003,
    "enableFloatingIP": false,
    "idleTimeoutInMinutes": 4,
    "backendIPConfiguration": {
      "resourceRef": "/networkInterfaces/e5ea0c14-ce85-4eb7-909a-993f0477f5ac/ipConfigurations/45af7ff3-555f-43b0-ae74-7fcce88c5197"
    }
  }
}
```

The JSON schema for the **inboundNatRules GET** method is located in section 6.5.6.2.

3.1.5.5.4.1.2.3 Processing Details

Retrieves an inboundNatRules resource.

3.1.5.5.4.1.3 GET ~~(AH)~~ALL

This method retrieves all **inboundNatRules** resources.

It is invoked through the following URI.

https://<url>/networking/v1/loadBalancers/{parentResourceId}/inboundNatRules

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.5.4.1.3.1 Request Body

None.

3.1.5.5.4.1.3.2 Response Body

The format for the response body for the **inboundNatRules GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/fc44af15-be82-46c5-b75a-3e89ccd792a9",
      "resourceId": "fc44af15-be82-46c5-b75a-3e89ccd792a9",
      "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
      "instanceId": "a748c5db-e2fd-4335-8c89-280b78d2511c",
      "properties": {
        "provisioningState": "Succeeded",
        "frontendIPConfigurations": [
          {
            "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57"
          }
        ],
        "protocol": "Tcp",
        "frontendPort": 2003,
        "backendPort": 2003,
        "enableFloatingIP": false,
        "idleTimeoutInMinutes": 4,
        "backendIPConfiguration": {
          "resourceRef": "/networkInterfaces/e5ea0c14-ce85-4eb7-909a-993f0477f5ac/ipConfigurations/45af7ff3-555f-43b0-ae74-7fcce88c5197"
        }
      }
    },
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/inboundNatRules/0e5ed8cf-60fb-40f4-b02a-90932d4de000",
      "resourceId": "0e5ed8cf-60fb-40f4-b02a-90932d4de000",
      "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
      "instanceId": "e8c59538-e641-4796-968d-50c4e11225e7",
      "properties": {
        "provisioningState": "Succeeded",
        "frontendIPConfigurations": [
          {
            "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/94c568d8-d839-431a-aed4-a5c178356018"
          }
        ]
      }
    }
  ]
}
```

```

    }
  ],
  "protocol": "Tcp",
  "frontendPort": 2003,
  "backendPort": 2003,
  "enableFloatingIP": false,
  "idleTimeoutInMinutes": 4,
  "backendIPConfiguration": {
    "resourceRef": "/networkInterfaces/97c69782-f173-4793-a408-
64074e601dd1/ipConfigurations/1b94ce74-b012-49a7-8e93-9315252c6ab2"
  }
}
}
],
"nextLink": ""
}

```

The JSON schema for the **inboundNatRules GET ALL** method is located in section 6.5.6.3.

3.1.5.5.4.1.3.3 Processing Details

Retrieves all **inboundNatRules** resources.

3.1.5.5.4.1.4 DELETE

This method deletes an **inboundNatRules** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/inboundNatRules/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.5.4.1.4.1 Request Body

None.

3.1.5.5.4.1.4.2 Response Body

None.

3.1.5.5.4.1.4.3 Processing Details

Deletes [an inboundNatRules](#) resource.

3.1.5.5.5 loadBalancingRules

The **loadBalancingRules** resource is used to configure load balancing policies. The policies dictate the kind of traffic that is load-balanced, and port mapping between frontend IPs and backend [IpsIPs](#).

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/loadBalancingRules/{resourceId}
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.5.5.1.1	Create a new loadBalancingRules resource or update an existing loadBalancingRules resource.
GET	3.1.5.5.5.1.2	Get one loadBalancingRules resource.
GET (A#)ALL	3.1.5.5.5.1.3	List all loadBalancingRules resources in the Network Controller.
DELETE	3.1.5.5.5.1.4	Deletes a loadBalancingRules resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
backendAddressPool	Optional	Indicates an array of references to a backendAddressPool / backendAddressPools resource. Inbound traffic is randomly load balanced across IPs in the backend pool.
backendPort	Optional	Indicates the port used for internal connections on the endpoint. The localPort attribute maps the external port on the endpoint to an internal port on a role. This is useful in scenarios where a role has to communicate to an internal component on a port that different from the one that is exposed externally. If not specified, the value of localPort is the same as the port attribute. Set the value of localPort to "*" -asterisk (*) to automatically assign an unallocated port that is discoverable using the runtime API. Possible values range between 1 and 65535, inclusive. This parameter is required if the protocol is TCP or UDP.
frontendIPConfigurations	Required	Indicates an array of references to frontendIpAddress resources.
frontendPort	Optional	Indicates the port for the external endpoint. Possible values range between 1 and 65535, inclusive. This value MUST be unique for the loadbalancer / loadBalancers resource.

Element name	Type	Description
		This parameter is required if the protocol is TCP or UDP.
idleTimeoutInMinutes	Optional	Indicates the timeout for the TCP idle connection in the inbound direction, i.e. a connection initiated by an internet client to a VIP. The value can be set between 4 and 30 minutes. The default value is 4 minutes.
protocol	Required	Indicates the inbound transport protocol for the external endpoint. Valid values include UDP+TCP+GRE+ESP+or ALL.
probe	Optional	Indicates a reference to the probe resource used by this loadBalancingRule .
EnableFloatingIP	Optional	This specifies that a floating IP (VIP) will be used on the available servers behind a load-balancer -loadBalancer. Floating IP (VIP) will be forwarded by the load-balancer loadBalancer to the backend server. The back-end server will be configured with that VIP, a datacenter IP and weakhost forwarding. Floating IP configuration is required if you are using the SQL AlwaysOn Availability Group feature. This setting can't be changed after you create the endpoint.
LoadDistribution	Optional	This specifies the load balancing distribution type to be used by the load-balancer loadBalancer. The loadBalancer uses a distribution algorithm which is a 5-tuple (source IP, source port, destination IP, destination port, protocol type) hash to map traffic to available servers. It provides stickiness only within a transport session, which is a feature that routes the requests for a specific session to the same physical machine that serviced the first request for that session. Packets in the same TCP or UDP session will be directed to the same datacenter IP instance behind the load balanced endpoint. When the client closes and re-opens the connection or starts a new session from the same source IP, the source port changes and causes the traffic to go to a different datacenter IP endpoint. The loadBalancer can be configured to use a 2-tuple (Source IP, Destination IP) or 3-tuple (Source IP, Destination IP, Protocol) to map traffic to the available servers. By using SourceIPProtocol, connections initiated from the same client computer goes to the same datacenter IP endpoint. Default – The load-balancer loadBalancer is configured to use a 5-tuple hash to map traffic to available servers. SourceIP – The load-balancer loadBalancer is configured to use a 2-tuple hash to map traffic to available servers. SourceIPProtocol – The load-balancer loadBalancer is configured to use a 3-tuple hash to map traffic to available servers.

3.1.5.5.5.1 HTTP Methods

3.1.5.5.5.1.1 PUT

This method creates a new **loadBalancingRules** resource or updates an existing **loadBalancingRules** resource.

It is invoked through the following URI.

https://<url>/networking/v1/loadBalancers/{parentResourceId}/loadBalancingRules/{resourceId}

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.5.1.1.1 Request Body

The format for the request body for the **loadBalancingRules PUT** method is as follows.

```
{
  "properties": {
    "frontendIPConfigurations": [
      {
        "resourceRef": "/loadBalancers/0df23cd2-633f-4322-a9e6-c4388c023e32
          /frontendIPConfigurations/046e56a4-9dca-422f-b3ad-42d4d1174259"
      }
    ],
    "protocol": "Tcp",
    "frontendPort": 36920,
    "backendPort": 31267,
    "enableFloatingIP": false,
    "idleTimeoutInMinutes": 4,
    "backendAddressPool": {
      "resourceRef": "/loadBalancers/0df23cd2-633f-4322-a9e6-c4388c023e32
        /backendAddressPools/0a4e1f96-1a82-497e-8979-38b96bf9344a"
    },
    "loadDistribution": "Default"
  }
}
```

The JSON schema for the **loadBalancingRules PUT** method is located in section 6.5.7.1.

3.1.5.5.1.1.2 Response Body

The format for the **loadBalancingRules PUT** response body is the same as the format for the **loadBalancingRules GET** response body (section 3.1.5.5.1.2.2). The JSON schema is located in section 6.5.7.2.

3.1.5.5.1.1.3 Processing Details

Create a new **loadBalancingRules** resource or update an existing **loadBalancingRules** resource.

3.1.5.5.1.2 GET

This method retrieves a **loadBalancingRules** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/loadBalancingRules/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.5.1.2.1 Request Body

None.

3.1.5.5.1.2.2 Response Body

The format for the response body for the **loadBalancingRules GET** method is as follows.

```
{
  "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/loadBalancingRules/6339de0b-5730-4057-b2ee-37e90d3e4470",
  "resourceId": "6339de0b-5730-4057-b2ee-37e90d3e4470",
  "etag": "W/\"87c5f43a-3d37-4955-b6ba-bc3037fcfefed\"",
  "instanceId": "58b176c8-f4d1-4a5f-bfe4-623dcfe3ba2a",
  "properties": {
    "provisioningState": "Succeeded",
    "frontendIPConfigurations": [
      {
        "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/frontendIPConfigurations/6bad6ea2-eca8-4143-8925-55aa497d3882"
      }
    ],
    "protocol": "Tcp",
    "frontendPort": 2003,
    "backendPort": 2003,
    "enableFloatingIP": false,
    "idleTimeoutInMinutes": 4,
    "backendAddressPool": {
      "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/backendAddressPools/9827f986-4606-4331-b63f-7cc39665e2c9"
    },
    "loadDistribution": "Default"
  }
}
```

The JSON schema for the **loadBalancingRules GET** method is located in section 6.5.7.2.

3.1.5.5.1.2.3 Processing Details

Retrieves a **loadBalancingRules** resource.

3.1.5.5.1.3 GET ~~(All)~~ALL

This method retrieves all **loadBalancingRules** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/loadBalancingRules
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.5.1.3.1 Request Body

None.

3.1.5.5.1.3.2 Response Body

The format for the response body for the **loadBalancingRules GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/loadBalancingRules/6339de0b-5730-4057-b2ee-37e90d3e4470",
      "resourceId": "6339de0b-5730-4057-b2ee-37e90d3e4470",
      "etag": "W/\"87c5f43a-3d37-4955-b6ba-bc3037fcfefd\"",
      "instanceId": "58b176c8-f4d1-4a5f-bfe4-623dcfe3ba2a",
      "properties": {
        "provisioningState": "Succeeded",
        "frontendIPConfigurations": [
          {
            "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/frontendIPConfigurations/6bad6ea2-eca8-4143-8925-55aa497d3882"
          }
        ],
        "protocol": "Tcp",
        "frontendPort": 2003,
        "backendPort": 2003,
        "enableFloatingIP": false,
        "idleTimeoutInMinutes": 4,
        "backendAddressPool": {
          "resourceRef": "/loadBalancers/d2251a0d-32d2-457e-b3aa-
e0fe1f42cce1/backendAddressPools/9827f986-4606-4331-b63f-7cc39665e2c9"
        },
        "loadDistribution": "Default"
      }
    }
  ]
}
```

```
    }  
  ],  
  "nextLink": ""  
}
```

The JSON schema for the **loadBalancingRules GET ALL** method is located in section 6.5.7.3.

3.1.5.5.1.3.3 Processing Details

Retrieves all loadBalancingRules resources.

3.1.5.5.1.4 DELETE

This method deletes a **loadBalancingRules** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/loadBalancingRules/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.5.1.4.1 Request Body

None.

3.1.5.5.1.4.2 Response Body

None.

3.1.5.5.1.4.3 Processing Details

Deletes a loadBalancingRules resource.

3.1.5.5.6 outboundNatRules

The **outboundNatRules** resource is used to configure the load balancer to apply Network Address Translation of outbound traffic.

The URI for the resource is as follows.

https://<url>/networking/v1/loadBalancers/{parentResourceId}/outboundNatRules/{resourceId}

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.5.6.1.1	Create a new outboundNatRules resource or update an existing outboundNatRules resource.
GET	3.1.5.5.6.1.2	Get one outboundNatRules resource_.
GET (A#)ALL	3.1.5.5.6.1.3	List all outboundNatRules resources in the Network Controller_.
DELETE	3.1.5.5.6.1.4	Delete an outboundNatRules resource_.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
frontendIPConfigurations	Required	Indicates an array of frontendIPConfigurations resources. Indicates an array of references to frontendIpAddress resources.
backendAddressPool	Required	Indicates a reference to the backendAddressPools resource. This is the pool of IP addresses where outbound traffic originates.
protocol	Required	Protocol for outbound traffic. For transparent outbound NAT specify "All". Valid values include TCP, UDP, GRE, ESP, or All.

3.1.5.5.6.1 HTTP Methods

3.1.5.5.6.1.1 PUT

This method creates a new **outboundNatRules** resource or updates an existing **outboundNatRules** resource.

It is invoked through the following URI.

https://<url>/networking/v1/loadBalancers/{parentResourceId}/outboundNatRules/{resourceId}

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.5.6.1.1.1 Request Body

The format for the request body for the **outboundNatRules PUT** method is as follows.

```
{
  "properties": {
    "frontendIPConfigurations": [
      {
        "resourceRef": "/loadBalancers/0df23cd2-633f-4322-a9e6-
c4388c023e32/frontendIPConfigurations/046e56a4-9dca-422f-b3ad-42d4d1174259"
      }
    ],
    "protocol": "All",
    "backendAddressPool": {
      "resourceRef": "/loadBalancers/0df23cd2-633f-4322-a9e6-
c4388c023e32/backendAddressPools/0a4e1f96-1a82-497e-8979-38b96bf9344a"
    }
  }
}
```

The JSON schema for the **outboundNatRules PUT** method is located in section 6.5.8.1.

3.1.5.5.6.1.1.2 Response Body

The format for the **outboundNatRules PUT** response body is the same as the format for the **outboundNatRules GET** response body (section 3.1.5.5.6.1.2.2). The JSON schema is located in section 6.5.8.2.

3.1.5.5.6.1.1.3 Processing Details

Create a new **outboundNatRules** resource or update an existing **outboundNatRules** resource.

3.1.5.5.6.1.2 GET

This method retrieves an **outboundNatRules** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/outboundNatRules/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.5.6.1.2.1 Request Body

None.

3.1.5.5.6.1.2.2 Response Body

The format for the response body for the **outboundNatRules GET** method is as follows.

```
{
  "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160",
  "resourceId": "49053c15-2d0f-45a2-8148-be8615282160",
  "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
  "instanceId": "c4000c95-7f90-4bb4-b68d-b2bc9c1dfc3e",
  "properties": {
    "provisioningState": "Succeeded",
    "frontendIPConfigurations": [
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57"
      },
      {
        "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/94c568d8-d839-431a-aed4-a5c178356018"
      }
    ],
    "protocol": "All",
    "backendAddressPool": {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/backendAddressPools/b32b5ef0-5332-49a8-b383-f91090135f71"
    }
  }
}
```

The JSON schema for the **outboundNatRules GET** method is located in section 6.5.8.2.

3.1.5.5.6.1.2.3 Processing Details

Retrieves an **outboundNatRules** resource.

3.1.5.5.6.1.3 GET ~~(All)~~ALL

This method retrieves all **outboundNatRules** resources.

It is invoked through the following URI.

`https://<url>/networking/v1/loadBalancers/{parentResourceId}/outboundNatRules`

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.5.6.1.3.1 Request Body

None.

3.1.5.5.6.1.3.2 Response Body

The format for the response body for the **outboundNatRules GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/outboundNatRules/49053c15-2d0f-45a2-8148-be8615282160",
      "resourceId": "49053c15-2d0f-45a2-8148-be8615282160",
      "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
      "instanceId": "c4000c95-7f90-4bb4-b68d-b2bc9c1d3e",
      "properties": {
        "provisioningState": "Succeeded",
        "frontendIPConfigurations": [
          {
            "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/5187779d-c61c-44d2-87be-fa69ac2d9d57"
          },
          {
            "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/frontendIPConfigurations/94c568d8-d839-431a-aed4-a5c178356018"
          }
        ],
        "protocol": "All",
        "backendAddressPool": {
          "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/backendAddressPools/b32b5ef0-5332-49a8-b383-f91090135f71"
        }
      }
    }
  ],
  "nextLink": ""
}
```

The JSON schema for the **outboundNatRules GET ALL** method is located in section 6.5.8.3.

3.1.5.5.6.1.3.3 Processing Details

Retrieves all outboundNatRules resources.

3.1.5.5.6.1.4 DELETE

This method deletes an **outboundNatRules** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/outboundNatRules/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.5.6.1.4.1 Request Body

None.

3.1.5.5.6.1.4.2 Response Body

None.

3.1.5.5.6.1.4.3 Processing Details

Deletes a outboundNatRules resource.

3.1.5.5.7 probes

The **probes** resources are used to configure the mechanism of detection of connectivity issues with load balanced IPs.

The URI for the resource is as follows.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/probes/{resourceId}
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.5.7.1.1	Create a new probes resource or update an existing probes resource.
GET	3.1.5.5.7.1.2	Get one probes resource
GET (All) ALL	3.1.5.5.7.1.3	List all probes resources in the Network Controller
DELETE	3.1.5.5.7.1.4	Deletes a probes resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
intervalInSeconds	Optional	Indicates the interval, in seconds, for how frequently to probe the endpoint for health status. Typically, the interval SHOULD<4> be slightly less than half the allocated timeout period (in seconds), which allows two full probes before taking the instance out of rotation.
loadBalancingRules	Read-only	Indicates an array of references to loadBalancingRule resources that use this probe.
numberOfProbes	Optional	Indicates the timeout period, in seconds, applied to the probe where no response will result in stopping further traffic from being delivered to the endpoint. This value allows endpoints to be taken out of rotation faster or slower than the typical times (which are the defaults). The default value is 31, the minimum value is 11.
protocol	Required	Indicates the protocol of the endpoint. Valid values are HTTP or TCP. If TCP is specified, a received ACK is required for the probe to be successful. If HTTP is specified, a 200 (OK) response from the specified URI is required for the probe to be successful.
port	Required	Indicates the port for communicating the probe. Possible values range from 1 to 65535, inclusive.
requestPath	Required	Indicates the URI used for requesting health status from the VM. path is required if protocol is set to HTTP. Otherwise, it is not allowed. There is no default value.

3.1.5.5.7.1 HTTP Methods

3.1.5.5.7.1.1 PUT

This method creates a new **probes** resource or updates an existing **probes** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/probes/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.5.7.1.1.1 Request Body

The format for the request body for the **probes PUT** method is as follows.

```
{
  "resourceId": "{uniqueString}",
  "instanceId": "XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXX",
  "tags": { "key": "value" },
  "resourceMetadata":
  {
    "client": "WAP Network Resource Provider",
    "tenantId": "{subscriptionid}",
    "groupId": "{groupname}",
    "name": "{name}",
    "originalHref": "https://..."
  },
  "properties": {
    <insertProperties>
  }
}
```

The JSON schema for the **probes PUT** method is located in section 6.5.9.1.

3.1.5.5.7.1.1.2 Response Body

The format for the **probes PUT** response body is the same as the format for the **probes GET** response body (section 3.1.5.5.7.1.2.2). The JSON schema is located in section 6.5.9.2.

3.1.5.5.7.1.1.3 Processing Details

Create a new probes resource or update an existing probes resource.

3.1.5.5.7.1.2 GET

This method retrieves a **probes** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/probes/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.5.7.1.2.1 Request Body

None.

3.1.5.5.7.1.2.2 Response Body

The format for the response body for the **probes GET** method is as follows.

```
{
  "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/probes/9f940e29-1d25-44fc-88d3-c81151a0344e",
  "resourceId": "9f940e29-1d25-44fc-88d3-c81151a0344e",
  "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
  "instanceId": "0da65588-247b-475b-bd1a-7ead0ba1a182",
  "properties": {
    "provisioningState": "Succeeded",
    "protocol": "Tcp",
    "port": 55555,
    "intervalInSeconds": 30,
    "numberOfProbes": 1,
    "loadBalancingRules": [
      {
        "resourceRef": "/loadBalancers/ee396509-27d3-44f9-849c-f6ed28d59f66/loadBalancingRules/2ea746ea-968f-41f2-8bfa-71d2391ef752"
      }
    ]
  }
}
```

The JSON schema for the **probes GET** method is located in section 6.5.9.2.

3.1.5.5.7.1.2.3 Processing Details

Retrieves a **probes** resource.

3.1.5.5.7.1.3 GET ~~(All)~~ALL

This method retrieves all **probes** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/probes/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.5.7.1.3.1 Request Body

None.

3.1.5.5.7.1.3.2 Response Body

The format for the response body for the **probes GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/loadBalancers/0cac5f8a-9d5c-455a-a971-2682d597e098/probes/9f940e29-1d25-44fc-88d3-c81151a0344e",
      "resourceId": "9f940e29-1d25-44fc-88d3-c81151a0344e",
      "etag": "W/\"fb318cf6-9102-4e34-a684-5e25aee8d3f4\"",
      "instanceId": "0da65588-247b-475b-bd1a-7ead0bala182",
      "properties": {
        "provisioningState": "Succeeded",
        "protocol": "Tcp",
        "port": 55555,
        "intervalInSeconds": 30,
        "numberOfProbes": 1,
        "loadBalancingRules": []
      }
    }
  ],
  "nextLink": ""
}
```

The JSON schema for the **probes GET ALL** method is located in section 6.5.9.3.

3.1.5.5.7.1.3.3 Processing Details

Retrieves all probes resources.

3.1.5.5.7.1.4 DELETE

This method deletes a **probes** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancers/{parentResourceId}/probes/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.5.7.1.4.1 Request Body

None.

3.1.5.5.7.1.4.2 Response Body

None.

3.1.5.5.7.1.4.3 Processing Details

Deletes a probes resource.

3.1.5.6 loadBalancerManager

The **loadBalancerManager** resource is a singleton resource that configures the load balancing service of the Network Controller.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancerManager/config
```

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.6.1.1	Create a new loadBalancerManager resource or update an existing loadBalancerManager resource.
GET	3.1.5.6.1.2	Get the loadBalancerManager resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
loadBalancerManagerIPAddress	Required	The IP address of the load balancer service. This is part of one of the frontendIPPool s/ vipIpPools as specified in the frontendIPPool / vipIpPools element in this resource.

Element name	Type	Description
outboundNatIPExemptions	Required	An array of v4 or v6 subnets masks with prefixes that will not have the source IP and Port changed by being NAT-ed. This is typically used for datacenter services that will communicate with other services within the same datacenter or cluster. Array of strings in the following format: 0.0.0.0/0. Note There is no validation that these IP addresses are known by the network controller.
vipIpPools	Required	An array of references to ipPool resource resources that will be used for the frontend IP Addresses addresses.

A **loadBalancerManager** is a singleton resource, it cannot be deleted once it is created. However, it can be updated.

The **loadBalancerManager** IP address MUST be part of one of the ~~vipPools~~**vipIpPools** configured on the **loadbalancerManager** resource.

In any update removal of an ~~IpPool~~**ipPool** reference form **vipIpPools** MUST only be attempted when no ~~loadbalancers~~**loadBalancers** reference IP addresses from that pool in their ~~frontendIpConfiguration~~**frontendIPConfigurations** and no ~~PublicIPs~~public IPs are allocated from that ~~IPPool~~**ipPool**. Removal of an in use ~~IpPool~~**ipPool** is disallowed and will place the **loadbalancerManager** resource in a failed provisioning state.

Similarly, if an ~~IpPool~~**ipPool** is added for use by the **loadBalancerManager**, it MUST have no ~~IPAddress~~IP address usage prior to being added to the **loadBalancerManager**.

3.1.5.6.1 HTTP Methods

3.1.5.6.1.1 PUT

This method creates a new **loadBalancerManager** resource or updates the existing **loadBalancerManager** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancerManager/config
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.6.1.1.1 Request Body

The format for the request body for the **loadBalancerManager PUT** method is as follows.

```
{
  "resourceRef": "/loadBalancerManager/",
  "resourceId": "config",
  "instanceId": "00000000-0000-0000-0000-000000000000",
  "properties": {
    "provisioningState": "Succeeded",
    "loadBalancerManagerIPAddress": "10.0.21.21",
    "outboundNatIPExemptions": [],
    "vipIpPools": [
      {
        "resourceRef": "/logicalnetworks/4b14f3a1-ed8d-4647-b370-2ae3ff227b9a/subnets/6d290ba5-f642-49bc-9cab-1478d76a8565/ipPools/843ef1a8-2b23-4496-8be0-4317fecf5870"
      }
    ]
  }
}
```

The JSON schema for the **loadBalancerManager PUT** method is located in section 6.6.1.

3.1.5.6.1.1.2 Response Body

The format for the **loadBalancerManager PUT** response body is the same as the format for the **loadBalancerManager GET** response body (section 3.1.5.6.1.2.2). The JSON schema is located in section 6.6.2.

3.1.5.6.1.1.3 Processing Details

Updates the existing **loadBalancerManager** resource.

3.1.5.6.1.2 GET

This method retrieves a **loadBalancerManager** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancerManager/config
```

There are no query parameters.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.6.1.2.1 Request Body

None.

3.1.5.6.1.2.2 Response Body

The format for the response body for the **loadBalancerManager GET** method is as follows.

```
{
  "resourceRef": "/loadBalancerManager/config",
  "resourceId": "config",
  "etag": "W/\"ea4ce83a-3b5c-4b92-90b4-f1a69aa5935f\"",
  "instanceId": "6a42e935-92bb-4081-ala7-bac1d772671f",
  "properties": {
    "provisioningState": "Succeeded",
    "loadBalancerManagerIPAddress": "21.0.0.21",
    "outboundNatIPExemptions": [ ],
    "vipIpPools": [
      {
        "resourceRef": "/logicalnetworks/logicalNetworks/ccb732ec-a3b5-4755-99ff-fddb91d50884/subnets/262b479f-0952-49b9-ad20-3d6732729389/ipPools/968917ad-8122-447d-90f7-bee2f95828c8"
      },
      {
        "resourceRef": "/logicalnetworks/logicalNetworks/9c1b2b61-dec2-49e3-b573-c2ecff57893d/subnets/a4f7c90b-6056-4dff-97fb-f46211ecdc10/ipPools/6b7c0255-c68d-4b2f-9870-9757255b55de"
      }
    ]
  }
}
```

The JSON schema for the **loadBalancerManager GET** method is located in section 6.6.2.

3.1.5.6.1.2.3 Processing Details

Retrieves one **loadBalancerManager** resource.

3.1.5.7 **loadBalancerMux**loadBalancerMuxes

The **loadBalancerMux**loadBalancerMuxes resource represents a MUX VM deployed in the Network Controller's stamp.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancerMuxloadBalancerMuxes/{resourceId}
```

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.6.1.1	Create a new loadBalancerMux <u>loadBalancerMuxes</u> resource or update an existing loadBalancerMux <u>loadBalancerMuxes</u> resource.
GET	3.1.5.7.1.2	Get one loadBalancerMux <u>loadBalancerMuxes</u> resource.

HTTP method	Section	Description
GET (All) ALL	3.1.5.7.1.3	List all loadBalancerMux loadBalancerMuxes resources in the Network Controller.
DELETE	3.1.5.7.1.4	Delete a loadBalancerMux loadBalancerMuxes resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
connections[]	Optional	Indicates an array of connections that specifies the information needed to connect to the specific device for the purposes of managing and controlling the device.
connections.credential	Optional	Indicates a reference to a credential credentials resource that can be used to connect to the device for management purposes.
connections.credentialType	Optional	Indicates the type of credential, e.g. X509Certificate or UsernamePassword.
connections.managementAddresses	Optional	Indicates the management address used to connect to the server. This is in the form of an IPv4 IP address, an IPv6 IP address, a DNS name or a flat (NetBIOS) name.
routerConfiguration	Required	Provides the BGP router configuration to the MUX to ensure it peers with the datacenter routing infrastructure and properly advertises routes.
routerConfiguration.localASN	Required	Is the BGP autonomous system number (ASN) of the MUX.
routerConfiguration.peerRouterConfigurations	Required	The BGP settings the MUX uses to establish and maintain BGP peering with one or more peers.
routerConfiguration.peerRouterConfigurations.routerName	Required	The friendly name of the peer router.
routerConfiguration.peerRouterConfigurations.peerAsn	Required	The BGP autonomous system number (ASN) of the peer.
routerConfiguration.peerRouterConfigurations.routerIpAddress	Optional	The IPv4 address of the local interface on the Mux MUX from which peering to BGP will be established. If this is not specified, peering is attempted from the management interface on the mux MUX . If a localIpAddress is specified on a router configuration, the same localIpAddress MUST be specified for

Element name	Type	Description
		every other router configuration in a given Mux MUX resource.
virtualServer	Required	Indicates a reference to the virtualServer resource that the loadBalancer mux loadBalancer MUX runs on.
configurationState	Optional Read-only	See configurationState specification in section 2.2.4. Additional details are in the section for the GET operation section 3.1.5.7.1.2.
networkInterface	Read/Write Optional	Indicates the external and internal interfaces on which the LoadBalancerMux loadBalancerMuxes resource operates.
networkInterfaces.externalNetworkInterface	Read/Write	A resource reference to a network interface.<5>
networkInterfaces.internalNetworkInterface	Read/Write	A resource reference to a network interface.<6>

3.1.5.7.1 HTTP Methods

3.1.5.7.1.1 PUT

This method creates a new ~~loadBalancerMux~~loadBalancerMuxes resource or updates an existing ~~loadBalancerMux~~loadBalancerMuxes resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancerMuxloadBalancerMuxes/{resourceId}
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.7.1.1.1 Request Body

The format for the request body for the **loadBalancerMuxloadBalancerMuxes** PUT method is as follows.

```
{
  "resourceRef": "/loadBalancerMuxes/"/, /Mux-0",
  "resourceId": "Mux-0",
  "etag": "W/\\"2c51ddb2-39bb-45f3-8072-2f5437a00b30\"",
  "instanceId": "00000000-0000-0000-0000-000000000000bf7ab799-0bfc-44c6-acd5-ef320295d57c",
  "properties": {
    "provisioningState": "Succeeded",
    "routerConfiguration": {
      "localASN": 2,
      "peerRouterConfigurations": [
        {
          "routerName": "BGPGateway-0",
          "routerIPAddress": "192.169168.0.1",
          "peerASN": 1,
          "id": "00000000-0000-0000-0000-00000000000077ee5813-6292-45c8-846f-898c36626ca4"
        }
      ]
    }
  },
  "virtualServer": {
    "resourceRef": "/virtualServers/b25e83dd-edb9-407d-b54e-27399db3de70ae2a42ad-659b-4519-bf26-694dce109fcl""
  },
  "connections": [{}],
  "managementAddresses": [
    "195.171.120.21",
    "hmv-test22"
  ],
  "credential": {
    "resourceRef": "/credentials/hmv-test22-credentials"
  },
  "credentialType": "usernamePassword",
  "protocol": "tcp",
  "port": "2003"
}
+
  "configurationState": {
    "status": "Success",
    "detailedInfo": [
      {
        "source": "SoftwareLoadBalancerManager",
        "message": "LoadBalancer Mux is healthy.",
        "code": "Success"
      }
    ]
  },
  "lastUpdatedTime": "2018-01-17T22:31:35.575849-08:00"
},
"networkInterfaces": {}
}
```

The JSON schema for the **loadBalancerMuxloadBalancerMuxes** PUT method is located in section 6.7.1.

3.1.5.7.1.1.2 Response Body

The format for the **loadBalancerMuxloadBalancerMuxes** **PUT** response body is the same as the format for the **loadBalancerMuxloadBalancerMuxes** **GET** response body (section 3.1.5.7.1.2.2). The JSON schema is located in section 6.7.2.

3.1.5.7.1.1.3 Processing Details

Create a new **loadBalancerMuxloadBalancerMuxes** resource or update an existing **loadBalancerMuxloadBalancerMuxes** resource.

3.1.5.7.1.2 GET

This method retrieves a **loadBalancerMuxloadBalancerMuxes** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancerMuxloadBalancerMuxes/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.7.1.2.1 Request Body

None.

3.1.5.7.1.2.2 Response Body

The format for the response body for the **loadBalancerMuxloadBalancerMuxes** **GET** method is as follows.

```
{
  "resourceRef": "/loadBalancerMuxes/Mux-0",
  "resourceId": "Mux-0",
  "etag": "W/\"fac641b5-304d-4578-878f-cb9fe670bbb5\"",
  "instanceId": "68070a20-8434-4885-ae8c-eda27618d4ce",
  "properties": {
    "provisioningState": "Succeeded",
    "routerConfiguration": {
      "localASN": 2,
      "peerRouterConfigurations": [
        {
          "routerName": "BGPGateway-0",
          "routerIPAddress": "195.171.120.1",
          "peerASN": 1,
          "id": "860ed1e7-b165-4397-a2bf-d78578feb1c9"
        }
      ]
    }
  }
},
```

```

"virtualServer": {
  "resourceRef": "/virtualServers/8e361faf-e957-4e26-9728-3ab6454543ab"
},
"connections": [
  {
    "managementAddresses": [
      "195.171.120.21",
      "hnv-test22"
    ],
    "credential": {
      "resourceRef": "/credentials/hnv-test22-credentials"
    },
    "credentialType": "usernamePassword",
    "protocol": "tcp",
    "port": "2003"
  }
],
"configurationState": {
  "status": "Success",
  "detailedInfo": [
    {
      "source": "SoftwareLoadBalancerManager",
      "message": "LoadbalancerloadBalancer Mux is Healthyhealthy.",
      "code": "Success"
    }
  ],
  "lastUpdatedTime": "2016-06-09T17:21:46.3280587-07:00"
}
}
}

```

The JSON schema for the **loadBalancerMuxloadBalancerMuxes** GET method is located in section 6.7.2.

3.1.5.7.1.2.3 Processing Details

Retrieves a **loadBalancerMuxloadBalancerMuxes** resource.

The server returns a configuration state only if it has already attempted to configure settings according to the REST resource properties that were created or updated by using the **PUT** method. **configurationState.lastUpdatedTime** is set to a value that is implementation-specific.

The server returns a configuration state property **configurationState.status** set to "Success" if there were no errors. The server returns a configuration state property **configurationState.status** set to "Failure" if there were errors during the configuration of settings. **configurationState.detailedInfo** contains an array of objects per the specification in section 2.2.4. Acceptable values in the response are as follows.

configurationState.Status	Code values in configurationState.detailInfo	Description
Success	Success	LoadbalancerMuxLoadBalancer Mux is healthy.
InProgress	InProgress	LoadbalancerLoadBalancer Mux is getting ready to receive Goal States.
Failure	Unknown	LoadbalancerLoadBalancer Mux is UnHealthyunHealthy .
Failure	VirtualServerUnreachable	LoadbalancerLoadBalancer Mux is not connected to SLBM.
Failure	VirtualServerUnreachable	Host is not connected.

configurationState.Status	Code values in configurationState.detailInfo	Description
Failure	CertificateNotTrusted	LoadbalancerLoadBalancer Mux is not connected to SLBM due to certificate errors.
Failure	CertificateNotAuthorized	LoadbalancerLoadBalancer Mux is not connected to SLBM due to certificate errors.
Failure	RoutePublicationFailure	LoadbalancerLoadBalancer Mux is not connected to a BGP router.

The following is an example.

```

"configurationState": {
  "status": "Success",
  "detailedInfo": [
    {
      "source": "SoftwareLoadBalancerManager",
      "message": "LoadbalancerLoadBalancer Mux is Healthyhealthy.",
      "code": "Success"
    }
  ],
  "lastUpdatedTime": "2017-01-05T16:34:45.2662488-08:00"
}

"configurationState": {
  "status": "Failure",
  "detailedInfo": [
    {
      "source": "SoftwareLoadBalancerManager",
      "message": "LoadbalancerLoadBalancer Mux is UnHealthyunHealthy.",
      "code": "Unknown"
    }
  ],
  "lastUpdatedTime": "2017-01-05T13:22:44.8066949-08:00"
}

```

3.1.5.7.1.3 GET ~~(All)~~ALL

This method retrieves all ~~loadBalancerMux~~~~loadBalancerMuxes~~ resources.

It is invoked through the following URI.

`https://<url>/networkng/v1/loadBalancerMuxloadBalancerMuxes`

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.7.1.3.1 Request Body

None.

3.1.5.7.1.3.2 Response Body

The format for the response body for the **loadBalancerMuxloadBalancerMuxes GET ALL** method is an array of resources that is similar to what **loadBalancerMuxloadBalancerMuxes GET** returns (section 3.1.5.7.1.2.2).

```
{
  "value": [
    {
      "resourceRef": "/loadBalancerMuxes/Mux-0",
      "resourceId": "Mux-0",
      "etag": "W/\"fac641b5-304d-4578-878f-cb9fe670bbb5\"",
      "instanceId": "68070a20-8434-4885-ae8c-eda27618d4ce",
      "properties": {
        "provisioningState": "Succeeded",
        "routerConfiguration": {
          "localASN": 2,
          "peerRouterConfigurations": [
            {
              "routerName": "BGPGateway-0",
              "routerIPAddress": "195.171.120.1",
              "peerASN": 1,
              "id": "860ed1e7-b165-4397-a2bf-d78578feb1c9"
            }
          ]
        },
        "virtualServer": {
          "resourceRef": "/virtualServers/8e361faf-e957-4e26-9728-3ab6454543ab"
        },
        "connections": [
          {
            "managementAddresses": [
              "195.171.120.21",
              "hnv-test22"
            ],
            "credential": {
              "resourceRef": "/credentials/hnv-test22-credentials"
            },
            "credentialType": "usernamePassword",
            "protocol": "tcp",
            "port": "2003"
          }
        ],
        "configurationState": {
          "status": "Success",
          "detailedInfo": [
            {
              "source": "SoftwareLoadBalancerManager",
              "message": "LoadBalancerLoadBalancer Mux is Healthyhealthy.",
              "code": "Success"
            }
          ]
        },
        "lastUpdatedTime": "2016-06-09T17:21:46.3280587-07:00"
      }
    }
  ],
  "nextLink": ""
}
```

The JSON schema for the **loadBalancerMuxloadBalancerMuxes GET** method is located in section 6.7.3.

3.1.5.7.1.3.3 Processing Details

Retrieves all **loadBalancerMuxloadBalancerMuxes** resources.

3.1.5.7.1.4 DELETE

This method deletes a **loadBalancerMuxloadBalancerMuxes** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/loadBalancerMuxloadBalancerMuxes/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.7.1.4.1 Request Body

None.

3.1.5.7.1.4.2 Response Body

None.

3.1.5.7.1.4.3 Processing Details

Deletes a **loadBalancerMuxloadBalancerMuxes** resource.

3.1.5.8 logicalNetworks

The **logicalNetworks** resource represents a logical partition of physical network that is dedicated for a specific purpose. A logical network comprises of a collection of logical subnets.

~~The URI for~~It is invoked through the ~~resource is as follows~~following URI.

```
https://<url>/networking/v1/logicalNetworks/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.8.1.1	Create a new logicalNetworks resource or update an existing logicalNetworks resource.
GET	3.1.5.8.1.2	Get one logicalNetworks resource.
GET (All)ALL	3.1.5.8.1.3	List all logicalNetworks resources in the Network Controller.
DELETE	3.1.5.8.1.4	Deletes a logicalNetworks resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
subnets	Optional	Indicates the subnets that are contained in the logical network. See logicalSubnets subnets resource, section 3.1.5.8.2, for full details on this element.
networkVirtualizationEnabled	Optional	Indicates if the logical network is enabled to be the Provider Address (underlay) network for one or more virtual networks. Valid values are True False , TRUE or FALSE . The default is false is FALSE .
virtualNetworks	Read-only	Indicates an array of virtualNetwork virtualNetworks resources that are using the network.

3.1.5.8.1 HTTP Methods

3.1.5.8.1.1 PUT

This method creates a new **logicalNetworks** resource or updates an existing **logicalNetworks** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)

Status code
500 (Internal Server Error)

3.1.5.8.1.1.1 Request Body

The format for the request body for the **logicalNetworks PUT** method is as follows.

```
{
  "etag": "W/\"88023c76-85bf-4f3a-82a0-f3385025be23\"",
  "properties": {
    "subnets": [
      {
        "resourceId": "lnsubnet1",
        "etag": "W/\"88023c76-85bf-4f3a-82a0-f3385025be23\"",
        "instanceId": "d99fad69-d311-4a08-bff2-255265dff8aa",
        "properties": {
          "addressPrefix": "192.168.1.0/24",
          "ipConfigurations": [ ],
          "networkInterfaces": [ ],
          "gatewayPoolsGatewayPools": [ ],
          "networkConnections": [ ],
          "vlanIDvlanId": "1",
          "routes": [
            {
              "resourceId": "lnroute1",
              "etag": "W/\"88023c76-85bf-4f3a-82a0-f3385025be23\"",
              "properties": {
                "destination": "192.168.1.252/31",
                "nextHop": "192.168.1.1"
              }
            }
          ]
        },
        "dnsServers": [
          "10.0.0.1",
          "10.0.0.2"
        ],
        "defaultGateways": [
          "192.168.1.1",
          "192.168.1.2"
        ],
        "isPublic": true
      }
    ],
    "virtualNetworks": [ ],
    "networkVirtualizationEnabled": "True"
  },
  "resourceId": "1b0993ad-9690-4f26-9a99-f4ee1d101c52"
}
```

The JSON schema for the **logicalNetworks PUT** method is located in section 6.8.1.

3.1.5.8.1.1.2 Response Body

The format for the **logicalNetworks PUT** response body is the same as the format for the **logicalNetworks GET** response body (section 3.1.5.8.1.2.2). The JSON schema is located in section 6.8.2.

3.1.5.8.1.1.3 Processing Details

Create a new **logicalNetworks** resource or update an existing **logicalNetworks** resource.

3.1.5.8.1.2 GET

This method retrieves a **logicalNetworks** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.8.1.2.1 Request Body

None.

3.1.5.8.1.2.2 Response Body

The format for the response body for the **logicalNetworks GET** method is as follows.

```
{
  "resourceRef": "/logicalnetworkslogicalNetworks/1b0993ad-9690-4f26-9a99-f4eed1d101c52",
  "resourceId": "1b0993ad-9690-4f26-9a99-f4eed1d101c52",
  "etag": "W/\"88023c76-85bf-4f3a-82a0-f3385025be23\"",
  "instanceId": "6e383781-d3fe-4925-bfb6-b743f7783674",
  "properties": {
    "provisioningState": "Succeeded",
    "subnets": [
      {
        "resourceRef": "/logicalnetworkslogicalNetworks/1b0993ad-9690-4f26-9a99-
f4eed1d101c52/subnets/lnsubnet1",
        "resourceId": "lnsubnet1",
        "etag": "W/\"88023c76-85bf-4f3a-82a0-f3385025be23\"",
        "instanceId": "d99fad69-d311-4a08-bff2-255265dff8aa",
        "properties": {
          "provisioningState": "Succeeded",
          "addressPrefix": "192.168.1.0/24",
          "ipConfigurations": [ ],
          "networkInterfaces": [ ],
          "gatewayPoolsGatewayPools": [ ],
          "networkConnections": [ ],
          "vlanIDvlanId": "1",
          "ipPools": [
            {
              "resourceRef": "/logicalnetworkslogicalNetworks/1b0993ad-9690-4f26-9a99-
f4eed1d101c52/subnets/lnsubnet1/ipPools/{1DAED41A-1D11-4DA5-8839-99B89C7C1806}",
              "resourceId": "{1DAED41A-1D11-4DA5-8839-99B89C7C1806}",
              "etag": "W/\"57d03dea-0e8a-44af-8883-b0f3403de0b9\"",

```

```

        "instanceId": "52bd179d-a747-4f2d-9608-cce85ca4365a",
        "properties": {
            "provisioningState": "Succeeded",
            "startIpAddress": "192.168.1.0",
            "endIpAddress": "192.168.1.99"
        }
    },
    "routes": [
        {
            "resourceRef": "/logicalnetworkslogicalNetworks/lb0993ad-9690-4f26-9a99-
f4ee1d101c52/subnets/lbsubnet1/routes/lnroutel",
            "resourceId": "lnroutel",
            "etag": "W/\"88023c76-85bf-4f3a-82a0-f3385025be23\"",
            "instanceId": "bfb3ddf0-1cb4-413f-bf7d-24649df812ed",
            "properties": {
                "provisioningState": "Succeeded",
                "destination": "192.168.1.252/31",
                "nextHop": "192.168.1.1"
            }
        }
    ],
    "dnsServers": [
        "10.0.0.1"
    ],
    "defaultGateways": [
        "192.168.1.1"
    ],
    "isPublic": true
}
],
"virtualNetworks": [ ],
"networkVirtualizationEnabled": "True"
}
}

```

The JSON schema for the **logicalNetworks GET** method is located in section 6.8.2.

3.1.5.8.1.2.3 Processing Details

Retrieves one **logicalNetworks** resource.

3.1.5.8.1.3 GET ~~(All)~~ALL

This method retrieves all **logicalNetworks** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.8.1.3.1 Request Body

None.

3.1.5.8.1.3.2 Response Body

The format for the response body for the **logicalNetworks GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/logicalnetworksLogicalNetworks/72570539-58a9-43d6-b858-d7ec3f202c6d",
      "resourceId": "72570539-58a9-43d6-b858-d7ec3f202c6d",
      "etag": "W/\"34b565dc-c69e-4165-97ea-6e8ef6c84420\"",
      "instanceId": "b75b250f-f2d1-4a2f-bb2e-57380523b407",
      "properties": {
        "provisioningState": "Succeeded",
        "subnets": [
          {
            "resourceRef": "/logicalnetworksLogicalNetworks/72570539-58a9-43d6-b858-d7ec3f202c6d/subnets/3d46ae72-b1d0-48fa-b4fe-ab183e737493",
            "resourceId": "3d46ae72-b1d0-48fa-b4fe-ab183e737493",
            "etag": "W/\"34b565dc-c69e-4165-97ea-6e8ef6c84420\"",
            "instanceId": "78c262d9-de13-4f33-a564-5f168b38a573",
            "properties": {
              "provisioningState": "Succeeded",
              "addressPrefix": "192.83.0.0/16",
              "ipConfigurations": [],
              "networkInterfaces": [
                {
                  "resourceRef": "/servers/27-3145F0416/networkInterfaces/ab055aa1-27d6-4a2e-a4b7-7916008dd1a4"
                }
              ],
              "gatewayPoolsGatewayPools": [],
              "networkConnections": [],
              "vlanIDVlanId": "109",
              "ipPools": [
                {
                  "resourceRef": "/logicalnetworksLogicalNetworks/72570539-58a9-43d6-b858-d7ec3f202c6d/subnets/3d46ae72-b1d0-48fa-b4fe-ab183e737493/ipPools/66ce16cb-7c9e-4666-b6b4-41208a497604",
                  "resourceId": "66ce16cb-7c9e-4666-b6b4-41208a497604",
                  "etag": "W/\"34b565dc-c69e-4165-97ea-6e8ef6c84420\"",
                  "instanceId": "0d68218b-50dc-4cc9-bb36-66324e93b407",
                  "properties": {
                    "provisioningState": "Succeeded",
                    "startIpAddress": "192.83.0.100",
                    "endIpAddress": "192.83.255.255"
                  }
                }
              ],
              {
                "resourceRef": "/logicalnetworksLogicalNetworks/72570539-58a9-43d6-b858-d7ec3f202c6d/subnets/3d46ae72-b1d0-48fa-b4fe-ab183e737493/ipPools/small",
                "resourceId": "small",
                "etag": "W/\"34b565dc-c69e-4165-97ea-6e8ef6c84420\"",
                "instanceId": "581b56e7-dfb2-4fc1-833c-1aaf970c91e6",
                "properties": {
                  "provisioningState": "Succeeded",
                  "startIpAddress": "192.83.0.90",
                  "endIpAddress": "192.83.0.98"
                }
              }
            ]
          },
          "dnsServers": [],

```



```

        "defaultGateways": [
            "192.83.0.1"
        ],
        "isPublic": false,
        "usage": {
            "numberOfIPAddresses": 65445,
            "numberOfIPAddressesAllocated": 2,
            "numberOfIPAddressesInTransition": 0
        }
    }
},
"virtualNetworks": [
    {
        "resourceRef": "/virtualNetworks/fcfc99f9-50ce-4644-8a47-a23711c3b704"
    }
],
"networkVirtualizationEnabled": "True"
}
}
],
"nextLink": ""
}

```

The JSON schema for the **logicalNetworks GET ALL** method is located in section 6.8.3.

3.1.5.8.1.3.3 Processing Details

Retrieves all **logicalNetworks** resources.

3.1.5.8.1.4 DELETE

This method deletes a **logicalNetworks** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.8.1.4.1 Request Body

None.

3.1.5.8.1.4.2 Response Body

None.

3.1.5.8.1.4.3 Processing Details

Deletes a **logicalNetworks** resource.

3.1.5.8.2 **logicalSubnets**subnets

The **logicalSubnets**subnets resource consists of a subnet/VLAN pair. The **vlanVlanId** resource is required; however, it MAY contain a value of zero if the subnet is not associated with a **vlanVLAN**.

An IP subnet MUST NOT overlap with any other IP subnet in same logical network. An IP subnet MUST NOT span across multiple **vlanVLANs** within a logical network. All **nextHops** resources that are associated with the **routes** resource for this **logicalSubnet****logicalSubnets** resource MUST be contained within the logical subnet.

The URI for the resource is as follows.

```
https://<url>/networking/v1/logicalNetworks/{parentResourceId}/logicalSubnetssubnets/{resourceId}
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.8.2.1.1	Create a new logicalSubnets subnets resource or update an existing logicalSubnets subnets resource.
GET	3.1.5.8.2.1.2	Get one logicalSubnets subnets resource
GET (All)ALL	3.1.5.8.2.1.3	List all logicalSubnets subnets resources in the Network Controller
DELETE	3.1.5.8.2.1.4	Deletes a logicalSubnets subnets resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
addressPrefix	Read/write	Identifies the subnet idID in form of ipAddress ipAddress/prefixlength.
vlanId	Read/write Required	Indicates the VLAN ID associated with the logical subnet. Valid values range from 0 through 4095. The value can be shared across multiple logicalSubnets subnets.
routes	Optional Read/write	Indicates the routes that are contained in the logical subnet. See section 3.1.5.8.2.3, for full details on this element.

Element name	Type	Description
ipPools	Optional Read/write	Indicates the IP-Pools ipPools that are contained in the logical subnet. See section 3.1.5.8.2.2, for full details on this element.
dnsServers	Optional Read/write	Indicates one or more DNS servers that are used for resolving DNS queries by devices or host connected to this logical subnet.
networkInterfaces	Read-only	Indicates an array of references to networkInterfaces resources that are attached to the logical subnet.
isPublic	Read/write	Boolean flag specifying whether the logical subnet is a public subnet.
defaultGateways	Read/write	A collection of one or more gateways for the subnet.

3.1.5.8.2.1 HTTP Methods

3.1.5.8.2.1.1 PUT

This method creates a new **logicalSubnets****subnets** resource or updates an existing **logicalSubnets****subnets** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks/{parentResourceId}/logicalSubnets/subnets/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.8.2.1.1.1 Request Body

The format for the request body for the **logicalSubnets****subnets** **PUT** method is as follows.

```
{
  "resourceId": "{uniqueString}",
  "tags": { "key": "value" },
  "resourceMetadata":
  {
    "client": "Windows PowerShell",
```

```

        "name": "{name}",
        "originalHref": "https://..."
    },
    "properties": {
        "addressPrefix": "192.168.1.0/24",
        "ipConfigurations": [],
        "vlanIPvlanId": "1",
        "routes": []
        "dnsServers": [ "10.0.0.1", "10.0.0.2" ]
        "defaultGateway": [ "192.168.1.1", "192.168.1.2" ]
        "isPublic": true,
        "ipPools": []
    }
}

```

The JSON schema for the **logicalSubnetssubnets** PUT method is contained within the **logicalNetworks** PUT schema in section 6.8.1.

3.1.5.8.2.1.1.2 Response Body

The format for the **logicalSubnetssubnets** PUT response body is the same as the format for the **logicalSubnetssubnets** GET response body (section 3.1.5.8.2.1.2.2). The JSON schema is contained within the **logicalNetworks** GET schema in section 6.8.2.

3.1.5.8.2.1.1.3 Processing Details

Create a new **logicalSubnetssubnets** resource or update an existing **logicalSubnetssubnets** resource.

3.1.5.8.2.1.2 GET

This method retrieves a **logicalSubnetssubnets** resource.

It is invoked through the following URI.

```

https://<url>/networking/v1/logicalNetworks/{parentResourceId}/logicalSubnetssubnets/{resourceId}

```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.8.2.1.2.1 Request Body

None.

3.1.5.8.2.1.2.2 Response Body

The format for the response body for the **logicalSubnetsubnets** GET method is as follows.

```
{
  "resourceId": "{uniqueString}",
  "etag": "00000000-0000-0000-0000-000000000000",
  "instanceId": "XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXX",
  "tags": { "key": "value" },
  "resourceMetadata":
  {
    "client": "<Insert likely client>",
    "tenantId": "{subscriptionid}",
    "groupId": "{groupname}",
    "name": "{name}",
    "originalHref": "https://..."
  },
  "properties": {
    "provisioningState": "Updating|Deleting|Failed|Succeeded",

    "addressPrefix": "192.168.1.0/24",
    "ipConfigurations": [],
    "networkInterfaces": [],
    "vlanIPvlanId": "1",
    "routes": []
    "dnsServers": [ "10.0.0.1", "10.0.0.2"]
    "defaultGateways": [ "192.168.1.1", "192.168.1.2"]
    "isPublic": true,
    "ipPools":[]

  }
}
```

The JSON schema for the **logicalSubnetsubnets** GET method is contained within the **logicalNetworks** GET schema in section 6.8.2.

3.1.5.8.2.1.2.3 Processing Details

Retrieves a **logicalSubnetsubnets** resource.

3.1.5.8.2.1.3 GET ~~(All)~~ALL

This method retrieves all **logicalSubnetsubnets** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks/{parentResourceId}/logicalSubnetsubnets
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

.
.
]

The JSON schema for the **logicalSubnetssubnets GET ALL** method is contained within the **logicalNetworks GET ALL** schema in section 6.8.3.

3.1.5.8.2.1.3.3 Processing Details

Retrieves all **logicalSubnetssubnets** resources.

3.1.5.8.2.1.4 DELETE

This method deletes a **logicalSubnetssubnets** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks/{parentResourceId}/logicalSubnetssubnets/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.8.2.1.4.1 Request Body

None.

3.1.5.8.2.1.4.2 Response Body

None.

3.1.5.8.2.1.4.3 Processing Details

Deletes a **logicalSubnetssubnets** resource.

3.1.5.8.2.2 ipPools

The **ipPools** resource represents the range of IP addresses from which IP addresses will be allocated for nodes within a subnet. The subnet is a logical or physical subnet inside a logical network.

The **ipPools** for a virtual subnet are implicit. The start and end IP addresses of the pool of the virtual subnet is based on the IP prefix of the virtual subnet.

The URI for the resource is as follows.

```
https://<url>/networking/v1/logicalNetworks/{grandparentResourceId}/logicalSubnetsgrandParentResourceId}/subnets/{parentResourceId}/ipPools/{resourceId}
```

grandParentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.1, for more details.

parentResourceId: the identifier for the specific resource that is the descendant of the grandParentResource and the ancestor of the ipPools resource. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific resource within the resource type that is the descendant of the parentResource. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.8.2.2.1.1	Create a new ipPools resource or update an existing ipPools resource.
GET	3.1.5.8.2.2.1.2	Get one ipPools resource.
GET (All)ALL	3.1.5.8.2.2.1.3	List all ipPools resources in the Network Controller.
DELETE	3.1.5.8.2.2.1.4	Deletes an ipPools resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
startIPaddressstartIpAddress	Read/write Required	Start IP address of the pool. Note This is an inclusive value so it is a valid IP address from this pool.
endIPaddressendIpAddress	Read/write Required	End IP address of the pool. Note This is an inclusive value so it is a valid IP address from this pool.
usage	Read-only	Statistics of the usage of the IP pool
usage.numberOfIPAddresses	Read-only	Total number of IP Addresses in the IP pool
usage.numberOfIPAddresses Allocated	Read-only	Number of allocated IP addresses in the IP pool
usage.numberOfIPAddresses InTransition	Read-only	Number of IP addresses which are in transition state. These IP addresses are freed but are not yet available for allocation because of a hold-off period.

3.1.5.8.2.2.1 HTTP Methods

3.1.5.8.2.2.1.1 PUT

This method creates a new **ipPools** resource or updates an existing **ipPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks/{grandparentResourceId}/logicalSubnetsgrandParentResourceId}/subnets/{parentResourceId}/ipPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.8.2.2.1.1.1 Request Body

The format for the request body for the **ipPools PUT** method is as follows.

```
{
  "resourceId": "{1DAED41A-1D11-4DA5-8839-99B89C7C1806}",
  "properties": {
    "startIpAddress": "192.168.1.0",
    "endIpAddress": "192.168.1.99"
  }
}
```

The JSON schema for the **ipPools PUT** method is located in section 6.8.4.1.1.

3.1.5.8.2.2.1.1.2 Response Body

The format for the **ipPools PUT** response body is the same as the format for the **ipPools GET** response body (section 3.1.5.8.2.2.1.2.2). The JSON schema is located in section 6.8.4.1.2.

3.1.5.8.2.2.1.1.3 Processing Details

Create a new **ipPools** resource or update an existing **ipPools** resource.

3.1.5.8.2.2.1.2 GET

This method retrieves an **ipPools** resource.

It is invoked through the following URI.

```
https://<url>/networkinglogicalnetworking/v1/networks/{grandparentResourceid}/logicalSubn
etsLogicalNetworks/{grandParentResourceId}/subnets/{parentResourceid}/ipPools/{resourceId
}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.8.2.2.1.2.1 Request Body

None.

3.1.5.8.2.2.1.2.2 Response Body

The format for the response body for the **ipPools GET** method is as follows.

```
{
  "resourceRef": "/logicalnetworksLogicalNetworks/72570539-58a9-43d6-b858-
d7ec3f202c6d/subnets/3d46ae72-b1d0-48fa-b4fe-ab183e737493/ipPools/66ce16cb-7c9e-4666-b6b4-
41208a497604",
  "resourceId": "66ce16cb-7c9e-4666-b6b4-41208a497604",
  "etag": "W/\"18b36409-81e3-4bc1-8234-cf924de405ce\"",
  "instanceId": "0d68218b-50dc-4cc9-bb36-66324e93b407",
  "properties": {
    "provisioningState": "Succeeded",
    "startIpAddress": "192.83.0.100",
    "endIpAddress": "192.83.255.255",
    "usage": {
      "numberOfIPAddresses": 65436,
      "numberOfIPAddressesAllocated": 2,
      "numberOfIPAddressesInTransition": 0
    }
  }
}
```

The JSON schema for the **ipPools GET** method is located in section 6.8.4.1.2.

3.1.5.8.2.2.1.2.3 Processing Details

Retrieves a **ipPools** resource.

3.1.5.8.2.2.1.3 GET ~~(All)~~ALL

This method retrieves all **ipPools** resources.

It is invoked through the following URI.

<https://<url>/networking/v1/networks/{grandparentResourceid}/logicalSubnets/{parentResourceid}logicalNetworks/{grandParentResourceId}/subnets/{parentResourceId}/ipPools>

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.8.2.2.1.3.1 Request Body

None.

3.1.5.8.2.2.1.3.2 Response Body

The format for the response body for the **ipPools GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/logicalnetworkslogicalNetworks/a647c7f3-9203-44df-a15e-bfff856c83d7
/subnets/d1078059-fe58-4c26-bdce-9bf61e0d2be2/ipPools/9176fa09-48ca-4e0e-b953-
c9c065561e03",
      "resourceId": "9176fa09-48ca-4e0e-b953-c9c065561e03",
      "etag": "W/\"fd2b18a6-f142-494c-adee-fb244cd7245d\"",
      "instanceId": "10080cf6-504d-4e6c-bf22-d2b90bd51090",
      "properties": {
        "provisioningState": "Succeeded",
        "startIpAddress": "15.65.2.100",
        "endIpAddress": "15.65.2.255",
        "usage": {
          "numberOfIPAddresses": 156,
          "numberOfIPAddressesAllocated": 0,
          "numberOfIPAddressesInTransition": 0
        }
      }
    }
  ],
  "nextLink": ""
}
```

The JSON schema for the **ipPools GET ALL** method is located in section 6.8.4.1.3.

3.1.5.8.2.2.1.3.3 Processing Details

Retrieves all **ipPools** resources.

3.1.5.8.2.2.1.4 DELETE

This method deletes an **ipPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/networks/{grandparentResourceid}/logicalSubnets/{parentResourceid}
logicalNetworks/{grandParentResourceId}/subnets/{parentResourceId}/ipPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.8.2.2.1.4.1 Request Body

None.

3.1.5.8.2.2.1.4.2 Response Body

None.

3.1.5.8.2.2.1.4.3 Processing Details

Deletes an **ipPools** resource.

3.1.5.8.2.3 routes

The **routes** resource represents a provider route. If a host connects to a logical subnet as part of hosting a virtual network, then all routes in that logical subnet are applied to the host. Consequently, the host can route the traffic to the correct destination.

The URI for the resource is as follows.

```
https://<url>/networking/v1/logicalNetworks/{grandparentResourceid}/logicalSubnetsgrandParent
Resourceid}/subnets/{parentResourceId}/routes/{resourceId}
```

grandParentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.1, for more details.

parentResourceId: the identifier for the specific resource that is the descendant of the grandParentResource and the ancestor of the routes resource. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific resource within the resource type that is the descendant of the parentResource. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.8.2.3.1.1	Create a new routes resource or update an existing routes resource.
GET	3.1.5.8.2.3.1.2	Get one routes resource.
GET (All) ALL	3.1.5.8.2.3.1.3	List all routes resources in the Network Controller.
DELETE	3.1.5.8.2.3.1.4	Delete a routes resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
destination	Required	Indicates the destination subnet that this route applies to. It is specified in the form of 0.0.0.0/0. The destination subnet is of the same type as the subnet that it is created in. Ex. This For example, this has to be an IPv4 destination subnet if its parent subnet is an IPv4 subnet, similarly for IPv6 the destination route is the subnet is IPv6.
nextHop	Required	Indicates the next hop IP address for this route. routes resource . It is specified in the form of 0.0.0.0. The next hop has to be a valid IP address in the subnet.

3.1.5.8.2.3.1 HTTP Methods

3.1.5.8.2.3.1.1 PUT

This method creates a new **routes** resource or updates an existing **routes** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks/{grandparentResourceId}/logicalSubnetsgrandParentResourceId/subnets/{parentResourceId}/routes/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.8.2.3.1.1.1 Request Body

The format for the request body for the **routes PUT** method is as follows.

```
{
  "resourceId": "lnroute2",
  "properties": {
    "destination": "192.168.1.128/31",
    "nextHop": "192.168.1.1"
  }
}
```

The JSON schema for the **routes PUT** method is contained within the **logicalNetworks GET** schema in section 6.8.1.

3.1.5.8.2.3.1.1.2 Response Body

The format for the **routes PUT** response body is the same as the format for the **routes GET** response body (section 3.1.5.8.2.3.1.2.2). The JSON schema is contained within the **logicalNetworks GET** schema in section 6.8.2.

3.1.5.8.2.3.1.1.3 Processing Details

Create a new **routes** resource or update an existing **routes** resource.

3.1.5.8.2.3.1.2 GET

This method retrieves a **routes** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks/{grandparentResourceId}/logicalSubnetsgrandParentResourceId/subnets/{parentResourceId}/routes/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.8.2.3.1.2.1 Request Body

None.

3.1.5.8.2.3.1.2.2 Response Body

The format for the response body for the **routes GET** method is as follows.

```
{
  "resourceRef": "/logicalnetworkslogicalNetworks/testln/subnets/lsubnet1/routes/lnroutel",
  "resourceId": "lnroutel",
  "etag": "W/\"01f97500-620c-4877-868a-2f07833ed040\"",
  "instanceId": "93229775-761a-448e-a9eb-df2ea3878f8a",
  "properties": {
    "provisioningState": "Succeeded",
    "destination": "192.168.1.252/31",
    "nextHop": "192.168.1.1"
  }
}
```

The JSON schema for the **routes GET** method is contained within the **logicalNetworks GET** schema in section 6.8.2.

3.1.5.8.2.3.1.2.3 Processing Details

Retrieves a **routes** resource.

3.1.5.8.2.3.1.3 GET ~~(All)~~ALL

This method retrieves all **routes** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/logicalNetworks/{grandparentResourceId}/logicalSubnetsgrandParent
ResourceId}/subnets/{parentResourceId}/routes
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.8.2.3.1.3.1 Request Body

None.

3.1.5.8.2.3.1.3.2 Response Body

The format for the response body for the **routes GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef":
"/logicalnetworkslogicalNetworks/testln/subnets/lsubnet1/routes/lnroutel",
      "resourceId": "lnroutel",
      "etag": "W/\"6b69784b-5bcc-4724-a2ab-4eab0fafdf7e\"",

```

```

    "instanceId": "93229775-761a-448e-a9eb-df2ea3878f8a",
    "properties": {
      "provisioningState": "Succeeded",
      "destination": "192.168.1.252/31",
      "nextHop": "192.168.1.1"
    }
  },
  {
    "resourceRef":
"/logicalnetworks/logicalNetworks/testln/subnets/lsubnet1/routes/lroute2",
    "resourceId": "lnroute2",
    "etag": "W/\"6b69784b-5bcc-4724-a2ab-4eab0fafdf7e\"",
    "instanceId": "1ae56b5f-5b8d-49dd-8d52-40cc6b02face",
    "properties": {
      "provisioningState": "Succeeded",
      "destination": "192.168.1.128/31",
      "nextHop": "192.168.1.1"
    }
  }
],
"nextLink": ""
}

```

The JSON schema for the **routes GET ALL** method is contained within the **logicalNetworks GET** schema in section 6.8.2.

3.1.5.8.2.3.1.3.3 Processing Details

Retrieves all **routes** resources.

3.1.5.8.2.3.1.4 DELETE

This method deletes a **routes** resource.

It is invoked through the following URI.

```

https://<url>/networking/v1/logicalNetworks/{grandparentResourceId}/logicalSubnetsgrandParent
ResourceId}/subnets/{parentResourceId}/routes/{resourceId}

```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.8.2.3.1.4.1 Request Body

None.

3.1.5.8.2.3.1.4.2 Response Body

None.

3.1.5.8.2.3.1.4.3 Processing Details

Deletes a **routes** resource.

3.1.5.9 macPools

The **macPools** resource specifies a range one or more ranges of MAC addresses, which are used internally by the Network Controller ~~service modules and are plumbed down to the hosts for items such as Host vNICs.~~

~~The MAC address pool resource is a global resource addresses are used internally by the Network Controller for various service modules in for both CA and PA space including VNET, VSM, and GWM. Specifically, these MAC pools are used for the PA Host vNIC(s), the HNV Distributed Router (DR) Host vNIC (used for health probes), and the HNV Virtual MAC (to route traffic to the HNV Distributed Router).~~

~~The MAC pool range is a proper subset from the overall MAC pool used for tenant VMs (CA MAC).~~

overlay and underlay needs. If more than one MAC pool is created ~~by the admin, the ASM service module, the MAC address space management component~~ in the Network Controller MUST determine which MAC pool to allocate ~~from for the requesting service module (e.g. Vnet). the MAC from.~~ After a MAC pool has been created, the pool cannot be extended or shrunk. MACs from the pool will not be reassigned.

~~The URI for~~ It is invoked through the resource is as follows following URI.

```
https://<url>/networking/v1/macPools/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The Network Controller MUST be installed and configured prior to using this resource.

In addition, the admin MUST create a dedicated range of MACs, and make non-overlapping subset of those MACs available to the Network Controller for internal use as defined with this resource.

A **macPools** resource SHOULD be created prior to the creation of any server or **networkInterfaces** resources.

~~IP subnets in the same logical network MUST not overlap. An IP subnet MUST not span across multiple VLANs within a logical network. All next hops in the routes resource (as specified in section 3.1.5.8.2.3) MUST be within the logical subnet.~~

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.9.1.1	Create a new macPools resource or update an existing macPools resource.
GET	3.1.5.9.1.2	Get one macPools resource

HTTP method	Section	Description
GET (All) ALL	3.1.5.9.1.3	List all macPools resources in the Network Controller
DELETE	3.1.5.9.1.4	Deletes a macPools resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
startMacAddress	Required Read/write	This is a string in the form of "AA-BB-CC-DD-EE-FF".
endMacAddress	Required Read/write	This is a string in the form of "UU-VV-WW-XX-YY-ZZ".
usage	Read-only	Usage statistics of the MAC address pool.
usage.numberOfMacAddresses	Read-only	Number of MAC addresses in the address pool.
usage.numberOfMACAddressesAllocated	Read-only	Number of allocated MAC addresses in the address pool.

3.1.5.9.1 HTTP Methods

3.1.5.9.1.1 PUT

This method creates a new **macPools** resource or updates an existing **macPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/macPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.9.1.1.1 Request Body

The format for the request body for the **macPools PUT** method is as follows.

```
{
  "properties": {
    "startMacAddress": "E0-60-F0-0D-FF-FE",
    "endMacAddress": "E0-60-F0-0D-FF-FF",
  }
}
```

The JSON schema for the **macPools PUT** method is located in section 6.9.1.

3.1.5.9.1.1.2 Response Body

The format for the **macPools PUT** response body is the same as the format for the **macPools GET** response body (section 3.1.5.9.1.2.2). The JSON schema is located in section 6.9.2.

3.1.5.9.1.1.3 Processing Details

Create a new **macPools** resource or update an existing **macPools** resource.

3.1.5.9.1.2 GET

This method retrieves a **macPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/macPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.9.1.2.1 Request Body

None.

3.1.5.9.1.2.2 Response Body

The format for the response body for the **macPools GET** method is as follows.

```
{
```

```

"resourceRef": "/macPools/macPool3",
"resourceId": "macPool3",
"etag": "W/\"5785aa19-c76b-44d3-99cf-dbe04db06172\"",
"instanceId": "5b9f4e36-e483-4408-a928-78c8cca26af4",
"properties": {
  "provisioningState": "Succeeded",
  "startMacAddress": "B0-60-F0-0D-00-00",
  "endMacAddress": "B0-60-F0-0D-FF-FF",
  "usage": {
    "numberOfMacAddresses": 65536,
    "numberOfMacAddressesAllocated": 0
  }
}
}
}

```

The JSON schema for the **macPools GET** method is located in section 6.9.2.

3.1.5.9.1.2.3 Processing Details

Retrieves a **macPools** resource.

3.1.5.9.1.3 GET ~~(All)~~ALL

This method retrieves all **macPools** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/macPools
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.9.1.3.1 Request Body

None.

3.1.5.9.1.3.2 Response Body

The format for the response body for the **macPools GET ALL** method is as follows.

```

{
  "value": [
    {
      "resourceRef": "/macPools/macPool1",
      "resourceId": "macPool1",
      "etag": "W/\"2ec6925c-71fe-4698-9342-ec0dcd292d84\"",
      "instanceId": "d48f4896-19a8-4553-889f-835dce11bda0",
      "properties": {
        "provisioningState": "Succeeded",

```

```

    "startMacAddress": "D0-60-F0-0D-00-00",
    "endMacAddress": "D0-60-F0-0D-FF-FF",
    "usage": {
      "numberOfMacAddresses": 65536,
      "numberOfMacAddressesAllocated": 0
    }
  },
  {
    "resourceRef": "/macPools/macPool2",
    "resourceId": "macPool2",
    "etag": "W/\"e6f5a533-51da-434f-b115-3193f7e2393a\"",
    "instanceId": "47a5eale-586a-4953-ad84-916eed92a0c1",
    "properties": {
      "provisioningState": "Succeeded",
      "startMacAddress": "A0-60-F0-0D-00-00",
      "endMacAddress": "A0-60-F0-0D-FF-FF",
      "usage": {
        "numberOfMacAddresses": 65536,
        "numberOfMacAddressesAllocated": 0
      }
    }
  },
  {
    "resourceRef": "/macPools/macPool3",
    "resourceId": "macPool3",
    "etag": "W/\"5785aa19-c76b-44d3-99cf-dbe04db06172\"",
    "instanceId": "5b9f4e36-e483-4408-a928-78c8cca26af4",
    "properties": {
      "provisioningState": "Succeeded",
      "startMacAddress": "B0-60-F0-0D-00-00",
      "endMacAddress": "B0-60-F0-0D-FF-FF",
      "usage": {
        "numberOfMacAddresses": 65536,
        "numberOfMacAddressesAllocated": 0
      }
    }
  }
]
}

```

The JSON schema for the **macPools GET ALL** method is located in section 6.9.3.

3.1.5.9.1.3.3 Processing Details

Retrieves all **macPools** resources.

3.1.5.9.1.4 DELETE

This method deletes a **macPools** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/macPools/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.9.1.4.1 Request Body

None.

3.1.5.9.1.4.2 Response Body

None.

3.1.5.9.1.4.3 Processing Details

Deletes a **macPools** resource.

3.1.5.10 routeTables

The **routeTables** resource contains a list of **routes**. **routeTables** resources can be applied to **subnets** of a tenant virtual network to control routing within a virtual network. Once **routeTables** has been associated to a virtual subnet, all tenant VMs created within that subnet will inherit the **routeTables** and will have their traffic routed per the routes contained in the table.

It is invoked through the following URI.

```
https://<URLurl>/networking/v1/routeTables/{resourceId}
```

url: the address of the computer on which the Network Controller is running.

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.10.1.1	Create a new routeTables resource or update an existing routeTables resource.
GET	3.1.5.10.1.2	Get one routeTables resource
GET ALL	3.1.5.10.1.3	List all routeTables resources in the Network Controller
DELETE	3.1.5.10.1.4	Deletes a routeTables resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
routes	Optional	Indicates the routes in a route table, see routes resource for full details on this element.<7>
subnets	Read-only	Indicates an array of references to subnets resources this route table is associated with.

3.1.5.10.1 HTTP Methods

3.1.5.10.1.1 PUT

This operation creates a new **routeTables** resource or updates an existing **routeTables** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/routeTables/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.10.1.1.1 Request Body

The format for the request body for the **routeTables PUT** method is as follows.

```
{
  "properties": {
    "routes": [
      {
        "resourceId": "4f7b9b29-6744-436d-af0e-779fa7093f29",
        "resourceMetadata": {},
        "properties": {
          "addressPrefix": "11.0.0.0/24",
          "nextHopType": "VirtualAppliance",
          "nextHopIpAddress": "12.0.0.21"
        }
      }
    ]
  }
}
```

```
    ]  
  }  
}
```

The JSON schema for the **routeTables PUT** method is located in section 6.10.1.

3.1.5.10.1.1.2 Response Body

The format for the **routeTables PUT** response body is the same as the format for the **routeTables GET** response body. The JSON schema is located in section 6.10.2.

3.1.5.10.1.1.3 Processing Details

Creates a new **routeTables** resource or update an existing **routeTables** resource.

3.1.5.10.1.2 GET

This operation retrieves a **routeTables** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/routeTables/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.10.1.2.1 Request Body

None.

3.1.5.10.1.2.2 Response Body

The format for the response body for the **routeTables GET** is as follows.

```
{  
  "resourceRef": "/routeTables/d81c27bd-4be4-438a-8b88-31ca717cfe75",  
  "resourceId": "d81c27bd-4be4-438a-8b88-31ca717cfe75",  
  "etag": "W/\"7a107f52-a9b3-486e-b8a0-cb85426c1400\"",  
  "instanceId": "a6070cef-9db4-439a-a095-1cc5e5b9ed8c",  
  "properties": {  
    "provisioningState": "Succeeded",  
    "routes": [  
      {  
        "resourceRef": "/routeTables/d81c27bd-4be4-438a-8b88-31ca717cfe75/routes/4f7b9b29-6744-436d-af0e-779fa7093f29",
```



```

    "resourceId": "4f7b9b29-6744-436d-af0e-779fa7093f29",
    "etag": "W/\"7a107f52-a9b3-486e-b8a0-cb85426c1400\"",
    "instanceId": "94428b30-47fa-4ba3-b5c5-0fa949eb0ccc",
    "properties": {
      "provisioningState": "Succeeded",
      "addressPrefix": "11.0.0.0/24",
      "nextHopType": "VirtualAppliance",
      "nextHopIpAddress": "12.0.0.21"
    }
  },
  {
    "resourceRef": "/routeTables/d81c27bd-4be4-438a-8b88-31ca717cfe75/routes/4e65fd4c-51bd-4ac5-bbec-c9fad8d66a24",
    "resourceId": "4e65fd4c-51bd-4ac5-bbec-c9fad8d66a24",
    "etag": "W/\"7a107f52-a9b3-486e-b8a0-cb85426c1400\"",
    "instanceId": "1dcd588f-56b9-4807-b818-b1325831684b",
    "properties": {
      "provisioningState": "Succeeded",
      "addressPrefix": "11.0.0.22/32",
      "nextHopType": "VnetLocal",
      "nextHopIpAddress": ""
    }
  }
],
"subnets": [
  {
    "resourceRef": "/virtualNetworks/13b0d711-6db5-4309-b454-595625165034/subnets/4e577d52-e7be-4c45-a369-f0f941f3555a"
  }
]
}
}

```

The JSON schema for the **routeTables GET** method is located in section 6.10.2.

3.1.5.10.1.2.3 Processing Details

Retrieves a **routeTables** resource.

3.1.5.10.1.3 GET ~~(All)~~ALL

This operation retrieves a list of all **routeTables** resources in the Network Controller.

It is invoked through the following URI.

```
https://<url>/networking/v1/routeTables
```

There are no parameters for this query.

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

3.1.5.10.1.3.1 Request Body

None.

3.1.5.10.1.3.2 Response Body

The format for the response body for the **routeTables GET ALL** is as follows.

```
{
  "value": [
    {
      "resourceRef": "/routeTables/rt",
      "resourceId": "rt",
      "resourceMetadata": {},
      "etag": "W/\"153bce9f-1830-4f13-b90d-a7017119ac24\"",
      "instanceId": "0cbeadb5-6bc8-41b6-9bba-6b96ca010eba",
      "properties": {
        "provisioningState": "Succeeded",
        "routes": [
          {
            "resourceRef": "/routeTables/rt/routes/4f7b9b29-6744-436d-af0e-779fa7093f29",
            "resourceId": "4f7b9b29-6744-436d-af0e-779fa7093f29",
            "resourceMetadata": {},
            "etag": "W/\"153bce9f-1830-4f13-b90d-a7017119ac24\"",
            "instanceId": "cddf5edf-d288-4d8e-89b9-f45a2ald59ec",
            "properties": {
              "provisioningState": "Succeeded",
              "addressPrefix": "11.0.0.0/24",
              "nextHopType": "VirtualAppliance",
              "nextHopIpAddress": "12.0.0.21"
            }
          }
        ],
        "subnets": []
      }
    }
  ],
  "nextLink": ""
}
```

The JSON schema for the **routeTables GET ALL** method is located in section 6.10.3.

3.1.5.10.1.3.3 Processing Details

Retrieves all **routeTables** resources.

3.1.5.10.1.4 DELETE

This operation deletes a **routeTables** resource. The operation is transported by a HTTP DELETE ~~and can be invoked through the following URIs:~~

It is invoked through the following URI.

```
https://<url>/networking/v1/routeTables/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.10.1.4.1 Request Body

None.

3.1.5.10.1.4.2 Response Body

None.

3.1.5.10.1.4.3 Processing Details

Deletes a **routeTables** resource.

3.1.5.10.2 routes

A **routes** resource is used to create routes under a tenant's Route Table. The tenant can specify the **addressPrefix** of the route, the type of next hop, and the next hop customer IP address.

It is invoked through the following URI.

```
https://<url>/networking/v1/routeTables/{parentResourceId}/routes/{resourceId}
```

url: the address of the computer on which the Network Controller is running.

parentResourceId: the identifier for the specific ancestor resource within the resource type. See 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.10.2.1.1	Create a new routes resource or update an existing routes resource.
GET	3.1.5.10.2.1.2	Get one routes resource.
GET ALL	3.1.5.10.2.1.3	List all routes resources in the Network Controller.
DELETE	3.1.5.10.2.1.4	Deletes a routes resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
addressPrefix	Required	The destination CIDR to which the route applies, such as 10.1.0.0/16
nextHopType	Required	The type of hop to which the packet is sent. Valid values are VirtualAppliance ₊ , VnetLocal ₊ , VirtualNetworkGateway ₊ , Internet ₊ , or None ₊ . VirtualAppliance ₋ represents a virtual appliance VM within the tenant virtual network. VnetLocal ₋ represents the local virtual network. VirtualNetworkGateway ₋ represents a virtual network gateway. Internet ₋ represents the default internet gateway. None ₋ represents a black hole. Packets forwarded to a black hole will not be forwarded out of it.
nextHopIpAddress	Optional	Indicates the next hop to which IP address packets are forwarded, such as 11.0.0.23. This value can only be specified for routes where the next hop type is VirtualAppliance and this value MUST be specified when the next hop type is VirtualAppliance.

3.1.5.10.2.1 HTTP Methods

3.1.5.10.2.1.1 PUT

This method creates a new **routes** resource or updates an existing **routes** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/routeTables/{parentResourceId}/routes/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.10.2.1.1.1 Request Body

The format for the request body for the **routes PUT** method is as follows.

```
{
  "resourceId": "4f7b9b29-6744-436d-af0e-779fa7093f29",
  "resourceMetadata": {
  },
  "properties": {
    "addressPrefix": "11.0.0.0/24",
    "nextHopType": "VirtualAppliance",
    "nextHopIpAddress": "12.0.0.21"
  }
}
```

The JSON schema for the **routes PUT** method is located in section 6.10.4.1.

3.1.5.10.2.1.1.2 Response Body

The format is the same as in the format for **routes GET** (section 3.1.5.10.2.1.2.2). The JSON schema is located in section 6.10.4.2.

3.1.5.10.2.1.1.3 Processing Details

Create a new **routes** resource or update an existing **routes** resource.

3.1.5.10.2.1.2 GET

This method retrieves a **routes** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/routeTables/{parentResourceId}/routes/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.10.2.1.2.1 Request Body

None.

3.1.5.10.2.1.2.2 Response Body

The format for the response body for the **routes GET** method is as follows.

```
{
```

```

    "resourceRef": "/routeTables/d81c27bd-4be4-438a-8b88-31ca717cfe75/routes/4f7b9b29-6744-436d-af0e-779fa7093f29",
    "resourceId": "4f7b9b29-6744-436d-af0e-779fa7093f29",
    "etag": "W/\"7a107f52-a9b3-486e-b8a0-cb85426c1400\"",
    "instanceId": "94428b30-47fa-4ba3-b5c5-0fa949eb0ccc",
    "properties": {
      "provisioningState": "Succeeded",
      "addressPrefix": "11.0.0.0/24",
      "nextHopType": "VirtualAppliance",
      "nextHopIpAddress": "12.0.0.21"
    }
  }
}

```

The JSON schema for the **routes GET** method is located in section 6.10.4.2.

3.1.5.10.2.1.2.3 Processing Details

Retrieves a **routes** resource.

3.1.5.10.2.1.3 GET ~~(All)~~ALL

This method retrieves all **routes** resources that belong to a **routeTables** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/routeTables/{parentResourceId}/routes
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.10.2.1.3.1 Request Body

None.

3.1.5.10.2.1.3.2 Response Body

The format for the response body for the **routes GET ALL** method is as follows.

```

[
  {
    "resourceId": "{uniqueString}",
    "instanceId": "XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXXXXXX",
    "tags": { "key": "value" },
    "resourceMetadata": {
      "client": "WAP Network Resource Provider",
      "tenantId": "{subscriptionid}",
      "groupId": "{groupname}",
      "name": "{name}",
    }
  }
]

```

```

        "originalHref": "https://..."
    },
    "properties": {
        "etag": "00000000-0000-0000-0000-000000000000",
        "provisioningState": "Updating|Deleting|Failed|Succeeded",
        "addressPrefix": "10.0.0.0/24",
        "nextHopType": "VirtualAppliance",
        "nextHopIpAddress": "11.0.0.5"
    }
},
[
{
    "resourceId": "{uniqueString}",
    "instanceId": "XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXX",
    "tags": { "key": "value" },
    "resourceMetadata":
    {
        "client": "WAP Network Resource Provider",
        "tenantId": "{subscriptionid}",
        "groupId": "{groupname}",
        "name": "{name}",
        "originalHref": "https://..."
    },
    "properties": {
        "etag": "00000000-0000-0000-0000-000000000000",
        "provisioningState": "Updating|Deleting|Failed|Succeeded",
        "addressPrefix": "11.11.0.0/16",
        "nextHopType": "VirtualAppliance",
        "nextHopIpAddress": "11.12.5.5"
    }
},
.
.
]

```

The JSON schema for the **routes GET ALL** method is located in section 6.10.4.3.

3.1.5.10.2.1.3.3 Processing Details

Retrieves all **routes** resources that belong to a **routeTables** resource.

3.1.5.10.2.1.4 DELETE

This method deletes a **routes** resource.

[It is invoked through the following URI.](#)

<https://<url>/networking/v1/routeTables/{parentResourceId}/routes/{resourceId}>

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

Status code
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.10.2.1.4.1 Request Body

None.

3.1.5.10.2.1.4.2 Response Body

None.

3.1.5.10.2.1.4.3 Processing Details

Deletes a **routes** resource.

3.1.5.11 networkInterfaces

The **networkInterfaces** resource specifies the configuration of either a host virtual [network](#) interface [card](#) (host vNIC) or a virtual server NIC (VMNIC).

~~The URI for~~ [it is invoked through](#) the ~~resource is as follows~~ [following URI](#).

```
https://<url>/networking/v1/networkInterfaces/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.11.1.1	Create a new networkInterfaces resource or update an existing networkInterfaces resource.
GET	3.1.5.11.1.2	Get one networkInterfaces resource
GET (All)ALL	3.1.5.11.1.3	List all networkInterfaces resources in the Network Controller
DELETE	3.1.5.11.1.4	Delete a networkInterfaces resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
dnsSettings		Indicates the DNS settings of this network interface.
dnsSettings.dnsServers		Indicates an array of IP Addresses that this network

Element name	Type	Description
		interface resource will use for the DNS servers.
ipConfigurations		Indicates an array of IP configurations that are contained in the network interface. See section 3.1.5.11.2, for full details on this element.
isHostVirtualNetworkInterface		TrueTRUE – this is a host virtual network interface card (host vNIC). FalseFALSE – this is a virtual server NIC (VMNIC).
internalDnsNameLabel		Determines the name that will be registered in the internal Domain Name Service (iDNS) when the iDnsServer resource is configured. The host address (A) record containing the InternalDnsNameLabel is in addition to that containing the virtual machine host name. The name in the two records are InternalDnsNameLabel and virtual machine hostname, respectively, followed by the virtual network resource ID, which is followed by the global zone name. internalDnsNameLabel can be set only for primary interfaces (meaning interfaces for which the isPrimary property is trueTRUE).
isPrimary		TrueTRUE – this is the primary interface and the default value if the property is not set. FalseFALSE - this is a secondary interface. The distinction is important if a virtual machine has more than one network interface. This property cannot be changed after the resource is created.
configurationState	Optional Read-only	See specification in section 2.2.4. The configurationState for network interfaces contains an id field that is set to the instance ID of the network interface. More details are given in the section for the GET operation section 3.1.5.11.1.2.
isMultitenantStack		TrueTRUE – Allows the NIC to be part of multiple virtual networks. FalseFALSE – the opposite (this is the default).
server	Read-only	Indicates a reference to the servers resource for the machine that is currently hosting the virtual machine to which this network interface belongs.
portSettings		See following table.
privateMacAddress		Indicates the private MAC address of this network interface.
privateMacAllocationMethod		Indicates the allocation scheme of the MAC for this network interface. Valid values are Static or Dynamic.
serviceInsertionElements	Read-only	Indicates an array of serviceInsertions resources that this networkInterfaces resource is part of.

Port Settings

Element name	Type	Description
macSpoofing	Optional	Specifies whether virtual machines can change the source MAC address in outgoing packets to one not assigned to them. Allowed values are " enabled " Enabled (allowing the virtual machine to use a different MAC address) and " disabled " Disabled (allowing the virtual machine to use only the MAC address assigned to it).
arpGuard	Optional	Specifies whether ARP guard is enabled or not. ARP guard will allow only addresses specified in ArpFilter to pass through the port. Allowed values are " enabled " Enabled or " disabled " Disabled .
dhcpGuard	Optional	Specifies whether to drop DHCP messages from a virtual machine claiming to be a DHCP server. Allowed values are " enabled " Enabled , which drops DHCP messages because the virtualized DHCP server is considered untrusted or " disabled " Disabled , which allows the message to be received because the virtualized DHCP server is considered trustworthy.
stormLimit	Optional	Specifies the number of broadcast, multicast, and unknown unicast packets per second a virtual machine is allowed to send through the specified virtual network adapter. Broadcast, multicast, and unknown unicast packets beyond the limit during that one second interval are dropped. A value of zero (0) means there is no limit.
portFlowLimit	Optional	Specifies the maximum number of flows that can be executed for the port. A value of blank or zero (0) means there is no limit.
vmqWeight	Optional	Specifies whether virtual machine queue (VMQ) is to be enabled on the virtual network adapter. The relative weight describes the affinity of the virtual network adapter to use VMQ. The range of value is typically from 0 through 100. Specify 0 to disable VMQ on the virtual network adapter.
iovWeight	Optional	Specifies whether single-root I/O virtualization (SR-IOV) is to be enabled on this virtual network adapter. The relative weight sets the affinity of the virtual network adapter to the assigned SR-IOV virtual function. The range of the value is typically from 0 through 100. Specify 0 to disable SR-IOV on the virtual network adapter.
iovInterruptModeration	Optional	Specifies the interrupt moderation value for a single-root I/O virtualization (SR-IOV) virtual function assigned to a virtual network adapter. Allowed values are " default ", " adaptive ", " off ", " low ", " medium ", and " high ". Default, Adaptive, Off, Low, Medium, and High. If Default is chosen, the value is determined by the physical network adapter vendor's setting. If Adaptive is chosen, the interrupt moderation rate will be based on the runtime traffic pattern.
iovQueuePairsRequested	Optional	Specifies the number of hardware queue pairs to be allocated to an SR-IOV virtual function. If receive-side scaling (RSS) is required, and if the physical network adapter that binds to the virtual switch supports RSS on SR-IOV virtual functions, then more than one queue pair is required. Allowed values range from 1 to 4294967295.
QosSettings	Optional	The following QOS Settings can be configured; all are optional: outboundReservedValue: If outboundReservedMode is " absolute " Absolute then the value indicates the bandwidth, in Mbps, guaranteed to the virtual port for transmission (egress). If outboundReservedMode is " weight " Weight then the value

Element name	Type	Description
		<p>indicates the weighted portion of the bandwidth guaranteed.</p> <p>outboundMaximumMbps: Indicates the maximum permitted send-side bandwidth, in Mbps, for the virtual port (egress).</p> <p>InboundMaximumMbps: Indicates the maximum permitted receive-side bandwidth for the virtual port (ingress) in Mbps.</p>
configurationState	Optional Read-only	See specification in section 2.2.4. More details are given in the section for the GET operation section 3.1.5.11.1.2.

3.1.5.11.1 HTTP Methods

3.1.5.11.1.1 PUT

This method creates a new **networkInterfaces** resource or updates an existing **networkInterfaces** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkInterfaces/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.11.1.1.1 Request Body

The format for the request body for the **networkInterfaces PUT** method is as follows.

```
{
  "properties": {
    "ipConfigurations": [
      {
        "resourceId": "c1fe8acf-cf68-45f0-bc70-f9a1cd8d3953",
        "properties": {
          "privateIPAddress": "20.168.0.126",
          "privateIPAllocationMethod": "Static",

```

```

        "subnet": {
            "resourceRef": "/virtualNetworks/29d028bc-a244-4bec-b3bb-
958ea0c64681/subnets/c0f6d801-ca07-4345-8274-20b13454c51a"
        },
        "accessControlList": {
            "resourceRef": "/accessControlLists/28f4e1fc-2d3a-41c0-97f2-261be40bda77"
        }
    }
},
"privateMacAddress": "003624000005",
"privateMacAllocationMethod": "Static",
"isHostVirtualNetworkInterface": false,
"internalDnsNameLabel": "VM10-Adapter1",
},
"tags": {
    "VirtualMachineId": "a898f3ec-aa8c-49de-bbcf-84f59c5e6a53",
    "VnicId": "7edb10da-bcd1-4d2d-87ca-f17405be5849"
}
}
}

```

The JSON schema for the **networkInterfaces PUT** method is located in section 6.11.1.

3.1.5.11.1.1.2 Response Body

The format is the same as the format for the **networkInterfaces GET** response body (section 3.1.5.11.1.2.2). The JSON schema is located in section 6.11.2.

3.1.5.11.1.1.3 Processing Details

Create a new **networkInterfaces** resource or update an existing **networkInterfaces** resource.

3.1.5.11.1.2 GET

This method retrieves a **networkInterfaces** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkInterfaces/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.11.1.2.1 Request Body

None.

3.1.5.11.1.2.2 Response Body

The format for the response body for the **networkInterfaces GET** method is as follows.

```
{
  "resourceRef": "/networkInterfaces/81cf4776-e842-421c-9b09-65889177a9ca",
  "resourceId": "81cf4776-e842-421c-9b09-65889177a9ca",
  "etag": "W/\"3146e60f-9760-48fc-a94c-95ed95260504\"",
  "instanceId": "60b36f34-e880-4792-ad0d-df18d4fcfcc7",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/81cf4776-e842-421c-9b09-65889177a9ca/ipConfigurations/983ab5d2-fb70-48d8-90cf-a2af145e019e",
        "resourceId": "983ab5d2-fb70-48d8-90cf-a2af145e019e",
        "etag": "W/\"3146e60f-9760-48fc-a94c-95ed95260504\"",
        "instanceId": "3bc913c4-34c1-4e27-8a42-abbf96070bc6",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "13.168.101.23",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/virtualNetworks/f6d4ce32-0c2c-4b1b-bce1-172e7fce955d/subnets/9ff17bd3-dfel-424c-80c9-claffee9de58"
          },
          "accessControlList": {
            "resourceRef": "/accessControlLists/454cf89c-c545-43e4-95d1-6a26898cdd02"
          },
          "loadBalancerBackendAddressPools": [],
          "loadBalancerInboundNatRules": []
        }
      }
    ],
    "dnsSettings": {},
    "privateMacAddress": "00155D52E711",
    "privateMacAllocationMethod": "Static",
    "serviceInsertionElements": [],
    "portSettings": {
      "macSpoofingEnabled": "Disabled",
      "arpGuardEnabled": "Disabled",
      "dhcpGuardEnabled": "Disabled",
      "stormLimit": 0,
      "portFlowLimit": 0,
      "iovWeight": 0,
      "iovInterruptModeration": "Off",
      "iovQueuePairsRequested": 0,
      "vmqWeight": 100
    },
    "isHostVirtualNetworkInterface": false,
    "runningState": {
      "status": "Failure",
      "detailedInfo": [
        {
          "source": "VirtualNetwork",
          "message": "Failed to configure the policies on the host device.",
          "code": "PolicyConfigurationFailure"
        }
      ]
    },
    "lastUpdatedTime": "2016-02-22T20:04:54.109219-08:00",
    "id": "60b36f34-e880-4792-ad0d-df18d4fcfcc7"
  },
  "isMultitenantStack": false
}
```

The JSON schema for the **networkInterfaces GET** method is located in section 6.11.2.

3.1.5.11.1.2.3 Processing Details

Retrieves a **networkInterfaces** resource.

The server returns a configuration state only if it has already attempted to configure settings according to the REST resource properties that were created or updated by using the **PUT** method. **configurationState.lastUpdatedTime** is set to a value that is implementation-specific. **configurationState.id** MUST be set to the resource instance ID of the network interface.

The server MUST return a configuration state property **configurationState.status** set to "Success" if there were no errors. The server MUST return a configuration state property **configurationState.status** set to "Failure" if there were errors during the configuration of settings. **configurationState.detailedInfo** contains an array of objects per the specification in section 2.2.4. The following table contains acceptable values in the response when **configurationState.status** is "Failure".

Code inside configurationState.detailedInfo array	Description
Unknown	An unknown error occurred while configuring policies.
HostUnreachable	The host is unreachable.
PAIpAddressExhausted	Failed to assign an IP address on the host.
PAMacAddressExhausted	Failed to assign a Mac address on the host.
PAAddressConfigurationFailure	Failed to configure IP addresses on the host.
CertificateNotTrusted	The certificate used to establish the connection is not trusted.
CertificateNotAuthorized	The certificate used to establish the connection is not authorized.
PolicyConfigurationFailureOnVfp	Failed to configure the policies on the Virtual Filtering Platform (VFP).
PolicyConfigurationFailure	Failed to configure the policies on the host device.
HostNotConnectedToController	The host has not yet established communication with the Network Controller.
MultipleVfpEnabledSwitches	Multiple switches with the VFP enabled exist on the host, which is unsupported.
DhcpAddressAllocationFailure	Failed to assign DHCP address to the Network Interface.
PortBlocked	The Port is blocked on the host.
DistributedRouterConfigurationFailure	Failed to configure isolation settings on the host.
QosConfigurationFailure	Failed to configure QOS policies on the Virtual Filtering Platform (VFP).
InfrastructurePortsBlocked	One or more Infrastructure ports are blocked on this host.
PolicyConfigurationFailureOnVfp	The Firewall Service encountered an error in adding the rules to the Virtual Network Interface.

3.1.5.11.1.3 GET ~~(All)~~ALL

This method retrieves all **networkInterfaces** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkInterfaces
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.11.1.3.1 Request Body

None.

3.1.5.11.1.3.2 Response Body

The format for the response body for the **GET ALL** method is similar to the format for the **networkInterfaces GET** method but in an array format.

```
{
  "value": [
    {
      "resourceRef": "/networkInterfaces/00000000-3333-0000-0000-000000000001",
      "resourceId": "00000000-3333-0000-0000-000000000001",
      "etag": "W/\"f2bf845b-a81a-4148-9971-501fc017ffb0\"",
      "instanceId": "2c784cfe-47f4-499c-ab27-905cfad0fb22",
      "properties": {
        "provisioningState": "Succeeded",
        "dnsSettings": {},
        "privateMacAddress": "00FFFF009B80",
        "privateMacAllocationMethod": "Static",
        "serviceInsertionElements": [],
        "portSettings": {
          "macSpoofingEnabled": "Disabled",
          "arpGuardEnabled": "Disabled",
          "dhcpGuardEnabled": "Disabled",
          "stormLimit": 0,
          "portFlowLimit": 0,
          "iovWeight": 0,
          "iovInterruptModeration": "Off",
          "iovQueuePairsRequested": 0,
          "vmqWeight": 100
        },
        "isHostVirtualNetworkInterface": false,
        "configurationState": {
          "status": "Failure",
          "detailedInfo": [
            {
              "source": "VirtualSwitch",
              "message": "The Port is blocked on the host.",
              "code": "PortBlocked"
            }
          ]
        }
      }
    }
  ]
}
```

```

    ],
    "lastUpdatedTime": "2016-06-10T17:03:38.1131088-07:00",
    "id": "2c784cfe-47f4-499c-ab27-905cfad0fb22"
  },
  "isMultitenantStack": false
}
},
{
  "resourceRef": "/networkInterfaces/00000000-3333-0000-0000-000000000002",
  "resourceId": "00000000-3333-0000-0000-000000000002",
  "etag": "W/\b69c7e1e-a13e-45e5-a5f5-3b7b7da4427a\"",
  "instanceId": "568a9d72-3790-4b99-a8cb-245caeeefffb",
  "properties": {
    "provisioningState": "Succeeded",
    "dnsSettings": {},
    "privateMacAddress": "00FFFF0045FB",
    "privateMacAllocationMethod": "Static",
    "serviceInsertionElements": [],
    "portSettings": {
      "macSpoofingEnabled": "Disabled",
      "arpGuardEnabled": "Disabled",
      "dhcpGuardEnabled": "Disabled",
      "stormLimit": 0,
      "portFlowLimit": 0,
      "iovWeight": 0,
      "iovInterruptModeration": "Off",
      "iovQueuePairsRequested": 0,
      "vmqWeight": 100
    },
    "isHostVirtualNetworkInterface": false,
    "configurationState": {
      "status": "Failure",
      "detailedInfo": [
        {
          "source": "VirtualSwitch",
          "message": "The Port is blocked on the host.",
          "code": "PortBlocked"
        }
      ]
    },
    "lastUpdatedTime": "2016-06-10T17:03:38.1286886-07:00",
    "id": "568a9d72-3790-4b99-a8cb-245caeeefffb"
  },
  "isMultitenantStack": false
}
},
{
  "resourceRef": "/networkInterfaces/12fc43be-402b-4251-9298-f983fc3f5342",
  "resourceId": "12fc43be-402b-4251-9298-f983fc3f5342",
  "etag": "W/\bc08a698-966b-40e0-924a-47ca7f674a77\"",
  "instanceId": "f54b24e6-4ff8-46f0-88e8-3043087d871a",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/12fc43be-402b-4251-9298-f983fc3f5342/ipConfigurations/5941da25-a39b-43dc-afbe-014b3b105c16",
        "resourceId": "5941da25-a39b-43dc-afbe-014b3b105c16",
        "etag": "W/\bc08a698-966b-40e0-924a-47ca7f674a77\"",
        "instanceId": "2f9e0add-e89a-4a51-8696-7b5c0ed1a1e3",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "10.11.20.28",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworks/LogicalNetworks/47931036-2874-4d45-b1f1-b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec",
            "accessControlList": {
              "resourceRef": "/accessControlLists/R2H06D4-ACS03"
            }
          }
        }
      }
    ]
  }
}

```



```

        "loadBalancerBackendAddressPools": [
            {
                "resourceRef": "/loadBalancers/539bd9de-9506-4423-9047-
6eb9364c2a84/backendAddressPools/b6fbd9dd-1611-4ab0-ab3a-37176707bb9b"
            }
        ],
        "loadBalancerInboundNatRules": []
    }
},
"dnsSettings": {},
"privateMacAddress": "00FFFF003561",
"privateMacAllocationMethod": "Static",
"serviceInsertionElements": [],
"portSettings": {
    "macSpoofingEnabled": "Disabled",
    "arpGuardEnabled": "Disabled",
    "dhcpGuardEnabled": "Disabled",
    "stormLimit": 0,
    "portFlowLimit": 0,
    "iovWeight": 0,
    "iovInterruptModeration": "Off",
    "iovQueuePairsRequested": 0,
    "vmqWeight": 100
},
"isHostVirtualNetworkInterface": false,
"configurationState": {
    "status": "Failure",
    "detailedInfo": [
        {
            "source": "VirtualSwitch",
            "message": "Failed to configure the policies on the Virtual Filtering
Platform.",
            "code": "PolicyConfigurationFailureOnVfp"
        }
    ],
    "lastUpdatedTime": "2016-06-10T17:03:37.7948284-07:00",
    "id": "f54b24e6-4ff8-46f0-88e8-3043087d871a"
},
"isMultitenantStack": false
},
},
{
    "resourceRef": "/networkInterfaces/2bebbd8f-e18b-4990-ba88-ed7c9b1892f5",
    "resourceId": "2bebbd8f-e18b-4990-ba88-ed7c9b1892f5",
    "etag": "W/\"e018a8ef-a59c-4dff-9aae-f3f5c8cd24a9\"",
    "instanceId": "38f40abe-9e46-4a00-beb1-3688652d3a4a",
    "properties": {
        "provisioningState": "Succeeded",
        "ipConfigurations": [
            {
                "resourceRef": "/networkInterfaces/2bebbd8f-e18b-4990-ba88-
ed7c9b1892f5/ipConfigurations/f0131475-1920-40c6-a951-789557254a54",
                "resourceId": "f0131475-1920-40c6-a951-789557254a54",
                "etag": "W/\"e018a8ef-a59c-4dff-9aae-f3f5c8cd24a9\"",
                "instanceId": "11f615e6-5527-4659-8c2c-6dc7104011d1",
                "properties": {
                    "provisioningState": "Succeeded",
                    "privateIPAddress": "10.11.20.25",
                    "privateIPAllocationMethod": "Static",
                    "subnet": {
                        "resourceRef": "/logicalnetworkslogicalNetworks/47931036-2874-4d45-b1f1-
b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec"
                    },
                    "accessControlList": {
                        "resourceRef": "/accessControlLists/R2H06D4-WAS01"
                    },
                    "loadBalancerBackendAddressPools": [
                        {

```



```

    "accessControlList": {
      "resourceRef": "/accessControlLists/R2H06D4-Xrp01"
    },
    "loadBalancerBackendAddressPools": [
      {
        "resourceRef": "/loadBalancers/7c13fef9-2dcd-4561-8b33-087425c0b519/backendAddressPools/2fd20693-a837-430c-b695-8a1c9323d158"
      },
      {
        "resourceRef": "/loadBalancers/888db9d4-716c-4002-8bee-fc1b933a1457/backendAddressPools/4374e94e-4aef-4f24-bdfa-bf6b51498da5"
      },
      {
        "resourceRef": "/loadBalancers/99bdd85b-f979-4d3f-931e-48a80a88a885/backendAddressPools/9bfcf3b2-1c25-4360-88d8-0158cd0859bd"
      },
      {
        "resourceRef": "/loadBalancers/c5d4d9c6-5cdd-401f-a08c-3ac01315036a/backendAddressPools/39eed82a-28b1-4288-be68-631262788785"
      }
    ],
    "loadBalancerInboundNatRules": []
  }
},
"dnsSettings": {},
"privateMacAddress": "00FFFF008AE5",
"privateMacAllocationMethod": "Static",
"serviceInsertionElements": [],
"portSettings": {
  "macSpoofingEnabled": "Disabled",
  "arpGuardEnabled": "Disabled",
  "dhcpGuardEnabled": "Disabled",
  "stormLimit": 0,
  "portFlowLimit": 0,
  "iovWeight": 0,
  "iovInterruptModeration": "Off",
  "iovQueuePairsRequested": 0,
  "vmqWeight": 100
},
"isHostVirtualNetworkInterface": false,
"configurationState": {
  "status": "Failure",
  "detailedInfo": [
    {
      "source": "VirtualSwitch",
      "message": "Failed to configure the policies on the Virtual Filtering Platform.",
      "code": "PolicyConfigurationFailureOnVfp"
    }
  ]
},
"lastUpdatedTime": "2016-06-10T17:03:38.0193353-07:00",
"id": "8372e129-0b4f-43f1-96f7-4bd49b3e6192"
},
"isMultitenantStack": false
}
},
{
  "resourceRef": "/networkInterfaces/5ecfd6cf-0792-45c4-8fce-63a201e3f5d9",
  "resourceId": "5ecfd6cf-0792-45c4-8fce-63a201e3f5d9",
  "etag": "W/\"2b58427a-8613-4a16-baa4-3fc7450f4a42\"",
  "instanceId": "c8d172b2-f756-4a25-8bcc-1d54d7d64955",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/5ecfd6cf-0792-45c4-8fce-63a201e3f5d9/ipConfigurations/33b79dbc-8632-439d-bd27-2b85d515f8f4",
        "resourceId": "33b79dbc-8632-439d-bd27-2b85d515f8f4",
        "etag": "W/\"2b58427a-8613-4a16-baa4-3fc7450f4a42\"",

```

```

    "instanceId": "317ce731-a7cb-4ef9-89fa-5e0f63574be9",
    "properties": {
      "provisioningState": "Succeeded",
      "privateIPAddress": "10.11.20.22",
      "privateIPAllocationMethod": "Static",
      "subnet": {
        "resourceRef": "/logicalnetworks/LogicalNetworks/47931036-2874-4d45-b1f1-b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec"
      },
      "accessControlList": {
        "resourceRef": "/accessControlLists/R2H06D4-ASq102"
      },
      "loadBalancerBackendAddressPools": [],
      "loadBalancerInboundNatRules": []
    }
  },
  "dnsSettings": {},
  "privateMacAddress": "00FFFF003346",
  "privateMacAllocationMethod": "Static",
  "serviceInsertionElements": [],
  "portSettings": {
    "macSpoofingEnabled": "Disabled",
    "arpGuardEnabled": "Disabled",
    "dhcpGuardEnabled": "Disabled",
    "stormLimit": 0,
    "portFlowLimit": 0,
    "iovWeight": 0,
    "iovInterruptModeration": "Off",
    "iovQueuePairsRequested": 0,
    "vmqWeight": 100
  },
  "isHostVirtualNetworkInterface": false,
  "configurationState": {
    "status": "Failure",
    "detailedInfo": [
      {
        "source": "VirtualSwitch",
        "message": "Failed to configure the policies on the Virtual Filtering Platform.",
        "code": "PolicyConfigurationFailureOnVfp"
      }
    ]
  },
  "lastUpdatedTime": "2016-06-10T17:03:37.847415-07:00",
  "id": "c8d172b2-f756-4a25-8bcc-1d54d7d64955"
},
"isMultitenantStack": false
}
},
{
  "resourceRef": "/networkInterfaces/64814d86-8a2e-4a66-b452-f67b5e148a6f",
  "resourceId": "64814d86-8a2e-4a66-b452-f67b5e148a6f",
  "etag": "W/\"75a9396f-4fc9-47de-8404-eb33e38e0201\"",
  "instanceId": "35bac936-f071-4644-a6e9-1543054b0e50",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/64814d86-8a2e-4a66-b452-f67b5e148a6f/ipConfigurations/6d118103-b6b8-4621-8d67-93101a4770a5",
        "resourceId": "6d118103-b6b8-4621-8d67-93101a4770a5",
        "etag": "W/\"75a9396f-4fc9-47de-8404-eb33e38e0201\"",
        "instanceId": "c0bec304-d698-4278-8bcb-521bde580ec5",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "10.11.20.31",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworks/LogicalNetworks/47931036-2874-4d45-b1f1-b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec"
          }
        }
      }
    ]
  }
}

```

```

    },
    "accessControlList": {
      "resourceRef": "/accessControlLists/R2H06D4-CA01"
    },
    "loadBalancerBackendAddressPools": [],
    "loadBalancerInboundNatRules": []
  }
}
],
"dnsSettings": {},
"privateMacAddress": "00FFFF0036EE",
"privateMacAllocationMethod": "Static",
"serviceInsertionElements": [],
"portSettings": {
  "macSpoofingEnabled": "Disabled",
  "arpGuardEnabled": "Disabled",
  "dhcpGuardEnabled": "Disabled",
  "stormLimit": 0,
  "portFlowLimit": 0,
  "iovWeight": 0,
  "iovInterruptModeration": "Off",
  "iovQueuePairsRequested": 0,
  "vmqWeight": 100
},
"isHostVirtualNetworkInterface": false,
"configurationState": {
  "status": "Failure",
  "detailedInfo": [
    {
      "source": "VirtualSwitch",
      "message": "Failed to configure the policies on the Virtual Filtering
Platform.",
      "code": "PolicyConfigurationFailureOnVfp"
    }
  ],
  "lastUpdatedTime": "2016-06-10T17:03:38.0974609-07:00",
  "id": "35bac936-f071-4644-a6e9-1543054b0e50"
},
"isMultitenantStack": false
}
},
{
  "resourceRef": "/networkInterfaces/665d0a8b-00bd-4db8-9a9d-d7a234e58dcd",
  "resourceId": "665d0a8b-00bd-4db8-9a9d-d7a234e58dcd",
  "etag": "W/\"df409b55-8ba2-4540-b274-69f90c09427f\"",
  "instanceId": "08062f05-7d88-4e0b-9ee9-5fd36e367a02",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/665d0a8b-00bd-4db8-9a9d-
d7a234e58dcd/ipConfigurations/834c1c0a-3880-41b2-a034-58a9143d8853",
        "resourceId": "834c1c0a-3880-41b2-a034-58a9143d8853",
        "etag": "W/\"df409b55-8ba2-4540-b274-69f90c09427f\"",
        "instanceId": "bee20f5a-23ea-491a-9da6-041bfd927344",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "10.11.20.30",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworkslogicalNetworks/47931036-2874-4d45-b1f1-
b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec"
          },
          "accessControlList": {
            "resourceRef": "/accessControlLists/R2H06D4-ADFS01"
          },
          "loadBalancerBackendAddressPools": [
            {
              "resourceRef": "/loadBalancers/92b66fb0-c8e4-4f2d-9548-
aab8e70dd59a/backendAddressPools/15a0482e-0b94-4102-adf5-f6efb0c04237"
            }
          ]
        }
      }
    ]
  }
}

```

```

    },
    {
      "resourceRef": "/loadBalancers/c7672d18-8497-4359-85bf-
e4e0982bf718/backendAddressPools/8b562e63-5b5a-4598-8953-52fd4c2e2f6e"
    }
  ],
  "loadBalancerInboundNatRules": []
}
],
"dnsSettings": {},
"privateMacAddress": "00FFFF00DF6A",
"privateMacAllocationMethod": "Static",
"serviceInsertionElements": [],
"portSettings": {
  "macSpoofingEnabled": "Disabled",
  "arpGuardEnabled": "Disabled",
  "dhcpGuardEnabled": "Disabled",
  "stormLimit": 0,
  "portFlowLimit": 0,
  "iovWeight": 0,
  "iovInterruptModeration": "Off",
  "iovQueuePairsRequested": 0,
  "vmqWeight": 100
},
"isHostVirtualNetworkInterface": false,
"configurationState": {
  "status": "Failure",
  "detailedInfo": [
    {
      "source": "VirtualSwitch",
      "message": "Failed to configure the policies on the Virtual Filtering
Platform.",
      "code": "PolicyConfigurationFailureOnVfp"
    }
  ]
},
"lastUpdatedTime": "2016-06-10T17:03:38.066241-07:00",
"id": "08062f05-7d88-4e0b-9ee9-5fd36e367a02"
},
"isMultitenantStack": false
}
},
{
  "resourceRef": "/networkInterfaces/6bfd26f7-c43e-4d25-9d9f-a995faf37e16",
  "resourceId": "6bfd26f7-c43e-4d25-9d9f-a995faf37e16",
  "etag": "W/\"a6c0a639-3182-4c64-bd8f-f21149f471f0\"",
  "instanceId": "ff62cf92-b5bb-4bf2-9259-0704e41a9243",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/6bfd26f7-c43e-4d25-9d9f-
a995faf37e16/ipConfigurations/c4bbe7ab-e201-4fdd-9e97-fb6e11072829",
        "resourceId": "c4bbe7ab-e201-4fdd-9e97-fb6e11072829",
        "etag": "W/\"a6c0a639-3182-4c64-bd8f-f21149f471f0\"",
        "instanceId": "17735903-d811-4c5e-837e-74363be61be9",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "10.11.20.20",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworkslogicalNetworks/47931036-2874-4d45-b1f1-
b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec"
          },
          "accessControlList": {
            "resourceRef": "/accessControlLists/R2H06D4-Con01"
          },
          "loadBalancerBackendAddressPools": [],
          "loadBalancerInboundNatRules": []
        }
      }
    ]
  }
}

```

```

    }
  ],
  "dnsSettings": {},
  "privateMacAddress": "00FFFF00873D",
  "privateMacAllocationMethod": "Static",
  "serviceInsertionElements": [],
  "portSettings": {
    "macSpoofingEnabled": "Disabled",
    "arpGuardEnabled": "Disabled",
    "dhcpGuardEnabled": "Disabled",
    "stormLimit": 0,
    "portFlowLimit": 0,
    "iovWeight": 0,
    "iovInterruptModeration": "Off",
    "iovQueuePairsRequested": 0,
    "vmqWeight": 100
  },
  "isHostVirtualNetworkInterface": false,
  "configurationState": {
    "status": "Failure",
    "detailedInfo": [
      {
        "source": "VirtualSwitch",
        "message": "Failed to configure the policies on the Virtual Filtering
Platform.",
        "code": "PolicyConfigurationFailureOnVfp"
      }
    ]
  },
  "lastUpdatedTime": "2016-06-10T17:03:37.8104684-07:00",
  "id": "ff62cf92-b5bb-4bf2-9259-0704e41a9243"
},
"isMultitenantStack": false
},
{
  "resourceRef": "/networkInterfaces/c295951a-a495-41f0-b8ef-84d3317150a3",
  "resourceId": "c295951a-a495-41f0-b8ef-84d3317150a3",
  "etag": "W/\"592569bf-fdfa-4004-b465-5ec46fcdf27b\"",
  "instanceId": "a362889f-e715-4f71-b798-d9530ec27306",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/c295951a-a495-41f0-b8ef-
84d3317150a3/ipConfigurations/e3d8fbc1-a0c2-4583-a3bc-96f59e1a31a3",
        "resourceId": "e3d8fbc1-a0c2-4583-a3bc-96f59e1a31a3",
        "etag": "W/\"592569bf-fdfa-4004-b465-5ec46fcdf27b\"",
        "instanceId": "41b6f512-0224-4953-a7af-09757e1fe94d",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "10.11.20.24",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworkslogicalNetworks/47931036-2874-4d45-b1f1-
b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec"
          },
          "accessControlList": {
            "resourceRef": "/accessControlLists/R2H06D4-WDS01"
          },
          "loadBalancerBackendAddressPools": [],
          "loadBalancerInboundNatRules": []
        }
      }
    ]
  },
  "dnsSettings": {},
  "privateMacAddress": "00FFFF00DD4F",
  "privateMacAllocationMethod": "Static",
  "serviceInsertionElements": [],
  "portSettings": {
    "macSpoofingEnabled": "Disabled",

```

```

    "arpGuardEnabled": "Disabled",
    "dhcpGuardEnabled": "Disabled",
    "stormLimit": 0,
    "portFlowLimit": 0,
    "iovWeight": 0,
    "iovInterruptModeration": "Off",
    "iovQueuePairsRequested": 0,
    "vmqWeight": 100
  },
  "isHostVirtualNetworkInterface": false,
  "configurationState": {
    "status": "Failure",
    "detailedInfo": [
      {
        "source": "VirtualSwitch",
        "message": "Failed to configure the policies on the Virtual Filtering
Platform.",
        "code": "PolicyConfigurationFailureOnVfp"
      }
    ],
    "lastUpdatedTime": "2016-06-10T17:03:37.8787124-07:00",
    "id": "a362889f-e715-4f71-b798-d9530ec27306"
  },
  "isMultitenantStack": false
},
{
  "resourceRef": "/networkInterfaces/cb30d461-1921-42b3-b8f1-042c02271aa1",
  "resourceId": "cb30d461-1921-42b3-b8f1-042c02271aa1",
  "etag": "W/\"c53edc8f-e195-4dd8-85e2-134c79e3a763\"",
  "instanceId": "1dbd4c42-d37b-472c-a4dc-f3f983078515",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/cb30d461-1921-42b3-b8f1-
042c02271aa1/ipConfigurations/0d1e86b9-2442-43fc-8fdf-7d12f1f152ca",
        "resourceId": "0d1e86b9-2442-43fc-8fdf-7d12f1f152ca",
        "etag": "W/\"c53edc8f-e195-4dd8-85e2-134c79e3a763\"",
        "instanceId": "09f3330e-2fec-41cc-a0f7-47598bbe61a",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "10.11.20.21",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworkslogicalNetworks/47931036-2874-4d45-b1f1-
b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec"
          },
          "accessControlList": {
            "resourceRef": "/accessControlLists/R2H06D4-ASq101"
          },
          "loadBalancerBackendAddressPools": [],
          "loadBalancerInboundNatRules": []
        }
      }
    ]
  },
  "dnsSettings": {},
  "privateMacAddress": "00FFFF00DDC1",
  "privateMacAllocationMethod": "Static",
  "serviceInsertionElements": [],
  "portSettings": {
    "macSpoofingEnabled": "Disabled",
    "arpGuardEnabled": "Disabled",
    "dhcpGuardEnabled": "Disabled",
    "stormLimit": 0,
    "portFlowLimit": 0,
    "iovWeight": 0,
    "iovInterruptModeration": "Off",
    "iovQueuePairsRequested": 0,
    "vmqWeight": 100
  }
}

```



```

    },
    "isHostVirtualNetworkInterface": false,
    "configurationState": {
      "status": "Failure",
      "detailedInfo": [
        {
          "source": "VirtualSwitch",
          "message": "Failed to configure the policies on the Virtual Filtering
Platform.",
          "code": "PolicyConfigurationFailureOnVfp"
        }
      ],
      "lastUpdatedTime": "2016-06-10T17:03:37.8359266-07:00",
      "id": "1dbd4c42-d37b-472c-a4dc-f3f983078515"
    },
    "isMultitenantStack": false
  }
},
{
  "resourceRef": "/networkInterfaces/e40e3b34-13fd-42fc-a74e-26fe68999b73",
  "resourceId": "e40e3b34-13fd-42fc-a74e-26fe68999b73",
  "etag": "W/\"7481d801-d103-4c30-a6d2-013df0790946\"",
  "instanceId": "cf89bc5d-32d6-4f35-9cbf-66ae94e5c004",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/e40e3b34-13fd-42fc-a74e-
26fe68999b73/ipConfigurations/424fb61c-3b12-4c02-82d3-4a36d66d1617",
        "resourceId": "424fb61c-3b12-4c02-82d3-4a36d66d1617",
        "etag": "W/\"7481d801-d103-4c30-a6d2-013df0790946\"",
        "instanceId": "b53ecbbf-b21c-43f1-a606-36b9fe111e80",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "10.11.20.26",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworks/LogicalNetworks/47931036-2874-4d45-b1f1-
b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec"
          },
          "accessControlList": {
            "resourceRef": "/accessControlLists/R2H06D4-ACS01"
          },
          "loadBalancerBackendAddressPools": [
            {
              "resourceRef": "/loadBalancers/539bd9de-9506-4423-9047-
6eb9364c2a84/backendAddressPools/b6fbd9dd-1611-4ab0-ab3a-37176707bb9b"
            }
          ],
          "loadBalancerInboundNatRules": []
        }
      }
    ],
    "dnsSettings": {},
    "privateMacAddress": "00FFFF008A58",
    "privateMacAllocationMethod": "Static",
    "serviceInsertionElements": [],
    "portSettings": {
      "macSpoofingEnabled": "Disabled",
      "arpGuardEnabled": "Disabled",
      "dhcpGuardEnabled": "Disabled",
      "stormLimit": 0,
      "portFlowLimit": 0,
      "iovWeight": 0,
      "iovInterruptModeration": "Off",
      "iovQueuePairsRequested": 0,
      "vmqWeight": 100
    },
    "isHostVirtualNetworkInterface": false,
    "configurationState": {

```

```

    "status": "Failure",
    "detailedInfo": [
      {
        "source": "VirtualSwitch",
        "message": "Failed to configure the policies on the Virtual Filtering
Platform.",
        "code": "PolicyConfigurationFailureOnVfp"
      }
    ],
    "lastUpdatedTime": "2016-06-10T17:03:37.9412444-07:00",
    "id": "cf89bc5d-32d6-4f35-9cbf-66ae94e5c004"
  },
  "isMultitenantStack": false
},
{
  "resourceRef": "/networkInterfaces/e9e900f3-8285-4fef-b336-65b4896e09a8",
  "resourceId": "e9e900f3-8285-4fef-b336-65b4896e09a8",
  "etag": "W/\"e248b728-51a2-4be7-91cf-8d894a33dbaf\"",
  "instanceId": "dbd62461-2f1b-434a-aa54-d7fab820cd57",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/e9e900f3-8285-4fef-b336-
65b4896e09a8/ipConfigurations/007efd64-1e3e-4104-97c7-039cc1bd3ec3",
        "resourceId": "007efd64-1e3e-4104-97c7-039cc1bd3ec3",
        "etag": "W/\"e248b728-51a2-4be7-91cf-8d894a33dbaf\"",
        "instanceId": "7f9593e7-c92b-4e63-b1d8-c0bfa3119e2e",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "10.11.20.23",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworks/logicalNetworks/47931036-2874-4d45-b1f1-
b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec"
          },
          "accessControlList": {
            "resourceRef": "/accessControlLists/R2H06D4-SUS01"
          },
          "loadBalancerBackendAddressPools": [],
          "loadBalancerInboundNatRules": []
        }
      }
    ],
    "dnsSettings": {},
    "privateMacAddress": "00FFFF0089CA",
    "privateMacAllocationMethod": "Static",
    "serviceInsertionElements": [],
    "portSettings": {
      "macSpoofingEnabled": "Disabled",
      "arpGuardEnabled": "Disabled",
      "dhcpGuardEnabled": "Disabled",
      "stormLimit": 0,
      "portFlowLimit": 0,
      "iovWeight": 0,
      "iovInterruptModeration": "Off",
      "iovQueuePairsRequested": 0,
      "vmqWeight": 100
    },
    "isHostVirtualNetworkInterface": false,
    "configurationState": {
      "status": "Failure",
      "detailedInfo": [
        {
          "source": "VirtualSwitch",
          "message": "Failed to configure the policies on the Virtual Filtering
Platform.",
          "code": "PolicyConfigurationFailureOnVfp"
        }
      ]
    }
  }
}

```

```

    ],
    "lastUpdatedTime": "2016-06-10T17:03:37.8630807-07:00",
    "id": "dbd62461-2f1b-434a-aa54-d7fab820cd57"
  },
  "isMultitenantStack": false
}
},
{
  "resourceRef": "/networkInterfaces/f5730847-0879-4eab-89de-ce54b217630c",
  "resourceId": "f5730847-0879-4eab-89de-ce54b217630c",
  "etag": "W/\\"0d7aa01f-dd17-48ad-ba7b-cf20de59563b\\"",
  "instanceId": "d0842ac6-36aa-4fae-93ce-98beedaca3ee",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/f5730847-0879-4eab-89de-
ce54b217630c/ipConfigurations/cf2a6356-c9de-4e63-9abe-d4b7759a7181",
        "resourceId": "cf2a6356-c9de-4e63-9abe-d4b7759a7181",
        "etag": "W/\\"0d7aa01f-dd17-48ad-ba7b-cf20de59563b\\"",
        "instanceId": "efce1627-227b-44a7-8bee-83cb578472a8",
        "properties": {
          "provisioningState": "Succeeded",
          "privateIPAddress": "10.11.20.27",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/logicalnetworkslogicalNetworks/47931036-2874-4d45-b1f1-
b69666088968/subnets/d977fe45-c5d0-43b6-8420-acc441cd15ec"
          },
          "accessControlList": {
            "resourceRef": "/accessControlLists/R2H06D4-ACS02"
          },
          "loadBalancerBackendAddressPools": [
            {
              "resourceRef": "/loadBalancers/539bd9de-9506-4423-9047-
6eb9364c2a84/backendAddressPools/b6fbd9dd-1611-4ab0-ab3a-37176707bb9b"
            }
          ],
          "loadBalancerInboundNatRules": []
        }
      }
    ],
    "dnsSettings": {},
    "privateMacAddress": "00FFFF00DFDC",
    "privateMacAllocationMethod": "Static",
    "serviceInsertionElements": [],
    "portSettings": {
      "macSpoofingEnabled": "Disabled",
      "arpGuardEnabled": "Disabled",
      "dhcpGuardEnabled": "Disabled",
      "stormLimit": 0,
      "portFlowLimit": 0,
      "iovWeight": 0,
      "iovInterruptModeration": "Off",
      "iovQueuePairsRequested": 0,
      "vmqWeight": 100
    },
    "isHostVirtualNetworkInterface": false,
    "configurationState": {
      "status": "Failure",
      "detailedInfo": [
        {
          "source": "VirtualSwitch",
          "message": "Failed to configure the policies on the Virtual Filtering
Platform.",
          "code": "PolicyConfigurationFailureOnVfp"
        }
      ]
    },
    "lastUpdatedTime": "2016-06-10T17:03:37.972492-07:00",
    "id": "d0842ac6-36aa-4fae-93ce-98beedaca3ee"
  }
}

```

```

    },
    "isMultitenantStack": false
  }
}
],
"nextLink": ""
}

```

The JSON schema for the **networkInterfaces GET ALL** method is located in section 6.11.3.

3.1.5.11.1.3.3 Processing Details

Retrieves all **networkInterfaces** resources.

3.1.5.11.1.4 DELETE

This method deletes a **networkInterfaces** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkInterfaces/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.11.1.4.1 Request Body

None.

3.1.5.11.1.4.2 Response Body

None.

3.1.5.11.1.4.3 Processing Details

Deletes a **networkInterfaces** resource.

3.1.5.11.2 ipConfigurations

The **ipConfigurations** resource represents configuration information for IP addresses: allocation method, actual IP address, membership of a logical or virtual subnet, load balancing and access control information.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkInterfaces/{parentResourceId}/ipConfigurations/{resourceId}
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.11.2.1.1	Create a new ipConfigurations resource or update an existing ipConfigurations resource.
GET	3.1.5.11.2.1.2	Get one ipConfigurations resource.
GET (All)ALL	3.1.5.11.2.1.3	List all ipConfigurations resources in the Network Controller.
DELETE	3.1.5.11.2.1.4	Deletes an ipConfigurations resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
accessControlList	Optional	Indicates a reference to an accessControlList resource that defines the ACLs in and out of the IP configuration.
loadBalancerBackendAddressPool	Optional Read-only	Reference to backendAddressPools child resource of loadBalancers resource.
loadBalancerInboundNatRules	Optional	Reference to inboundNatRules child resource of loadBalancers resource.
privateIPAddress	Optional	Indicates the private IP address of the IP configuration.
privateIPAllocationMethod	Optional	<p>Possible values are: Static, Dynamic, and Unmanged.</p> <p>Static allocation</p> <p>The server MUST validate that there is a privateIPAddress property in the input message and that the IP Address falls within the range of the subnet referenced by the IP configuration REST resource, and that the IP address is not already in use.</p> <p>If the IP is not in the subnet range, the server MUST return an error response with the error code set to "PrivateIPAddressNotInSubnet".</p> <p>If the IP is already in use, the server MUST return an error response with the error code set to</p>

Element name	Type	Description
		<p>"PrivateIPAddressInUse" Dynamic allocation The server SHOULD allocate an IP address from the subnet referenced by the IP configuration. The server SHOULD return an error response with code "SubnetIsFull" if there are no more IP Addresses available. If the server allocates an IP address, then the server MUST return the allocated IP in the privateIPAddress property in GET operations on the resource, see section 3.1.5.11.2.1.2.</p> <p>Unmanaged allocation The server MUST support unmanaged allocation only for IP configurations with references to logical network subnets that have the networkVirtualizationEnabled property set to FalseFALSE. The server MUST return an error response with code "UnmanagedAllocationMethodNotSupported" for references to any other type of subnets. The server MUST apply all applicable policies except IP address to the network interface that contains an IP configuration with unmanaged private IP allocation. Examples of applicable policies are access control lists and QOS.</p>
publicIpAddresspublicIPAddress	Optional	Indicates the public IP address of the IP configuration.
serviceInsertion	Optional	Indicates a reference to a serviceInsertionserviceInsertions resource that defines the service insertion in and out of the IP configuration.
subnet	Read-only	Indicates a reference to the subnetsubnets resource that the IP configuration is connected to.

3.1.5.11.2.1 HTTP Methods

3.1.5.11.2.1.1 PUT

This method creates a new **ipConfigurations** resource or updates an existing **ipConfigurations** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkInterfaces/{parentResourceId}/ipConfigurations/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.11.2.1.1.1 Request Body

The format for the request body for the **ipConfigurations PUT** method is as follows.

```
{
  "resourceId": "bb36bb47-b8c7-48a8-b868-bc0d695452f7",
  "properties": {
    "ipConfigurations": [
      {
        "resourceId": "2aaa9fe0-2d74-475b-9ecf-a8ce8ad8c919",
        "properties": {
          "privateIPAddress": "13.168.101.21",
          "privateIPAllocationMethod": "Static",
          "subnet": {
            "resourceRef": "/virtualNetworks/69ec2dd0-510f-4e28-b665-54eee2ed41b5/subnets/2e777dcc-7bbd-427f-8f2b-62ab85853de9"
          },
          "accessControlList": {
            "resourceRef": "/accessControlLists/097890d3-b154-46c8-a9ad-c19871e4ecfc",
            "loadBalancerInboundNatRules": [
              {
                "resourceRef": "/loadBalancers/2ea43ab6-cb92-4ad3-854f-bc62092cf4b0/inboundNatRules/inb"
              },
              {
                "resourceRef": "/loadBalancers/2ea43ab6-cb92-4ad3-854f-bc62092cf4b0/inboundNatRules/inb2"
              }
            ]
          }
        }
      }
    ],
    "dnsSettings": {
      "DnsServers": [ "1.2.3.4", "1.2.3.5" ]
    },
    "privateMacAddress": "001F46000004",
    "privateMacAllocationMethod": "Static",
    "serviceInsertionElements": [ ],
    "portSettings": {
      "macSpoofingEnabled": "Disabled",
      "arpGuardEnabled": "Disabled",
      "dhcpGuardEnabled": "Disabled",
      "stormLimit": 0,
      "portFlowLimit": 0,
      "iovWeight": 0,
      "iovInterruptModeration": "Off",
      "iovQueuePairsRequested": 0,
      "vmqWeight": 100
    },
    "isHostVirtualNetworkInterface": false,
    "internalDnsNameLabel": "Tenant0-App0-Tier1-DIP-0_VMAdapter-13",
    "isMultitenantStack": false,
  }
}
```

```
}  
}
```

The JSON schema for the **ipConfigurations PUT** method is contained within the schema for its parent resource **networkInterfaces**, in section 6.11.1.

3.1.5.11.2.1.1.2 Response Body

The format for the **ipConfigurations PUT** response body is the same as the format for the **ipConfigurations GET** response body (section 3.1.5.11.2.1.2.2). The JSON schema is located in section 6.11.4.1.

3.1.5.11.2.1.1.3 Processing Details

Create a new **ipConfigurations** resource or update an existing **ipConfigurations** resource.

3.1.5.11.2.1.2 GET

This method retrieves a **ipConfigurations** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkInterfaces/{parentResourceId}/ipConfigurations/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.11.2.1.2.1 Request Body

None.

3.1.5.11.2.1.2.2 Response Body

The format for the response body for the **ipConfigurations GET** method is as follows.

```
{  
  "resourceRef": "/networkInterfaces/ec3ac77e-64be-4bc1-a2e3-  
7cd6170a4752/ipConfigurations/cbcab016-6c87-4a32-8158-08e0db71635a",  
  "resourceId": "cbcab016-6c87-4a32-8158-08e0db71635a",  
  "etag": "W/\"5e2e060a-2103-4022-87ee-bf1667bd18eb\"",  
  "instanceId": "83283a7e-4885-468a-9a2a-c7c568efd290",  
  "properties": {  
    "provisioningState": "Succeeded",  
    "privateIPAddress": "13.168.101.21",  
  }  
}
```



```

    "privateIPAllocationMethod": "Static",
    "subnet": {
      "resourceRef": "/virtualNetworks/740f3670-de42-4345-aaa7-6bb8d423c5df/subnets/da459373-42ee-43d3-b094-6e2176406e4a"
    },
    "accessControlList": {
      "resourceRef": "/accessControlLists/4561e835-128c-44cd-b55f-98bca0d34aba"
    },
    "loadBalancerBackendAddressPools": [
      {
        "resourceRef": "/loadBalancers/2ea43ab6-cb92-4ad3-854f-bc62092cf4b0/backendAddressPools/1cd5d838-b574-4bcb-b6ac-9db3fc5e5f4d"
      }
    ],
    "loadBalancerInboundNatRules": []
  }
}

```

The JSON schema for the **ipConfigurations GET** method is located in section 6.11.4.1.

3.1.5.11.2.1.2.3 Processing Details

Retrieves an **ipConfigurations** resource.

3.1.5.11.2.1.3 GET ~~(All)~~ALL

This method retrieves all **ipConfigurations** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkInterfaces/{parentResourceId}/ipConfigurations
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.11.2.1.3.1 Request Body

None.

3.1.5.11.2.1.3.2 Response Body

The format for the response body for the **ipConfigurations GET ALL** method is as follows.

```

{
  "value": [
    {
      "resourceRef": "/networkInterfaces/ee9be550-4dd3-43af-9b69-8a45f1ef3569/ipConfigurations/clfe8acf-cf68-45f0-bc70-f9a1cd8d3953",
      "resourceId": "clfe8acf-cf68-45f0-bc70-f9a1cd8d3953",
    }
  ]
}

```

```

"etag": "W/\"d728c292-9499-497b-a328-0216b50e7f21\"",
"instanceId": "2d254540-9c81-4216-8da6-44d498061040",
"properties": {
  "provisioningState": "Succeeded",
  "privateIPAddress": "20.168.0.26",
  "privateIPAllocationMethod": "Static",
  "subnet": {
    "resourceRef": "/virtualNetworks/29d028bc-a244-4bec-b3bb-958ea0c64681
/subnets/c0f6d801-ca07-4345-8274-20b13454c51a"
  },
  "accessControlList": {
    "resourceRef": "/accessControlLists/28f4e1fc-2d3a-41c0-97f2-261be40bda77"
  },
  "loadBalancerBackendAddressPools": [],
  "loadBalancerInboundNatRules": []
}
}
],
"nextLink": ""
}

```

The JSON schema for the **ipConfigurations GET ALL** method is located in section 6.11.4.2.

3.1.5.11.2.1.3.3 Processing Details

Retrieves all ipConfigurations resources.

3.1.5.11.2.1.4 DELETE

This method deletes an **ipConfigurations** resource.

It is invoked through the following URI.

```

https://<url>/networking/v1/networkInterfaces/{parentResourceId}/ipConfigurations/{resourceId
}

```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.11.2.1.4.1 Request Body

None.

3.1.5.11.2.1.4.2 Response Body

None.

3.1.5.11.2.1.4.3 Processing Details

Deletes an **ipConfigurations** resource.

3.1.5.12 operations

The **operations** resource provides the status of a specific asynchronous operation. The URL for a specific operations resource is returned in the **Azure-AsyncOperation** header of that operation.

Note The system currently stores a history of one million operations. If the system reaches more than a million operations, then the oldest ones will be removed from the Network Controller and are stored in the operational logs of the Network Controller.

It is invoked through the following URI.

```
https://<url>/networking/v1/operations/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
GET	3.1.5.12.1	Get an operations resource

See section 1.3.2, for more details on asynchronous operation usage.

The following property elements are valid:

Element name	Type	Description
Status	Read-only	This is the status of the operations resource . The following are valid values "InProgress", "Succeeded", "Failed", or "Canceled".
error	Read-only	Indicates that the request was in error or could not be processed. This element contains the detailed explanation on what the error was and what caused it. It will only be returned when the status element is returned as "Failed".
error.code	Read-only	Indicates the string value of the error code associated with the error being returned. This will always be returned in case of an error response.
error.message	Read-only	Indicates the error message provided to the caller. This is used in diagnosing what caused the error. This will always be returned in case of an error response.
error.details	Read-only	Indicates the detailed information of the error. This is used for advanced diagnostics purposes. It is ideal for diagnostics if all these details are returned but they will not always be returned. It will not be in the error response content if it is not returned.
error.details.code	Read-only	Indicates the detailed error code of the error response. It is ideal for diagnostics if this code is returned but it will not always be returned.

Element name	Type	Description
		It will not be in the error response content if it is not returned.
error.details.target	Read-only	Indicates the target of the detailed error message in the error response. It is ideal for diagnostics if this code is returned but it will not always be returned. It will not be in the error response content if it is not returned.
error.details.message	Read-only	Indicates the detailed message of the error response. It is ideal for diagnostics if this code is returned but it will not always be returned. It will not be in the error response content if it is not returned.
error.details.innerError	Read-only	Provides the inner error details if any for the error. This can help with more detailed diagnostics of the error.

3.1.5.12.1 HTTP Methods

3.1.5.12.1.1 GET

This method retrieves an **operations** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/operations/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.12.1.1.1 Request Body

None.

3.1.5.12.1.1.2 Response Body

The format for the response body for the **operations GET** method is as follows.

```
{
  "status": "Succeeded"
}
```

3.1.5.12.1.1.3 Processing Details

Retrieves an **operations** resource.

3.1.5.13 operationResults

The **operationResults** resource provides the status of a specific asynchronous operation. The URL for a specific operations resource is returned in the ~~location~~**Location** header of that operations.

Note: The system currently stores a history of one million **operationResults**. If the system reaches more than a million **operationResults** then the oldest ones will be removed from the Network Controller but are still located in the operational logs of the Network Controller.

~~The URI for~~It is invoked through the ~~resource is as follows~~following URI.

```
https://<url>/networking/v1/operationResults/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
GET	3.1.5.13.1	Get an operationResults resource.

See Asynchronous Operations, section 1.3.2, for more details on its usage.

The following property elements are valid:

Element name	Type	Description
Status	Read-only	This is the status of the operations . The following are valid values "InProgress+_ Succeeded+_ Failed+_ or Canceled"-_.
error	Read-only	Indicates that the request was in error or could not be processed. This element contains the detailed explanation on what the error was and what caused it. It will only be returned when the status element is returned as "Failed"-_.
error.code	Read-only	Indicates the string value of the error code associated with the error being returned. This will always be returned in case of an error response.
error.message	Read-only	Indicates the error message provided to the caller. This is used in diagnosing what caused the error. This will always be returned in case of an error response.
error.details	Read-only	Indicates the detailed information of the error. This is used for advanced diagnostics purposes. It is ideal for diagnostics if all these details are returned but they will not always be returned. It will not be in the error response content if it is not returned.
error.details.code	Read-only	Indicates the detailed error code of the error response. It is ideal for diagnostics if this code is returned but it will not always be returned. It will not be in the error response content if it is not returned.
error.details.target	Read-only	Indicates the target of the detailed error message in the error response. It is ideal for diagnostics if this code is returned but it will not always be returned. It will not be in the error response content if it is not returned.

Element name	Type	Description
error.details.message	Read-only	Indicates the detailed message of the error response. It is ideal for diagnostics if this code is returned but it will not always be returned. It will not be in the error response content if it is not returned.
error.details.innerError	Read-only	Provides the inner error details if any for the error. This can help with more detailed diagnostics of the error.

3.1.5.13.1 HTTP Methods

3.1.5.13.1.1 GET

This method retrieves an **operationResults** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/operationResults/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.13.1.1.1 Request Body

None.

3.1.5.13.1.1.2 Response Body

The format for the response body for the **operationResults GET** method is as follows.

```
{
  "resourceRef": "/networkInterfaces/VM12interface",
  "resourceId": "VM12interface",
  "etag": "W/\"6cf71bc5-4624-4903-a1d2-89b9c1f0761f\"",
  "instanceId": "75801123-0db8-4927-987a-bbaf6f4b3326",
  "properties": {
    "provisioningState": "Succeeded",
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/VM12interface/ipConfigurations/c1fe8acf-cf68-45f0-bc70-f9a1cd8d3953",
        "resourceId": "c1fe8acf-cf68-45f0-bc70-f9a1cd8d3953",
        "etag": "W/\"6cf71bc5-4624-4903-a1d2-89b9c1f0761f\"",
        "instanceId": "00802eaf-97bb-4f85-a4f5-dac025d1cf8f",

```

```

    "properties": {
      "provisioningState": "Succeeded",
      "privateIpAddress": "20.168.0.126",
      "privateIPAllocationMethod": "Static",
      "subnet": {
        "resourceRef": "/virtualNetworks/29d028bc-a244-4bec-b3bb-958ea0c64681/subnets/c0f6d801-ca07-4345-8274-20b13454c51a"
      },
      "accessControlList": {
        "resourceRef": "/accessControlLists/28f4e1fc-2d3a-41c0-97f2-261be40bda77"
      },
      "loadBalancerBackendAddressPools": [],
      "loadBalancerInboundNatRules": []
    }
  },
  "dnsSettings": {},
  "privateMacAddress": "003624000005",
  "privateMacAllocationMethod": "Static",
  "serviceInsertionElements": [],
  "portSettings": {
    "macSpoofingEnabled": "Disabled",
    "arpGuardEnabled": "Disabled",
    "dhcpGuardEnabled": "Disabled",
    "stormLimit": 0,
    "portFlowLimit": 0,
    "iovWeight": 0,
    "iovInterruptModeration": "Off",
    "iovQueuePairsRequested": 0,
    "vmqWeight": 100
  },
  "isHostVirtualNetworkInterface": false,
  "internalDnsNameLabel": "VM10-Adapter1",
  "configurationState": {
    "status": "Failure",
    "detailedInfo": [
      {
        "source": "VirtualSwitch",
        "message": "The host has not yet established communication with the Network Controller.",
        "code": "HostNotConnectedToController"
      }
    ]
  },
  "lastUpdatedTime": "2016-06-23T17:39:16.8945892-07:00",
  "id": "75801123-0db8-4927-987a-bbaf6f4b3326"
},
"isMultitenantStack": false
},
"tags": {
  "VirtualMachineId": "a898f3ec-aa8c-49de-bbcf-84f59c5e6a53",
  "VnicId": "7edb10da-bcd1-4d2d-87ca-f17405be5849"
}
}
}

```

3.1.5.13.1.1.3 Processing Details

Retrieves an **operationResults** resource.

3.1.5.14 **publicIpAddresses**

The **publicIpAddresses** resource specifies an IP Address which is publicly available. This **publicIpAddresses** resource is used by the **virtualGateways** resource and the **loadBalancers** resource to indicate the IP Address that can be used to communicate with the virtual network from outside it.

The URI for it is invoked through the **resource-is-as-follows** following URI.

https://<url>/networking/v1/~~publicIpAddresses~~publicIPAddresses/{resourceId}

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.14.1.1	Create a new publicIpAddresses publicIPAddresses resource or update an existing publicIpAddresses publicIPAddresses resource.
GET	3.1.5.14.1.2	Get one publicIpAddresses publicIPAddresses resource.
GET (All)ALL	3.1.5.14.1.3	List all publicIpAddresses publicIPAddresses resources in the Network Controller.
DELETE	3.1.5.14.1.4	Delete a publicIpAddresses publicIPAddresses resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
ipAddress	Optional	IP address which is allocated. The caller can pass in a specific public IP address to be allocated or leave it empty.
publicIpAllocationMethod publicIPAllocationMethod	Optional	Dynamic or Static In case of static publicIpAllocationMethodStatic publicIPAllocationMethod , ipAddress property needs to be passed indicating the specific public IP address which needs to be allocated. In case of Dynamic publicIpAllocationMethod publicIPAllocationMethod, the ipAddress property is not meaningful in a PUT (allocation request). In case of Dynamic, any free public IP address will be allocated to the caller.
dnsRecord	Optional	Properties of a DNS record associated with this public IP address.
IdleTimeoutInMinutes	Optional	Optional —Specifies the timeout for the TCP idle connection. The value can be set between 4 and 30 minutes. The default is 4 minutes. If public IP is used as a frontend IP of a Loadload Balancer this value is ignored.
ipConfiguration	Read-only	Reference to an ipConfigurations resource. Relative URI of the private IP address with which this public IP is associated. Private ipIP can be defined on NIC, loadBalancers , or gateways .

3.1.5.14.1 HTTP Methods

3.1.5.14.1.1 PUT

This method creates a new **publicIpAddressespublicIPAddresses** resource or updates an existing **publicIpAddressespublicIPAddresses** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/publicIpAddressespublicIPAddresses/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.14.1.1.1 Request Body

The format for the request body for the **publicIpAddressespublicIPAddresses** PUT method is as follows.

```
{
  "resourceId": "{uniqueString}",
  "instanceId": "XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXX",
  "tags": { "key": "value" },
  "resourceMetadata":
  {
    "client": "WAP Network Resource Provider",
    "tenantId": "{subscriptionid}",
    "groupId": "{groupname}",
    "name": "{name}",
    "originalHref": "https://..."
  },
  "properties": {
    "etag": "generated-guid",
    "provisioningState": "Updating|Deleting|Failed|Succeeded|Cancelled",
    "ipAddress": "203.0.113.1", // the given IP address
    "publicIPAllocationMethod": "Static|Dynamic",
    "dnsRecord":
    {
      "fqdn": "my-cloud-service.cloudapp.net"
    }
  }
}
```

```
}  
}
```

The JSON schema for the **publicIpAddressespublicIPAddresses** **PUT** method is located in section 6.12.1.

3.1.5.14.1.1.2 Response Body

The format is the same as the format for the **publicIpAddressespublicIPAddresses** **GET** response body (section 3.1.5.14.1.2.2). The JSON schema is located in section 6.12.2.

3.1.5.14.1.1.3 Processing Details

Create a new **publicIpAddressespublicIPAddresses** resource or update an existing **publicIpAddressespublicIPAddresses** resource.

3.1.5.14.1.2 GET

This method retrieves an **publicIpAddressesa publicIPAddresses** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/publicIpAddressespublicIPAddresses/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.14.1.2.1 Request Body

None.

3.1.5.14.1.2.2 Response Body

The format for the **publicIpAddressespublicIPAddresses** **GET** response body is as follows.

```
{  
  "resourceRef": "/publicIPAddresses/pip2",  
  "resourceId": "pip2",  
  "resourceMetadata": {  
    "resourceName": "outbound1"  
  },  
  "etag": "W/\\"90a799f7-549d-44ac-baa9-f7ccf69b1dda\"",  
  "instanceId": "018a7e31-cf8e-4292-899d-2f3f4b9b96c5",  
  "properties": {  
    "provisioningState": "Updating",  
  }  
}
```

```

        "ipAddress": "12.21.4.51",
        "publicIPAllocationMethod": "Static",
        "idleTimeoutInMinutes": 1
    }
}

```

The JSON schema for the **publicIpAddressespublicIPAddresses GET** method is located in section 6.12.2.

3.1.5.14.1.2.3 Processing Details

Retrieves a **publicIpAddressespublicIPAddresses** resource.

3.1.5.14.1.3 GET ~~(All)~~ALL

This method retrieves all **publicIpAddressespublicIPAddresses** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/publicIpAddressespublicIPAddresses
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.14.1.3.1 Request Body

None.

3.1.5.14.1.3.2 Response Body

The format for the **publicIpAddressespublicIPAddresses GET ALL** response body is as follows.

```

{
  "value": [
    {
      "resourceRef": "/publicIPAddresses/pip1",
      "resourceId": "pip1",
      "etag": "W/\"2b2feb9e-9830-42ed-9923-01d6693fb240\"",
      "instanceId": "b34f7a07-4637-40f2-abc5-075ddfc9b785",
      "properties": {
        "provisioningState": "Succeeded",
        "ipAddress": "12.21.4.5",
        "publicIPAllocationMethod": "Dynamic",
        "idleTimeoutInMinutes": 4
      }
    },
    {
      "resourceRef": "/publicIPAddresses/pip2",
      "resourceId": "pip2",

```

```

    "etag": "W/\"c7a95773-8ad3-44a6-b89c-f4a305569e1d\"",
    "instanceId": "018a7e31-cf8e-4292-899d-2f3f4b9b96c5",
    "properties": {
      "provisioningState": "Succeeded",
      "ipAddress": "12.21.4.51",
      "publicIPAllocationMethod": "Static",
      "idleTimeoutInMinutes": 4
    },
    "tags": {
      "a": "b"
    }
  }
],
"nextLink": ""
}

```

The JSON schema for the **publicIpAddressespublicIPAddresses GET ALL** method is located in section 6.12.3.

3.1.5.14.1.3.3 Processing Details

Retrieves all **publicIpAddressespublicIPAddresses** resources.

3.1.5.14.1.4 DELETE

This method deletes a **publicIpAddresspublicIPAddress** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/publicIpAddressespublicIPAddresses/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.14.1.4.1 Request Body

None.

3.1.5.14.1.4.2 Response Body

None.

3.1.5.14.1.4.3 Processing Details

Deletes a ~~publicIpAddress~~**publicIPAdress** resource.

3.1.5.15 servers

The **servers** resource represents a physical server that is being controlled by the Network Controller. The network controller controls all the physical servers that the client adds to the network.

~~The URI for~~It is invoked through the ~~resource is as follows~~following URI.

```
https://<url>/networking/v1/servers/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.15.1.1	Create a new servers resource or update an existing servers resource.
GET	3.1.5.15.1.2	Get one servers resource
GET (All) ALL	3.1.5.15.1.3	List all servers resources in the Network Controller
DELETE	3.1.5.15.1.4	Deletes a servers resource

The following property elements are valid:<8>

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
connections		Indicates an array of connections that specifies the information needed to connect to the specific device for the purposes of managing and controlling the device.
connections.credential		Reference to a credential credentials resource that can be used to connect to the device for management purposes.
connections.credentialType		See credentials resource, section 3.1.5.2.
connections.managementAddresses		The management address used to connect to the server. This can be in the form of an IPv4 IP address, an IPv6 IP address, or a DNS name.
model	Optional	Model number of <u>the</u> server.
networkInterfaces[]	Optional	An array of network interfaces this server has. See networkInterfaces resource, section 3.1.5.15.2, for more details. These networkInterfaces resources will be automatically created based on the physical network interface cards the server has. They cannot be created or deleted but can have their properties updated.

Element name	Type	Description
os	Optional	Identifies the operating system running on the server.
rackSlot	Optional	Indicates the slot in the rack in which the server has been plugged.
serial	Optional	Indicates the serial number of the server.
vendor	Optional	Indicates the name of the server's vendor.
certificate		The encoded representation of the certificate that the Network Controller accepts when the server (host) represented by this REST resource connects to the controller.
configurationState	Optional Read-only	Indicates the configuration state for the server (host). See definition in section 2.2.4. The values are the same as for network interfaces and load balancer Balancer MUX.
VirtualNetworkInterfaces	Optional Read-only	Indicates an array of references to the virtual network interfaces that are hosted on this server.

3.1.5.15.1 HTTP Methods

3.1.5.15.1.1 PUT

This method creates a new **serverservers** resource or updates an existing **serverservers** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/servers/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.15.1.1.1 Request Body

The format for the request body for the **serverservers PUT** method is as follows.

```

{
  "resourceId": "server1",
  "properties": {
    "connections": [
      {
        "managementAddresses": [
          "servername"
        ],
        "credential": {
          "resourceRef": "/credentials/sn-credentials"
        },
        "credentialType": "usernamePassword"
      },
      {
        "managementAddresses": [
          "servername",
          "altservername"
        ],
        "credential": {
          "resourceRef": "/credentials/9321c52a-3bb5-4553-89a5-4d453b7bcb05"
        },
        "credentialType": "X509Certificate"
      }
    ],
    "certificate": "MIIC",
    "networkInterfaces": [
      {
        "resourceId": "ab055aa1-27d6-4a2e-a4b7-7916008dd1a4",
        "properties": {
          "interfaceIndex": "0",
          "isBMC": "false",
          "logicalSubnets": [
            {
              "resourceRef": "/logicalnetworksLogicalNetworks/72570539-58a9-43d6-b858-d7ec3f202c6d/subnets/3d46ae72-b1d0-48fa-b4fe-ab183e737493"
            }
          ]
        }
      }
    ]
  }
}

```

The JSON schema for the **[serverservers](#) PUT** method is located in section 6.13.1.

3.1.5.15.1.1.2 Response Body

The format is the same as the format for the **[serverservers](#) GET** response body (section 3.1.5.15.1.2.2). The JSON schema is located in section 6.13.2.

3.1.5.15.1.1.3 Processing Details

Create a new **[serverservers](#)** resource or update an existing **[serverservers](#)** resource.

3.1.5.15.1.2 GET

This method retrieves a **[serverservers](#)** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/servers/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.15.1.2.1 Request Body

None.

3.1.5.15.1.2.2 Response Body

The format for the response body for the **servers GET** method is as follows.

```
{
  "resourceRef": "/servers/Server501",
  "resourceId": "Server501",
  "resourceMetadata": {
    "client": "Test",
    "groupId": "",
    "resourceName": "Server501"
  },
  "etag": "W/\"61c878ca-fa0b-4509-b736-24d67bb2086c\"",
  "instanceId": "64313570-3232-4b5e-914e-8b3b7895e550",
  "properties": {
    "provisioningState": "Succeeded",
    "connections": [
      {
        "managementAddresses": [
          "10.1.1.1"
        ],
        "credential": {
          "resourceRef": "/credentials/Administrator"
        },
        "credentialType": "UsernamePassword"
      }
    ],
    "certificate": "",
    "rackSlot": "1",
    "os": "Windows",
    "model": "Minitower",
    "vendor": "Dell",
    "serial": "101010",
    "configurationState": {
      "status": "Warning",
      "detailedInfo": [
        {
          "source": "SoftwareLoadBalancerManager",
          "message": "Host is not Connected.",
          "code": "HostNotConnectedToController"
        }
      ]
    },
    "lastUpdatedTime": "2016-06-15T07:44:00.4342843-07:00"
  },
  "networkInterfaces": [
```



```

{
  "resourceRef": "/servers/Server501/networkInterfaces/NetworkInterface501",
  "resourceId": "NetworkInterface501",
  "resourceMetadata": {
    "client": "Test",
    "groupId": "",
    "resourceName": "NetworkInterface501"
  },
  "etag": "W/\"61c878ca-fa0b-4509-b736-24d67bb2086c\"",
  "instanceId": "80cb7d15-9a9d-4f17-b3a7-c7d862469a93",
  "properties": {
    "provisioningState": "Succeeded",
    "interfaceName": "NetworkInterface501",
    "mac": "18-03-73-B3-C2-4B",
    "ipConfiguration": [
      {
        "ipAddress": "1.1.1.1",
        "networkPrefix": "23",
        "isDhcpEnabled": "true"
      },
      {
        "ipAddress": "2.2.2.2",
        "networkPrefix": "24",
        "isDhcpEnabled": "false"
      }
    ],
    "vlanIds": [
      "1",
      "2"
    ],
    "adminStatus": "1",
    "operationalStatus": "1",
    "interfaceIndex": "1",
    "interfaceSpeed": "300",
    "isBMC": "false",
    "logicalSubnets": [ ]
  }
}
]
},
"tags": {
  "abc": "abc"
}
}

```

The JSON schema for the **servers GET** method is located in section 6.13.2.

3.1.5.15.1.2.3 Processing Details

Retrieves a **server**~~servers~~ resource.

3.1.5.15.1.3 GET ~~(All)~~ALL

This method retrieves all **server**~~servers~~ resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/servers
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources exist, the result is returned as an empty array.

3.1.5.15.1.3.1 Request Body

None.

3.1.5.15.1.3.2 Response Body

The format for the **servers GET ALL** response body is as follows.

```
{
  "value": [
    {
      "resourceRef": "/servers/Server501",
      "resourceId": "Server501",
      "resourceMetadata": {
        "client": "Test",
        "groupId": "",
        "resourceName": "Server501"
      },
      "etag": "W/\\"37ac6989-a791-4bc1-bf80-7b3ccb598d5c\\\"",
      "instanceId": "64313570-3232-4b5e-914e-8b3b7895e550",
      "properties": {
        "provisioningState": "Succeeded",
        "connections": [
          {
            "managementAddresses": [
              "10.1.1.1"
            ],
            "credential": {
              "resourceRef": "/credentials/Administrator"
            },
            "credentialType": "UsernamePassword"
          }
        ],
        "certificate": "",
        "rackSlot": "1",
        "os": "Windows",
        "model": "Minitower",
        "vendor": "Dell",
        "serial": "101010",
        "configurationState": {
          "status": "Warning",
          "detailedInfo": [
            {
              "source": "SoftwareLoadBalancerManager",
              "message": "Host is not Connected.",
              "code": "HostNotConnectedToController"
            }
          ]
        },
        "lastUpdatedTime": "2016-06-15T08:08:32.4020758-07:00"
      },
      "networkInterfaces": [
        {
          "resourceRef": "/servers/Server501/networkInterfaces/NetworkInterface501",
          "resourceId": "NetworkInterface501",
          "resourceMetadata": {
            "client": "Test",
            "groupId": "",
            "resourceName": "NetworkInterface501"
          }
        }
      ]
    }
  ]
}
```

```

    },
    "etag": "W/\"37ac6989-a791-4bc1-bf80-7b3ccb598d5c\"",
    "instanceId": "80cb7d15-9a9d-4f17-b3a7-c7d862469a93",
    "properties": {
      "provisioningState": "Succeeded",
      "interfaceName": "NetworkInterface501",
      "mac": "18-03-73-B3-C2-4B",
      "ipConfiguration": [
        {
          "ipAddress": "1.1.1.1",
          "networkPrefix": "23",
          "isDhcpEnabled": "true"
        },
        {
          "ipAddress": "2.2.2.2",
          "networkPrefix": "24",
          "isDhcpEnabled": "false"
        }
      ],
      "vlanIds": [
        "1",
        "2"
      ],
      "adminStatus": "1",
      "operationalStatus": "1",
      "interfaceIndex": "1",
      "interfaceSpeed": "300",
      "isBMC": "false",
      "logicalSubnets": [ ]
    }
  }
],
"tags": {
  "abc": "abc"
}
},
"nextLink": ""
}

```

The JSON schema for the **servers GET ALL** method is located in section 6.13.4.

3.1.5.15.1.3.3 Processing Details

Retrieves all **server**~~servers~~ resources.

3.1.5.15.1.4 DELETE

This method deletes a **server**~~servers~~ resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/servers/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.15.1.4.1 Request Body

None.

3.1.5.15.1.4.2 Response Body

None.

3.1.5.15.1.4.3 Processing Details

Deletes a ~~server~~**servers** resource.

3.1.5.15.2 networkInterfaces

The **networkInterfaces** resource represents a physical NIC on the host device.

~~The URI for~~ it is invoked through the ~~resource is as follows~~following URI.

```
https://<url>/networking/v1/servers/{parentResourceId}/networkInterfaces/{resourceId}
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.15.2.1.1	Create a new networkInterfaces resource or update an existing networkInterfaces resource.
GET	3.1.5.15.2.1.2	Get one networkInterfaces resource
GET (All)ALL	3.1.5.15.2.1.3	List all networkInterfaces resources in the Network Controller
DELETE	3.1.5.15.2.1.4	Deletes a networkInterfaces resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.

Element name	Type	Description
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
adminStatus	Optional	Indicates the adminStatus administrator status of the network interface.
interfaceIndex	Optional	Indicates the interface index of the network interface.
interfaceName	Optional	Indicates the name of the network interface.
interfaceSpeed	Optional	Indicates the speed of the network interface.
IpConfiguration ipConfiguration	Optional	Indicates an array of IP configurations.
IpConfiguration ipConfiguration.ipAddress	Optional	IP address of the interface.
IpConfiguration ipConfiguration.networkPrefix	Optional	Network prefix associated with the interface IP address.
IpConfiguration ipConfiguration.defaultGateway	Optional	Default gateway associated with the interface.
IpConfiguration.vlans	Optional	VLAN IDs associated with the IP address on the interface.
IpConfiguration ipConfiguration.isDhcpEnabled	Optional	Boolean flag indicating whether the IP address has been obtained using DHCP. True is TRUE means the IP address has been obtained using DHCP and false ; otherwise FALSE . Default is false FALSE .
logicalSubnets	Read-only	Indicates an array of logicalSubnets resourcesubnets resources that the network interface is connected to.
mac	Optional	Indicates the MAC address of the network interface.
operationalStatus	Optional	Indicates the operational status of the network interface.
vlanIds	Optional	Indicates the ID of the VLANs that the network interface is connected to.
isBMC	Optional	Boolean flag to indicate whether the interface is a BMC interface. This is True TRUE if the interface is a BMC interface, False ; otherwise FALSE .

3.1.5.15.2.1 HTTP Methods

3.1.5.15.2.1.1 PUT

This method creates a new **networkInterfaces** resource or updates an existing **networkInterfaces** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/servers/{parentResourceId}/networkInterfaces/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.15.2.1.1.1 Request Body

The format for the request body for the **networkInterfaces PUT** method is as follows.

```
{
  "properties": {
    "interfaceIndex": "0",
    "isBMC": "false",
    "logicalSubnets": [
      {
        "resourceRef": "/logicalnetworkslogicalNetworks/7d14191e-5b55-4e99-9059-
a42d120da0ce/subnets/33a30080-b71d-4c64-8385-750525216905"
      }
    ]
  }
}
```

The JSON schema for the **networkInterfaces PUT** method is contained within the **servers PUT** method schema in section 6.13.1.

3.1.5.15.2.1.1.2 Response Body

The format is the same as the format for the **networkInterfaces GET** response body (section 3.1.5.15.2.1.2.2). The JSON schema for the **networkInterfaces GET** method is contained within the **servers GET** method schema in section 6.13.2.

3.1.5.15.2.1.1.3 Processing Details

Create or update a **networkInterfaces** resource.

3.1.5.15.2.1.2 GET

This method retrieves a **networkInterfaces** resource.

It is invoked through the following URI.

https://<url>/networking/v1/servers/{parentResourceId}/networkInterfaces/{resourceId}

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.15.2.1.2.1 Request Body

None.

3.1.5.15.2.1.2.2 Response Body

The format for the **networkInterfaces GET** response body is as follows.

```
{
  "resourceRef": "/servers/s27/networkInterfaces/2bd6b8e5-d173-4474-a7ab-cc1f60cba579",
  "resourceId": "2bd6b8e5-d173-4474-a7ab-cc1f60cba579",
  "etag": "W/\"a05b0a83-8051-4379-a1f8-e365c57284f5\"",
  "instanceId": "137a1ebe-9ffc-473a-be69-2f6ed84c0463",
  "properties": {
    "provisioningState": "Succeeded",
    "interfaceIndex": "0",
    "isBMC": "false",
    "logicalSubnets": [
      {
        "resourceRef": "/logicalnetworks/7d14191e-5b55-4e99-9059-a42d120da0ce/subnets/33a30080-b71d-4c64-8385-750525216905"
      }
    ]
  }
}
```

The JSON schema for the **networkInterfaces GET** method is contained within the **servers GET** method schema in section 6.13.2.

3.1.5.15.2.1.2.3 Processing Details

Retrieves a **networkInterfaces** resource.

3.1.5.15.2.1.3 GET ~~(AH)~~ALL

This method retrieves all **networkInterfaces** resources.

It is invoked through the following URI.

https://<url>/networking/v1/servers/{parentResourceId}/networkInterfaces/

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.15.2.1.3.1 Request Body

None.

3.1.5.15.2.1.3.2 Response Body

The format for the **networkInterfaces GET ALL** response body is as follows.

```
{
  "value": [
    {
      "resourceRef": "/servers/s27/networkInterfaces/2bd6b8e5-d173-4474-a7ab-cc1f60cba579",
      "resourceId": "2bd6b8e5-d173-4474-a7ab-cc1f60cba579",
      "etag": "W/\"a05b0a83-8051-4379-a1f8-e365c57284f5\"",
      "instanceId": "137alebe-9ffc-473a-be69-2f6ed84c0463",
      "properties": {
        "provisioningState": "Succeeded",
        "interfaceIndex": "0",
        "isBMC": "false",
        "logicalSubnets": [
          {
            "resourceRef": "/logicalnetworkslogicalNetworks/7d14191e-5b55-4e99-9059-a42d120da0ce/subnets/33a30080-b71d-4c64-8385-750525216905"
          }
        ]
      }
    }
  ],
  "nextLink": ""
}
```

The JSON schema for the **networkInterfaces GET ALL** method is contained within the **servers GET ALL** method schema in section 6.13.4.

3.1.5.15.2.1.3.3 Processing Details

Retrieves all **networkInterfaces** resources.

3.1.5.15.2.1.4 DELETE

This method deletes a **networkInterfaces** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/servers/{parentResourceId}/networkInterfaces/{resourceId}
```


The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.15.2.1.4.1 Request Body

None.

3.1.5.15.2.1.4.2 Response Body

None.

3.1.5.15.2.1.4.3 Processing Details

Deletes a **networkInterfaces** resource.

3.1.5.16 serviceInsertions

The **serviceInsertions** resource specifies the relationship between the service insertion and the service insertion rule.

It is invoked through the following URI.

```
https://<url>/networking/v1/ServiceInsertionsserviceInsertions/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.16.1.1	Create a new serviceInsertions resource or update an existing serviceInsertions resource.
GET	3.1.5.16.1.2	Get one serviceInsertions resource
GET (A#)ALL	3.1.5.16.1.3	List all serviceInsertions resources in the Network Controller
DELETE	3.1.5.16.1.4	Deletes a serviceInsertions resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
ipConfiguration	Read-only	Indicate references to ipConfigurations resource resources this access control list is associated with.
priority	Required	Indicates the relative order in which the policies are processed. Priorities MUST be unique, and a PUT will fail if policies with duplicate priorities are specified.
type	Required	Indicate the type of service insertion. Valid value is PortMirror.
rules	Optional	Indicates an array of rules used to define what traffic will go through the service insertion.
rules.protocol	Optional	Indicates the protocol to match for this rule. Valid values are TCP, UDP, *, or *. The asterisk (*) indicates the rule will match for all protocols.
rules.sourcePortStart	Required	Indicates the starting source port to match. This value MUST be between 0 and 65535. Specify 0 to indicate any port.
rules.sourcePortEnd	Optional	Indicates the end of range of source ports to match. This value MUST be greater than the sourcePortStart element. If not specified, then only the start port is matched.
rules.destinationPortStart	Required	Indicates the starting destination port to match. This value MUST be between 0 and 65535. Specify 0 to indicate any port.
rules.destinationPortEnd	Optional	Indicates the end of range of destination ports to match. This value MUST be greater than the destinationPortStart element. If not specified, then only the start destination port is matched.
rules.sourceSubnets	Optional	Indicates an array of subnets to match as source subnet. For a single source ipIP address match specify as a /32 subnet.
rules.destinationSubnets	Optional	Indicates an array of subnets to match as the destination subnet. For a single source ipIP address match specify as a /32 subnet.
serviceInsertionElements	Optional	Indicates an array of elements in the list of network interfaces to send packets matching rules through. If type is "PortMirror" then the array MUST contain 1 element.
serviceInsertionElements.description	Optional	Indicates the description of the element in the service insertion.

Element name	Type	Description
serviceInsertionElements.order	Required	Indicates the position in the service insertion that the element is located. This value MUST be unique in the serviceInsertions resource. The lowest value element will be the first element in the insertion.
serviceInsertionElements.name	Optional	User friendly name of the appliance/element.
serviceInsertionElements.networkInterface	Required	Indicates a networkInterfaces resource that is an element in the service insertion.
subnets	Read-only	Indicates an array of references to ubnets subnets resources with which this serviceInsertions resource is associated.

3.1.5.16.1 HTTP Methods

3.1.5.16.1.1 PUT

This method creates a new **serviceInsertions** resource or updates an existing **serviceInsertions** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/serviceInsertions/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.16.1.1.1 Request Body

The format for the request body for the **serviceInsertions PUT** method is as follows.

```
{
  "resourceId": "80a29b25-0216-4f02-bc9a-ce41fab1b1b9",
  "resourceMetadata": {
  },
  "properties": {
```

```

"serviceInsertionRules": [
  {
    "resourceId": "3b11aaf2-de79-44a3-8f5e-f14f009d3216",
    "resourceMetadata": {
    },
    "properties": {
      "description": "Http Traffic Rule",
      "protocol": "Tcp",
      "sourcePortRangeStart": 0,
      "sourcePortRangeEnd": 65535,
      "destinationPortRangeStart": 80,
      "destinationPortRangeEnd": 80,
      "sourceSubnets": [
        "*"
      ],
      "destinationSubnets": [
        "11.0.0.0/8"
      ]
    }
  }
],
"serviceInsertionElements": [
  {
    "resourceId": "4a9ee40b-aa42-4b31-b8d3-d7fe3508bbb1",
    "resourceMetadata": {
    },
    "properties": {
      "description": "My Appliance",
      "order": 1,
      "networkInterface": {
        "resourceRef": "/networkInterfaces/05e4ff39-ala2-4913-8197-0fe9eaa61eb9"
      }
    }
  }
],
"priority": 1
}
}

```

The JSON schema for the **serviceInsertions PUT** method is located in section 6.14.1.

3.1.5.16.1.1.2 Response Body

The format is the same as the format for the **serviceInsertions GET** response body (section 3.1.5.16.1.2.2). The JSON schema is located in section 6.14.2.

3.1.5.16.1.1.3 Processing Details

Create a new **serviceInsertions** resource or update an existing **serviceInsertions** resource.

3.1.5.16.1.2 GET

This method retrieves a **serviceInsertions** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/serviceInsertions/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.16.1.2.1 Request Body

None.

3.1.5.16.1.2.2 Response Body

The format for the **serviceInsertions GET** response body is as follows.

```
{
  "resourceRef": "/serviceInsertions/80a29b25-0216-4f02-bc9a-ce41fab1b1b9",
  "resourceId": "80a29b25-0216-4f02-bc9a-ce41fab1b1b9",
  "etag": "W/\"c8336af7-3c74-42af-b23f-6096d8a26628\"",
  "instanceId": "cf8abca3-d5b5-4b40-a6e4-045c9e28763c",
  "properties": {
    "provisioningState": "Succeeded",
    "serviceInsertionRules": [
      {
        "resourceRef": "/serviceInsertions/80a29b25-0216-4f02-bc9a-ce41fab1b1b9/serviceInsertionRules/3b11aaf2-de79-44a3-8f5e-f14f009d3216",
        "resourceId": "3b11aaf2-de79-44a3-8f5e-f14f009d3216",
        "etag": "W/\"c8336af7-3c74-42af-b23f-6096d8a26628\"",
        "instanceId": "e3b39934-617b-4d8c-b920-af478c1d569f",
        "properties": {
          "provisioningState": "Succeeded",
          "description": "Http Traffic Rule",
          "protocol": "Tcp",
          "sourcePortRangeStart": 0,
          "sourcePortRangeEnd": 65535,
          "destinationPortRangeStart": 80,
          "destinationPortRangeEnd": 80,
          "sourceSubnets": [
            "*"
          ],
          "destinationSubnets": [
            "11.0.0.0/8"
          ]
        }
      }
    ],
    "serviceInsertionElements": [
      {
        "resourceRef": "/serviceInsertions/80a29b25-0216-4f02-bc9a-ce41fab1b1b9/serviceInsertionElements/4a9ee40b-aa42-4b31-b8d3-d7fe3508bbb1",
        "resourceId": "4a9ee40b-aa42-4b31-b8d3-d7fe3508bbb1",
        "etag": "W/\"c8336af7-3c74-42af-b23f-6096d8a26628\"",
        "instanceId": "3222b5b5-4019-4917-b857-3198a5145b0e",
        "properties": {
          "provisioningState": "Succeeded",
          "description": "My Appliance",
          "order": 1,
          "networkInterface": {
            "resourceRef": "/networkInterfaces/05e4ff39-ala2-4913-8197-0fe9eaa61eb9"
          }
        }
      }
    ]
  },
}
```

```

    "ipConfigurations": [
      ],
      "subnets": [
        {
          "resourceRef": "/virtualNetworks/ca212a4d-d280-4aef-8144-89c558a55076/subnets/9e8b3d5c-95d5-4cea-8744-8ee55ab709ac"
        }
      ],
      "priority": 1
    }
  }
}

```

The JSON schema for the **serviceInsertions GET** method is located in section 6.14.2.

3.1.5.16.1.2.3 Processing Details

Retrieves a **serviceInsertions** resource.

3.1.5.16.1.3 GET ~~(All)~~ALL

This method retrieves all **serviceInsertions** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/serviceInsertions
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources exist, the result is returned as an empty array.

3.1.5.16.1.3.1 Request Body

None.

3.1.5.16.1.3.2 Response Body

The format for the **serviceInsertions GET ALL** response body is as follows.

```

[
  {
    "resourceId": "{uniqueString}",
    "instanceId": "XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXX",
    "tags": { "key": "value" },
    "resourceMetadata":
    {
      "client": "WAP Network Resource Provider",
      "tenantId": "{subscriptionid}",
      "groupId": "{groupname}",
      "name": "{name}",
    }
  }
]

```

```

    "originalHref": "https://..."
  },
  "properties":
  {
    "priority" : 1,
    "type" : "PortMirror"

    "rules" : [
      {
        "protocol" : "tcp|udp|*",
        "sourcePortRangeStart" : 1000,
        "sourcePortRangeEnd" : 2000,
        "destinationPortRangeStart" : 1000,
        "destinationPortRangeEnd" : 2000,
        "sourceSubnets": ["192.168.0.0/32"],
        "destinationSubnets": ["192.168.1.0/32"]
      },
      {
        "protocol" : "tcp|udp|*",
        "sourcePortRangeStart" : 1000,
        "sourcePortRangeEnd" : 2000,
        "destinationPortRangeStart" : 1000,
        "destinationPortRangeEnd" : 2000,
        "sourceSubnets": ["192.168.0.0/32"],
        "destinationSubnets": ["192.168.1.0/32"]
      }
    ],

    "serviceInsertionElements": [
      {
        "order": 1,
        "name": "My Firewall Service",
        "description": "Provides the firewall service for my tenant workloads.",
        "resourceRef": "~/networkinterfaces/{resourceId}"
      }
    ]

    "ipConfiguration": [
      {
        "resourceRef": "~/networkinterfaces/{resourceId}"
      }
    ],

    "subnets": [
      {
        "resourceRef": "~/subnet/{resourceId}"
      }
    ]
  }
},

{
  "resourceId": "{uniqueString}",
  "instanceId": "XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXX",
  "tags": { "key": "value" },
  "resourceMetadata":
  {
    "client": "WAP Network Resource Provider",
    "tenantId": "{subscriptionid}",
    "groupId": "{groupname}",
    "name": "{name}",
    "originalHref": "https://..."
  },
  "properties":
  {
    "priority" : 2,
    "type" : "PortMirror"
  }
}

```

```

"rules" : [
  {
    "protocol" : "tcp|udp|*",
    "sourcePortRangeStart" : 1000,
    "sourcePortRangeEnd" : 2000,
    "destinationPortRangeStart" : 1000,
    "destinationPortRangeEnd" : 2000,
    "sourceSubnets": ["192.168.0.0/32"],
    "destinationSubnets": ["192.168.1.0/32"]
  },
  {
    "protocol" : "tcp|udp|*",
    "sourcePortRangeStart" : 1000,
    "sourcePortRangeEnd" : 2000,
    "destinationPortRangeStart" : 1000,
    "destinationPortRangeEnd" : 2000,
    "sourceSubnets": ["192.168.0.0/32"],
    "destinationSubnets": ["192.168.1.0/32"]
  }
],
"serviceInsertionElements": [
  {
    "order": 1,
    "name": "My Firewall Service",
    "description": "Provides the firewall service for my tenant workloads.",
    "resourceRef": "~/networkinterfaces/{resourceId}"
  }
]
"ipConfiguration": [
  {
    "resourceRef": "~/networkinterfaces/{resourceId}"
  }
],
"subnets": [
  {
    "resourceRef": "~/subnet/{resourceId}"
  }
]
}
.
.
]

```

The JSON schema for the **serviceInsertions GET ALL** method is located in section 6.14.3.

3.1.5.16.1.3 Processing Details

Retrieves all serviceInsertions resources.

3.1.5.16.1.4 DELETE

This method deletes a **serviceInsertions** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/serviceInsertions/{resourceId}
```

The query parameters are specified in section 2.2.3.

HTTP method	Section	Description
DELETE	3.1.5.17.1.4	Delete a virtualGatewaysVirtualGateways resource.

The following property elements are valid.

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
gatewaySubnets	Required Read/write	Indicates collection of references to IPv4/IPv6 subnet of the VSID/gateway subnet that includes the gateway.
networkConnections	Optional Read/write	Indicates list of network connections that are configured for this virtualGatewaysVirtualGateways resource. See section 3.1.5.17.4, for full details on this element.
vpnConfiguration.IPv4AddressPrefixes	Read/write	Indicates collection of IPv4 address pools from which VPN clients are assigned addresses.
vpnConfiguration.IPv4AddressPrefixes	Read/write	Indicates IPv4 prefix of the pool.
vpnConfiguration.IPv4AddressPrefixes.start	Read/write	Starting IPv4 address of the pool. This is required if the start and end addresses do not form a subnet.
vpnConfiguration.IPv4AddressPrefixes.end	Read/write	Ending IPv4 address of the pool. This is not required if the start and end addresses form a subnet.
vpnConfiguration.IPv6AddressPrefixes	Read/write	Indicates IPv6 prefix advertised to remote access VPN clients.
vpnConfiguration.capacity	Read/write	Aggregate bandwidth capacity of VPN Clients in Kbps.
vpnConfiguration.Realm	Read/write	Realm used to identify tenants. E.g. contoso, Woodgrove.
bgpRouters	Optional Read/write	Indicates the BGP peering information. See section 3.1.5.17.2, for full details on this element.
policyMaps	Optional Read/write	Indicates BGP policy Mapsmaps . See section 3.1.5.17.3, for details.
GatewayPools	Required Read/write	Indicates a collection of references to gatewayPoolsGatewayPools resources in which connections can be created. This information is populated at the time of subscription and can be changed only via the Service administrator portal.
routingType	Read-only	"Dynamic" is the only support value for this field.

Element name	Type	Description
configurationState	Optional Read-only	Indicates the last known running state of this virtual gateway. See specification in section 2.2.4. More details are given in the section for the GET operation section 3.1.5.17.1.2.

3.1.5.17.1 HTTP Methods

3.1.5.17.1.1 PUT

This method creates a new **virtualGatewaysVirtualGateways** resource or updates an existing **virtualGatewaysVirtualGateways** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.17.1.1.1 Request Body

The format for the request body for the **virtualGatewaysVirtualGateways PUT** method is as follows.

```
{
  "resourceRef": "/VirtualGateways/VirtualGateway_1",
  "resourceId": "VirtualGateway_1",
  "properties": {
    "networkConnections": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_IPSEC_1",
        "resourceId": "VirtualGateway_1_IPSEC_1",
        "properties": {
          "connectionType": "IPSec",
          "outboundKiloBitsPerSecond": 1000,
          "inboundKiloBitsPerSecond": 1000,

```

```

"ipSecConfiguration": {
  "authenticationMethod": "PSK",
  "quickMode": {
    "perfectForwardSecrecy": "PFS2048",
    "cipherTransformationConstant": "DES3",
    "authenticationTransformationConstant": "SHA256128",
    "idleDisconnectSeconds": 500,
    "saLifetimeSeconds": 1233,
    "saLifetimeKiloBytes": 2000
  },
  "mainMode": {
    "diffieHellmanGroup": "Group2",
    "encryptionAlgorithm": "AES256",
    "integrityAlgorithm": "SHA256",
    "saLifetimeSeconds": 1234,
    "saLifetimeKiloBytes": 2000
  },
  "localVpnTrafficSelector": [],
  "remoteVpnTrafficSelector": []
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
  {
    "destinationPrefix": "50.1.1.0/24",
    "nextHop": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  },
  {
    "destinationPrefix": "40.1.1.4/32",
    "nextHop": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  }
],
"connectionStatus": "Enabled",
"destinationIPAddress": "11.1.0.1",
},
{
  "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_Gre_1",
  "resourceId": "VirtualGateway_1_Gre_1",
  "properties": {
    "connectionType": "GRE",
    "outboundKiloBitsPerSecond": 1000,
    "inboundKiloBitsPerSecond": 1000,
    "greConfiguration": {
      "greKey": "1234"
    },
  },
  "l3Configuration": {},
  "ipAddresses": [],
  "peerIPAddresses": [],
  "routes": [
    {
      "destinationPrefix": "50.1.2.0/24",
      "nextHop": "0.0.0.0",
      "metric": 10,
      "protocol": "Static"
    },
    {
      "destinationPrefix": "40.1.2.4/32",
      "nextHop": "0.0.0.0",
      "metric": 10,
      "protocol": "Static"
    }
  ],
  "connectionStatus": "Enabled",

```

```

        "destinationIPAddress": "11.1.0.2",
    }
},
{
    "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_L3_1",
    "resourceId": "VirtualGateway_1_L3_1",
    "properties": {
        "connectionType": "L3",
        "outboundKiloBitsPerSecond": 1000,
        "inboundKiloBitsPerSecond": 1000,
        "l3Configuration": {
            "vlanSubnet": {
                "resourceRef":
"/logicalnetworksLogicalNetworks/LogicalNetwork_VG_1/subnets/LogicalNetwork_VG_1_Subnet_1"
            }
        },
        "ipAddresses": [
            {
                "ipAddress": "31.1.1.4",
                "prefixLength": 24
            }
        ],
        "peerIPAddresses": [
            "31.1.1.5"
        ],
        "routes": [
            {
                "destinationPrefix": "50.1.3.0/24",
                "nextHop": "0.0.0.0",
                "metric": 10,
                "protocol": "Static"
            },
            {
                "destinationPrefix": "40.1.3.4/32",
                "nextHop": "0.0.0.0",
                "metric": 10,
                "protocol": "Static"
            }
        ],
        "connectionStatus": "Enabled",
    }
},
{
    "bgpRouters": [
        {
            "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1",
            "resourceId": "router1",
            "properties": {
                "isEnabled": true,
                "requireIgpSync": true,
                "extAsNumber": "0.3458",
                "routerId": "10.1.1.1",
                "routerIP": [
                    "10.1.1.1"
                ],
                "isGenerated": false,
                "bgpPeers": [
                    {
                        "resourceRef":
"/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer1",
                        "resourceId": "Peer1",
                        "etag": "W/\"8d23a02c-3465-41b5-afdb-644272787bae\"",
                        "instanceId": "f7d8724b-7be9-46f4-882f-5c37ef4143e8",
                        "properties": {
                            "provisioningState": "Succeeded",
                            "asNumber": "1236",
                            "extAsNumber": "0.1236",
                            "peerIpAddress": "40.1.1.4",
                            "addressFamily": "IPv4",

```



```

        }
      ],
      "setActions": []
    }
  ]
}
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
  {
    "resourceRef": "/GatewayPools/default"
  }
],
"gatewaySubnets": [
  {
    "resourceRef": "/virtualNetworks/00000000-1111-0000-0001-000000000000/subnets/00000000-1111-1111-0001-000000000001"
  }
]
]
}
}

```

The JSON schema for the **virtualGatewaysVirtualGateways PUT** method is located in section 6.15.1.

3.1.5.17.1.1.2 Response Body

The format is the same as the format for the **virtualGatewaysVirtualGateways GET** response body (section 3.1.5.17.1.2.2). The JSON schema is located in section 6.15.2.

3.1.5.17.1.1.3 Processing Details

Create a new **virtualGatewaysVirtualGateways** resource or update an existing **virtualGatewaysVirtualGateways** resource.

3.1.5.17.1.2 GET

This method retrieves a **virtualGatewaysVirtualGateways** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.17.1.2.1 Request Body

None.

3.1.5.17.1.2.2 Response Body

The format for the **virtualGatewaysVirtualGateways GET** response body is as follows.

```
{
  "resourceRef": "/VirtualGateways/VirtualGateway_1",
  "resourceId": "VirtualGateway_1",
  "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
  "instanceId": "cc7de412-f5d0-4f0c-83f2-1cabb2e6a3a9",
  "properties": {
    "provisioningState": "Succeeded",
    "networkConnections": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_IPSEC_1",
        "resourceId": "VirtualGateway_1_IPSEC_1",
        "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
        "instanceId": "21974569-b8b3-4bde-a517-c8f5bb7ae13e",
        "properties": {
          "provisioningState": "Succeeded",
          "connectionType": "IPSec",
          "outboundKiloBitsPerSecond": 307200,
          "inboundKiloBitsPerSecond": 307200,
          "ipSecConfiguration": {
            "authenticationMethod": "PSK",
            "quickMode": {
              "perfectForwardSecrecy": "None",
              "cipherTransformationConstant": "AES128",
              "authenticationTransformationConstant": "SHA196",
              "idleDisconnectSeconds": 500,
              "saLifetimeSeconds": 3600,
              "saLifetimeKiloBytes": 33552408
            },
            "mainMode": {
              "diffieHellmanGroup": "Group2",
              "encryptionAlgorithm": "DES3",
              "integrityAlgorithm": "SHA1",
              "saLifetimeSeconds": 28800,
              "saLifetimeKiloBytes": 33552408
            },
            "localVpnTrafficSelector": [],
            "remoteVpnTrafficSelector": []
          },
          "l3Configuration": {},
          "ipAddresses": [],
          "peerIPAddresses": [],
          "routes": [
            {
              "destinationPrefix": "50.1.1.0/24",
              "nextHop": "0.0.0.0",
              "metric": 10,
              "protocol": "Static"
            },
            {
              "destinationPrefix": "40.1.1.4/32",
              "nextHop": "0.0.0.0",
              "metric": 10,
              "protocol": "Static"
            }
          ],
          "connectionStatus": "Enabled",
          "connectionState": "Disconnected",
          "connectionUpTime": "00:00:00",
          "connectionErrorReason": "809",

```



```

"unreachabilityReason": "ConnectionFailure",
"statistics": {
  "outboundBytes": 7608457281,
  "inboundBytes": 91940776693,
  "rxTotalPacketsDropped": 0,
  "txTotalPacketsDropped": 0,
  "txRateKbps": 0,
  "rxRateKbps": 0,
  "txRateLimitedPacketsDropped": 0,
  "rxRateLimitedPacketsDropped": 0,
  "lastUpdated": "2016-06-16T06:17:26.5237938Z"
},
"configurationState": {
  "status": "Success",
  "lastUpdateTime": "2016-06-15T23:13:41.1459839-07:00"
},
"sourceIPAddress": "91.1.1.4",
"destinationIPAddress": "11.1.0.1",
"gateway": {
  "resourceRef": "/Gateways/CloudGw1"
}
},
{
  "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_Gre_1",
"resourceId": "VirtualGateway_1_Gre_1",
"etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
"instanceId": "b8102aff-71ae-40ef-a8f6-4d1d2aad7521",
"properties": {
  "provisioningState": "Succeeded",
  "connectionType": "GRE",
  "outboundKiloBitsPerSecond": 307200,
  "inboundKiloBitsPerSecond": 307200,
  "greConfiguration": {
    "greKey": "101"
  },
  "l3Configuration": {},
  "ipAddresses": [],
  "peerIPAddresses": [],
  "routes": [
    {
      "destinationPrefix": "50.2.1.0/24",
      "nextHop": "0.0.0.0",
      "metric": 10,
      "protocol": "Static"
    },
    {
      "destinationPrefix": "40.1.2.4/32",
      "nextHop": "0.0.0.0",
      "metric": 10,
      "protocol": "Static"
    }
  ],
  "connectionStatus": "Enabled",
  "connectionState": "Connected",
  "connectionUpTime": "01:43:04",
  "connectionErrorReason": "",
  "unreachabilityReason": "",
  "statistics": {
    "outboundBytes": 29356,
    "inboundBytes": 0,
    "rxTotalPacketsDropped": 0,
    "txTotalPacketsDropped": 0,
    "txRateKbps": 0,
    "rxRateKbps": 0,
    "txRateLimitedPacketsDropped": 0,
    "rxRateLimitedPacketsDropped": 0,
    "lastUpdated": "2016-06-16T06:17:26.5237938Z"
  },
}

```

```

    "configurationState": {
      "status": "Success",
      "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "sourceIPAddress": "22.1.1.2",
    "destinationIPAddress": "11.1.0.2",
    "gateway": {
      "resourceRef": "/Gateways/CloudGw1"
    }
  }
},
{
  "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_L3_1",
  "resourceId": "VirtualGateway_1_L3_1",
  "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
  "instanceId": "92db503f-fa02-445e-96ec-eaefb02bb459",
  "properties": {
    "provisioningState": "Succeeded",
    "connectionType": "L3",
    "outboundKiloBitsPerSecond": 307200,
    "inboundKiloBitsPerSecond": 307200,
    "l3Configuration": {
      "vlanSubnet": {
        "resourceRef":
"/logicalnetworks/LogicalNetworks/LogicalNetwork_VG_1/subnets/LogicalNetwork_VG_1_Subnet_1"
      }
    },
    "ipAddresses": [
      {
        "ipAddress": "31.1.1.4",
        "prefixLength": 24
      }
    ],
    "peerIPAddresses": [
      "31.1.1.5"
    ],
    "routes": [
      {
        "destinationPrefix": "50.3.1.0/24",
        "nextHop": "0.0.0.0",
        "metric": 10,
        "protocol": "Static"
      },
      {
        "destinationPrefix": "40.1.3.4/32",
        "nextHop": "0.0.0.0",
        "metric": 10,
        "protocol": "Static"
      }
    ],
    "connectionStatus": "Enabled",
    "connectionState": "Connected",
    "connectionUpTime": "00:00:00",
    "statistics": {
      "outboundBytes": 0,
      "inboundBytes": 0,
      "rxTotalPacketsDropped": 0,
      "txTotalPacketsDropped": 0,
      "txRateKbps": 0,
      "rxRateKbps": 0,
      "txRateLimitedPacketsDropped": 0,
      "rxRateLimitedPacketsDropped": 0,
      "lastUpdated": "0001-01-01T00:00:00"
    },
    "configurationState": {
      "status": "Success",
      "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "gateway": {

```

```

        "resourceRef": "/Gateways/CloudGw1"
    }
}
],
"bgpRouters": [
{
    "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1",
    "resourceId": "router1",
    "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
    "instanceId": "be8fe6b1-302f-4bbc-97f7-e727b2f533df",
    "properties": {
        "provisioningState": "Succeeded",
        "isEnabled": true,
        "requireIgpSync": true,
        "extAsNumber": "0.3458",
        "routerId": "10.2.2.2",
        "routerIP": [
            "10.2.2.2"
        ],
        "isGenerated": false,
        "bgpPeers": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer2",
                "resourceId": "Peer2",
                "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
                "instanceId": "6dfc12fb-484a-4771-98f9-6c1d4ffbaa1a",
                "properties": {
                    "provisioningState": "Succeeded",
                    "asNumber": "1236",
                    "extAsNumber": "0.1236",
                    "peerIpAddress": "40.1.2.4",
                    "connectionState": "Disconnected",
                    "statistics": {
                        "tcpConnectionClosed": "2016-06-15T23:17:02.419-07:00",
                        "openMessageStats": {
                            "sentCount": 0,
                            "receivedCount": 0
                        },
                        "notificationMessageStats": {
                            "sentCount": 0,
                            "receivedCount": 0
                        },
                        "keepAliveMessageStats": {
                            "sentCount": 0,
                            "receivedCount": 0
                        },
                        "routeRefreshMessageStats": {
                            "sentCount": 0,
                            "receivedCount": 0
                        },
                        "updateMessageStats": {
                            "sentCount": 0,
                            "receivedCount": 0
                        },
                        "ipv4Route": {
                            "updateSentCount": 0,
                            "updateReceivedCount": 0,
                            "withdrawlSentCount": 0,
                            "withdrawlReceivedCount": 0
                        },
                        "ipv6Route": {
                            "updateSentCount": 0,
                            "updateReceivedCount": 0,
                            "withdrawlSentCount": 0,
                            "withdrawlReceivedCount": 0
                        },
                        "lastUpdated": "2016-06-16T06:17:26.4229961Z"
                    }
                },
            }
        ]
    }
},

```

```

        "isGenerated": false
    }
},
{
    "resourceRef":
"/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer3",
    "resourceId": "Peer3",
    "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
    "instanceId": "d6bc7e33-4ac9-4f74-a3f2-81c39eb2a85d",
    "properties": {
        "provisioningState": "Succeeded",
        "asNumber": "1236",
        "extAsNumber": "0.1236",
        "peerIpAddress": "40.1.3.4",
        "connectionState": "Disconnected",
        "statistics": {
            "tcpConnectionClosed": "2016-06-15T23:17:07.293-07:00",
            "openMessageStats": {
                "sentCount": 0,
                "receivedCount": 0
            },
            "notificationMessageStats": {
                "sentCount": 0,
                "receivedCount": 0
            },
            "keepAliveMessageStats": {
                "sentCount": 0,
                "receivedCount": 0
            },
            "routeRefreshMessageStats": {
                "sentCount": 0,
                "receivedCount": 0
            },
            "updateMessageStats": {
                "sentCount": 0,
                "receivedCount": 0
            },
            "ipv4Route": {
                "updateSentCount": 0,
                "updateReceivedCount": 0,
                "withdrawlSentCount": 0,
                "withdrawlReceivedCount": 0
            },
            "ipv6Route": {
                "updateSentCount": 0,
                "updateReceivedCount": 0,
                "withdrawlSentCount": 0,
                "withdrawlReceivedCount": 0
            },
            "lastUpdated": "2016-06-16T06:17:26.4229961Z"
        },
        "isGenerated": false
    }
},
{
    "resourceRef":
"/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer1",
    "resourceId": "Peer1",
    "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
    "instanceId": "b9e57199-f352-4121-9842-24c0ba23f3f1",
    "properties": {
        "provisioningState": "Succeeded",
        "asNumber": "1236",
        "extAsNumber": "0.1236",
        "peerIpAddress": "40.1.1.4",
        "connectionState": "Disconnected",
        "statistics": {
            "tcpConnectionClosed": "2016-06-15T23:17:22.498-07:00",
            "openMessageStats": {
                "sentCount": 0,

```

```

        "receivedCount": 0
      },
      "notificationMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "keepAliveMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "routeRefreshMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "updateMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "ipv4Route": {
        "updateSentCount": 0,
        "updateReceivedCount": 0,
        "withdrawlSentCount": 0,
        "withdrawlReceivedCount": 0
      },
      "ipv6Route": {
        "updateSentCount": 0,
        "updateReceivedCount": 0,
        "withdrawlSentCount": 0,
        "withdrawlReceivedCount": 0
      },
      "lastUpdated": "2016-06-16T06:17:26.4229961Z"
    },
    "isGenerated": false
  }
},
"configurationState": {
  "status": "Success",
  "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
}
},
],
"policyMaps": [
  {
    "resourceRef": "/VirtualGateways/VirtualGateway_1/PolicyMaps/MAP1",
    "resourceId": "MAP1",
    "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
    "instanceId": "b52840f9-91a9-4a3e-91b3-0383ae1ea607",
    "properties": {
      "provisioningState": "Succeeded",
      "bgpPeersWithPolicyMapIn": [],
      "bgpPeersWithPolicyMapOut": [],
      "policyMapEntryList": [
        {
          "action": "Deny",
          "matchCriteria": [
            {
              "property": "MatchPrefix",
              "value": [
                "5.4.3.2/32",
                "5.4.3.1/32"
              ]
            }
          ],
          {
            "property": "NextHop",
            "value": [
              "4.3.2.1",
              "6.4.3.1"
            ]
          }
        ]
      ]
    }
  }
]

```

```

    }
    ],
    "setActions": []
  }
]
},
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
  {
    "resourceRef": "/GatewayPools/default"
  }
],
"configurationState": {
  "status": "Success",
  "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
  {
    "resourceRef": "/virtualNetworks/00000000-1111-0000-0001-000000000000/subnets/00000000-1111-1111-0001-000000000002"
  }
]
}
}
}

```

The JSON schema for the **virtualGatewaysVirtualGateways** GET method is located in section 6.15.2.

3.1.5.17.1.2.3 Processing Details

Retrieves a **virtualGatewaysVirtualGateways** resource.

The server returns a configuration state only if it has already attempted to configure settings according to the REST resource properties that were created or updated by using the **PUT** method. **configurationState.lastUpdatedTime** is set to a value that is implementation-specific.

The server MUST return a configuration state property **configurationState.status** set to "Success" if there were no errors. The server MUST return a configuration state property **configurationState.status** set to a value other than "Failure" if there were errors during the configuration of settings. **configurationState.detailedInfo** contains an array of objects per the specification in section 2.2.4. The following table contains acceptable values in the response when status is not "Success".

configurationState.status	Code inside configurationState.detailedInfo array	Description
Failure	Failure	Unknown error has occurred.
InProgress	HostUnreachable	Unable to allocate resources.
Failure	HostUnreachable	Could not configure virtual gateway settings.
Warning	HostUnreachable	Stale connection for the virtualGatewaysVirtualGateways resource is present on the gateway.

3.1.5.17.1.3 GET ~~(All)~~ALL

This method retrieves all **virtualGatewaysVirtualGateways** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources, the result is returned as an empty array.

3.1.5.17.1.3.1 Request Body

None.

3.1.5.17.1.3.2 Response Body

The format for the **virtualGatewaysVirtualGateways GET ALL** response body is as follows.

```
{
  "value": [
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_1",
      "resourceId": "VirtualGateway_1",
      "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
      "instanceId": "cc7de412-f5d0-4f0c-83f2-1cabb2e6a3a9",
      "properties": {
        "provisioningState": "Succeeded",
        "networkConnections": [
          {
            "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_IPSEC_1",
            "resourceId": "VirtualGateway_1_IPSEC_1",
            "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
            "instanceId": "21974569-b8b3-4bde-a517-c8f5bb7ae13e",
            "properties": {
              "provisioningState": "Succeeded",
              "connectionType": "IPSec",
              "outboundKiloBitsPerSecond": 307200,
              "inboundKiloBitsPerSecond": 307200,
              "ipSecConfiguration": {
                "authenticationMethod": "PSK",
                "quickMode": {
                  "perfectForwardSecrecy": "None",
                  "cipherTransformationConstant": "AES128",
                  "authenticationTransformationConstant": "SHA196",
                  "idleDisconnectSeconds": 500,
                  "saLifeTimeSeconds": 3600,
                  "saLifeTimeKiloBytes": 33552408
                },
                "mainMode": {
                  "diffieHellmanGroup": "Group2",
                  "encryptionAlgorithm": "DES3",
                  "integrityAlgorithm": "SHA1",

```

```

        "saLifeTimeSeconds": 28800,
        "saLifeTimeKiloBytes": 33552408
    },
    "localVpnTrafficSelector": [],
    "remoteVpnTrafficSelector": []
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
    {
        "destinationPrefix": "50.1.1.0/24",
        "nextHop": "0.0.0.0",
        "metric": 10,
        "protocol": "Static"
    },
    {
        "destinationPrefix": "40.1.1.4/32",
        "nextHop": "0.0.0.0",
        "metric": 10,
        "protocol": "Static"
    }
],
"connectionStatus": "Enabled",
"connectionState": "Disconnected",
"connectionUpTime": "00:00:00",
"connectionErrorReason": "809",
"unreachabilityReason": "ConnectionFailure",
"statistics": {
    "outboundBytes": 7608457281,
    "inboundBytes": 91940776693,
    "rxTotalPacketsDropped": 0,
    "txTotalPacketsDropped": 0,
    "txRateKbps": 0,
    "rxRateKbps": 0,
    "txRateLimitedPacketsDropped": 0,
    "rxRateLimitedPacketsDropped": 0,
    "lastUpdated": "2016-06-16T06:17:26.5237938Z"
},
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"sourceIPAddress": "91.1.1.4",
"destinationIPAddress": "11.1.0.1",
"gateway": {
    "resourceRef": "/Gateways/CloudGw1"
}
}
},
{
    "resourceRef":
"/VirtualGateways/VirtualGateway_1/NetworkConnections/VirtualGateway_1_Gre_1",
"resourceId": "VirtualGateway_1_Gre_1",
"etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
"instanceId": "b8102aff-71ae-40ef-a8f6-4d1d2aad7521",
"properties": {
    "provisioningState": "Succeeded",
    "connectionType": "GRE",
    "outboundKiloBitsPerSecond": 307200,
    "inboundKiloBitsPerSecond": 307200,
    "greConfiguration": {
        "greKey": "101"
    },
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
    {
        "destinationPrefix": "50.2.1.0/24",

```



```

    },
    {
      "destinationPrefix": "40.1.3.4/32",
      "nextHop": "0.0.0.0",
      "metric": 10,
      "protocol": "Static"
    }
  ],
  "connectionStatus": "Enabled",
  "connectionState": "Connected",
  "connectionUpTime": "00:00:00",
  "statistics": {
    "outboundBytes": 0,
    "inboundBytes": 0,
    "rxTotalPacketsDropped": 0,
    "txTotalPacketsDropped": 0,
    "txRateKbps": 0,
    "rxRateKbps": 0,
    "txRateLimitedPacketsDropped": 0,
    "rxRateLimitedPacketsDropped": 0,
    "lastUpdated": "0001-01-01T00:00:00"
  },
  "configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
  },
  "gateway": {
    "resourceRef": "/Gateways/CloudGw1"
  }
}
},
],
"bgpRouters": [
  {
    "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1",
    "resourceId": "router1",
    "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
    "instanceId": "be8fe6b1-302f-4bbc-97f7-e727b2f533df",
    "properties": {
      "provisioningState": "Succeeded",
      "isEnabled": true,
      "requireIgpSync": true,
      "extAsNumber": "0.3458",
      "routerId": "10.2.2.2",
      "routerIP": [
        "10.2.2.2"
      ],
    },
    "isGenerated": false,
    "bgpPeers": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer2",
        "resourceId": "Peer2",
        "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
        "instanceId": "6dfc12fb-484a-4771-98f9-6c1d4ffbaala",
        "properties": {
          "provisioningState": "Succeeded",
          "asNumber": "1236",
          "extAsNumber": "0.1236",
          "peerIpAddress": "40.1.2.4",
          "connectionState": "Disconnected",
          "statistics": {
            "tcpConnectionClosed": "2016-06-15T23:17:02.419-07:00",
            "openMessageStats": {
              "sentCount": 0,
              "receivedCount": 0
            },
          },
          "notificationMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          }
        }
      }
    ]
  }
]
}

```

```

    },
    "keepAliveMessageStats": {
      "sentCount": 0,
      "receivedCount": 0
    },
    "routeRefreshMessageStats": {
      "sentCount": 0,
      "receivedCount": 0
    },
    "updateMessageStats": {
      "sentCount": 0,
      "receivedCount": 0
    },
    "ipv4Route": {
      "updateSentCount": 0,
      "updateReceivedCount": 0,
      "withdrawlSentCount": 0,
      "withdrawlReceivedCount": 0
    },
    "ipv6Route": {
      "updateSentCount": 0,
      "updateReceivedCount": 0,
      "withdrawlSentCount": 0,
      "withdrawlReceivedCount": 0
    },
    "lastUpdated": "2016-06-16T06:17:26.4229961Z"
  },
  "isGenerated": false
}
},
{
  "resourceRef":
"/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer3",
  "resourceId": "Peer3",
  "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
  "instanceId": "d6bc7e33-4ac9-4f74-a3f2-81c39eb2a85d",
  "properties": {
    "provisioningState": "Succeeded",
    "asNumber": "1236",
    "extAsNumber": "0.1236",
    "peerIpAddress": "40.1.3.4",
    "connectionState": "Disconnected",
    "statistics": {
      "tcpConnectionClosed": "2016-06-15T23:17:07.293-07:00",
      "openMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "notificationMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "keepAliveMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "routeRefreshMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "updateMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "ipv4Route": {
        "updateSentCount": 0,
        "updateReceivedCount": 0,
        "withdrawlSentCount": 0,
        "withdrawlReceivedCount": 0
      }
    }
  },

```

```

        "ipv6Route": {
            "updateSentCount": 0,
            "updateReceivedCount": 0,
            "withdrawlSentCount": 0,
            "withdrawlReceivedCount": 0
        },
        "lastUpdated": "2016-06-16T06:17:26.4229961Z"
    },
    "isGenerated": false
}
},
{
    "resourceRef":
"/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer1",
    "resourceId": "Peer1",
    "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
    "instanceId": "b9e57199-f352-4121-9842-24c0ba23f3f1",
    "properties": {
        "provisioningState": "Succeeded",
        "asNumber": "1236",
        "extAsNumber": "0.1236",
        "peerIpAddress": "40.1.1.4",
        "connectionState": "Disconnected",
        "statistics": {
            "tcpConnectionClosed": "2016-06-15T23:17:22.498-07:00",
            "openMessageStats": {
                "sentCount": 0,
                "receivedCount": 0
            },
            "notificationMessageStats": {
                "sentCount": 0,
                "receivedCount": 0
            },
            "keepAliveMessageStats": {
                "sentCount": 0,
                "receivedCount": 0
            },
            "routeRefreshMessageStats": {
                "sentCount": 0,
                "receivedCount": 0
            },
            "updateMessageStats": {
                "sentCount": 0,
                "receivedCount": 0
            },
            "ipv4Route": {
                "updateSentCount": 0,
                "updateReceivedCount": 0,
                "withdrawlSentCount": 0,
                "withdrawlReceivedCount": 0
            },
            "ipv6Route": {
                "updateSentCount": 0,
                "updateReceivedCount": 0,
                "withdrawlSentCount": 0,
                "withdrawlReceivedCount": 0
            },
            "lastUpdated": "2016-06-16T06:17:26.4229961Z"
        },
        "isGenerated": false
    }
}
},
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
}
}
},
],

```

```

"policyMaps": [
  {
    "resourceRef": "/VirtualGateways/VirtualGateway_1/PolicyMaps/MAP1",
    "resourceId": "MAP1",
    "etag": "W/\\"681f2608-6588-49d2-ba50-85db700a4300\\"",
    "instanceId": "b52840f9-91a9-4a3e-91b3-0383ae1ea607",
    "properties": {
      "provisioningState": "Succeeded",
      "bgpPeersWithPolicyMapIn": [],
      "bgpPeersWithPolicyMapOut": [],
      "policyMapEntryList": [
        {
          "action": "Deny",
          "matchCriteria": [
            {
              "property": "MatchPrefix",
              "value": [
                "5.4.3.2/32",
                "5.4.3.1/32"
              ]
            },
            {
              "property": "NextHop",
              "value": [
                "4.3.2.1",
                "6.4.3.1"
              ]
            }
          ],
          "setActions": []
        }
      ]
    }
  },
  {
    "routingType": "Dynamic",
    "gatewayPoolsGatewayPools": [
      {
        "resourceRef": "/GatewayPools/default"
      }
    ],
    "configurationState": {
      "status": "Success",
      "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "gatewaySubnets": [
      {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0001-000000000000/subnets/00000000-1111-1111-0001-000000000002"
      }
    ]
  },
  {
    "resourceRef": "/VirtualGateways/VirtualGateway_10",
    "resourceId": "VirtualGateway_10",
    "etag": "W/\\"b185a9f7-abc6-40ec-8800-751f88777d34\\"",
    "instanceId": "5e8cb561-ddcd-475f-87c5-ec182fbd6b53",
    "properties": {
      "provisioningState": "Succeeded",
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_10/NetworkConnections/VirtualGateway_10_IPSEC_1",
          "resourceId": "VirtualGateway_10_IPSEC_1",
          "etag": "W/\\"b185a9f7-abc6-40ec-8800-751f88777d34\\"",
          "instanceId": "4c2ec16e-d110-4dd6-9ab4-69c7d82feb50",
          "properties": {
            "provisioningState": "Succeeded",
            "connectionType": "IPSec",

```

```

"outboundKiloBitsPerSecond": 307200,
"inboundKiloBitsPerSecond": 307200,
"ipSecConfiguration": {
  "authenticationMethod": "PSK",
  "quickMode": {
    "perfectForwardSecrecy": "None",
    "cipherTransformationConstant": "AES128",
    "authenticationTransformationConstant": "SHA196",
    "idleDisconnectSeconds": 500,
    "saLifeTimeSeconds": 3600,
    "saLifeTimeKiloBytes": 33552408
  },
  "mainMode": {
    "diffieHellmanGroup": "Group2",
    "encryptionAlgorithm": "DES3",
    "integrityAlgorithm": "SHA1",
    "saLifeTimeSeconds": 28800,
    "saLifeTimeKiloBytes": 33552408
  },
  "localVpnTrafficSelector": [],
  "remoteVpnTrafficSelector": []
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
  {
    "destinationPrefix": "50.10.1.0/24",
    "nextHop": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  }
],
"connectionStatus": "Enabled",
"connectionState": "Disconnected",
"connectionUpTime": "00:00:00",
"connectionErrorReason": "0",
"unreachabilityReason": "",
"statistics": {
  "outboundBytes": 985135812,
  "inboundBytes": 48811304059,
  "rxTotalPacketsDropped": 0,
  "txTotalPacketsDropped": 0,
  "txRateKbps": 0,
  "rxRateKbps": 0,
  "txRateLimitedPacketsDropped": 0,
  "rxRateLimitedPacketsDropped": 0,
  "lastUpdated": "2016-06-16T06:17:26.5237938Z"
},
"configurationState": {
  "status": "Success",
  "lastUpdateTime": "2016-06-15T23:13:41.1459839-07:00"
},
"sourceIPAddress": "91.1.1.4",
"destinationIPAddress": "11.10.0.1",
"gateway": {
  "resourceRef": "/Gateways/CloudGw1"
}
}
},
"bgpRouters": [
  {
    "resourceRef":
"/VirtualGateways/VirtualGateway_10/BgpRouters/BGP_VirtualGateway_10_b04b21a5-eab4-49e2-9770-d98a63662c17",
    "resourceId": "BGP_VirtualGateway_10_b04b21a5-eab4-49e2-9770-d98a63662c17",
    "instanceId": "b04b21a5-eab4-49e2-9770-d98a63662c17",
    "properties": {
      "provisioningState": "Succeeded",

```

```

        "extAsNumber": "0.65001",
        "routerId": "10.2.11.2",
        "routerIP": [
            "10.2.11.2"
        ],
        "isGenerated": true,
        "configurationState": {
            "status": "Success",
            "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
        }
    }
}
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
    {
        "resourceRef": "/GatewayPools/default"
    }
],
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
    {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0010-000000000000/subnets/00000000-1111-1111-0010-000000000002"
    }
]
},
{
    "resourceRef": "/VirtualGateways/VirtualGateway_11",
    "resourceId": "VirtualGateway_11",
    "etag": "W/\"37c3b8ec-c329-4383-b1fd-4df96aba70b0\"",
    "instanceId": "a80b5015-f71f-467f-8c2e-747863d5275a",
    "properties": {
        "provisioningState": "Succeeded",
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_11/NetworkConnections/VirtualGateway_11_IPSEC_1",
                "resourceId": "VirtualGateway_11_IPSEC_1",
                "etag": "W/\"37c3b8ec-c329-4383-b1fd-4df96aba70b0\"",
                "instanceId": "0f4a568e-e910-4f97-ad05-ef8b57c94da",
                "properties": {
                    "provisioningState": "Succeeded",
                    "connectionType": "IPSec",
                    "outboundKiloBitsPerSecond": 307200,
                    "inboundKiloBitsPerSecond": 307200,
                    "ipSecConfiguration": {
                        "authenticationMethod": "PSK",
                        "quickMode": {
                            "perfectForwardSecrecy": "None",
                            "cipherTransformationConstant": "AES128",
                            "authenticationTransformationConstant": "SHA196",
                            "idleDisconnectSeconds": 500,
                            "saLifeTimeSeconds": 3600,
                            "saLifeTimeKiloBytes": 33552408
                        },
                    },
                    "mainMode": {
                        "diffieHellmanGroup": "Group2",
                        "encryptionAlgorithm": "DES3",
                        "integrityAlgorithm": "SHA1",
                        "saLifeTimeSeconds": 28800,
                        "saLifeTimeKiloBytes": 33552408
                    },
                    "localVpnTrafficSelector": [],
                    "remoteVpnTrafficSelector": []
                }
            }
        ]
    }
},

```

```

    "l3Configuration": {},
    "ipAddresses": [],
    "peerIPAddresses": [],
    "routes": [
      {
        "destinationPrefix": "50.11.1.0/24",
        "nextHop": "0.0.0.0",
        "metric": 10,
        "protocol": "Static"
      }
    ],
    "connectionStatus": "Enabled",
    "connectionState": "Disconnected",
    "connectionUpTime": "00:00:00",
    "connectionErrorReason": "0",
    "unreachabilityReason": "",
    "statistics": {
      "outboundBytes": 1444062644,
      "inboundBytes": 72530686817,
      "rxTotalPacketsDropped": 0,
      "txTotalPacketsDropped": 0,
      "txRateKbps": 0,
      "rxRateKbps": 0,
      "txRateLimitedPacketsDropped": 0,
      "rxRateLimitedPacketsDropped": 0,
      "lastUpdated": "2016-06-16T06:17:26.5237938Z"
    },
    "configurationState": {
      "status": "Success",
      "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "sourceIPAddress": "91.1.1.4",
    "destinationIPAddress": "11.11.0.1",
    "gateway": {
      "resourceRef": "/Gateways/CloudGw1"
    }
  }
},
"bgpRouters": [
  {
    "resourceRef":
"/VirtualGateways/VirtualGateway_11/BgpRouters/BGP_VirtualGateway_11_6e83f798-f561-4f45-844e-e6a0585930d8",
    "resourceId": "BGP_VirtualGateway_11_6e83f798-f561-4f45-844e-e6a0585930d8",
    "instanceId": "6e83f798-f561-4f45-844e-e6a0585930d8",
    "properties": {
      "provisioningState": "Succeeded",
      "extAsNumber": "0.65001",
      "routerId": "10.2.12.2",
      "routerIP": [
        "10.2.12.2"
      ],
      "isGenerated": true,
      "configurationState": {
        "status": "Success",
        "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
      }
    }
  }
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
  {
    "resourceRef": "/GatewayPools/default"
  }
],
"configurationState": {
  "status": "Success",
  "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
}

```



```

    },
    "gatewaySubnets": [
      {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0011-000000000000/subnets/00000000-1111-1111-0011-000000000002"
      }
    ]
  }
},
{
  "resourceRef": "/VirtualGateways/VirtualGateway_12",
  "resourceId": "VirtualGateway_12",
  "etag": "W/\\"70007e68-6534-48c3-b01d-cca0ae32dbbd\\"",
  "instanceId": "11748d24-b2ef-4e97-8c97-d5bb3bd53109",
  "properties": {
    "provisioningState": "Succeeded",
    "networkConnections": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_12/NetworkConnections/VirtualGateway_12_IPSEC_1",
        "resourceId": "VirtualGateway_12_IPSEC_1",
        "etag": "W/\\"70007e68-6534-48c3-b01d-cca0ae32dbbd\\"",
        "instanceId": "6296e4dc-ae3c-42ff-a5fa-4b6f2e1b0e8f",
        "properties": {
          "provisioningState": "Succeeded",
          "connectionType": "IPSec",
          "outboundKiloBitsPerSecond": 307200,
          "inboundKiloBitsPerSecond": 307200,
          "ipSecConfiguration": {
            "authenticationMethod": "PSK",
            "quickMode": {
              "perfectForwardSecrecy": "None",
              "cipherTransformationConstant": "AES128",
              "authenticationTransformationConstant": "SHA196",
              "idleDisconnectSeconds": 500,
              "saLifeTimeSeconds": 3600,
              "saLifeTimeKiloBytes": 33552408
            },
            "mainMode": {
              "diffieHellmanGroup": "Group2",
              "encryptionAlgorithm": "DES3",
              "integrityAlgorithm": "SHA1",
              "saLifeTimeSeconds": 28800,
              "saLifeTimeKiloBytes": 33552408
            },
            "localVpnTrafficSelector": [],
            "remoteVpnTrafficSelector": []
          },
          "l3Configuration": {},
          "ipAddresses": [],
          "peerIPAddresses": [],
          "routes": [
            {
              "destinationPrefix": "50.12.1.0/24",
              "nextHop": "0.0.0.0",
              "metric": 10,
              "protocol": "Static"
            }
          ],
          "connectionStatus": "Enabled",
          "connectionState": "Disconnected",
          "connectionUpTime": "00:00:00",
          "connectionErrorReason": "0",
          "unreachabilityReason": "",
          "statistics": {
            "outboundBytes": 1446425432,
            "inboundBytes": 71394354914,
            "rxTotalPacketsDropped": 0,
            "txTotalPacketsDropped": 0,
            "txRateKbps": 0,

```

```

        "rxRateKbps": 0,
        "txRateLimitedPacketsDropped": 0,
        "rxRateLimitedPacketsDropped": 0,
        "lastUpdated": "2016-06-16T06:17:26.5237938Z"
    },
    "configurationState": {
        "status": "Success",
        "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "sourceIPAddress": "91.1.1.4",
    "destinationIPAddress": "11.12.0.1",
    "gateway": {
        "resourceRef": "/Gateways/CloudGw1"
    }
}
],
"bgpRouters": [
    {
        "resourceRef":
"/VirtualGateways/VirtualGateway_12/BgpRouters/BGP_VirtualGateway_12_ef8630d4-8aac-46df-b037-0d93eb8b6a82",
        "resourceId": "BGP_VirtualGateway_12_ef8630d4-8aac-46df-b037-0d93eb8b6a82",
        "instanceId": "ef8630d4-8aac-46df-b037-0d93eb8b6a82",
        "properties": {
            "provisioningState": "Succeeded",
            "extAsNumber": "0.65001",
            "routerId": "10.2.13.2",
            "routerIP": [
                "10.2.13.2"
            ],
            "isGenerated": true,
            "configurationState": {
                "status": "Success",
                "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
            }
        }
    }
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
    {
        "resourceRef": "/GatewayPools/default"
    }
],
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
    {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0012-000000000000/subnets/00000000-1111-1111-0012-000000000002"
    }
]
},
{
    "resourceRef": "/VirtualGateways/VirtualGateway_13",
    "resourceId": "VirtualGateway_13",
    "etag": "W/\"ea80c5b6-8cd5-4925-84b8-4d51f60e68fc\"",
    "instanceId": "cec7ff21-0c58-45cf-afe2-480465abe062",
    "properties": {
        "provisioningState": "Succeeded",
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_13/NetworkConnections/VirtualGateway_13_IPSEC_1",
                "resourceId": "VirtualGateway_13_IPSEC_1",
                "etag": "W/\"ea80c5b6-8cd5-4925-84b8-4d51f60e68fc\"",

```

```

"instanceId": "1ab3c12b-4591-4d69-8a13-163cc1f8ae2e",
"properties": {
  "provisioningState": "Succeeded",
  "connectionType": "IPSec",
  "outboundKiloBitsPerSecond": 307200,
  "inboundKiloBitsPerSecond": 307200,
  "ipSecConfiguration": {
    "authenticationMethod": "PSK",
    "quickMode": {
      "perfectForwardSecrecy": "None",
      "cipherTransformationConstant": "AES128",
      "authenticationTransformationConstant": "SHA196",
      "idleDisconnectSeconds": 500,
      "saLifeTimeSeconds": 3600,
      "saLifeTimeKiloBytes": 33552408
    },
    "mainMode": {
      "diffieHellmanGroup": "Group2",
      "encryptionAlgorithm": "DES3",
      "integrityAlgorithm": "SHA1",
      "saLifeTimeSeconds": 28800,
      "saLifeTimeKiloBytes": 33552408
    },
    "localVpnTrafficSelector": [],
    "remoteVpnTrafficSelector": []
  },
  "l3Configuration": {},
  "ipAddresses": [],
  "peerIPAddresses": [],
  "routes": [
    {
      "destinationPrefix": "50.13.1.0/24",
      "nextHop": "0.0.0.0",
      "metric": 10,
      "protocol": "Static"
    }
  ],
  "connectionStatus": "Enabled",
  "connectionState": "Disconnected",
  "connectionUpTime": "00:00:00",
  "connectionErrorReason": "0",
  "unreachabilityReason": "",
  "statistics": {
    "outboundBytes": 1791277084,
    "inboundBytes": 94221208682,
    "rxTotalPacketsDropped": 0,
    "txTotalPacketsDropped": 0,
    "txRateKbps": 0,
    "rxRateKbps": 0,
    "txRateLimitedPacketsDropped": 0,
    "rxRateLimitedPacketsDropped": 0,
    "lastUpdated": "2016-06-16T06:17:26.5237938Z"
  },
  "configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
  },
  "sourceIPAddress": "91.1.1.4",
  "destinationIPAddress": "11.13.0.1",
  "gateway": {
    "resourceRef": "/Gateways/CloudGw1"
  }
}
},
"bgpRouters": [
  {
    "resourceRef":
"/VirtualGateways/VirtualGateway_13/BgpRouters/BGP_VirtualGateway_13_d6efc0cd-c388-475c-b3ae-45ce38d213c9",

```

```

    "resourceId": "BGP_VirtualGateway_13_d6efc0cd-c388-475c-b3ae-45ce38d213c9",
    "instanceId": "d6efc0cd-c388-475c-b3ae-45ce38d213c9",
    "properties": {
      "provisioningState": "Succeeded",
      "extAsNumber": "0.65001",
      "routerId": "10.2.14.2",
      "routerIP": [
        "10.2.14.2"
      ],
      "isGenerated": true,
      "configurationState": {
        "status": "Success",
        "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
      }
    }
  },
  "routingType": "Dynamic",
  "gatewayPoolsGatewayPools": [
    {
      "resourceRef": "/GatewayPools/default"
    }
  ],
  "configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
  },
  "gatewaySubnets": [
    {
      "resourceRef": "/virtualNetworks/00000000-1111-0000-0013-000000000000/subnets/00000000-1111-1111-0013-000000000002"
    }
  ]
},
{
  "resourceRef": "/VirtualGateways/VirtualGateway_14",
  "resourceId": "VirtualGateway_14",
  "etag": "W/\f5560e3b-0aaa-4780-8235-7c89c66cab36\"",
  "instanceId": "81db5245-cfb7-4324-a2c0-d669ebd55c1a",
  "properties": {
    "provisioningState": "Succeeded",
    "networkConnections": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_14/NetworkConnections/VirtualGateway_14_IPSEC_1",
        "resourceId": "VirtualGateway_14_IPSEC_1",
        "etag": "W/\f5560e3b-0aaa-4780-8235-7c89c66cab36\"",
        "instanceId": "c41c2b7a-7d09-45e6-aae0-1ed709da63d9",
        "properties": {
          "provisioningState": "Succeeded",
          "connectionType": "IPSec",
          "outboundKiloBitsPerSecond": 307200,
          "inboundKiloBitsPerSecond": 307200,
          "ipSecConfiguration": {
            "authenticationMethod": "PSK",
            "quickMode": {
              "perfectForwardSecrecy": "None",
              "cipherTransformationConstant": "AES128",
              "authenticationTransformationConstant": "SHA196",
              "idleDisconnectSeconds": 500,
              "saLifetimeSeconds": 3600,
              "saLifetimeKiloBytes": 33552408
            },
            "mainMode": {
              "diffieHellmanGroup": "Group2",
              "encryptionAlgorithm": "DES3",
              "integrityAlgorithm": "SHA1",
              "saLifetimeSeconds": 28800,
              "saLifetimeKiloBytes": 33552408
            }
          }
        }
      }
    ]
  }
}

```

```

    },
    "localVpnTrafficSelector": [],
    "remoteVpnTrafficSelector": []
  },
  "l3Configuration": {},
  "ipAddresses": [],
  "peerIPAddresses": [],
  "routes": [
    {
      "destinationPrefix": "50.14.1.0/24",
      "nextHop": "0.0.0.0",
      "metric": 10,
      "protocol": "Static"
    }
  ],
  "connectionStatus": "Enabled",
  "connectionState": "Disconnected",
  "connectionUpTime": "00:00:00",
  "connectionErrorReason": "0",
  "unreachabilityReason": "",
  "statistics": {
    "outboundBytes": 1199806611,
    "inboundBytes": 60091390974,
    "rxTotalPacketsDropped": 0,
    "txTotalPacketsDropped": 0,
    "txRateKbps": 0,
    "rxRateKbps": 0,
    "txRateLimitedPacketsDropped": 0,
    "rxRateLimitedPacketsDropped": 0,
    "lastUpdated": "2016-06-16T06:17:26.5237938Z"
  },
  "configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
  },
  "sourceIPAddress": "91.1.1.4",
  "destinationIPAddress": "11.14.0.1",
  "gateway": {
    "resourceRef": "/Gateways/CloudGw1"
  }
}
],
"bgpRouters": [
  {
    "resourceRef":
"/VirtualGateways/VirtualGateway_14/BgpRouters/BGP_VirtualGateway_14_424d5a1c-654d-4279-ae22-bd2e61d050ca",
    "resourceId": "BGP_VirtualGateway_14_424d5a1c-654d-4279-ae22-bd2e61d050ca",
    "instanceId": "424d5a1c-654d-4279-ae22-bd2e61d050ca",
    "properties": {
      "provisioningState": "Succeeded",
      "extAsNumber": "0.65001",
      "routerId": "10.2.15.2",
      "routerIP": [
        "10.2.15.2"
      ],
      "isGenerated": true,
      "configurationState": {
        "status": "Success",
        "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
      }
    }
  }
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
  {
    "resourceRef": "/GatewayPools/default"
  }
]

```

```

    ],
    "configurationState": {
      "status": "Success",
      "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "gatewaySubnets": [
      {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0014-000000000000/subnets/00000000-1111-1111-0014-000000000002"
      }
    ]
  }
},
{
  "resourceRef": "/VirtualGateways/VirtualGateway_15",
  "resourceId": "VirtualGateway_15",
  "etag": "W/\\"5e4a60e8-1dbb-4737-8743-3f60338a220d\\"",
  "instanceId": "43106c7c-5f04-4a47-a2ab-3eaa90ddd40",
  "properties": {
    "provisioningState": "Succeeded",
    "networkConnections": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_15/NetworkConnections/VirtualGateway_15_IPSEC_1",
        "resourceId": "VirtualGateway_15_IPSEC_1",
        "etag": "W/\\"5e4a60e8-1dbb-4737-8743-3f60338a220d\\"",
        "instanceId": "c296a3c8-f038-4afe-8206-689e2a870378",
        "properties": {
          "provisioningState": "Succeeded",
          "connectionType": "IPSec",
          "outboundKiloBitsPerSecond": 307200,
          "inboundKiloBitsPerSecond": 307200,
          "ipSecConfiguration": {
            "authenticationMethod": "PSK",
            "quickMode": {
              "perfectForwardSecrecy": "None",
              "cipherTransformationConstant": "AES128",
              "authenticationTransformationConstant": "SHA196",
              "idleDisconnectSeconds": 500,
              "saLifeTimeSeconds": 3600,
              "saLifeTimeKiloBytes": 33552408
            },
            "mainMode": {
              "diffieHellmanGroup": "Group2",
              "encryptionAlgorithm": "DES3",
              "integrityAlgorithm": "SHA1",
              "saLifeTimeSeconds": 28800,
              "saLifeTimeKiloBytes": 33552408
            },
            "localVpnTrafficSelector": [],
            "remoteVpnTrafficSelector": []
          },
          "l3Configuration": {},
          "ipAddresses": [],
          "peerIPAddresses": [],
          "routes": [
            {
              "destinationPrefix": "50.15.1.0/24",
              "nextHop": "0.0.0.0",
              "metric": 10,
              "protocol": "Static"
            }
          ],
          "connectionStatus": "Enabled",
          "connectionState": "Disconnected",
          "connectionUpTime": "00:00:00",
          "connectionErrorReason": "0",
          "unreachabilityReason": "",
          "statistics": {
            "outboundBytes": 2171444318,

```

```

        "inboundBytes": 116700933274,
        "rxTotalPacketsDropped": 0,
        "txTotalPacketsDropped": 0,
        "txRateKbps": 0,
        "rxRateKbps": 0,
        "txRateLimitedPacketsDropped": 0,
        "rxRateLimitedPacketsDropped": 0,
        "lastUpdated": "2016-06-16T06:17:26.5237938Z"
    },
    "configurationState": {
        "status": "Success",
        "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "sourceIPAddress": "91.1.1.4",
    "destinationIPAddress": "11.15.0.1",
    "gateway": {
        "resourceRef": "/Gateways/CloudGw1"
    }
}
},
"bgpRouters": [
    {
        "resourceRef":
"/VirtualGateways/VirtualGateway_15/BgpRouters/BGP_VirtualGateway_15_8f4ea52f-b2b1-4641-b554-454ef27ae9e3",
        "resourceId": "BGP_VirtualGateway_15_8f4ea52f-b2b1-4641-b554-454ef27ae9e3",
        "instanceId": "8f4ea52f-b2b1-4641-b554-454ef27ae9e3",
        "properties": {
            "provisioningState": "Succeeded",
            "extAsNumber": "0.65001",
            "routerId": "10.2.16.2",
            "routerIP": [
                "10.2.16.2"
            ],
            "isGenerated": true,
            "configurationState": {
                "status": "Success",
                "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
            }
        }
    }
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
    {
        "resourceRef": "/GatewayPools/default"
    }
],
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
    {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0015-000000000000/subnets/00000000-1111-1111-0015-000000000002"
    }
]
},
{
    "resourceRef": "/VirtualGateways/VirtualGateway_16",
    "resourceId": "VirtualGateway_16",
    "etag": "W/\"835a7333-af3f-46d6-a9bf-59395c3d8143\"",
    "instanceId": "46fd95d9-ff1d-49c2-ae3e-48dbeda29aaf",
    "properties": {
        "provisioningState": "Succeeded",
        "networkConnections": [
            {

```

```

    "resourceRef":
"/VirtualGateways/VirtualGateway_16/NetworkConnections/VirtualGateway_16_IPSEC_1",
    "resourceId": "VirtualGateway_16_IPSEC_1",
    "etag": "W/\\"835a7333-af3f-46d6-a9bf-59395c3d8143\\"",
    "instanceId": "aa52df50-0123-4c58-b3b8-d470ac10b18f",
    "properties": {
      "provisioningState": "Succeeded",
      "connectionType": "IPSec",
      "outboundKiloBitsPerSecond": 307200,
      "inboundKiloBitsPerSecond": 307200,
      "ipSecConfiguration": {
        "authenticationMethod": "PSK",
        "quickMode": {
          "perfectForwardSecrecy": "None",
          "cipherTransformationConstant": "AES128",
          "authenticationTransformationConstant": "SHA196",
          "idleDisconnectSeconds": 500,
          "saLifeTimeSeconds": 3600,
          "saLifeTimeKiloBytes": 33552408
        },
        "mainMode": {
          "diffieHellmanGroup": "Group2",
          "encryptionAlgorithm": "DES3",
          "integrityAlgorithm": "SHA1",
          "saLifeTimeSeconds": 28800,
          "saLifeTimeKiloBytes": 33552408
        },
        "localVpnTrafficSelector": [],
        "remoteVpnTrafficSelector": []
      },
      "l3Configuration": {},
      "ipAddresses": [],
      "peerIPAddresses": [],
      "routes": [
        {
          "destinationPrefix": "50.16.1.0/24",
          "nextHop": "0.0.0.0",
          "metric": 10,
          "protocol": "Static"
        }
      ],
      "connectionStatus": "Enabled",
      "connectionState": "Disconnected",
      "connectionUpTime": "00:00:00",
      "connectionErrorReason": "0",
      "unreachabilityReason": "",
      "statistics": {
        "outboundBytes": 1942546566,
        "inboundBytes": 92567236069,
        "rxTotalPacketsDropped": 0,
        "txTotalPacketsDropped": 0,
        "txRateKbps": 0,
        "rxRateKbps": 0,
        "txRateLimitedPacketsDropped": 0,
        "rxRateLimitedPacketsDropped": 0,
        "lastUpdated": "2016-06-16T06:17:26.5237938Z"
      },
      "configurationState": {
        "status": "Success",
        "lastUpdateTime": "2016-06-15T23:13:41.1459839-07:00"
      },
      "sourceIPAddress": "91.1.1.4",
      "destinationIPAddress": "11.16.0.1",
      "gateway": {
        "resourceRef": "/Gateways/CloudGw1"
      }
    }
  },
  "bgpRouters": [

```



```

    {
      "resourceRef":
"/VirtualGateways/VirtualGateway_16/BgpRouters/BGP_VirtualGateway_16_42df86d7-6a36-42fc-a558-9f9110b8288d",
      "resourceId": "BGP_VirtualGateway_16_42df86d7-6a36-42fc-a558-9f9110b8288d",
      "instanceId": "42df86d7-6a36-42fc-a558-9f9110b8288d",
      "properties": {
        "provisioningState": "Succeeded",
        "extAsNumber": "0.65001",
        "routerId": "10.2.17.2",
        "routerIP": [
          "10.2.17.2"
        ],
        "isGenerated": true,
        "configurationState": {
          "status": "Success",
          "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
        }
      }
    }
  ],
  "routingType": "Dynamic",
  "gatewayPoolsGatewayPools": [
    {
      "resourceRef": "/GatewayPools/default"
    }
  ],
  "configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
  },
  "gatewaySubnets": [
    {
      "resourceRef": "/virtualNetworks/00000000-1111-0000-0016-000000000000/subnets/00000000-1111-1111-0016-000000000002"
    }
  ]
},
{
  "resourceRef": "/VirtualGateways/VirtualGateway_17",
  "resourceId": "VirtualGateway_17",
  "etag": "W/\\"4cc6d29e-faee-47a8-8fd1-53e14a78a0d8\"",
  "instanceId": "7d773cd9-9e9a-4d49-806c-8c2082f5349a",
  "properties": {
    "provisioningState": "Succeeded",
    "networkConnections": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_17/NetworkConnections/VirtualGateway_17_IPSEC_1",
        "resourceId": "VirtualGateway_17_IPSEC_1",
        "etag": "W/\\"4cc6d29e-faee-47a8-8fd1-53e14a78a0d8\"",
        "instanceId": "a3e73063-b6e2-42ea-8510-40b5b47fb462",
        "properties": {
          "provisioningState": "Succeeded",
          "connectionType": "IPSec",
          "outboundKiloBitsPerSecond": 307200,
          "inboundKiloBitsPerSecond": 307200,
          "ipSecConfiguration": {
            "authenticationMethod": "PSK",
            "quickMode": {
              "perfectForwardSecrecy": "None",
              "cipherTransformationConstant": "AES128",
              "authenticationTransformationConstant": "SHA196",
              "idleDisconnectSeconds": 500,
              "saLifetimeSeconds": 3600,
              "saLifetimeKiloBytes": 33552408
            }
          },
          "mainMode": {
            "diffieHellmanGroup": "Group2",

```

```

        "encryptionAlgorithm": "DES3",
        "integrityAlgorithm": "SHA1",
        "saLifeTimeSeconds": 28800,
        "saLifeTimeKiloBytes": 33552408
    },
    "localVpnTrafficSelector": [],
    "remoteVpnTrafficSelector": []
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
    {
        "destinationPrefix": "50.17.1.0/24",
        "nextHop": "0.0.0.0",
        "metric": 10,
        "protocol": "Static"
    }
],
"connectionStatus": "Enabled",
"connectionState": "Disconnected",
"connectionUpTime": "00:00:00",
"connectionErrorReason": "0",
"unreachabilityReason": "",
"statistics": {
    "outboundBytes": 1043475124,
    "inboundBytes": 51078178327,
    "rxTotalPacketsDropped": 0,
    "txTotalPacketsDropped": 0,
    "txRateKbps": 0,
    "rxRateKbps": 0,
    "txRateLimitedPacketsDropped": 0,
    "rxRateLimitedPacketsDropped": 0,
    "lastUpdated": "2016-06-16T06:17:26.5237938Z"
},
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"sourceIPAddress": "91.1.1.4",
"destinationIPAddress": "11.17.0.1",
"gateway": {
    "resourceRef": "/Gateways/CloudGw1"
}
}
},
"bgpRouters": [
    {
        "resourceRef":
"/VirtualGateways/VirtualGateway_17/BgpRouters/BGP_VirtualGateway_17_6ec56965-4f32-4146-9413-aeacfde18626",
        "resourceId": "BGP_VirtualGateway_17_6ec56965-4f32-4146-9413-aeacfde18626",
        "instanceId": "6ec56965-4f32-4146-9413-aeacfde18626",
        "properties": {
            "provisioningState": "Succeeded",
            "extAsNumber": "0.65001",
            "routerId": "10.2.18.2",
            "routerIP": [
                "10.2.18.2"
            ],
            "isGenerated": true,
            "configurationState": {
                "status": "Success",
                "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
            }
        }
    }
],
"routingType": "Dynamic",

```

```

"gatewayPoolsGatewayPools": [
  {
    "resourceRef": "/GatewayPools/default"
  }
],
"configurationState": {
  "status": "Success",
  "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
  {
    "resourceRef": "/virtualNetworks/00000000-1111-0000-0017-000000000000/subnets/00000000-1111-1111-0017-000000000002"
  }
]
},
{
  "resourceRef": "/VirtualGateways/VirtualGateway_18",
  "resourceId": "VirtualGateway_18",
  "etag": "W/\"9db2adb7-7aed-4179-9ef2-086850ca45b6\"",
  "instanceId": "0b0d4416-6189-480e-9e98-3c3e8994dff5",
  "properties": {
    "provisioningState": "Succeeded",
    "networkConnections": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_18/NetworkConnections/VirtualGateway_18_IPSEC_1",
        "resourceId": "VirtualGateway_18_IPSEC_1",
        "etag": "W/\"9db2adb7-7aed-4179-9ef2-086850ca45b6\"",
        "instanceId": "38fd724b-05a8-464d-8e8e-69290261bbeF",
        "properties": {
          "provisioningState": "Succeeded",
          "connectionType": "IPSec",
          "outboundKiloBitsPerSecond": 307200,
          "inboundKiloBitsPerSecond": 307200,
          "ipSecConfiguration": {
            "authenticationMethod": "PSK",
            "quickMode": {
              "perfectForwardSecrecy": "None",
              "cipherTransformationConstant": "AES128",
              "authenticationTransformationConstant": "SHA196",
              "idleDisconnectSeconds": 500,
              "saLifeTimeSeconds": 3600,
              "saLifeTimeKiloBytes": 33552408
            },
            "mainMode": {
              "diffieHellmanGroup": "Group2",
              "encryptionAlgorithm": "DES3",
              "integrityAlgorithm": "SHA1",
              "saLifeTimeSeconds": 28800,
              "saLifeTimeKiloBytes": 33552408
            },
            "localVpnTrafficSelector": [],
            "remoteVpnTrafficSelector": []
          },
          "l3Configuration": {},
          "ipAddresses": [],
          "peerIPAddresses": [],
          "routes": [
            {
              "destinationPrefix": "50.18.1.0/24",
              "nextHop": "0.0.0.0",
              "metric": 10,
              "protocol": "Static"
            }
          ],
          "connectionStatus": "Enabled",
          "connectionState": "Disconnected",
          "connectionUpTime": "00:00:00",

```

```

        "connectionErrorReason": "0",
        "unreachabilityReason": "",
        "statistics": {
            "outboundBytes": 1421356117,
            "inboundBytes": 69812308550,
            "rxTotalPacketsDropped": 0,
            "txTotalPacketsDropped": 0,
            "txRateKbps": 0,
            "rxRateKbps": 0,
            "txRateLimitedPacketsDropped": 0,
            "rxRateLimitedPacketsDropped": 0,
            "lastUpdated": "2016-06-16T06:17:26.5237938Z"
        },
        "configurationState": {
            "status": "Success",
            "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
        },
        "sourceIPAddress": "91.1.1.4",
        "destinationIPAddress": "11.18.0.1",
        "gateway": {
            "resourceRef": "/Gateways/CloudGw1"
        }
    }
}
],
"bgpRouters": [
    {
        "resourceRef":
"/VirtualGateways/VirtualGateway_18/BgpRouters/BGP_VirtualGateway_18_0d2b38e7-79fd-4eb2-a445-8214c0da5d05",
        "resourceId": "BGP_VirtualGateway_18_0d2b38e7-79fd-4eb2-a445-8214c0da5d05",
        "instanceId": "0d2b38e7-79fd-4eb2-a445-8214c0da5d05",
        "properties": {
            "provisioningState": "Succeeded",
            "extAsNumber": "0.65001",
            "routerId": "10.2.19.2",
            "routerIP": [
                "10.2.19.2"
            ],
            "isGenerated": true,
            "configurationState": {
                "status": "Success",
                "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
            }
        }
    }
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
    {
        "resourceRef": "/GatewayPools/default"
    }
],
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
    {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0018-000000000000/subnets/00000000-1111-1111-0018-000000000002"
    }
]
},
{
    "resourceRef": "/VirtualGateways/VirtualGateway_19",
    "resourceId": "VirtualGateway_19",
    "etag": "W/\"36077b7b-36cc-404e-b776-6c52eaa581a1\"",
    "instanceId": "26ff4542-a4bf-4b51-a241-59d295f39815",

```

```

"properties": {
  "provisioningState": "Succeeded",
  "networkConnections": [
    {
      "resourceRef":
"/VirtualGateways/VirtualGateway_19/NetworkConnections/VirtualGateway_19_IPSEC_1",
      "resourceId": "VirtualGateway_19_IPSEC_1",
      "etag": "W/\\"36077b7b-36cc-404e-b776-6c52eaa581a1\\"",
      "instanceId": "c4bdef1b-9afc-4084-9b07-22a8ab800317",
      "properties": {
        "provisioningState": "Succeeded",
        "connectionType": "IPSec",
        "outboundKiloBitsPerSecond": 307200,
        "inboundKiloBitsPerSecond": 307200,
        "ipSecConfiguration": {
          "authenticationMethod": "PSK",
          "quickMode": {
            "perfectForwardSecrecy": "None",
            "cipherTransformationConstant": "AES128",
            "authenticationTransformationConstant": "SHA196",
            "idleDisconnectSeconds": 500,
            "saLifeTimeSeconds": 3600,
            "saLifeTimeKiloBytes": 33552408
          },
          "mainMode": {
            "diffieHellmanGroup": "Group2",
            "encryptionAlgorithm": "DES3",
            "integrityAlgorithm": "SHA1",
            "saLifeTimeSeconds": 28800,
            "saLifeTimeKiloBytes": 33552408
          },
          "localVpnTrafficSelector": [],
          "remoteVpnTrafficSelector": []
        },
        "l3Configuration": {},
        "ipAddresses": [],
        "peerIPAddresses": [],
        "routes": [
          {
            "destinationPrefix": "50.19.1.0/24",
            "nextHop": "0.0.0.0",
            "metric": 10,
            "protocol": "Static"
          }
        ],
        "connectionStatus": "Enabled",
        "connectionState": "Disconnected",
        "connectionUpTime": "00:00:00",
        "connectionErrorReason": "0",
        "unreachabilityReason": "",
        "statistics": {
          "outboundBytes": 1505920243,
          "inboundBytes": 74271334779,
          "rxTotalPacketsDropped": 0,
          "txTotalPacketsDropped": 0,
          "txRateKbps": 0,
          "rxRateKbps": 0,
          "txRateLimitedPacketsDropped": 0,
          "rxRateLimitedPacketsDropped": 0,
          "lastUpdated": "2016-06-16T06:17:26.5237938Z"
        },
        "configurationState": {
          "status": "Success",
          "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
        },
        "sourceIPAddress": "91.1.1.4",
        "destinationIPAddress": "11.19.0.1",
        "gateway": {
          "resourceRef": "/Gateways/CloudGw1"
        }
      }
    }
  ]
}

```

```

    }
  },
  "bgpRouters": [
    {
      "resourceRef":
"/VirtualGateways/VirtualGateway_19/BgpRouters/BGP_VirtualGateway_19_19b87991-6ec7-4e79-8b25-
b5bbac60baf6",
      "resourceId": "BGP_VirtualGateway_19_19b87991-6ec7-4e79-8b25-b5bbac60baf6",
      "instanceId": "19b87991-6ec7-4e79-8b25-b5bbac60baf6",
      "properties": {
        "provisioningState": "Succeeded",
        "extAsNumber": "0.65001",
        "routerId": "10.2.20.2",
        "routerIP": [
          "10.2.20.2"
        ],
        "isGenerated": true,
        "configurationState": {
          "status": "Success",
          "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
        }
      }
    }
  ],
  "routingType": "Dynamic",
  "gatewayPoolsGatewayPools": [
    {
      "resourceRef": "/GatewayPools/default"
    }
  ],
  "configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
  },
  "gatewaySubnets": [
    {
      "resourceRef": "/virtualNetworks/00000000-1111-0000-0019-
000000000000/subnets/00000000-1111-1111-0019-000000000002"
    }
  ]
},
{
  "resourceRef": "/VirtualGateways/VirtualGateway_2",
  "resourceId": "VirtualGateway_2",
  "etag": "W/\"17d90b70-e0f4-4153-a1b0-f4910bdb46e5\"",
  "instanceId": "b04ee085-fd0d-4267-8b35-35ae504a715f",
  "properties": {
    "provisioningState": "Succeeded",
    "networkConnections": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_2/NetworkConnections/VirtualGateway_2_IPSEC_1",
        "resourceId": "VirtualGateway_2_IPSEC_1",
        "etag": "W/\"17d90b70-e0f4-4153-a1b0-f4910bdb46e5\"",
        "instanceId": "7aff20cc-d426-4ff0-aaa8-0d6fc5979286",
        "properties": {
          "provisioningState": "Succeeded",
          "connectionType": "IPSec",
          "outboundKiloBitsPerSecond": 307200,
          "inboundKiloBitsPerSecond": 307200,
          "ipSecConfiguration": {
            "authenticationMethod": "PSK",
            "quickMode": {
              "perfectForwardSecrecy": "None",
              "cipherTransformationConstant": "AES128",
              "authenticationTransformationConstant": "SHA196",
              "idleDisconnectSeconds": 500,
              "saLifeTimeSeconds": 3600,
            }
          }
        }
      }
    ]
  }
}

```

```

        "saLifeTimeKiloBytes": 33552408
    },
    "mainMode": {
        "diffieHellmanGroup": "Group2",
        "encryptionAlgorithm": "DES3",
        "integrityAlgorithm": "SHA1",
        "saLifeTimeSeconds": 28800,
        "saLifeTimeKiloBytes": 33552408
    },
    "localVpnTrafficSelector": [],
    "remoteVpnTrafficSelector": []
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
    {
        "destinationPrefix": "50.2.1.0/24",
        "nextHop": "0.0.0.0",
        "metric": 10,
        "protocol": "Static"
    }
],
"connectionStatus": "Enabled",
"connectionState": "Disconnected",
"connectionUpTime": "00:00:00",
"connectionErrorReason": "0",
"unreachabilityReason": "",
"statistics": {
    "outboundBytes": 1104506155,
    "inboundBytes": 54005992110,
    "rxTotalPacketsDropped": 0,
    "txTotalPacketsDropped": 0,
    "txRateKbps": 0,
    "rxRateKbps": 0,
    "txRateLimitedPacketsDropped": 0,
    "rxRateLimitedPacketsDropped": 0,
    "lastUpdated": "2016-06-16T06:17:26.5237938Z"
},
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"sourceIPAddress": "91.1.1.4",
"destinationIPAddress": "11.2.0.1",
"gateway": {
    "resourceRef": "/Gateways/CloudGw1"
}
}
},
],
"bgpRouters": [
    {
        "resourceRef":
"/VirtualGateways/VirtualGateway_2/BgpRouters/BGP_VirtualGateway_2_83e43f34-c516-46ac-ad48-755ee9clf665",
        "resourceId": "BGP_VirtualGateway_2_83e43f34-c516-46ac-ad48-755ee9clf665",
        "instanceId": "83e43f34-c516-46ac-ad48-755ee9clf665",
        "properties": {
            "provisioningState": "Succeeded",
            "extAsNumber": "0.65001",
            "routerId": "10.2.3.2",
            "routerIP": [
                "10.2.3.2"
            ],
            "isGenerated": true,
            "configurationState": {
                "status": "Success",
                "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
            }
        }
    }
]

```

```

    }
  ],
  "routingType": "Dynamic",
  "gatewayPoolsGatewayPools": [
    {
      "resourceRef": "/GatewayPools/default"
    }
  ],
  "configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
  },
  "gatewaySubnets": [
    {
      "resourceRef": "/virtualNetworks/00000000-1111-0000-0002-000000000000/subnets/00000000-1111-1111-0002-000000000002"
    }
  ]
}
},
{
  "resourceRef": "/VirtualGateways/VirtualGateway_20",
  "resourceId": "VirtualGateway_20",
  "etag": "W/\"2de7077e-d755-4529-8982-6a8baa0cf6ca\"",
  "instanceId": "5a994f0c-b738-43d9-9364-5f19c0ef746e",
  "properties": {
    "provisioningState": "Succeeded",
    "networkConnections": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_20/NetworkConnections/VirtualGateway_20_IPSEC_1",
        "resourceId": "VirtualGateway_20_IPSEC_1",
        "etag": "W/\"2de7077e-d755-4529-8982-6a8baa0cf6ca\"",
        "instanceId": "8d562ef8-3fd5-412b-98e1-8ccb2e6adf1",
        "properties": {
          "provisioningState": "Succeeded",
          "connectionType": "IPSec",
          "outboundKiloBitsPerSecond": 307200,
          "inboundKiloBitsPerSecond": 307200,
          "ipSecConfiguration": {
            "authenticationMethod": "PSK",
            "quickMode": {
              "perfectForwardSecrecy": "None",
              "cipherTransformationConstant": "AES128",
              "authenticationTransformationConstant": "SHA196",
              "idleDisconnectSeconds": 500,
              "saLifeTimeSeconds": 3600,
              "saLifeTimeKiloBytes": 33552408
            },
            "mainMode": {
              "diffieHellmanGroup": "Group2",
              "encryptionAlgorithm": "DES3",
              "integrityAlgorithm": "SHA1",
              "saLifeTimeSeconds": 28800,
              "saLifeTimeKiloBytes": 33552408
            },
            "localVpnTrafficSelector": [],
            "remoteVpnTrafficSelector": []
          },
          "l3Configuration": {},
          "ipAddresses": [],
          "peerIPAddresses": [],
          "routes": [
            {
              "destinationPrefix": "50.20.1.0/24",
              "nextHop": "0.0.0.0",
              "metric": 10,
              "protocol": "Static"
            }
          ]
        }
      }
    ]
  }
}

```



```

    ],
    "connectionStatus": "Enabled",
    "connectionState": "Disconnected",
    "connectionUpTime": "00:00:00",
    "connectionErrorReason": "0",
    "unreachabilityReason": "",
    "statistics": {
      "outboundBytes": 1150643261,
      "inboundBytes": 57801964901,
      "rxTotalPacketsDropped": 0,
      "txTotalPacketsDropped": 0,
      "txRateKbps": 0,
      "rxRateKbps": 0,
      "txRateLimitedPacketsDropped": 0,
      "rxRateLimitedPacketsDropped": 0,
      "lastUpdated": "2016-06-16T06:17:26.5237938Z"
    },
    "configurationState": {
      "status": "Success",
      "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "sourceIPAddress": "91.1.1.4",
    "destinationIPAddress": "11.20.0.1",
    "gateway": {
      "resourceRef": "/Gateways/CloudGw1"
    }
  }
}
],
"bgpRouters": [
  {
    "resourceRef":
"/VirtualGateways/VirtualGateway_20/BgpRouters/BGP_VirtualGateway_20_557cfc53-e621-4559-bcb1-elf2045f56",
    "resourceId": "BGP_VirtualGateway_20_557cfc53-e621-4559-bcb1-elf2045f56",
    "instanceId": "557cfc53-e621-4559-bcb1-elf2045f56",
    "properties": {
      "provisioningState": "Succeeded",
      "extAsNumber": "0.65001",
      "routerId": "10.2.21.2",
      "routerIP": [
        "10.2.21.2"
      ],
    },
    "isGenerated": true,
    "configurationState": {
      "status": "Success",
      "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    }
  }
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
  {
    "resourceRef": "/GatewayPools/default"
  }
],
"configurationState": {
  "status": "Success",
  "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
  {
    "resourceRef": "/virtualNetworks/00000000-1111-0000-0020-000000000000/subnets/00000000-1111-1111-0020-000000000002"
  }
]
},
{

```

```

"resourceRef": "/VirtualGateways/VirtualGateway_3",
"resourceId": "VirtualGateway_3",
"etag": "W/\db876b1d-1121-4e57-bf8a-0f7981b00cc1\"",
"instanceId": "aeff9881-caba-4620-8c11-89d9e0ceaeed",
"properties": {
  "provisioningState": "Succeeded",
  "networkConnections": [
    {
      "resourceRef":
"/VirtualGateways/VirtualGateway_3/NetworkConnections/VirtualGateway_3_IPSEC_1",
      "resourceId": "VirtualGateway_3_IPSEC_1",
      "etag": "W/\db876b1d-1121-4e57-bf8a-0f7981b00cc1\"",
      "instanceId": "ea6df5fc-ce09-47ad-9447-8ac6b45397a3",
      "properties": {
        "provisioningState": "Succeeded",
        "connectionType": "IPSec",
        "outboundKiloBitsPerSecond": 307200,
        "inboundKiloBitsPerSecond": 307200,
        "ipSecConfiguration": {
          "authenticationMethod": "PSK",
          "quickMode": {
            "perfectForwardSecrecy": "None",
            "cipherTransformationConstant": "AES128",
            "authenticationTransformationConstant": "SHA196",
            "idleDisconnectSeconds": 500,
            "saLifeTimeSeconds": 3600,
            "saLifeTimeKiloBytes": 33552408
          },
          "mainMode": {
            "diffieHellmanGroup": "Group2",
            "encryptionAlgorithm": "DES3",
            "integrityAlgorithm": "SHA1",
            "saLifeTimeSeconds": 28800,
            "saLifeTimeKiloBytes": 33552408
          },
          "localVpnTrafficSelector": [],
          "remoteVpnTrafficSelector": []
        },
        "l3Configuration": {},
        "ipAddresses": [],
        "peerIPAddresses": [],
        "routes": [
          {
            "destinationPrefix": "50.3.1.0/24",
            "nextHop": "0.0.0.0",
            "metric": 10,
            "protocol": "Static"
          }
        ],
        "connectionStatus": "Enabled",
        "connectionState": "Disconnected",
        "connectionUpTime": "00:00:00",
        "connectionErrorReason": "0",
        "unreachabilityReason": "",
        "statistics": {
          "outboundBytes": 1239147857,
          "inboundBytes": 63220805197,
          "rxTotalPacketsDropped": 0,
          "txTotalPacketsDropped": 0,
          "txRateKbps": 0,
          "rxRateKbps": 0,
          "txRateLimitedPacketsDropped": 0,
          "rxRateLimitedPacketsDropped": 0,
          "lastUpdated": "2016-06-16T06:17:26.5237938Z"
        },
        "configurationState": {
          "status": "Success",
          "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
        },
        "sourceIPAddress": "91.1.1.4",

```

```

        "destinationIPAddress": "11.3.0.1",
        "gateway": {
            "resourceRef": "/Gateways/CloudGw1"
        }
    }
},
"bgpRouters": [
    {
        "resourceRef":
"/VirtualGateways/VirtualGateway_3/BgpRouters/BGP_VirtualGateway_3_366d5a41-19c9-4ec8-bd82-01a2fb9fef37",
        "resourceId": "BGP_VirtualGateway_3_366d5a41-19c9-4ec8-bd82-01a2fb9fef37",
        "instanceId": "366d5a41-19c9-4ec8-bd82-01a2fb9fef37",
        "properties": {
            "provisioningState": "Succeeded",
            "extAsNumber": "0.65001",
            "routerId": "10.2.4.2",
            "routerIP": [
                "10.2.4.2"
            ],
            "isGenerated": true,
            "configurationState": {
                "status": "Success",
                "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
            }
        }
    }
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
    {
        "resourceRef": "/GatewayPools/default"
    }
],
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
    {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0003-000000000000/subnets/00000000-1111-1111-0003-000000000002"
    }
]
},
{
    "resourceRef": "/VirtualGateways/VirtualGateway_4",
    "resourceId": "VirtualGateway_4",
    "etag": "W/\"28708f02-8b93-4a31-b265-98c6ba91e95e\"",
    "instanceId": "b3bd4bfb-129b-4a3a-9c4d-120b91c8b82b",
    "properties": {
        "provisioningState": "Succeeded",
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_4/NetworkConnections/VirtualGateway_4_IPSEC_1",
                "resourceId": "VirtualGateway_4_IPSEC_1",
                "etag": "W/\"28708f02-8b93-4a31-b265-98c6ba91e95e\"",
                "instanceId": "afb4b00e-23f3-421b-a524-04f108ffe54e",
                "properties": {
                    "provisioningState": "Succeeded",
                    "connectionType": "IPSec",
                    "outboundKiloBitsPerSecond": 307200,
                    "inboundKiloBitsPerSecond": 307200,
                    "ipSecConfiguration": {
                        "authenticationMethod": "PSK",
                        "quickMode": {
                            "perfectForwardSecrecy": "None",

```

```

        "cipherTransformationConstant": "AES128",
        "authenticationTransformationConstant": "SHA196",
        "idleDisconnectSeconds": 500,
        "saLifeTimeSeconds": 3600,
        "saLifeTimeKiloBytes": 33552408
    },
    "mainMode": {
        "diffieHellmanGroup": "Group2",
        "encryptionAlgorithm": "DES3",
        "integrityAlgorithm": "SHA1",
        "saLifeTimeSeconds": 28800,
        "saLifeTimeKiloBytes": 33552408
    },
    "localVpnTrafficSelector": [],
    "remoteVpnTrafficSelector": []
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
    {
        "destinationPrefix": "50.4.1.0/24",
        "nextHop": "0.0.0.0",
        "metric": 10,
        "protocol": "Static"
    }
],
"connectionStatus": "Enabled",
"connectionState": "Disconnected",
"connectionUpTime": "00:00:00",
"connectionErrorReason": "0",
"unreachabilityReason": "",
"statistics": {
    "outboundBytes": 1231011513,
    "inboundBytes": 59974878997,
    "rxTotalPacketsDropped": 0,
    "txTotalPacketsDropped": 0,
    "txRateKbps": 0,
    "rxRateKbps": 0,
    "txRateLimitedPacketsDropped": 0,
    "rxRateLimitedPacketsDropped": 0,
    "lastUpdated": "2016-06-16T06:17:26.5237938Z"
},
"configurationState": {
    "status": "Success",
    "lastUpdateTime": "2016-06-15T23:13:41.1459839-07:00"
},
"sourceIPAddress": "91.1.1.4",
"destinationIPAddress": "11.4.0.1",
"gateway": {
    "resourceRef": "/Gateways/CloudGw1"
}
}
},
"bgpRouters": [
    {
        "resourceRef":
"/VirtualGateways/VirtualGateway_4/BgpRouters/BGP_VirtualGateway_4_b73ef149-6db2-4d60-abfc-1fc7bf6c2271",
        "resourceId": "BGP_VirtualGateway_4_b73ef149-6db2-4d60-abfc-1fc7bf6c2271",
        "instanceId": "b73ef149-6db2-4d60-abfc-1fc7bf6c2271",
        "properties": {
            "provisioningState": "Succeeded",
            "extAsNumber": "0.65001",
            "routerId": "10.2.5.2",
            "routerIP": [
                "10.2.5.2"
            ],
        },
        "isGenerated": true,
    }
]

```

```

        "configurationState": {
            "status": "Success",
            "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
        }
    }
},
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
    {
        "resourceRef": "/GatewayPools/default"
    }
],
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
    {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0004-000000000000/subnets/00000000-1111-1111-0004-000000000002"
    }
]
},
{
    "resourceRef": "/VirtualGateways/VirtualGateway_5",
    "resourceId": "VirtualGateway_5",
    "etag": "W/\"bb807699-0fdc-4e80-ac95-c673eaad0329\"",
    "instanceId": "a2ff56a2-5755-46f1-a5c9-28c4b88bf0d3",
    "properties": {
        "provisioningState": "Succeeded",
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_5/NetworkConnections/VirtualGateway_5_IPSEC_1",
                "resourceId": "VirtualGateway_5_IPSEC_1",
                "etag": "W/\"bb807699-0fdc-4e80-ac95-c673eaad0329\"",
                "instanceId": "c9740314-d444-404c-b057-666b3f97bac9",
                "properties": {
                    "provisioningState": "Succeeded",
                    "connectionType": "IPSec",
                    "outboundKiloBitsPerSecond": 307200,
                    "inboundKiloBitsPerSecond": 307200,
                    "ipSecConfiguration": {
                        "authenticationMethod": "PSK",
                        "quickMode": {
                            "perfectForwardSecrecy": "None",
                            "cipherTransformationConstant": "AES128",
                            "authenticationTransformationConstant": "SHA196",
                            "idleDisconnectSeconds": 500,
                            "saLifeTimeSeconds": 3600,
                            "saLifeTimeKiloBytes": 33552408
                        },
                        "mainMode": {
                            "diffieHellmanGroup": "Group2",
                            "encryptionAlgorithm": "DES3",
                            "integrityAlgorithm": "SHA1",
                            "saLifeTimeSeconds": 28800,
                            "saLifeTimeKiloBytes": 33552408
                        },
                        "localVpnTrafficSelector": [],
                        "remoteVpnTrafficSelector": []
                    },
                    "l3Configuration": {},
                    "ipAddresses": [],
                    "peerIPAddresses": [],
                    "routes": [
                        {
                            "destinationPrefix": "50.5.1.0/24",

```

```

        "nextHop": "0.0.0.0",
        "metric": 10,
        "protocol": "Static"
    }
  ],
  "connectionStatus": "Enabled",
  "connectionState": "Disconnected",
  "connectionUpTime": "00:00:00",
  "connectionErrorReason": "0",
  "unreachabilityReason": "",
  "statistics": {
    "outboundBytes": 2063901411,
    "inboundBytes": 97287921459,
    "rxTotalPacketsDropped": 0,
    "txTotalPacketsDropped": 0,
    "txRateKbps": 0,
    "rxRateKbps": 0,
    "txRateLimitedPacketsDropped": 0,
    "rxRateLimitedPacketsDropped": 0,
    "lastUpdated": "2016-06-16T06:17:26.5237938Z"
  },
  "configurationState": {
    "status": "Success",
    "lastUpdateTime": "2016-06-15T23:13:41.1459839-07:00"
  },
  "sourceIPAddress": "91.1.1.4",
  "destinationIPAddress": "11.5.0.1",
  "gateway": {
    "resourceRef": "/Gateways/CloudGw1"
  }
}
],
"bgpRouters": [
  {
    "resourceRef":
"/VirtualGateways/VirtualGateway_5/BgpRouters/BGP_VirtualGateway_5_7d561f64-09e0-4338-be20-49d5e812c94d",
    "resourceId": "BGP_VirtualGateway_5_7d561f64-09e0-4338-be20-49d5e812c94d",
    "instanceId": "7d561f64-09e0-4338-be20-49d5e812c94d",
    "properties": {
      "provisioningState": "Succeeded",
      "extAsNumber": "0.65001",
      "routerId": "10.2.6.2",
      "routerIP": [
        "10.2.6.2"
      ],
    },
    "isGenerated": true,
    "configurationState": {
      "status": "Success",
      "lastUpdateTime": "2016-06-15T23:13:41.1459839-07:00"
    }
  }
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
  {
    "resourceRef": "/GatewayPools/default"
  }
],
"configurationState": {
  "status": "Success",
  "lastUpdateTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
  {
    "resourceRef": "/virtualNetworks/00000000-1111-0000-0005-000000000000/subnets/00000000-1111-1111-0005-000000000002"
  }
]

```

```

    }
  },
  {
    "resourceRef": "/VirtualGateways/VirtualGateway_6",
    "resourceId": "VirtualGateway_6",
    "etag": "W/\"f89cd8c8-5f5e-4ae4-8154-56f3bd7cc19f\"",
    "instanceId": "bda4ddld-d1b9-4d49-87aa-0aac445a3a40",
    "properties": {
      "provisioningState": "Succeeded",
      "networkConnections": [
        {
          "resourceRef":
"/VirtualGateways/VirtualGateway_6/NetworkConnections/VirtualGateway_6_IPSEC_1",
          "resourceId": "VirtualGateway_6_IPSEC_1",
          "etag": "W/\"f89cd8c8-5f5e-4ae4-8154-56f3bd7cc19f\"",
          "instanceId": "355c2da0-07c9-484f-90e0-3a88cdd9598b",
          "properties": {
            "provisioningState": "Succeeded",
            "connectionType": "IPSec",
            "outboundKiloBitsPerSecond": 307200,
            "inboundKiloBitsPerSecond": 307200,
            "ipSecConfiguration": {
              "authenticationMethod": "PSK",
              "quickMode": {
                "perfectForwardSecrecy": "None",
                "cipherTransformationConstant": "AES128",
                "authenticationTransformationConstant": "SHA196",
                "idleDisconnectSeconds": 500,
                "saLifetimeSeconds": 3600,
                "saLifetimeKiloBytes": 33552408
              },
              "mainMode": {
                "diffieHellmanGroup": "Group2",
                "encryptionAlgorithm": "DES3",
                "integrityAlgorithm": "SHA1",
                "saLifetimeSeconds": 28800,
                "saLifetimeKiloBytes": 33552408
              },
              "localVpnTrafficSelector": [],
              "remoteVpnTrafficSelector": []
            },
            "l3Configuration": {},
            "ipAddresses": [],
            "peerIPAddresses": [],
            "routes": [
              {
                "destinationPrefix": "50.6.1.0/24",
                "nextHop": "0.0.0.0",
                "metric": 10,
                "protocol": "Static"
              }
            ],
            "connectionStatus": "Enabled",
            "connectionState": "Disconnected",
            "connectionUpTime": "00:00:00",
            "connectionErrorReason": "0",
            "unreachabilityReason": "",
            "statistics": {
              "outboundBytes": 1204267121,
              "inboundBytes": 56474135188,
              "rxTotalPacketsDropped": 0,
              "txTotalPacketsDropped": 0,
              "txRateKbps": 0,
              "rxRateKbps": 0,
              "txRateLimitedPacketsDropped": 0,
              "rxRateLimitedPacketsDropped": 0,
              "lastUpdated": "2016-06-16T06:17:26.5237938Z"
            },
            "configurationState": {

```

```

        "status": "Success",
        "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "sourceIPAddress": "91.1.1.4",
    "destinationIPAddress": "11.6.0.1",
    "gateway": {
        "resourceRef": "/Gateways/CloudGw1"
    }
}
},
"bgpRouters": [
    {
        "resourceRef":
"/VirtualGateways/VirtualGateway_6/BgpRouters/BGP_VirtualGateway_6_78c53fcf-ac05-4e8b-ae03-775d4875fad4",
        "resourceId": "BGP_VirtualGateway_6_78c53fcf-ac05-4e8b-ae03-775d4875fad4",
        "instanceId": "78c53fcf-ac05-4e8b-ae03-775d4875fad4",
        "properties": {
            "provisioningState": "Succeeded",
            "extAsNumber": "0.65001",
            "routerId": "10.2.7.2",
            "routerIP": [
                "10.2.7.2"
            ],
            "isGenerated": true,
            "configurationState": {
                "status": "Success",
                "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
            }
        }
    }
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
    {
        "resourceRef": "/GatewayPools/default"
    }
],
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
    {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0006-000000000000/subnets/00000000-1111-1111-0006-000000000002"
    }
]
},
{
    "resourceRef": "/VirtualGateways/VirtualGateway_7",
    "resourceId": "VirtualGateway_7",
    "etag": "W/\"f651cd2f-fd67-40b9-8a4d-7709043a2794\"",
    "instanceId": "075d12f6-bc57-4586-80f5-8703e094fb80",
    "properties": {
        "provisioningState": "Succeeded",
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_7/NetworkConnections/VirtualGateway_7_IPSEC_1",
                "resourceId": "VirtualGateway_7_IPSEC_1",
                "etag": "W/\"f651cd2f-fd67-40b9-8a4d-7709043a2794\"",
                "instanceId": "aed01446-a80f-456e-a111-a828fb56ae88",
                "properties": {
                    "provisioningState": "Succeeded",
                    "connectionType": "IPSec",
                    "outboundKiloBitsPerSecond": 307200,
                    "inboundKiloBitsPerSecond": 307200,

```



```

"ipSecConfiguration": {
  "authenticationMethod": "PSK",
  "quickMode": {
    "perfectForwardSecrecy": "None",
    "cipherTransformationConstant": "AES128",
    "authenticationTransformationConstant": "SHA196",
    "idleDisconnectSeconds": 500,
    "saLifeTimeSeconds": 3600,
    "saLifeTimeKiloBytes": 33552408
  },
  "mainMode": {
    "diffieHellmanGroup": "Group2",
    "encryptionAlgorithm": "DES3",
    "integrityAlgorithm": "SHA1",
    "saLifeTimeSeconds": 28800,
    "saLifeTimeKiloBytes": 33552408
  },
  "localVpnTrafficSelector": [],
  "remoteVpnTrafficSelector": []
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
  {
    "destinationPrefix": "50.7.1.0/24",
    "nextHop": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  }
],
"connectionStatus": "Enabled",
"connectionState": "Disconnected",
"connectionUpTime": "00:00:00",
"connectionErrorReason": "0",
"unreachabilityReason": "",
"statistics": {
  "outboundBytes": 1331091986,
  "inboundBytes": 64440380975,
  "rxTotalPacketsDropped": 0,
  "txTotalPacketsDropped": 0,
  "txRateKbps": 0,
  "rxRateKbps": 0,
  "txRateLimitedPacketsDropped": 0,
  "rxRateLimitedPacketsDropped": 0,
  "lastUpdated": "2016-06-16T06:17:26.5237938Z"
},
"configurationState": {
  "status": "Success",
  "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"sourceIPAddress": "91.1.1.4",
"destinationIPAddress": "11.7.0.1",
"gateway": {
  "resourceRef": "/Gateways/CloudGw1"
}
}
],
"bgpRouters": [
  {
    "resourceRef":
"/VirtualGateways/VirtualGateway_7/BgpRouters/BGP_VirtualGateway_7_351ddc6d-d68c-40b1-94db-d2a5939c4eb0",
    "resourceId": "BGP_VirtualGateway_7_351ddc6d-d68c-40b1-94db-d2a5939c4eb0",
    "instanceId": "351ddc6d-d68c-40b1-94db-d2a5939c4eb0",
    "properties": {
      "provisioningState": "Succeeded",
      "extAsNumber": "0.65001",
      "routerId": "10.2.8.2",

```

```

        "routerIP": [
            "10.2.8.2"
        ],
        "isGenerated": true,
        "configurationState": {
            "status": "Success",
            "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
        }
    }
},
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
    {
        "resourceRef": "/GatewayPools/default"
    }
],
"configurationState": {
    "status": "Success",
    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [
    {
        "resourceRef": "/virtualNetworks/00000000-1111-0000-0007-000000000000/subnets/00000000-1111-1111-0007-000000000002"
    }
]
},
{
    "resourceRef": "/VirtualGateways/VirtualGateway_8",
    "resourceId": "VirtualGateway_8",
    "etag": "W/\"7be191c6-7a9f-43e0-aa04-b5d8c916d815\"",
    "instanceId": "4dad330a-8d7a-42d6-8ab1-8b6d5e85f6bd",
    "properties": {
        "provisioningState": "Succeeded",
        "networkConnections": [
            {
                "resourceRef":
"/VirtualGateways/VirtualGateway_8/NetworkConnections/VirtualGateway_8_IPSEC_1",
                "resourceId": "VirtualGateway_8_IPSEC_1",
                "etag": "W/\"7be191c6-7a9f-43e0-aa04-b5d8c916d815\"",
                "instanceId": "c9781dac-b4b0-4cf3-bd85-951222b669a4",
                "properties": {
                    "provisioningState": "Succeeded",
                    "connectionType": "IPSec",
                    "outboundKiloBitsPerSecond": 307200,
                    "inboundKiloBitsPerSecond": 307200,
                    "ipSecConfiguration": {
                        "authenticationMethod": "PSK",
                        "quickMode": {
                            "perfectForwardSecrecy": "None",
                            "cipherTransformationConstant": "AES128",
                            "authenticationTransformationConstant": "SHA196",
                            "idleDisconnectSeconds": 500,
                            "saLifeTimeSeconds": 3600,
                            "saLifeTimeKiloBytes": 33552408
                        },
                        "mainMode": {
                            "diffieHellmanGroup": "Group2",
                            "encryptionAlgorithm": "DES3",
                            "integrityAlgorithm": "SHA1",
                            "saLifeTimeSeconds": 28800,
                            "saLifeTimeKiloBytes": 33552408
                        },
                        "localVpnTrafficSelector": [],
                        "remoteVpnTrafficSelector": []
                    },
                    "l3Configuration": {},
                    "ipAddresses": [],

```

```

    "peerIPAddresses": [],
    "routes": [
      {
        "destinationPrefix": "50.8.1.0/24",
        "nextHop": "0.0.0.0",
        "metric": 10,
        "protocol": "Static"
      }
    ],
    "connectionStatus": "Enabled",
    "connectionState": "Disconnected",
    "connectionUpTime": "00:00:00",
    "connectionErrorReason": "0",
    "unreachabilityReason": "",
    "statistics": {
      "outboundBytes": 1813010299,
      "inboundBytes": 87629965539,
      "rxTotalPacketsDropped": 0,
      "txTotalPacketsDropped": 0,
      "txRateKbps": 0,
      "rxRateKbps": 0,
      "txRateLimitedPacketsDropped": 0,
      "rxRateLimitedPacketsDropped": 0,
      "lastUpdated": "2016-06-16T06:17:26.5237938Z"
    },
    "configurationState": {
      "status": "Success",
      "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "sourceIPAddress": "91.1.1.4",
    "destinationIPAddress": "11.8.0.1",
    "gateway": {
      "resourceRef": "/Gateways/CloudGw1"
    }
  }
},
"bgpRouters": [
  {
    "resourceRef":
"/VirtualGateways/VirtualGateway_8/BgpRouters/BGP_VirtualGateway_8_f4c1d9a5-b3b8-4aa0-8b7e-c7cec321a0de",
    "resourceId": "BGP_VirtualGateway_8_f4c1d9a5-b3b8-4aa0-8b7e-c7cec321a0de",
    "instanceId": "f4c1d9a5-b3b8-4aa0-8b7e-c7cec321a0de",
    "properties": {
      "provisioningState": "Succeeded",
      "extAsNumber": "0.65001",
      "routerId": "10.2.9.2",
      "routerIP": [
        "10.2.9.2"
      ],
    },
    "isGenerated": true,
    "configurationState": {
      "status": "Success",
      "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    }
  }
],
"routingType": "Dynamic",
"gatewayPoolsGatewayPools": [
  {
    "resourceRef": "/GatewayPools/default"
  }
],
"configurationState": {
  "status": "Success",
  "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
},
"gatewaySubnets": [

```

```

    {
      "resourceRef": "/virtualNetworks/00000000-1111-0000-0008-
000000000000/subnets/00000000-1111-1111-0008-000000000002"
    }
  ]
},
{
  "resourceRef": "/VirtualGateways/VirtualGateway_9",
  "resourceId": "VirtualGateway_9",
  "etag": "W/\\"754364d9-2932-4430-bd0c-b0cb7c2560ba\\"",
  "instanceId": "1d681158-0e80-40d5-9842-a8fdad35063b",
  "properties": {
    "provisioningState": "Succeeded",
    "networkConnections": [
      {
        "resourceRef":
"/VirtualGateways/VirtualGateway_9/NetworkConnections/VirtualGateway_9_IPSEC_1",
        "resourceId": "VirtualGateway_9_IPSEC_1",
        "etag": "W/\\"754364d9-2932-4430-bd0c-b0cb7c2560ba\\"",
        "instanceId": "caf7c894-a658-47de-a4b4-68f61ef2db12",
        "properties": {
          "provisioningState": "Succeeded",
          "connectionType": "IPSec",
          "outboundKiloBitsPerSecond": 307200,
          "inboundKiloBitsPerSecond": 307200,
          "ipSecConfiguration": {
            "authenticationMethod": "PSK",
            "quickMode": {
              "perfectForwardSecrecy": "None",
              "cipherTransformationConstant": "AES128",
              "authenticationTransformationConstant": "SHA196",
              "idleDisconnectSeconds": 500,
              "saLifeTimeSeconds": 3600,
              "saLifeTimeKiloBytes": 33552408
            },
            "mainMode": {
              "diffieHellmanGroup": "Group2",
              "encryptionAlgorithm": "DES3",
              "integrityAlgorithm": "SHA1",
              "saLifeTimeSeconds": 28800,
              "saLifeTimeKiloBytes": 33552408
            },
            "localVpnTrafficSelector": [],
            "remoteVpnTrafficSelector": []
          },
          "l3Configuration": {},
          "ipAddresses": [],
          "peerIPAddresses": [],
          "routes": [
            {
              "destinationPrefix": "50.9.1.0/24",
              "nextHop": "0.0.0.0",
              "metric": 10,
              "protocol": "Static"
            }
          ],
          "connectionStatus": "Enabled",
          "connectionState": "Disconnected",
          "connectionUpTime": "00:00:00",
          "connectionErrorReason": "0",
          "unreachabilityReason": "",
          "statistics": {
            "outboundBytes": 1188774461,
            "inboundBytes": 57971114251,
            "rxTotalPacketsDropped": 0,
            "txTotalPacketsDropped": 0,
            "txRateKbps": 0,
            "rxRateKbps": 0,
            "txRateLimitedPacketsDropped": 0,

```

```

        "rxRateLimitedPacketsDropped": 0,
        "lastUpdated": "2016-06-16T06:17:26.5237938Z"
    },
    "configurationState": {
        "status": "Success",
        "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "sourceIPAddress": "91.1.1.4",
    "destinationIPAddress": "11.9.0.1",
    "gateway": {
        "resourceRef": "/Gateways/CloudGw1"
    }
    }
    ],
    "bgpRouters": [
        {
            "resourceRef":
"/VirtualGateways/VirtualGateway_9/BgpRouters/BGP_VirtualGateway_9_6c2433ae-410f-4eb2-bd38-3c6a4c170079",
            "resourceId": "BGP_VirtualGateway_9_6c2433ae-410f-4eb2-bd38-3c6a4c170079",
            "instanceId": "6c2433ae-410f-4eb2-bd38-3c6a4c170079",
            "properties": {
                "provisioningState": "Succeeded",
                "extAsNumber": "0.65001",
                "routerId": "10.2.10.2",
                "routerIP": [
                    "10.2.10.2"
                ],
                "isGenerated": true,
                "configurationState": {
                    "status": "Success",
                    "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
                }
            }
        }
    ],
    "routingType": "Dynamic",
    "gatewayPoolsGatewayPools": [
        {
            "resourceRef": "/GatewayPools/default"
        }
    ],
    "configurationState": {
        "status": "Success",
        "lastUpdatedTime": "2016-06-15T23:13:41.1459839-07:00"
    },
    "gatewaySubnets": [
        {
            "resourceRef": "/virtualNetworks/00000000-1111-0000-0009-000000000000/subnets/00000000-1111-1111-0009-000000000002"
        }
    ]
    }
    ],
    "nextLink": ""
}

```

The JSON schema for the **virtualGatewaysVirtualGateways GET ALL** method is located in section 6.15.3.

3.1.5.17.1.3.3 Processing Details

Retrieves all **virtualGatewaysVirtualGateways** resources.

3.1.5.17.1.4 DELETE

This method deletes a **virtualGatewaysVirtualGateways** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.17.1.4.1 Request Body

None.

3.1.5.17.1.4.2 Response Body

None.

3.1.5.17.1.4.3 Processing Details

Deletes a **virtualGatewaysVirtualGateways** resource.

3.1.5.17.2 bgpRouters

The **bgpRouters** resource contains the configuration needed for the ~~Border Gateway Protocol (BGP)~~**BGP** router in the virtual gateway to connect to BGP routers outside the virtual network in order to exchange routing information.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways{parentResourceId}/bgpRouters/{resourceId}
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.17.2.1.1	Create or update a bgpRouters resource.
GET	3.1.5.17.2.1.2	Get a bgpRouters resource.
GET (All) ALL	3.1.5.17.2.1.3	List all bgpRouters resources in the Network Controller.
DELETE	3.1.5.17.2.1.4	Deletes a bgpRouters resource.

The following property elements are valid.

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
isGenerated	Read-only	If this BGP router is automatically enabled, without making any REST calls then isGenerated is set to "true".TRUE.
extAsNumber	Read/write	Extended (4-byte) ASN of the local BGP Router in XX.YY format.
routerId	Read/write	Indicates Router ID.
routerIpAddress routerIpAddress[]	Read/write	Indicates IP addresses to which BGP peering can be established.
bgpPeers[]	Read/write	Collection of BGP peers associated with the BGP Routers bgpRouters resource. See section 3.1.5.17.2.2, for details.
configurationState	Optional Read-only	Indicates the last known running state of this router. See specification in section 2.2.4. More details are given in the section for the GET operation section 3.1.5.17.2.1.2.

3.1.5.17.2.1 HTTP Methods

3.1.5.17.2.1.1 PUT

Creates or updates a **bgpRouters** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualgatewaysVirtualGateways/parentResourceId/bgpRouters/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.17.2.1.1.1 Request Body

The format for the request body for the **bgpRouters PUT** method is as follows.

```
{
  "resourceId": "router1",
  "etag": "W/\"fe4cd15f-f117-449a-b819-9fd007a1abdf\"",
  "instanceId": "6638f081-a838-43f8-90f9-18bc662c130f",
  "properties": {
    "provisioningState": "Succeeded",
    "isEnabled": "true",
    "requireIGPSync": "true",
    "extASNumber": "0.3458",
    "routerIP": [

  ],
  "bgpNetworks": [

  ],
  "isGenerated": false,
  "bgpPeers": [
    {
      "resourceId": "Peer1",
      "properties": {
        "peerIpAddress": "40.1.1.4",
        "asNumber": "1236",
        "extAsNumber": "0.1236",
        "policyMapIn": null,
        "policyMapOut": null
      }
    },
    {
      "resourceId": "Peer2",
      "properties": {
        "peerIpAddress": "40.1.2.4",
        "asNumber": "1236",
        "extAsNumber": "0.1236",
        "policyMapIn": null,
        "policyMapOut": null
      }
    },
    {
      "resourceId": "Peer3",
      "properties": {
        "peerIpAddress": "40.1.3.4",
        "asNumber": "1236",
        "extAsNumber": "0.1236",
        "policyMapIn": null,
        "policyMapOut": null
      }
    }
  ]
}
```


}

The JSON schema for the **PUT bgpRouters** method is located in section 6.15.4.1.

3.1.5.17.2.1.1.2 Response Body

The format is the same as the format for the **bgpRouters GET** response body (section 3.1.5.17.2.1.2.2). The JSON schema is located in section 6.15.4.2.

3.1.5.17.2.1.1.3 Processing Details

Create a new **bgpRouters** resource or update an existing **bgpRouters** resource.

3.1.5.17.2.1.2 GET

This method retrieves a **bgpRouters** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualgatewaysVirtualGateways/{parentResourceId}/bgpRouters/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.17.2.1.2.1 Request Body

None.

3.1.5.17.2.1.2.2 Response Body

The format for the **bgpRouters GET** response body is as follows.

```
{
  "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1",
  "resourceId": "router1",
  "etag": "W/\"5fb62acf-04c7-4071-9f06-c89ea8b01b0\"",
  "instanceId": "dc972df1-cce2-44b7-a0e4-df6f882b101a",
  "properties": {
    "provisioningState": "Succeeded",
    "isEnabled": true,
    "requireIgpSync": true,
    "extAsNumber": "0.3458",
    "routerId": "10.2.2.2",
    "routerIP": [
      "10.2.2.2"
    ]
  }
}
```

```

],
"isGenerated": false,
"bgpPeers": [
  {
    "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer1",
    "resourceId": "Peer1",
    "etag": "W/\"5fb62acf-04c7-4071-9f06-c89ea8b0b1b0\"",
    "instanceId": "cb4a4eba-9716-4d22-bd51-50998181e3a8",
    "properties": {
      "provisioningState": "Succeeded",
      "asNumber": "1236",
      "extAsNumber": "0.1236",
      "peerIpAddress": "40.1.1.4",
      "connectionState": "Disconnected",
      "statistics": {
        "tcpConnectionClosed": "2016-06-15T21:56:27.063-07:00",
        "openMessageStats": {
          "sentCount": 0,
          "receivedCount": 0
        },
        "notificationMessageStats": {
          "sentCount": 0,
          "receivedCount": 0
        },
        "keepAliveMessageStats": {
          "sentCount": 0,
          "receivedCount": 0
        },
        "routeRefreshMessageStats": {
          "sentCount": 0,
          "receivedCount": 0
        },
        "updateMessageStats": {
          "sentCount": 0,
          "receivedCount": 0
        },
        "ipv4Route": {
          "updateSentCount": 0,
          "updateReceivedCount": 0,
          "withdrawlSentCount": 0,
          "withdrawlReceivedCount": 0
        },
        "ipv6Route": {
          "updateSentCount": 0,
          "updateReceivedCount": 0,
          "withdrawlSentCount": 0,
          "withdrawlReceivedCount": 0
        },
        "lastUpdated": "2016-06-16T04:56:29.6397721Z"
      },
      "isGenerated": false
    }
  },
  {
    "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer2",
    "resourceId": "Peer2",
    "etag": "W/\"5fb62acf-04c7-4071-9f06-c89ea8b0b1b0\"",
    "instanceId": "d85b9574-8d53-4b70-8b4b-4053eaeeba60",
    "properties": {
      "provisioningState": "Succeeded",
      "asNumber": "1236",
      "extAsNumber": "0.1236",
      "peerIpAddress": "40.1.2.4",
      "connectionState": "Disconnected",
      "statistics": {
        "tcpConnectionClosed": "2016-06-15T21:56:12.053-07:00",
        "openMessageStats": {
          "sentCount": 0,
          "receivedCount": 0
        },
      },
    }
  }
]

```

```

    "notificationMessageStats": {
      "sentCount": 0,
      "receivedCount": 0
    },
    "keepAliveMessageStats": {
      "sentCount": 0,
      "receivedCount": 0
    },
    "routeRefreshMessageStats": {
      "sentCount": 0,
      "receivedCount": 0
    },
    "updateMessageStats": {
      "sentCount": 0,
      "receivedCount": 0
    },
    "ipv4Route": {
      "updateSentCount": 0,
      "updateReceivedCount": 0,
      "withdrawlSentCount": 0,
      "withdrawlReceivedCount": 0
    },
    "ipv6Route": {
      "updateSentCount": 0,
      "updateReceivedCount": 0,
      "withdrawlSentCount": 0,
      "withdrawlReceivedCount": 0
    },
    "lastUpdated": "2016-06-16T04:56:29.6397721Z"
  },
  "isGenerated": false
}
},
{
  "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer3",
  "resourceId": "Peer3",
  "etag": "W/\"5fb62acf-04c7-4071-9f06-c89ea8b0b1b0\"",
  "instanceId": "3b7e4db3-c415-4b06-8d0a-b2138142a8ff",
  "properties": {
    "provisioningState": "Succeeded",
    "asNumber": "1236",
    "extAsNumber": "0.1236",
    "peerIpAddress": "40.1.3.4",
    "connectionState": "Disconnected",
    "statistics": {
      "tcpConnectionClosed": "2016-06-15T21:56:14.232-07:00",
      "openMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "notificationMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "keepAliveMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "routeRefreshMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "updateMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "ipv4Route": {
        "updateSentCount": 0,
        "updateReceivedCount": 0,
        "withdrawlSentCount": 0,

```


The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources exist, the result is returned as an empty array.

3.1.5.17.2.1.3.1 Request Body

None.

3.1.5.17.2.1.3.2 Response Body

The format for the **bgpRouters GET ALL** response body is as follows.

```
{
  "value": [
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1",
      "resourceId": "router1",
      "etag": "W/\"5fb62acf-04c7-4071-9f06-c89ea8b0b1b0\"",
      "instanceId": "dc972df1-cce2-44b7-a0e4-df6f882b101a",
      "properties": {
        "provisioningState": "Succeeded",
        "isEnabled": true,
        "requireIgpSync": true,
        "extAsNumber": "0.3458",
        "routerId": "10.2.2.2",
        "routerIP": [
          "10.2.2.2"
        ],
        "isGenerated": false,
        "bgpPeers": [
          {
            "resourceRef":
"/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer1",
            "resourceId": "Peer1",
            "etag": "W/\"5fb62acf-04c7-4071-9f06-c89ea8b0b1b0\"",
            "instanceId": "cb4a4eba-9716-4d22-bd51-50998181e3a8",
            "properties": {
              "provisioningState": "Succeeded",
              "asNumber": "1236",
              "extAsNumber": "0.1236",
              "peerIpAddress": "40.1.1.4",
              "connectionState": "Disconnected",
              "statistics": {
                "tcpConnectionClosed": "2016-06-15T22:01:03.186-07:00",
                "openMessageStats": {
                  "sentCount": 0,
                  "receivedCount": 0
                },
                "notificationMessageStats": {
                  "sentCount": 0,
                  "receivedCount": 0
                },
                "keepAliveMessageStats": {
                  "sentCount": 0,
                  "receivedCount": 0
                },
                "routeRefreshMessageStats": {
                  "sentCount": 0,
                  "receivedCount": 0
                },
                "updateMessageStats": {
                  "sentCount": 0,

```

```

        "receivedCount": 0
      },
      "ipv4Route": {
        "updateSentCount": 0,
        "updateReceivedCount": 0,
        "withdrawlSentCount": 0,
        "withdrawlReceivedCount": 0
      },
      "ipv6Route": {
        "updateSentCount": 0,
        "updateReceivedCount": 0,
        "withdrawlSentCount": 0,
        "withdrawlReceivedCount": 0
      },
      "lastUpdated": "2016-06-16T05:01:33.2899007Z"
    },
    "isGenerated": false
  }
},
{
  "resourceRef":
"/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer2",
  "resourceId": "Peer2",
  "etag": "W/\\"5fb62acf-04c7-4071-9f06-c89ea8b0b1b0\"",
  "instanceId": "d85b9574-8d53-4b70-8b4b-4053eaeeba60",
  "properties": {
    "provisioningState": "Succeeded",
    "asNumber": "1236",
    "extAsNumber": "0.1236",
    "peerIpAddress": "40.1.2.4",
    "connectionState": "Disconnected",
    "statistics": {
      "tcpConnectionClosed": "2016-06-15T22:01:21.091-07:00",
      "openMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "notificationMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "keepAliveMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "routeRefreshMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "updateMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "ipv4Route": {
        "updateSentCount": 0,
        "updateReceivedCount": 0,
        "withdrawlSentCount": 0,
        "withdrawlReceivedCount": 0
      },
      "ipv6Route": {
        "updateSentCount": 0,
        "updateReceivedCount": 0,
        "withdrawlSentCount": 0,
        "withdrawlReceivedCount": 0
      },
      "lastUpdated": "2016-06-16T05:01:33.2899007Z"
    },
    "isGenerated": false
  }
},
}
},
}

```

```

    {
      "resourceRef":
"/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer3",
      "resourceId": "Peer3",
      "etag": "W/\"5fb62acf-04c7-4071-9f06-c89ea8b01b0\"",
      "instanceId": "3b7e4db3-c415-4b06-8d0a-b2138142a8ff",
      "properties": {
        "provisioningState": "Succeeded",
        "asNumber": "1236",
        "extAsNumber": "0.1236",
        "peerIpAddress": "40.1.3.4",
        "connectionState": "Disconnected",
        "statistics": {
          "tcpConnectionClosed": "2016-06-15T22:01:27.67-07:00",
          "openMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          },
          "notificationMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          },
          "keepAliveMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          },
          "routeRefreshMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          },
          "updateMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          },
          "ipv4Route": {
            "updateSentCount": 0,
            "updateReceivedCount": 0,
            "withdrawlSentCount": 0,
            "withdrawlReceivedCount": 0
          },
          "ipv6Route": {
            "updateSentCount": 0,
            "updateReceivedCount": 0,
            "withdrawlSentCount": 0,
            "withdrawlReceivedCount": 0
          },
          "lastUpdated": "2016-06-16T05:01:33.2899007Z"
        },
        "isGenerated": false
      }
    },
    "configurationState": {
      "status": "Success",
      "lastUpdatedTime": "2016-06-15T21:34:32.1843967-07:00"
    }
  },
  "nextLink": ""
}

```

The JSON schema for the **GET ALL bgpRouters** method is located in section 6.15.4.3.

3.1.5.17.2.1.3.3 Processing Details

Retrieves all **bgpRouters** resources.

3.1.5.17.2.1.4 DELETE

This method deletes a **bgpRouters** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{parentResourceId}/bgpRouters/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.17.2.1.4.1 Request Body

None.

3.1.5.17.2.1.4.2 Response Body

None.

3.1.5.17.2.1.4.3 Processing Details

Deletes a **bgpRouters** resource.

3.1.5.17.2.2 bgpPeers

The ~~bgPeersbgpPeers~~ resource configures BGP peers of the ~~virtualGatewaysVirtualGateways~~ resource.

The peer is identified by ~~remoteRouterIdresourceId~~ and asNumber.

A [Virtual Routing and Forwarding \(VRF\)](#) context can be specified on devices that support VRF. The **routeMapIn** and **routeMapOut** properties can specify a policy map that controls the route updates that are associated with the BGP peer.

The URI for the resource is as follows.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{grandParentResourceId}/bgpRouters/  
/  
{parentResourceId}/bgpPeers/{resourceId}
```


grandParentResourceId: the identifier for the specific ancestor of the ancestor resource within the resource type. See section 2.2.3.1, for more details.

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.17.2.2.1.1	Create or update a bgpPeers resource.
GET	3.1.5.17.2.2.1.2	Get a bgpPeers resource
GET (All)ALL	3.1.5.17.2.2.1.3	List all bgpPeers resources in the Network Controller
DELETE	3.1.5.17.2.2.1.4	Deletes a bgpPeers resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
resourceId	Read-only	Indicates identifier of BGP peer.
asNumber	Read-only	Indicates the ASN number of the BGP Peer.
extAsNumber	Read/write	Indicates Extended extended ASN number of the BGP Peer in XX.YY format.
peerIpAddress	Read/write	IP address of the peer.
connectionState	Read-only	Status of BGP peering for this peer. Possible values are "Connected" and "Disconnected".
statistics	Read-only	Provides statistics for this peer.
statistics.tcpConnectionEstablished	Read-only	Timestamp of TCP connection establishment for BGP.
statistics.tcpConnectionClosed	Read-only	<u>Timestamp when the TCP connection was closed.</u>
statistics.openMessageStats	Read-only	<u>Stats for open messages.</u>
statistics.openMessageStats.lastsent	Read-only	Last sent timestamp.
statistics.openMessageStats.lastReceived	Read-only	Last received timestamp.
statistics.openMessageStats.sentCount	Read-only	Sent count.
statistics.openMessageStats.receivedCount	Read-only	Received count.

Element name	Type	Description
statistics.notificationMessageStats	Read-only	Stats for notification messages.
statistics.notificationMessageStats.sentCount	Read-only	Sent count.
statistics.notificationMessageStats.receivedCount	Read-only	Received count.
statistics.keepAliveMessageStats	Read-only	Stats for keepalive messages.
statistics.keepAliveMessageStats.lastSent	Read-only	Last sent timestamp.
statistics.keepAliveMessageStats.lastReceived	Read-only	Last received timestamp.
statistics.keepAliveMessageStats.sentCount	Read-only	Sent count.
statistics.keepAliveMessageStats.receivedCount	Read-only	Received count.
statistics.routeRefreshMessageStats	Read-only	Stats for route refresh messages.
statistics.routeRefreshMessageStats.sentCount	Read-only	Sent count.
statistics.routeRefreshMessageStats.receivedCount	Read-only	Received count.
statistics.updateMessageStats	Read-only	Stats for update messages.
statistics.updateMessageStats.lastReceived	Read-only	Last received timestamp.
statistics.updateMessageStats.sentCount	Read-only	Sent count.
statistics.updateMessageStats.receivedCount	Read-only	Received count.
statistics.ipv4Route	Read-only	Stats for IPv4 routes.
statistics.ipv4Route.updateSentCount	Read-only	Route update sent count.
statistics.ipv4Route.updateReceivedCount	Read-only	Route update received count.
statistics.ipv4Route.withdrawlSentCount	Read-only	Route withdrawal sent count.
statistics.ipv4Route.withdrawlReceivedCount	Read-only	Route withdrawal received count.
statistics.ipv6Route	Read-only	Stats for IPv6 routes.
statistics.ipv6Route.updateSentCount	Read-only	Route update sent count.
statistics.ipv6Route.updateReceivedCount	Read-only	Route update received count.
statistics.ipv6Route.withdrawlSentCount	Read-only	Route withdrawal sent count.
statistics.ipv6Route.withdrawlReceivedCount	Read-only	Route withdrawal received count.
Statistics.lastUpdated	Read-only	Time stamp when the stats were last updated.
policyMapOut	Read/write	Reference to the policy map object that is used to filter the routing updates sent to the peer.
policyMapIn	Read/write	Reference to the policy map object that is used to filter routing updates received from the peer.
isGenerated	Read-only	This flag is set to "True" TRUE for internal BGP (iBGP) peers.

Element name	Type	Description
configurationState	Optional Read-only	See configurationState in section 2.2.4. More details are given in the section for the GET operation section 3.1.5.17.2.2.1.2.

3.1.5.17.2.2.1 HTTP Methods

3.1.5.17.2.2.1.1 PUT

This method creates a new **bgpPeers** resource or updates an existing **bgpPeers** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGateways/{grandParentResourceId}/bgpRouters/{parentResourceId}/bgpPeers/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.17.2.2.1.1.1 Request Body

The format for the request body for the **bgpPeers PUT** method is as follows.

```
{
  "resourceId": "Peer1",
  "properties": {
    "peerIpAddress": "40.1.1.4",
    "asNumber": "1236",
    "extAsNumber": "0.1236",
    "policyMapIn": null,
    "policyMapOut": null
  }
}
```

The JSON schema for the **bgpPeers PUT** method is located in section 6.15.4.4.1.

3.1.5.17.2.2.1.1.2 Response Body

The format is the same as the format for the **bgpPeers GET** response body (section 3.1.5.17.2.2.1.2.2). The JSON schema is located in section 6.15.4.4.2.

3.1.5.17.2.2.1.1.3 Processing Details

Create a new **bgpPeers** resource or update an existing **bgpPeers** resource.

3.1.5.17.2.2.1.2 GET

This method retrieves a **bgpPeers** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{grandParentResourceId}/bgpRouters/{parentResourceId}/bgpPeers/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.17.2.2.1.2.1 Request Body

None.

3.1.5.17.2.2.1.2.2 Response Body

The format for the response body for the **bgpPeers GET** method is as follows.

```
{
  "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer1",
  "resourceId": "Peer1",
  "etag": "W/\"6b3cec3d-d04b-4e4b-828b-355cd29d7ece\"",
  "instanceId": "6f6a0c77-3830-4884-9b22-833f58f13e02",
  "properties": {
    "provisioningState": "Succeeded",
    "asNumber": "1236",
    "extAsNumber": "0.1236",
    "peerIpAddress": "40.1.1.4",
    "connectionState": "Disconnected",
    "statistics": {
      "tcpConnectionClosed": "2016-06-15T22:11:33.395-07:00",
      "openMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "notificationMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      }
    }
  }
}
```

```

    "keepAliveMessageStats": {
      "sentCount": 0,
      "receivedCount": 0
    },
    "routeRefreshMessageStats": {
      "sentCount": 0,
      "receivedCount": 0
    },
    "updateMessageStats": {
      "sentCount": 0,
      "receivedCount": 0
    },
    "ipv4Route": {
      "updateSentCount": 0,
      "updateReceivedCount": 0,
      "withdrawlSentCount": 0,
      "withdrawlReceivedCount": 0
    },
    "ipv6Route": {
      "updateSentCount": 0,
      "updateReceivedCount": 0,
      "withdrawlSentCount": 0,
      "withdrawlReceivedCount": 0
    },
    "lastUpdated": "2016-06-16T05:11:39.7306466Z"
  },
  "isGenerated": false
}
}

```

The JSON schema for the **bgpPeers GET** method is located in section 6.15.4.4.2.

3.1.5.17.2.2.1.2.3 Processing Details

Retrieves a **bgpPeers** resource.

3.1.5.17.2.2.1.3 GET ~~(All)~~ALL

This method retrieves all **bgpPeers** resources.

It is invoked through the following URI.

```

https://<url>/networking/v1/virtualGatewaysVirtualGateways/{grandParentResourceId}/bgpRouters
/{parentResourceId}/bgpPeers

```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources exist, the result is returned as an empty array.

3.1.5.17.2.2.1.3.1 Request Body

None.

3.1.5.17.2.2.1.3.2 Response Body

The format for the response body for the **bgpPeers GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer1",
      "resourceId": "Peer1",
      "etag": "W/\"6b3cec3d-d04b-4e4b-828b-355cd29d7ece\"",
      "instanceId": "6f6a0c77-3830-4884-9b22-833f58f13e02",
      "properties": {
        "provisioningState": "Succeeded",
        "asNumber": "1236",
        "extAsNumber": "0.1236",
        "peerIpAddress": "40.1.1.4",
        "connectionState": "Disconnected",
        "statistics": {
          "tcpConnectionClosed": "2016-06-15T22:11:33.395-07:00",
          "openMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          },
          "notificationMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          },
          "keepAliveMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          },
          "routeRefreshMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          },
          "updateMessageStats": {
            "sentCount": 0,
            "receivedCount": 0
          },
          "ipv4Route": {
            "updateSentCount": 0,
            "updateReceivedCount": 0,
            "withdrawlSentCount": 0,
            "withdrawlReceivedCount": 0
          },
          "ipv6Route": {
            "updateSentCount": 0,
            "updateReceivedCount": 0,
            "withdrawlSentCount": 0,
            "withdrawlReceivedCount": 0
          },
          "lastUpdated": "2016-06-16T05:11:39.7306466Z"
        },
        "isGenerated": false
      }
    },
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer2",
      "resourceId": "Peer2",
      "etag": "W/\"6b3cec3d-d04b-4e4b-828b-355cd29d7ece\"",
      "instanceId": "6dfc12fb-484a-4771-98f9-6c1d4ffbaa1a",
      "properties": {
        "provisioningState": "Succeeded",
        "asNumber": "1236",
        "extAsNumber": "0.1236",
        "peerIpAddress": "40.1.2.4",
      }
    }
  ]
}
```

```

"connectionState": "Disconnected",
"statistics": {
  "tcpConnectionClosed": "2016-06-15T22:11:33.41-07:00",
  "openMessageStats": {
    "sentCount": 0,
    "receivedCount": 0
  },
  "notificationMessageStats": {
    "sentCount": 0,
    "receivedCount": 0
  },
  "keepAliveMessageStats": {
    "sentCount": 0,
    "receivedCount": 0
  },
  "routeRefreshMessageStats": {
    "sentCount": 0,
    "receivedCount": 0
  },
  "updateMessageStats": {
    "sentCount": 0,
    "receivedCount": 0
  },
  "ipv4Route": {
    "updateSentCount": 0,
    "updateReceivedCount": 0,
    "withdrawalSentCount": 0,
    "withdrawalReceivedCount": 0
  },
  "ipv6Route": {
    "updateSentCount": 0,
    "updateReceivedCount": 0,
    "withdrawalSentCount": 0,
    "withdrawalReceivedCount": 0
  },
  "lastUpdated": "2016-06-16T05:11:39.7306466Z"
},
"isGenerated": false
},
{
  "resourceRef": "/VirtualGateways/VirtualGateway_1/BgpRouters/router1/BgpPeers/Peer3",
  "resourceId": "Peer3",
  "etag": "W/\"6b3cec3d-d04b-4e4b-828b-355cd29d7ece\"",
  "instanceId": "d6bc7e33-4ac9-4f74-a3f2-81c39eb2a85d",
  "properties": {
    "provisioningState": "Succeeded",
    "asNumber": "1236",
    "extAsNumber": "0.1236",
    "peerIpAddress": "40.1.3.4",
    "connectionState": "Disconnected",
    "statistics": {
      "tcpConnectionClosed": "2016-06-15T22:11:33.425-07:00",
      "openMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "notificationMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "keepAliveMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "routeRefreshMessageStats": {
        "sentCount": 0,
        "receivedCount": 0
      },
      "updateMessageStats": {

```

```

        "sentCount": 0,
        "receivedCount": 0
    },
    "ipv4Route": {
        "updateSentCount": 0,
        "updateReceivedCount": 0,
        "withdrawlSentCount": 0,
        "withdrawlReceivedCount": 0
    },
    "ipv6Route": {
        "updateSentCount": 0,
        "updateReceivedCount": 0,
        "withdrawlSentCount": 0,
        "withdrawlReceivedCount": 0
    },
    "lastUpdated": "2016-06-16T05:11:39.7306466Z"
},
"isGenerated": false
}
}
],
"nextLink": ""
}

```

The JSON schema for the **bgpPeers GET ALL** method is located in section 6.15.4.4.3.

3.1.5.17.2.2.1.3.3 Processing Details

Retrieves all **bgpPeers** resources.

3.1.5.17.2.2.1.4 DELETE

This method deletes a **bgpPeers** resource.

It is invoked through the following URI.

```

https://<url>/networking/v1/virtualGatewaysVirtualGateways/{grandParentResourceId}/bgpRouters
/{parentResourceId}/bgpPeers/{resourceId}

```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.17.2.2.1.4.1 Request Body

None.

3.1.5.17.2.2.1.4.2 Response Body

None.

3.1.5.17.2.2.1.4.3 Processing Details

This method deletes a **bgpPeers** resource.

3.1.5.17.3 policyMaps

The **policyMaps** resource contains the configuration needed for the routing policies for the **Border Gateway Protocol** (BGP) router in the virtual gateway to be able to exchange routing information with peers. ~~It is invoked through the following URI.~~

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{parentResourceId}/policyMaps/{resourceId}
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.17.3.1.1	Create or update a policyMaps .
GET	3.1.5.17.3.1.2	Get a policyMaps resource.
GET (All) ALL	3.1.5.17.3.1.3	List all policyMaps resources in the Network Controller.
DELETE	3.1.5.17.3.1.4	Delete a policyMaps resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
policyMapEntryList[]		Indicates list of policies (objects of type policyMapEntry) .
policyMapEntry.policyName	Read/write	Indicates the name of the policy.
policyMapEntry.action	Read/write	Indicates type of policy (Deny (Allow (or ModifyAttribute).
policyMapEntry.matchCriteria[]	Read/write	Indicates criteria to be matched (objects of type policyMapEntryMatchCriteria) .
policyMapEntry.matchCriteria.property	Read/write	Indicates clause to be matched (MatchPrefix (

Element name	Type	Description
		NextHop+; IgnorePrefix+; AsnRange+; <u>or</u> Community).
policyMapEntry.matchCriteria.values	Read/write	Indicates values for the property to be matched with the ingress <u>for</u> egress packet.
policyMapEntry.setActions[]	Read/write	Indicates action to be taken once there is match in criteria+; objects of type policyMapEntrySetAction +;
policyMapEntry.setActions.property	Read/write	Enum that indicates the property of the egress/ingress data packet to update if match criteria specified in the entry are successfully matched with the data packet (As-Path+; Add-Community+; Remove-Community+; Remove-All-Community+; MED+; Clear-MED+; Weight+; Local-Pref+; <u>or</u> Next-Hop).
policyMapEntry.setActions.value	Read/write	New value of the property specified in policyMapEntry.setActions.property to updated in the ingress/egress data packet.
bgpPeersWithPolicyMapIn	Read/write	Collection of back references to BGP peers on which this policy map has been set as a route map to filter incoming routes.
bgpPeersWithPolicyMapOut	Read/write	Collection of back references to BGP peers on which this policy map has been set as a route map to filter outgoing routes.

3.1.5.17.3.1 HTTP Methods

3.1.5.17.3.1.1 PUT

This method creates a new policy Map resource or update an existing policy Map resource for a switch.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{parentResourceId}/policyMaps/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)

Status code
500 (Internal Server Error)

3.1.5.17.3.1.1.1 Request Body

The format for the request body for the **policyMaps PUT** method is as follows.

```
{
  "resourceId": "MAP1",
  "etag": "W/\"fe4cd15f-f117-449a-b819-9fd007a1abdf\"",
  "instanceId": "c8b34df3-cc7b-4eab-9ccf-97512e6014a9",
  "properties": {
    "provisioningState": "Succeeded",
    "policyMapEntryList": [
      {
        "policyName": "INPOLICY1",
        "action": "Deny",
        "matchCriteria": [
          {
            "property": "MatchPrefix",
            "value": [
              "5.4.3.2/32",
              "5.4.3.1/32"
            ]
          },
          {
            "property": "NextHop",
            "value": [
              "4.3.2.1",
              "6.4.3.1"
            ]
          }
        ],
        "setActions": [
        ]
      }
    ]
  }
}
```

The JSON schema for the **policyMaps PUT** method is located in section 6.15.5.1.

3.1.5.17.3.1.1.2 Response Body

The format is the same as the format for the **GET policyMaps** response body (section 3.1.5.17.3.1.2.2). The JSON schema is located in section 6.15.5.2.

3.1.5.17.3.1.1.3 Processing Details

Create a new **policyMaps** resource or update an existing **policyMaps** resource.

3.1.5.17.3.1.2 GET

This method retrieves a policyMap resource.

It is invoked through the following URI.

https://<url>/networking/v1/virtualGatewaysVirtualGateways/{parentResourceId}/portChannels/{resourceId}

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.17.3.1.2.1 Request Body

None.

3.1.5.17.3.1.2.2 Response Body

The format for the **policyMaps GET** response body is as follows.

```
{
  "resourceRef": "/VirtualGateways/VirtualGateway_1/PolicyMaps/MAP1",
  "resourceId": "MAP1",
  "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
  "instanceId": "b52840f9-91a9-4a3e-91b3-0383ae1ea607",
  "properties": {
    "provisioningState": "Succeeded",
    "bgpPeersWithPolicyMapIn": [],
    "bgpPeersWithPolicyMapOut": [],
    "policyMapEntryList": [
      {
        "action": "Deny",
        "matchCriteria": [
          {
            "property": "MatchPrefix",
            "value": [
              "5.4.3.2/32",
              "5.4.3.1/32"
            ]
          },
          {
            "property": "NextHop",
            "value": [
              "4.3.2.1",
              "6.4.3.1"
            ]
          }
        ],
        "setActions": []
      }
    ]
  }
}
```

The JSON schema for the **policyMaps GET** method is located in section 6.15.5.2.

3.1.5.17.3.1.2.3 Processing Details

Retrieves a policyMap resource.

3.1.5.17.3.1.3 GET ~~(All)~~ALL

This method retrieves all policyMap resources defined for a switch.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways{parentResourceId}/policyMaps/
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources exist, the result is returned as an empty array.

3.1.5.17.3.1.3.1 Request Body

None.

3.1.5.17.3.1.3.2 Response Body

The format for the **policyMaps GET ALL** method response body is as follows.

```
{
  "value": [
    {
      "resourceRef": "/VirtualGateways/VirtualGateway_1/PolicyMaps/MAP1",
      "resourceId": "MAP1",
      "etag": "W/\"681f2608-6588-49d2-ba50-85db700a4300\"",
      "instanceId": "b52840f9-91a9-4a3e-91b3-0383ae1ea607",
      "properties": {
        "provisioningState": "Succeeded",
        "bgpPeersWithPolicyMapIn": [],
        "bgpPeersWithPolicyMapOut": [],
        "policyMapEntryList": [
          {
            "action": "Deny",
            "matchCriteria": [
              {
                "property": "MatchPrefix",
                "value": [
                  "5.4.3.2/32",
                  "5.4.3.1/32"
                ]
              },
              {
                "property": "NextHop",
                "value": [
                  "4.3.2.1",
                  "6.4.3.1"
                ]
              }
            ]
          }
        ]
      }
    }
  ]
}
```

```

    ]
  },
  "setActions": []
}
]
}
],
"nextLink": ""
}

```

The JSON schema for the **policyMaps GET ALL** method is located in section 6.15.5.3.

3.1.5.17.3.1.3.3 Processing Details

List all **policyMaps** resources in the Network Controller.

3.1.5.17.3.1.4 DELETE

This method deletes a policyMap resource.

It is invoked through the following URI.

```

https://<url>/networking/v1/virtualGatewaysVirtualGateways//policyMaps/{resourceId}

```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.17.3.1.4.1 Request Body

None.

3.1.5.17.3.1.4.2 Response Body

None.

3.1.5.17.3.1.4.3 Processing Details

Deletes a policyMap resource.

3.1.5.17.4 networkConnections

The **networkConnections** resource specifies a connection from virtual network to external networks. Multiple connections can exist for a given virtual network and there are different types of connections.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{parentResourceId}/networkConnections/{resourceId}
```

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.17.4.1.1	Create or update a networkConnections resource.
GET	3.1.5.17.4.1.2	Get a networkConnections resource.
GET (All) ALL	3.1.5.17.4.1.3	List all networkConnections resources in the Network Controller.
DELETE	3.1.5.17.4.1.4	Delete a networkConnections resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
resourceId	Required	Friendly name of the connection.
connectionType	Read/write	Indicates type of connection. Valid values are IPsec, GRE, or L3 (Forward Forwarding).
outboundKiloBitsPerSecond	Read/write	Indicates maximum allowed outbound bandwidth in Kbps.
inboundKiloBitsPerSecond	Read/write	Indicates maximum allowed outbound inbound bandwidth in Kbps.
ipsecConfiguration	Read/write	Details of IPsec configuration.
ipsecConfiguration.authenticationMethod	Read/write	Indicates authentication method. PSK is the only valid value.
ipsecConfiguration.sharedsecret	Write	The shared secret used for this NetworkConnection. Note this is write-only property and the value of this field is not shown in the GET of networkconnection- networkConnections.
ipsecConfiguration.mainMode	Read/write	Main mode IPsec configuration details, as

Element name	Type	Description
		specified in [RFC2409] .
ipsecConfiguration.mainMode.diffieHellmanGroup	Read/write	Indicates Diffie Hellman group used during main mode IKE negotiation-, as specified in [RFC5996] . Values: Group1+ Group2+ Group14+ ECP256+ ECP384+ or Group24.
ipsecConfiguration.mainMode.integrityAlgorithm	Read/write	Indicates Integrity algorithm used during main mode IKE negotiation-, as specified in [RFC4306] . Values: MD5+ SHA196+ SHA256+ or SHA384.
ipsecConfiguration.mainMode.encryptionAlgorithm	Read/write	Indicates cipher algorithm used during main mode IKE negotiation. Values: DES+ DES3+ AES128+ AES192+ or AES256.
ipsecConfiguration.mainMode.saLifeTimeSeconds	Read/write	Indicates life time of security association (SA) in seconds-, as specified in [RFC4301] .
ipsecConfiguration.mainMode.saLifeTimeKilobytes	Read/write	Indicates life time of SA in Kilobytes. Ignored by IPsec.
ipsecConfiguration.quickMode	Read/write	Quick mode IPsec configuration.
ipsecConfiguration.quickMode.perfectForwardSecrecy	Read/write	Indicates whether Perfect Forward Secrecy is enabled or not. If enabled specifies the algorithm. Values: None+ PFS1+ PFS2+ PFS2048+ PFS14+ ECP256+ ECP384+ PFSMM+ or PFS24.
ipsecConfiguration.quickMode.cipherTransformationConstant	Read/write	Indicates the encryption algorithm used for data traffic. Values: None+ DES+ CBCDES+ DES3+ CBCDES3+ AES128+ AES192+ AES256+ AES128CBC+ AES192CBC+ AES256+ GCMAES128+ GCMAES192+ or GCMAES256.
ipsecConfiguration.quickMode.authenticationTransformationConstant	Read/write	Indicates the authentication transform used for data traffic. Values: None+ MD596+ SHA196+ SHA256+ GCMAES128+ GCMAES192+ GCMAES256.
ipsecConfiguration.quickMode.saLifeTimeSeconds	Read/write	Indicates life time of SA in seconds.
ipsecConfiguration.quickMode.saLifeTimeKilobytes	Read/write	Indicates life time of SA in Kilobytes.
ipsecConfiguration.quickMode.idleDisconnectSeconds	Read/write	Indicates idle time after which SA is disconnected.
ipsecConfiguration.localVpnTrafficSelector	Read/write	Indicates collection of IPsec TrafficSelectors on the hoster/host side.

Element name	Type	Description
ipsecConfiguration.localVpnTrafficSelector.Type	Read/write	Indicates whether traffic is IPv4 or IPv6.
ipsecConfiguration.localVpnTrafficSelector.ProtocolId	Read/write	Indicates IP protocol ID (such as UDP, TCP, and ICMP).
ipsecConfiguration.localVpnTrafficSelector.PortStart	Read/write	Indicates start of port range.
ipsecConfiguration.localVpnTrafficSelector.PortEnd	Read/write	Indicates end of port range.
ipsecConfiguration.localVpnTrafficSelector.IpAddressStart	Read/write	Indicates start of IP addresses.
ipsecConfiguration.localVpnTrafficSelector.IpAddressEnd	Read/write	Indicates end of IP addresses.
ipsecConfiguration.localVpnTrafficSelector.tsPayloadId	Read/write	Indicates the ID of the TrafficSelector payload.
ipsecConfiguration.remoteVpnTrafficSelector	Read/write	Indicates collection of IPsec TrafficSelectors on the tenant side.
ipsecConfiguration.remoteVpnTrafficSelector.Type	Read/write	Indicates whether traffic is IPv4 or IPv6.
ipsecConfiguration.remoteVpnTrafficSelector.ProtocolId	Read/write	Indicates IP protocol ID (such as UDP, TCP, and ICMP).
ipsecConfiguration.remoteVpnTrafficSelector.PortStart	Read/write	Indicates start of port range.
ipsecConfiguration.remoteVpnTrafficSelector.PortEnd	Read/write	Indicates end of port range.
ipsecConfiguration.remoteVpnTrafficSelector.IpAddressStart	Read/write	Indicates start of IP addresses.
ipsecConfiguration.remoteVpnTrafficSelector.IpAddressEnd	Read/write	Indicates end of IP addresses.
IpAddress	Read/write	Indicates ConnectTo Address to which peers connect to and which is the source IP address in egress direction. This would be the VIP.
ipAddresses	Read/write	IP assigned in the tenant compartment for L3 interface.
ipAddresses.ipAddress	Read/write	IP address for L3 interface in tenant compartment.
ipAddress.prefixLength	Read/write	Prefix length of the IP address.
PeerIpAddress	Read/write	Indicates peer IP address to which connection is made. Used by L3 interface.
SourceIpAddress	Read/write	Indicates sourceIpAddress used by the tunnel. Applicable to IKEv2 and GRE.
destinationIpAddress	Read/write	Indicates destination ip address of the tunnel. Applicable to IKEv2 and GRE.

Element name	Type	Description
routes[]	Read/write	List of all the routes (static and those learned via BGP) on the network Interface. Traffic matching the routes is transmitted on the network Interface.
routes.destinationPrefix	Required	Prefix with subnet of the routes.
routes.nextHop	Optional	Next Hop of the routes. Is significant only for L3 connections. Has no significance for point to point connections such as IPsec & GRE.
routes.metric	Optional	Indicates Metric of the route.
routes.protocol	Read-only	Indicates how the route is learnt/added (static + BGP).
ConnectionStatus	Read/write	Indicates administrative status of connection. Values: enabled disabled Enabled or Disabled.
ConnectionState	Read/write	Indicates operational status of connection. Values: Connected + Disconnected.
statistics	Read-only	Statistics of the connection.
statistics.outboundBytes	Read-only	Indicates number of bytes transmitted.
statistics.inboundBytes	Read-only	Indicates number of bytes received.
statistics.rxTotalPacketsDropped	Read-only	Indicates number of packets dropped in ingress (receiving (Rx)) direction.
statistics.txTotalPacketsDropped	Read-only	Indicates number of packets dropped in egress (transmitting (Tx)) direction.
statistics.txRateKbps	Read-only	Indicates rate at which traffic is going out in Kbps.
statistics.rxRateKbps	Read-only	Indicates rate at which traffic is coming in Kbps.
statistics.txRateLimitedPacketsDropped	Read-only	Indicates number of packets dropped in egress direction due to rate limiting.
statistics.rxRateLimitedPacketsDropped	Read-only	Indicates number of packets dropped in ingress direction due to rate limiting.
statistics.lastUpdated	Read-only	Indicates the time the statistics were last updated.
ConnectionUpTime	Read-only	Indicates operations up time of the connection in seconds.
ConnectionErrorReason	Read-only	Indicates the reason for not being able to connect after dialling in the previous attempt.
unreachabilityReason	Read-only	Indicates the reason for not being able to connect/dial in the previous attempt.
greConfiguration	Read/write	Indicates details of GRE configuration.
greConfiguration.greKey	Read/write	Indicates GRE key.

Element name	Type	Description
I3Configuration	Read/write	Indicates details of L3 configuration.
I3Configuration.vlanSubnet	Read/write	Reference to a logical subnet of L3 connection.
gateway	ResourceRef	Reference of the gateway on which the connection exists.
configurationState	Optional Read-only	Indicates the last known running state of this connection. See specification in section 2.2.4. More details are given in the section for the GET operation section 3.1.5.17.4.1.2.

3.1.5.17.4.1 HTTP Methods

3.1.5.17.4.1.1 PUT

This method creates a new **networkConnections** resource or updates an existing **networkConnections** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{parentResourceId}/networkConnections/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.17.4.1.1.1 Request Body

The format for the request body for the **networkConnections PUT** method is as follows.

```
"resourceRef":
"/VirtualGateways/VirtualGatewayTenant_1/NetworkConnections/VirtualGatewayTenant_1_IPSEC_1",
"resourceId": "VirtualGatewayTenant_1_IPSEC_1",
"properties": {
  "connectionType": "IPSec",
  "outboundKiloBitsPerSecond": 1000700000,
```

```

"inboundKiloBitsPerSecond": 1000700000,
"ipSecConfiguration": {
  "authenticationMethod": "PSK",
  "SharedSecret": "123abc",
  "quickMode": {
    "perfectForwardSecrecy": "PFS2048",
    "cipherTransformationConstant": "DES3",
    "authenticationTransformationConstant": "SHA256128",
    "idleDisconnectSeconds": 500,
    "saLifeTimeSeconds": 1233,
    "saLifeTimeKiloBytes": 2000
  },
  "mainMode": {
    "diffieHellmanGroup": "Group2",
    "encryptionAlgorithm": "AES256",
    "integrityAlgorithm": "SHA256",
    "saLifeTimeSeconds": 1234,
    "saLifeTimeKiloBytes": 2000
  },
  "localVpnTrafficSelector": [
    {
      "type": "IPv4",
      "protocolId": 0,
      "portStart": 0,
      "portEnd": 65535,
      "ipAddressStart": "0.0.0.0",
      "ipAddressEnd": "255.255.255.255",
      "tsPayloadId": 0
    }
  ],
  "remoteVpnTrafficSelector": [
    {
      "type": "IPv4",
      "protocolId": 0,
      "portStart": 0,
      "portEnd": 65535,
      "ipAddressStart": "0.0.0.0",
      "ipAddressEnd": "255.255.255.255",
      "tsPayloadId": 0
    }
  ]
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
  {
    "destinationPrefix": "50.1.110.2.3.0/24",
    "nextHop": "": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  },
  {
    "destinationPrefix": "40.1.1.4/32",
    "nextHop": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  }
],
"connectionStatus": "Enabled",
"destinationIPAddress": "11.1.0.1",
}

```

The JSON schema for the **networkConnections PUT** method is contained within the **virtualGatewaysVirtualGateways PUT** method schema in section 6.15.1.

3.1.5.17.4.1.1.2 Response Body

The format is the same as the format for the **networkConnections GET** response body (section 3.1.5.17.4.1.2.2). The JSON schema for the **networkConnections GET** method is contained within the **virtualGatewaysVirtualGateways GET** method schema in section 6.15.2.

3.1.5.17.4.1.1.3 Processing Details

Create a new **networkConnections** resource or update an existing **networkConnections** resource.

3.1.5.17.4.1.2 GET

This method retrieves a **networkConnections** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways/{parentResourceId}/networkConnections/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.17.4.1.2.1 Request Body

None.

3.1.5.17.4.1.2.2 Response Body

The format for the **networkConnections GET** response body is as follows.

```
{
  "resourceRef":
  "/VirtualGateways/VirtualGatewayTenant_1/NetworkConnections/VirtualGatewayTenant_1_IPSEC_1",
  "resourceId": "VirtualGatewayTenant_1_IPSEC_1",
  "etag": "W/\"8559fe48-df3e-4765-8515-e43151d93cfe\"",
  "ae62a1d6-a1ea-48a7-a122-56db52d5e7ee\"",
  "instanceId": "a192d851-0849-4d88-a0d5-86647f1b9efc",
  "827c5920-ce65-4175-a18f-6dfd84538a14",
  "properties": {
    "provisioningState": "Succeeded",
    "connectionType": "IPSec",
    "outboundKiloBitsPerSecond": 1000, 700000,
    "inboundKiloBitsPerSecond": 1000, 700000,
    "ipSecConfiguration": {
      "authenticationMethod": "PSK",
      "quickMode": {
```

```

    "perfectForwardSecrecy": "PFS2048",
    "cipherTransformationConstant": "DES3",
    "authenticationTransformationConstant": "SHA256128",
    "idleDisconnectSeconds": 500,
    "saLifeTimeSeconds": 1233,
    "saLifeTimeKiloBytes": 2000
  },
  },
  "mainMode": {
    "diffieHellmanGroup": "Group2",
    "encryptionAlgorithm": "AES256",
    "integrityAlgorithm": "SHA256",
    "saLifeTimeSeconds": 1234,
    "saLifeTimeKiloBytes": 2000
  },
  },
  "localVpnTrafficSelector": [
    {
      "type": "IPv4",
      "protocolId": 0,
      "portStart": 0,
      "portEnd": 65535,
      "ipAddressStart": "0.0.0.0",
      "ipAddressEnd": "255.255.255.255",
      "tsPayloadId": 0
    }
  ],
  "remoteVpnTrafficSelector": [
    {
      "type": "IPv4",
      "protocolId": 0,
      "portStart": 0,
      "portEnd": 65535,
      "ipAddressStart": "0.0.0.0",
      "ipAddressEnd": "255.255.255.255",
      "tsPayloadId": 0
    }
  ]
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
  {
    "destinationPrefix": "50.1.1.0/24",
    "nextHop": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  },
  {
    "destinationPrefix": "40.1.1.4/32",
    "nextHop": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  }
],
"connectionStatus": "Enabled",
"connectionErrorReason": "0",
"unreachabilityReason": "",
"statistics": {
  "outboundBytes": 0,
  "inboundBytes": 0,
  "txTotalPacketsDropped": 0,
  "txRateKbps": 0,
  "rxRateKbps": 0,
  "txRateLimitedPacketsDropped": 0,
  "rxRateLimitedPacketsDropped": 0,
  "lastUpdated": "2016-02-19T10:48:49.9938698Z"
},

```

```

"configurationState": {
  "status": "Success",
  "lastUpdatedTime": "2016-02-19T02:48:49.3532316-08:00"
},
"sourceIPAddress": "91.1.1.4",
"destinationIPAddress": "11.1.0.1",

"routes": [
  {
    "destinationPrefix": "10.2.3.0/24",
    "nextHop": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  }
],
"connectionStatus": "Enabled",
"connectionState": "Disconnected",
"connectionUpTime": "00:00:00",
"connectionErrorReason": "809",
"unreachabilityReason": "ConnectionFailure",
"statistics": {
  "outboundBytes": 0,
  "inboundBytes": 0,
  "rxTotalPacketsDropped": 0,
  "txTotalPacketsDropped": 0,
  "txRateKbps": 0,
  "rxRateKbps": 0,
  "txRateLimitedPacketsDropped": 0,
  "rxRateLimitedPacketsDropped": 0,
  "lastUpdated": "2016-01-14T08:26:37.8964269Z"
},
"gateway": {
  "resourceRef": "/Gateways/CloudGw1\"CloudGW2"
}
}
}
}}

```

The JSON schema for the **networkConnections GET** method is contained within the **virtualGatewaysVirtualGateways GET** method schema in section 6.15.2.

3.1.5.17.4.1.2.3 Processing Details

Get one **networkConnections** resource.

The server returns a configuration state only if it has already attempted to configure settings according to the REST resource properties that were created or updated by using the **PUT** method. **configurationState.lastUpdatedTime** is set to a value that is implementation-specific.

The server MUST return a configuration state property **configurationState.status** set to "Success" if there were no errors. The server MUST return a configuration state property **configurationState.status** set to a value other than "Failure" if there were errors during configuration of settings. **configurationState.detailedInfo** contains an array of objects per the specification in section 2.2.4. The following table contains acceptable values in the response when status is not "Success".

configurationState.status	Code inside configurationState.detailedInfo array	Description
Failure	HostUnreachable	Unable to configure settings related to connections on gateways.

3.1.5.17.4.1.3 GET ~~(All)~~ALL

This method retrieves all **networkConnections** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualGatewaysVirtualGateways{parentResourceId}/networkConnections
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.17.4.1.3.1 Request Body

None.

3.1.5.17.4.1.3.2 Response Body

The format for the **networkConnections GET ALL** response body is as follows.

```
{
  "resourceRef":
  "/VirtualGateways/VirtualGatewayTenant_1/NetworkConnections/VirtualGatewayTenant_1_IPSEC_1",
  "resourceId": "VirtualGatewayTenant_1_IPSEC_1",
  "etag": "W/\"8559fe48-df3e-4765-8515-e43151d93cfe\"",
  "ae62a1d6-alea-48a7-a122-56db52d5e7ee\"",
  "instanceId": "a192d851-0849-4d88-a0d5-86647f1b9efc",
  "827c5920-ce65-4175-a18f-6dfd84538a14", "properties": {
    "provisioningState": "Succeeded",
    "connectionType": "IPSec",
    "outboundKiloBitsPerSecond": 1000,700000,
    "inboundKiloBitsPerSecond": 1000,700000,
    "ipSecConfiguration": {
      "authenticationMethod": "PSK",
      "quickMode": {
        "perfectForwardSecrecy": "PFS2048",
        "cipherTransformationConstant": "DES3",
        "authenticationTransformationConstant": "SHA256128",
        "idleDisconnectSeconds": 500,
        "saLifeTimeSeconds": 1233,
        "saLifeTimeKiloBytes": 2000
      },
    },
    "mainMode": {
      "diffieHellmanGroup": "Group2",
      "encryptionAlgorithm": "AES256",
      "integrityAlgorithm": "SHA256",
      "saLifeTimeSeconds": 1234,
      "saLifeTimeKiloBytes": 2000
    },
  },
}
```



```

"localVpnTrafficSelector": [
  {
    "type": "IPv4",
    "protocolId": 0,
    "portStart": 0,
    "portEnd": 65535,
    "ipAddressStart": "0.0.0.0",
    "ipAddressEnd": "255.255.255.255",
    "tsPayloadId": 0
  }
],
"remoteVpnTrafficSelector": [
  {
    "type": "IPv4",
    "protocolId": 0,
    "portStart": 0,
    "portEnd": 65535,
    "ipAddressStart": "0.0.0.0",
    "ipAddressEnd": "255.255.255.255",
    "tsPayloadId": 0
  }
]
},
"l3Configuration": {},
"ipAddresses": [],
"peerIPAddresses": [],
"routes": [
  {
    "destinationPrefix": "50.1.1.0/24",
    "nextHop": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  },
  {
    "destinationPrefix": "40.1.1.4/32",
    "nextHop": "0.0.0.0",
    "metric": 10,
    "protocol": "Static"
  }
],
"connectionStatus": "Enabled",
"connectionErrorReason": "0",
"unreachabilityReason": "",
"statistics": {
  "outboundBytes": 0,
  "lastUpdated": "2016-02-19T10:48:49.9938698Z"
},
"configurationState": {
  "status": "Success",
  "lastUpdatedTime": "2016-02-19T02:48:49.3532316-08:00"
},
"sourceIPAddress": "91.1.1.4",
"destinationIPAddress": "11.1.0.1",

"routes": [
  {
    "destinationPrefix": "10.2.3.0/24",
    "metric": 10,
    "protocol": "Static"
  }
],
"connectionStatus": "Enabled",
"connectionState": "Disconnected",
"connectionUpTime": "00:00:00",
"connectionErrorReason": "809",
"unreachabilityReason": "ConnectionFailure",

"statistics": {
  "outboundBytes": 0,

```

```

    "inboundBytes": 0,
    "rxTotalPacketsDropped": 0,
    "txTotalPacketsDropped": 0,
    "txRateKbps": 0,
    "rxRateKbps": 0,
    "txRateLimitedPacketsDropped": 0,
    "rxRateLimitedPacketsDropped": 0,
    "lastUpdated": "2016-01-14T08:26:37.8964269Z"
  },
  "gateway": {
    "resourceRef": "/Gateways/CloudGw1"
  }
}CloudGW2"
}
}

```

The JSON schema for the **networkConnections GET ALL** method is contained within the **virtualGatewaysVirtualGateways GET ALL** method schema in section 6.15.3.

3.1.5.17.4.1.3.3 Processing Details

Retrieves all **networkConnections** resources.

3.1.5.17.4.1.4 DELETE

This method deletes a **networkConnections** resource.

It is invoked through the following URI.

```

https://<url>/networking/v1/virtualGatewaysVirtualGateways/{parentResourceId}/networkConnections/{resourceId}

```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.17.4.1.4.1 Request Body

None.

3.1.5.17.4.1.4.2 Response Body

None.

3.1.5.17.4.1.4.3 Processing Details

Deletes a **networkConnections** resource.

3.1.5.18 virtualNetworks

The **virtualNetworks** resource is used to create a virtual network using [Hyper-v network virtualization \(HNV\)](#) for tenant overlays. The default encapsulation for **virtualNetworks** is Virtual Extensible LAN ([VXLAN](#)) but this can be changed by updating the **virtualNetworkManager** resource. Similarly, the HNV Distributed Router is enabled by default but this can be overridden using the **virtualNetworkManager** resource.

The URI for it is invoked through the [resource is as follows following URIs](#).

```
https://<url>/networking/v1/virtualNetworks/{resourceId}
```

```
https://<url>/networking/v2/virtualNetworks/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.18.1.1	Create a new virtualNetworks resource or update an existing virtualNetworks resource.
GET	3.1.5.18.1.2	Get one virtualNetworks resource
GET (All)	3.1.5.18.1.3	List all virtualNetworks resources in the Network Controller
DELETE	3.1.5.18.1.4	Deletes a virtualNetworks resource

The following property elements are valid: <9>

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
logicalNetwork	Required	Indicates a reference to the networks resource that is the underlay network which the virtual network runs on.
subnets[]	Optional	Indicates the subnets that are on the virtual network. For more details see section 3.1.5.18.2.
addressSpace	Required	Indicates the address space of the virtual network.
addressSpace.addressPrefixes[]	Required	Indicates the valid list of address prefixes that can make up this virtual network. The value is an array of address prefixes in the format of 0.0.0.0/0. The space cannot be shrunk if addresses are in use in a subnet belonging to the virtual network.
dhcpOptions	Optional	Indicates the DHCP options used by servers in the virtual

Element name	Type	Description
		network.
dhcpOptions.dnsServers	Optional	Indicates an array of DNS servers that are being used by the virtual network.<10>
configurationState	Optional Read-only	See configurationState in section 2.2.4. More details are given in the section for the GET operation section 3.1.5.18.1.2.
configurationState.id		This is the instance ID of the virtual network resource.
configurationState.hostErrors		An array of configurationState objects as specified in section 2.2.4. The values for the various fields are the same as for the network interface configuration state specified in section 3.1.5.11.
UnbilledAddressRanges	Optional	Comma separated values of IP ranges for which egress traffic is not billed (not tallied towards billing).
EncryptionCredential	Optional	Reference to a credential resource of type X509 certificate. The certificate will be used to encrypt virtualized traffic for this virtual network. The certificate must be installed on all the hosts (servers) in both the "Root" and the "MY" stores of the local machine.

3.1.5.18.1 HTTP Methods

3.1.5.18.1.1 PUT

Create a new ~~virtualNetwork~~**virtualNetworks** resource or update an existing virtualNetwork resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualNetworks/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.18.1.1.1 Request Body

The format for the request body for the **virtualNetworks PUT** method is as follows.

```
{
  "properties": {
    "addressSpace": {
      "addressPrefixes": [
        "20.169.0.0/16"
      ]
    },
    "subnets": [
      {
        "resourceId": "919a1273-fb13-4810-b85b-f6474df694a9",
        "properties": {
          "addressPrefix": "20.169.0.0/16",
          "accessControlList": {
            "resourceRef": "/accessControlLists/7165e618-7957-43e9-9727-644b0021da7f"
          }
        }
      }
    ],
    "logicalNetwork": {
      "resourceRef": "/logicalnetworkslogicalNetworks/7d14191e-5b55-4e99-9059-a42d120da0ce"
    }
  }
}
```

The JSON schema for the **virtualNetworks PUT** method is located in section 6.16.1.

3.1.5.18.1.1.2 Response Body

The format is the same as the format for the **virtualNetworks GET** response body (section 3.1.5.18.1.2.2). The JSON schema is located in section 6.16.3.

3.1.5.18.1.1.3 Processing Details

Create a new virtualNetwork resource or update an existing virtualNetwork resource.

3.1.5.18.1.2 GET

This method retrieves a virtualNetwork resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualNetworks/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.18.1.2.1 Request Body

None.

3.1.5.18.1.2.2 Response Body

The format for the **virtualNetworks GET** response body is as follows.

```
{
  "resourceRef": "/virtualNetworks/88e38f44-a55b-4604-af5b-83d44bb32508",
  "resourceId": "88e38f44-a55b-4604-af5b-83d44bb32508",
  "etag": "W/\"f940af0b-194b-4264-b581-cf9ecd02417d\"",
  "instanceId": "77ccbb79-a7a2-432d-af08-cde9b6fbf89c",
  "properties": {
    "provisioningState": "Succeeded",
    "addressSpace": {
      "addressPrefixes": [
        "13.168.100.0/24",
        "13.168.101.0/24"
      ]
    },
    "dhcpOptions": { "DnsServers": [ "2.4.5.6" ] },
    "configurationState": {
      "status": "Failure",
      "lastUpdatedTime": "2016-06-14T19:12:06.400512-07:00",
      "id": "368ebe7d-38de-48f8-a0d8-b3b816a4b1ea",
      "virtualNetworkInterfaceErrors": [
        {
          "status": "Failure",
          "detailedInfo": [
            {
              "source": "VirtualNetwork",
              "message": "Failed to configure the policies on the host device.",
              "code": "PolicyConfigurationFailure"
            },
            {
              "source": "VirtualNetwork2",
              "message": "Failed to configure the policies on the host device2.",
              "code": "PolicyConfigurationFailure2"
            }
          ]
        },
        {
          "status": "Failure",
          "detailedInfo": [
            {
              "source": "VirtualNetwork",
              "message": "Failed to configure the policies on the host device.",
              "code": "PolicyConfigurationFailure"
            }
          ]
        },
        {
          "status": "Failure",
          "detailedInfo": [
            {
              "source": "VirtualNetwork",
              "message": "Failed to configure the policies on the host device.",
              "code": "PolicyConfigurationFailure"
            }
          ]
        }
      ]
    },
    "lastUpdatedTime": "2016-06-14T19:12:06.400512-07:00",
    "id": "c7ab848f-e522-47cd-b9f6-5a2c7749a73f"
  },
  {
    "status": "Failure",
    "detailedInfo": [
      {
        "source": "VirtualNetwork",
        "message": "Failed to configure the policies on the host device.",
        "code": "PolicyConfigurationFailure"
      }
    ]
  },
  "lastUpdatedTime": "2016-06-14T19:12:06.400512-07:00",
  "id": "5ef191d3-6ec6-4246-984c-8d6a19da301f"
},
{
  "status": "Failure",
  "detailedInfo": [
    {
      "source": "VirtualNetwork",
      "message": "Failed to configure the policies on the host device.",
      "code": "PolicyConfigurationFailure"
    }
  ]
},
"lastUpdatedTime": "2016-06-14T19:12:06.400512-07:00",
"id": "4058b793-6c28-43d4-a957-937d453075d7"
},
},
```

```

{
  "status": "Failure",
  "detailedInfo": [
    {
      "source": "VirtualNetwork",
      "message": "Failed to configure the policies on the host device.",
      "code": "PolicyConfigurationFailure"
    }
  ],
  "lastUpdatedTime": "2016-06-14T19:12:06.400512-07:00",
  "id": "2a9e39e6-8258-42b8-9db2-31bb2e3932c4"
},
"hostErrors": [
  {
    "status": "Failure",
    "detailedInfo": [
      {
        "source": "VirtualNetwork",
        "message": "Failed to configure the policies on the host device.",
        "code": "PolicyConfigurationFailure"
      }
    ]
  },
  "lastUpdatedTime": "2016-06-14T19:12:06.400512-07:00",
  "id": "6af6ddf0-cd09-44d8-917f-97de215f7c9d"
}
],
"subnets": [
  {
    "resourceRef": "/virtualNetworks/88e38f44-a55b-4604-af5b-83d44bb32508/subnets/32e2069d-b05c-4090-9f2a-dd1d9e076c18",
    "resourceId": "32e2069d-b05c-4090-9f2a-dd1d9e076c18",
    "etag": "W/\"f940af0b-194b-4264-b581-cf9ecd02417d\"",
    "instanceId": "30acab53-f9ef-4a8b-b349-5152d4ca0847",
    "properties": {
      "provisioningState": "Succeeded",
      "addressPrefix": "13.168.100.0/24",
      "accessControlList": {
        "resourceRef": "/accessControlLists/00000000-0000-BAAD-F00D-000000000000"
      }
    },
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/35cd19a9-a47b-457c-a616-b19dfb80a284/ipConfigurations/36bb234c-3594-486f-bfd8-84aee4f15c55"
      },
      {
        "resourceRef": "/networkInterfaces/6065ddd9-9574-422a-8ff7-cfb51275ebd5/ipConfigurations/60ce029d-d7ff-482d-88f7-7baca89f6d47"
      },
      {
        "resourceRef": "/networkInterfaces/4f937e27-dbbc-401f-8acf-60eb1b7f42f2/ipConfigurations/90db0417-9067-449a-bc19-776f07707497"
      },
      {
        "resourceRef": "/networkInterfaces/dda65508-b384-4215-b6cc-23c442d0b185/ipConfigurations/7bda1749-aled-4489-b871-c1378bae5f33"
      }
    ]
  },
  {
    "resourceRef": "/virtualNetworks/88e38f44-a55b-4604-af5b-83d44bb32508/subnets/45819314-35b0-47ff-8447-3c78ed3ad8eb",
    "resourceId": "45819314-35b0-47ff-8447-3c78ed3ad8eb",
    "etag": "W/\"f940af0b-194b-4264-b581-cf9ecd02417d\"",
    "instanceId": "ba555875-c564-4987-94a5-a0e260d7e2af",
    "properties": {
      "provisioningState": "Succeeded",
      "addressPrefix": "13.168.101.0/24",

```

```

    "accessControlList": {
      "resourceRef": "/accessControlLists/949fc25d-0675-4af4-b989-2bf653b795eb"
    },
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/e8a7fea7-e4f9-4742-9e89-aced72ee5a57/ipConfigurations/a9fbf102-6646-442b-8631-6c0c2c193b35"
      },
      {
        "resourceRef": "/networkInterfaces/f94421e8-3efb-42dc-b7dd-aaa61f1f32e5/ipConfigurations/ea5d80da-70da-4592-8d07-ce31b38808e4"
      },
      {
        "resourceRef": "/networkInterfaces/d9259a46-b685-4b40-ad0d-2afd74fbf6b3/ipConfigurations/34f81b26-ad6b-4dbf-b5d7-2ca3c5bbf9cf"
      },
      {
        "resourceRef": "/networkInterfaces/9be77260-a529-4162-b2a2-f04495a200da/ipConfigurations/fff40242-ca47-4e91-a206-3d11f2c49c7e"
      }
    ]
  }
},
"logicalNetwork": {
  "resourceRef": "/logicalnetworks/LogicalNetworks/dbbd37e2-031e-43b3-a16a-d167caca0067"
}
}
}

```

The JSON schema for the **virtualNetworks GET** method is located in section 6.16.3.

3.1.5.18.1.2.3 Processing Details

Retrieves a virtualNetwork resource.

3.1.5.18.1.3 GET ~~(All)~~ALL

This method retrieves all **virtualNetworks** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualNetworks
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources exist, the result is returned as an empty array.

3.1.5.18.1.3.1 Request Body

None.

3.1.5.18.1.3.2 Response Body

The format for the **virtualNetworks GET ALL** response body is as follows.

```
{
  "value": [
    {
      "resourceRef": "/virtualNetworks/2c40fb79-6488-4804-980a-a178a8e123f4",
      "resourceId": "2c40fb79-6488-4804-980a-a178a8e123f4",
      "etag": "W/\f183dbae-3908-4a08-b2d3-7f73bae97cab\"",
      "instanceId": "e5a0bb17-f781-4dc2-9f11-f472d61f8470",
      "properties": {
        "provisioningState": "Succeeded",
        "addressSpace": {
          "addressPrefixes": [
            "13.168.100.0/24",
            "13.168.101.0/24"
          ]
        },
        "dhcpOptions": { },
        "configurationState": {
          "status": "Failure",
          "lastUpdatedTime": "2016-06-14T19:12:06.400512-07:00",
          "id": "368ebe7d-38de-48f8-a0d8-b3b816a4b1ea",
          "virtualNetworkInterfaceErrors": [
            {
              "status": "Failure",
              "detailedInfo": [
                {
                  "source": "VirtualNetwork",
                  "message": "Failed to configure the policies on the host device.",
                  "code": "PolicyConfigurationFailure"
                },
                {
                  "source": "VirtualNetwork2",
                  "message": "Failed to configure the policies on the host device2.",
                  "code": "PolicyConfigurationFailure2"
                }
              ]
            },
            {
              "status": "Failure",
              "detailedInfo": [
                {
                  "source": "VirtualNetwork",
                  "message": "Failed to configure the policies on the host device.",
                  "code": "PolicyConfigurationFailure"
                }
              ]
            },
            {
              "status": "Failure",
              "detailedInfo": [
                {
                  "source": "VirtualNetwork",
                  "message": "Failed to configure the policies on the host device.",
                  "code": "PolicyConfigurationFailure"
                }
              ]
            }
          ]
        }
      ]
    },
    {
      "status": "Failure",
      "detailedInfo": [
        {
          "source": "VirtualNetwork",
          "message": "Failed to configure the policies on the host device.",
          "code": "PolicyConfigurationFailure"
        }
      ]
    },
    {
      "status": "Failure",
      "detailedInfo": [
        {
          "source": "VirtualNetwork",
          "message": "Failed to configure the policies on the host device.",
          "code": "PolicyConfigurationFailure"
        }
      ]
    }
  ]
}
```

```

        {
          "source": "VirtualNetwork",
          "message": "Failed to configure the policies on the host device.",
          "code": "PolicyConfigurationFailure"
        }
      ],
      "lastUpdatedTime": "2016-06-14T19:12:06.400512-07:00",
      "id": "2a9e39e6-8258-42b8-9db2-31bb2e3932c4"
    }
  ],
  "hostErrors": [
    {
      "status": "Failure",
      "detailedInfo": [
        {
          "source": "VirtualNetwork",
          "message": "Failed to configure the policies on the host device.",
          "code": "PolicyConfigurationFailure"
        }
      ]
    },
    {
      "lastUpdatedTime": "2016-06-14T19:12:06.400512-07:00",
      "id": "6af6ddf0-cd09-44d8-917f-97de215f7c9d"
    }
  ]
},
"subnets": [
  {
    "resourceRef": "/virtualNetworks/2c40fb79-6488-4804-980a-
a178a8e123f4/subnets/1b466669-3c06-4e34-b0c9-d737591ecc2c",
    "resourceId": "1b466669-3c06-4e34-b0c9-d737591ecc2c",
    "etag": "W/\"f183dbae-3908-4a08-b2d3-7f73bae97cab\"",
    "instanceId": "9db21d13-63ce-4571-9674-930663dafa90",
    "properties": {
      "provisioningState": "Succeeded",
      "addressPrefix": "13.168.100.0/24",
      "accessControlList": {
        "resourceRef": "/accessControlLists/0879bb16-0cdc-435a-88ff-ef24813201d9"
      }
    },
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/7cc631c8-ca6b-4d21-b1f8-
5b0373d32301/ipConfigurations/18e3af43-be4a-4116-882c-d7257a8bc72b"
      },
      {
        "resourceRef": "/networkInterfaces/6ebf2132-2871-4535-b412-
b6e255bcafa2/ipConfigurations/74fe0850-09a0-4526-9d43-906cd4e6f52a"
      },
      {
        "resourceRef": "/networkInterfaces/c55a70de-34a7-4260-be7b-
76e4b65f32c6/ipConfigurations/486734ba-5521-4348-81a9-3158e2b7fa6e"
      },
      {
        "resourceRef": "/networkInterfaces/d9a8a624-9356-4f4e-bd88-
fcde1574dba3/ipConfigurations/11aa8ca8-b684-4ca0-b35d-4e7db62e7b6f"
      }
    ]
  }
],
{
  "resourceRef": "/virtualNetworks/2c40fb79-6488-4804-980a-
a178a8e123f4/subnets/9c01100a-2bbc-4388-adb2-6cbcdee3447f",
  "resourceId": "9c01100a-2bbc-4388-adb2-6cbcdee3447f",
  "etag": "W/\"f183dbae-3908-4a08-b2d3-7f73bae97cab\"",
  "instanceId": "0ef3bac9-3496-40ec-aeff-3403ea6541ef",
  "properties": {
    "provisioningState": "Succeeded",
    "addressPrefix": "13.168.101.0/24",
    "accessControlList": {
      "resourceRef": "/accessControlLists/0879bb16-0cdc-435a-88ff-ef24813201d9"
    }
  }
},

```

```

        "ipConfigurations": [
            {
                "resourceRef": "/networkInterfaces/447843e7-3fe4-4337-aac5-72e38258d6a4/ipConfigurations/31bb0476-a4d4-4a9a-8d98-3a47dea56f59"
            },
            {
                "resourceRef": "/networkInterfaces/7a4ba9a1-7542-42f9-b718-80de763001cb/ipConfigurations/833540aa-5037-490f-96b9-6a7d78faa762"
            },
            {
                "resourceRef": "/networkInterfaces/3157a320-6a05-463f-8c32-5af4759fbf88/ipConfigurations/fe4536ec-8443-4393-b534-2e035bbe6aaf"
            },
            {
                "resourceRef": "/networkInterfaces/125f3909-8fc9-4ab4-b46c-3e8d39b52de2/ipConfigurations/7cca0ee7-dbcd-4d25-a211-8c26708093ca"
            }
        ]
    },
    "logicalNetwork": {
        "resourceRef": "/logicalnetworkslogicalNetworks/dbbd37e2-031e-43b3-a16a-d167caca0067"
    }
},
{
    "resourceRef": "/virtualNetworks/88e38f44-a55b-4604-af5b-83d44bb32508",
    "resourceId": "88e38f44-a55b-4604-af5b-83d44bb32508",
    "etag": "W/\"f940af0b-194b-4264-b581-cf9ecd02417d\"",
    "instanceId": "77ccbb79-a7a2-432d-af08-cde9b6fbf89c",
    "properties": {
        "provisioningState": "Succeeded",
        "addressSpace": {
            "addressPrefixes": [
                "13.168.100.0/24",
                "13.168.101.0/24"
            ]
        },
        "dhcpOptions": { },
        "subnets": [
            {
                "resourceRef": "/virtualNetworks/88e38f44-a55b-4604-af5b-83d44bb32508/subnets/32e2069d-b05c-4090-9f2a-ddld9e076c18",
                "resourceId": "32e2069d-b05c-4090-9f2a-ddld9e076c18",
                "etag": "W/\"f940af0b-194b-4264-b581-cf9ecd02417d\"",
                "instanceId": "30acab53-f9ef-4a8b-b349-5152d4ca0847",
                "properties": {
                    "provisioningState": "Succeeded",
                    "addressPrefix": "13.168.100.0/24",
                    "accessControlList": {
                        "resourceRef": "/accessControlLists/00000000-0000-BAAD-F00D-000000000000"
                    },
                    "ipConfigurations": [
                        {
                            "resourceRef": "/networkInterfaces/35cd19a9-a47b-457c-a616-b19dfb80a284/ipConfigurations/36bb234c-3594-486f-bfd8-84aee4f15c55"
                        },
                        {
                            "resourceRef": "/networkInterfaces/6065ddd9-9574-422a-8ff7-cfb51275ebd5/ipConfigurations/60ce029d-d7ff-482d-88f7-7baca89f6d47"
                        },
                        {
                            "resourceRef": "/networkInterfaces/4f937e27-dbbc-401f-8acf-60eb1b7f42f2/ipConfigurations/90db0417-9067-449a-bc19-776f07707497"
                        },
                        {
                            "resourceRef": "/networkInterfaces/dda65508-b384-4215-b6cc-23c442d0b185/ipConfigurations/7bda1749-aled-4489-b871-c1378bae5f33"
                        }
                    ]
                }
            }
        ]
    }
}

```

```

    }
  ]
},
{
  "resourceRef": "/virtualNetworks/88e38f44-a55b-4604-af5b-83d44bb32508/subnets/45819314-35b0-47ff-8447-3c78ed3ad8eb",
  "resourceId": "45819314-35b0-47ff-8447-3c78ed3ad8eb",
  "etag": "W/\"f940af0b-194b-4264-b581-cf9ecd02417d\"",
  "instanceId": "ba555875-c564-4987-94a5-a0e260d7e2af",
  "properties": {
    "provisioningState": "Succeeded",
    "addressPrefix": "13.168.101.0/24",
    "accessControlList": {
      "resourceRef": "/accessControlLists/949fc25d-0675-4af4-b989-2bf653b795eb"
    },
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/e8a7fea7-e4f9-4742-9e89-aced72ee5a57/ipConfigurations/a9fbf102-6646-442b-8631-6c0c2c193b35"
      },
      {
        "resourceRef": "/networkInterfaces/f94421e8-3efb-42dc-b7dd-aaa61f1f32e5/ipConfigurations/ea5d80da-70da-4592-8d07-ce31b38808e4"
      },
      {
        "resourceRef": "/networkInterfaces/d9259a46-b685-4b40-ad0d-2afd74fbf6b3/ipConfigurations/34f81b26-ad6b-4dbf-b5d7-2ca3c5bbf9cf"
      },
      {
        "resourceRef": "/networkInterfaces/9be77260-a529-4162-b2a2-f04495a200da/ipConfigurations/fff40242-ca47-4e91-a206-3d11f2c49c7e"
      }
    ]
  }
},
{
  "logicalNetwork": {
    "resourceRef": "/logicalnetworks/physicalNetworks/dbbd37e2-031e-43b3-a16a-d167caca0067"
  }
},
{
  "nextLink": ""
}
}

```

The JSON schema for the **virtualNetworks GET ALL** method is located in section 6.16.5.

3.1.5.18.1.3.3 Processing Details

Retrieves all **virtualNetwork** resources.

3.1.5.18.1.4 DELETE

This method deletes a **virtualNetwork** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualNetworks/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.18.1.4.1 Request Body

None.

3.1.5.18.1.4.2 Response Body

None.

3.1.5.18.1.4.3 Processing Details

Deletes a virtualNetwork resource.

3.1.5.18.2 subnets

The **subnets** resource is used to create ~~Virtual Subnets~~ [virtual subnets IDs](#) (VSIDs) under a tenant's virtual network [routing domain ID](#) (RDID). The user can specify the **addressPrefix** to use for the **subnets**, the ~~accessControl Lists~~ [accessControlLists](#) to protect the **subnets**, the **routeTable** to be applied to the subnet, and optionally the service insertion to use within the subnet.

It is invoked through the following [URIs](#).

<https://<url>/networking/v1/virtualNetworks/{parentResourceId}/subnets/{resourceId}>

<https://<url>/networking/v2/virtualNetworks/{parentResourceId}/subnets/{resourceId}>

parentResourceId: the identifier for the specific ancestor resource within the resource type. See section 2.2.3.3, for more details.

resourceId: the identifier for the specific descendant resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.18.1.1	Create a new subnets resource or update an existing subnets resource.
GET	3.1.5.18.1.2	Get one subnets resource
GET (All)ALL	3.1.5.18.1.3	List all subnets resources in the Network Controller for a parent virtual network resource.

HTTP method	Section	Description
DELETE	3.1.5.18.1.4	Delete a subnets resource.

The following property elements are valid:<11>

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
addressPrefix	Required	Indicates the address prefix that defines the subnet. The value is in the format of 0.0.0.0/0. This value MUST not overlap with other subnets in the virtual network and MUST fall in the addressPrefix defined in the virtual network.
accessControlList	Optional	Indicates a reference to an accessControlLists resource that defines the ACLs in and out of the subnet.
serviceInsertion	Optional	Indicates a reference to a serviceInsertions resource that defines the service insertion to be applied to the subnet.
routeTable	Optional	Indicates a reference to a routeTable resource that defines the tenant routes to be applied to the subnet.
ipConfigurations	Read-only	Indicates an array of references of networkInterfaces resources that are connected to the subnet.
VirtualSubnetId	Read-only	String representation of the unique virtual subnet identified allocated by the network controller for this subnet.
UnbilledEgressBytes	Optional	Number of unbilled bytes sent by virtual machines with network interfaces with IP configurations from this virtual subnet. Unbilled bytes are bytes sent to address ranges that are part of the UnbilledAddressRanges property of the parent virtual network.
BilledEgressBytes	Optional	Number of billed bytes sent by virtual machines with network interfaces with IP configurations from this virtual subnet. Billed bytes are bytes sent to address ranges that are not part of the UnbilledAddressRanges property of the parent virtual network.
EncryptionEnabled	Optional	Boolean that indicates if encryption is enabled. Encryption is disabled by default. If this property is set to true TRUE , then the parent virtual network resource must have the EncryptionCredential property set to a valid credential of type X509 certificate.

3.1.5.18.2.1 HTTP Methods

3.1.5.18.2.1.1 PUT

This method creates a new **subnetsubnets** resource or updates an existing **subnetsubnets** resource.

It is invoked through the following **URIs**.

<https://<url>/networking/v1/virtualNetworks/{parentResourceId}/subnets/{resourceId}>

<https://<url>/networking/v2/virtualNetworks/{parentResourceId}/subnets/{resourceId}>

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.18.2.1.1.1 Request Body

The format for the request body for the **subnets PUT** method is as follows.

```
{
  "resourceId": "{uniqueString}",
  "instanceId": "XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXX",
  "tags": { "key": "value" },
  "resourceMetadata": {
    {
      "client": "WAP Network Resource Provider",
      "tenantId": "{subscriptionid}",
      "groupId": "{groupname}",
      "name": "{name}",
      "originalHref": "https://..."
    },
    "properties": {
      "addressSpace": {
        "addressPrefixes": ["13.0.0.0/24", "11.1.1.0/24"]
      },
      "logicalNetwork": {
        "resourceRef": "/networks/00000000-0000-0000-0000-001000000000"
      },
      "subnets": [
        {
          "resourceId": "00000000-0000-0000-0001-000000000010",
          "resourceMetadata": {
            "resourceName": "subnet1",
          },
          "properties": {
            "addressPrefix": "13.0.0.0/24",
            "accessControlList": {
              "resourceRef": "/accessControlLists/00000000-0000-0000-0000-000000000001"
            },
            "ipConfigurations": []
          }
        },
        {
          "resourceId": "00000000-0000-0000-0002-000000000010",
          "resourceMetadata": {
            "resourceName": "subnet2",
          },
          "properties": {
            "addressPrefix": "11.1.1.0/24",
            "accessControlList": {
              "resourceRef": "/accessControlLists/00000000-0000-0000-0000-000000000001"
            }
          }
        }
      ]
    }
  }
}
```

```

    },
    "ipConfigurations": []
  }
}
}
}

```

The JSON schema for the **subnets PUT** method is located in section 6.16.7.1.

3.1.5.18.2.1.1.2 Response Body

The format is the same as the format for the **GET subnets** response body (section 3.1.5.18.2.1.2.2). The JSON schema is located in section 6.16.7.3.

3.1.5.18.2.1.1.3 Processing Details

Create a new **subnetsubnets** resource or update an existing **subnetsubnets** resource.

3.1.5.18.2.1.2 GET

This method retrieves a **subnetsubnets** resource.

It is invoked through the following **URIURIs**.

```

https://<url>/networking/v1/virtualNetworks/{parentResourceId}/subnets/{resourceId}
https://<url>/networking/v2/virtualNetworks/{parentResourceId}/subnets/{resourceId}

```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.18.2.1.2.1 Request Body

None.

3.1.5.18.2.1.2.2 Response Body

The format for the **subnetsubnets GET** response body is as follows.

```

{
  "resourceRef": "/virtualNetworks/740f3670-de42-4345-aaa7-6bb8d423c5df/subnets/da459373-42ee-43d3-b094-6e2176406e4a",
  "resourceId": "da459373-42ee-43d3-b094-6e2176406e4a",
  "etag": "W/\"63e97aed-2900-46d3-8667-ef183d773655\"",
  "instanceId": "b526c5e7-927c-4d74-be86-cd2933ac286d",
  "properties": {

```



```

    "provisioningState": "Succeeded",
    "addressPrefix": "13.168.101.0/24",
    "accessControlList": {
      "resourceRef": "/accessControlLists/b79fe2f0-8f27-4521-9c8c-4c02be8c62eb"
    },
    "ipConfigurations": [
      {
        "resourceRef": "/networkInterfaces/178480e8-cb41-4105-9ce9-
d3c4051b1e16/ipConfigurations/5d24f2a5-557c-4692-86d7-dce921ef7e57"
      },
      {
        "resourceRef": "/networkInterfaces/f7957eeb-55b0-46dd-8ef8-
0bb0127c55d1/ipConfigurations/8dd5a2e6-5d83-43b5-ad5b-c08a2fa26935"
      },
      {
        "resourceRef": "/networkInterfaces/ec3ac77e-64be-4bc1-a2e3-
7cd6170a4752/ipConfigurations/cbcab016-6c87-4a32-8158-08e0db71635a"
      },
      {
        "resourceRef": "/networkInterfaces/caa5e37a-30ce-4c0a-877c-
d21b7c732bce/ipConfigurations/aa0eff2d-00f6-413b-9650-7e13e3d31ead"
      }
    ]
  }
}

```

The JSON schema for the **subnetsubnets** GET method is located in section 6.16.7.3.

3.1.5.18.2.1.2.3 Processing Details

Retrieves a **subnetsubnets** resource.

3.1.5.18.2.1.3 GET ~~(All)~~ALL

This method retrieves all **subnetsubnets** resources.

It is invoked through the following **URIURIs**.

```

https://<url>/networking/v1/virtualNetworks/{parentResourceId}/subnets
https://<url>/networking/v2/virtualNetworks/{parentResourceId}/subnets

```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources of this type exist, the result is returned as an empty array.

3.1.5.18.2.1.3.1 Request Body

None.

3.1.5.18.2.1.3.2 Response Body

The format for the response body for the **subnets GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/virtualNetworks/740f3670-de42-4345-aaa7-6bb8d423c5df/subnets/f144bb56-9868-48f7-af38-73d331e780cc",
      "resourceId": "f144bb56-9868-48f7-af38-73d331e780cc",
      "etag": "W/\"63e97aed-2900-46d3-8667-ef183d773655\"",
      "instanceId": "bd2a55ed-47ad-478a-b7ee-c0ed3e14ca69",
      "properties": {
        "provisioningState": "Succeeded",
        "addressPrefix": "13.168.100.0/24",
        "accessControlList": {
          "resourceRef": "/accessControlLists/b79fe2f0-8f27-4521-9c8c-4c02be8c62eb"
        }
      },
      "ipConfigurations": [
        {
          "resourceRef": "/networkInterfaces/350ab978-a032-402e-96cb-ad48fbdce219/ipConfigurations/340229d1-fb10-46a6-bf83-e752d76871cd"
        },
        {
          "resourceRef": "/networkInterfaces/519d1b64-f99d-430b-b626-347ef7690ee1/ipConfigurations/8420d069-6414-43f7-bbaf-5c1f5cc9b434"
        },
        {
          "resourceRef": "/networkInterfaces/bc0b4ec5-8d40-4b62-bb1c-09181bb1ca57/ipConfigurations/bbda3955-5c56-454b-956c-ab576fealc8d"
        },
        {
          "resourceRef": "/networkInterfaces/1e03dd1d-c4c4-4153-alc8-d692d8e340ab/ipConfigurations/a6d79d5e-b266-47a1-83e1-e61f8784f882"
        }
      ]
    },
    {
      "resourceRef": "/virtualNetworks/740f3670-de42-4345-aaa7-6bb8d423c5df/subnets/da459373-42ee-43d3-b094-6e2176406e4a",
      "resourceId": "da459373-42ee-43d3-b094-6e2176406e4a",
      "etag": "W/\"63e97aed-2900-46d3-8667-ef183d773655\"",
      "instanceId": "b526c5e7-927c-4d74-be86-cd2933ac286d",
      "properties": {
        "provisioningState": "Succeeded",
        "addressPrefix": "13.168.101.0/24",
        "accessControlList": {
          "resourceRef": "/accessControlLists/b79fe2f0-8f27-4521-9c8c-4c02be8c62eb"
        }
      },
      "ipConfigurations": [
        {
          "resourceRef": "/networkInterfaces/178480e8-cb41-4105-9ce9-d3c4051b1e16/ipConfigurations/5d24f2a5-557c-4692-86d7-dce921ef7e57"
        },
        {
          "resourceRef": "/networkInterfaces/f7957eeb-55b0-46dd-8ef8-0bb0127c55d1/ipConfigurations/8dd5a2e6-5d83-43b5-ad5b-c08a2fa26935"
        },
        {
          "resourceRef": "/networkInterfaces/ec3ac77e-64be-4bc1-a2e3-7cd6170a4752/ipConfigurations/cbcab016-6c87-4a32-8158-08e0db71635a"
        },
        {
          "resourceRef": "/networkInterfaces/caa5e37a-30ce-4c0a-877c-d21b7c732bce/ipConfigurations/aa0eff2d-00f6-413b-9650-7e13e3d31ead"
        }
      ]
    }
  ]
}
```

```
"nextLink": ""
}
```

The JSON schema for the **subnets GET ALL** method is located in section 6.16.7.5.

3.1.5.18.2.1.3.3 Processing Details

Retrieves all subnet resources.

3.1.5.18.2.1.4 DELETE

This method deletes a **subnets** resource.

It is invoked through the following **URI**s.

```
https://<url>/networking/v1/virtualNetworks/{parentResourceId}/subnets/{resourceId}
https://<url>/networking/v2/virtualNetworks/{parentResourceId}/subnets/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.18.2.1.4.1 Request Body

None.

3.1.5.18.2.1.4.2 Response Body

None.

3.1.5.18.2.1.4.3 Processing Details

Deletes a **subnets** resource.

3.1.5.19 virtualNetworkManager

The **virtualNetworkManager** resource is a singleton resource that configures the virtual network service of the Network Controller. The properties in this resource are global for all virtual networks managed by the Network Controller.

It is invoked through the following URI.

`https://<url>/networking/v1/virtualNetworkManager/configuration`

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.19.1.1	Create a new virtualNetworkManager resource or update an existing virtualNetworkManager resource.
GET	3.1.5.19.1.2	Get the virtualNetworkManager resource.

The following property elements are valid: <12>

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
distributedRouterState	Optional	Indicates the state of the built-in distributed router of the virtual network. Values can be "Enable" or "Disable". The default value is "Enable".
networkVirtualizationProtocol	Optional	Indicates the encapsulation format String values which can be "Network Virtualization using Generic Routing Encapsulation (NVGRE) (RFC7637)" or "Virtual Extensible LAN (VXLAN) (RFC7348)". The default value is "VXLAN".
VirtualSubnetIdRange	Optional	A structure of type VirtualSubnetIdRange , has the following two properties StartId and EndId . It allows configuration of the server to use a desired range of identifiers for virtual subnets.
StartId	Optional	Indicates the minimum identifier that the server MUST use for virtual subnets. This value cannot be less than 4096.
EndId	Optional	Indicates the maximum identifier that the server MUST use for virtual subnets. This value cannot be greater than 16777215.

3.1.5.19.1 HTTP Methods

3.1.5.19.1.1 PUT

This method creates or updates the **virtualNetworkManager** resource.

It is invoked through the following URI.

`https://<url>/networking/v1/virtualNetworkManager/configuration`

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.19.1.1.1 Request Body

The format for the request body for the **virtualNetworkManager PUT** method is as follows.

```
{
  "resourceRef": "/virtualNetworkManager/configuration",
  "properties": {
    "distributedRouterState": "Enabled",
    "networkVirtualizationProtocol": "NVGRE"
  }
}
```

The JSON schema for the **virtualNetworkManager PUT** method is located in section 6.17.1.

3.1.5.19.1.1.2 Response Body

The format is the same as the format for the **GET virtualNetworkManager** response body (section 3.1.5.19.1.2.2). The JSON schema is located in section 6.17.3.

3.1.5.19.1.1.3 Processing Details

Create a new **virtualNetworkManager** resource or update an existing **virtualNetworkManager** resource.

3.1.5.19.1.2 GET

Retrieves the **virtualNetworkManager** configuration.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualNetworkManager/configuration
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.19.1.2.1 Request Body

None.

3.1.5.19.1.2.2 Response Body

The format for the response body for the **virtualNetworkManager GET** method is as follows.

```
{
  "resourceRef": "/virtualNetworkManager/configuration",
  "resourceId": "configuration",
  "etag": "W/\"5794dfc2-194d-4b07-910f-5eb373c0569a\"",
  "instanceId": "2bb4802e-f894-4337-b048-1abeb8153778",
  "properties": {
    "provisioningState": "Succeeded",
    "distributedRouterState": "Enabled",
    "networkVirtualizationProtocol": "VXLAN"
  }
}
```

The JSON schema for the **virtualNetworkManager GET** method is located in section 6.17.3.

3.1.5.19.1.2.3 Processing Details

Retrieves the **virtualNetworkManager** configuration.

3.1.5.20 virtualServers

The **virtualServers** resource corresponds to a [Virtual Machine-virtual machine \(VM\)](#). Such resources MUST be created for VMs that correspond to gateway resources (section 3.1.5.4) and MUX resources (section 3.1.5.7).

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualServers/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.20.1.1	Create a new virtualServers resource or update an existing virtualServers resource.
GET	3.1.5.20.1.2	Get one virtualServers resource
GET (All)ALL	3.1.5.20.1.3	List all virtualServers resources in the Network Controller

HTTP method	Section	Description
DELETE	3.1.5.20.1.4	Deletes a virtualServers resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
connections[]	Optional	Indicates an array of connections that specifies the information needed to connect to the specific device for the purposes of managing and controlling the device.
connections.credential		Indicates a reference to a credential resource that can be used to connect to the device for management purposes.
connections.credentialType		Indicates a reference to a credential credential s resource that specifies the type of credential.
connections.managementAddresses		Indicates the management address used to connect to the server. This is in the form of an IPv4 IP address, an IPv6 IP address, a DNS name or a flat (NetBIOS) name.
gateway	Read-only	Indicates a reference to the gateway resource representing the gateway running on this virtualServer. This element will not be returned if there is not a gateway running on the virtual server.
loadBalancerMux loadBalancerMuxes	Read-only	Indicates a reference to the loadBalancerMux loadBalancerMuxes resource representing the LoadBalancer loadBalancer MUX running on this virtualServer. This element will not be returned if there is not a LoadBalancer loadBalancer MUX running on the virtual server.
server	Read-only	Indicates a reference to the servers resource this virtualServer is located on. The server reference is automatically created when a corresponding NIC arrival notification from the south bound is handled.
vmGuid	Required	Indicates the GUID of the VM object as found in the Hyper-V Windows Management Instrumentation (WMI-l) .

3.1.5.20.1 HTTP Methods

3.1.5.20.1.1 PUT

This method creates a new **virtualServers** resource or updates an existing **virtualServers** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualServers/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.20.1.1.1 Request Body

The format for the request body for the **virtualServers PUT** method is as follows.

```
{
  "properties": {
    "connections": [
      {
        "managementAddresses": [
          "192.126.0.39"
        ],
        "credential": {
          "resourceRef": "/credentials/70a57404-967f-41fe-93a5-c309f601b068"
        },
        "credentialType": "X509Certificate"
      }
    ],
    "certificate": "this string must be replaced with valid certificate data",
    "vmGuid": "43613f44-ba4d-4540-8d60-d02d25464478"
  }
}
```

The JSON schema for the **virtualServers PUT** method is located in section 6.18.1.

3.1.5.20.1.1.2 Response Body

The format is the same as the format for the **GET virtualServers** response body (section 3.1.5.20.1.2.2). The JSON schema is located in section 6.18.2.

3.1.5.20.1.1.3 Processing Details

Creates a new **virtualServers** resource or updates an existing **virtualServers** resource.

3.1.5.20.1.2 GET

This method retrieves a **virtualServers** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualServers/{resourceId}
```


The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.20.1.2.1 Request Body

None.

3.1.5.20.1.2.2 Response Body

The format for the response body for the **virtualServers GET** is as follows.

```
{
  "resourceRef": "/virtualServers/ffbf0739-7de9-4175-8333-83687fc39653",
  "resourceId": "ffbf0739-7de9-4175-8333-83687fc39653",
  "etag": "W/\"87b4a1b5-ccdc-42e1-b7bd-897c83340890\"",
  "instanceId": "46306786-f927-42dc-8d12-9ea869497b26",
  "properties": {
    "provisioningState": "Succeeded",
    "connections": [
      {
        "managementAddresses": [
          "190.218.0.46",
          "foo"
        ],
        "credential": {
          "resourceRef": "/credentials/5eda8dd3-9fad-4f73-bb46-fa696b2ca894"
        },
        "credentialType": "X509Certificate"
      }
    ],
    "certificate":
    "MIICFjCCAYOgAwIBAgIQNHec33eFI59BpfQhRM5E5jAJBgUrDgMCHQUAMBCxFTATBgNVBAMTDDE5MC4yMTguMC40NjAe
    Fw0xMjAlMTAwNzAwMDBaFw0yMDEyMjIwNzAwMDEyMjIwNzAwMDEyMjIwNzAwMDEyMjIwNzAwMDEyMjIwNzAwMDEyMjIwNzAw
    QEFAAOBjQAwgYkCgYEAq1XZZ2AakK1/qpxnh6mZjGrza5KpoilcIkDJNHfD6lbs7t0DrfZa3PPuWkMAaP9bMMBuN9QFeV
    e3jh0mLnpeAAAX49sNyY1cxtVKtBYaDd2fG1vJQMMce0WQvEDj+yCN/ND0HXtJ8Icr1thqmxlHerMHOrP/PcA2SJZhWh7
    tzC0CAwEAAANrMGkwHQYDVR0lBBYwFAyIKwYBBQUHAWEGCCsGAQUFBwMCMCEgGALUdaAQRBMD+AEMprq6gkM6zsBHNK13n
    JK+hGTAXMRUwEwYDQDEwwxOTAuMjE4LjAuNDA CEDR3nN93hSO fQaX0IUTOROYwCQYFKw4DAh0FAAOBgQBW6Nj/tzmBW
    +KzmI2+YWiFex1PEVrM7ue7yVwLnelc+uH+5Eu9y1qg4DcgeIxmMYRk4AMXBqG6BBtTE9sID7seG2c0lyHyN5ZH0SPkPi
    I6cnMuDLCC9YuUFEH7HN+9Vo1BjQJ7cHMrqke0nlpSuPLYSYQYSYPNE+jQPawypuDY2A==",
    "vmGuid": "051e441c-bd92-4c81-9e3d-167b2e357e60"
  },
  "markServerReadOnly": true,
  "tags": {
    "good": "bad",
    "full": "empty",
    "num": "0"
  }
}
```

The JSON schema for the **virtualServers GET** method is located in section 6.18.2.

3.1.5.20.1.2.3 Processing Details

Retrieves a **virtualServers** resource.

3.1.5.20.1.3 GET ~~(All)~~ALL

This method retrieves all **virtualServers** resources.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualServers
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

If no resources exist, the result is returned as an empty array.

3.1.5.20.1.3.1 Request Body

None.

3.1.5.20.1.3.2 Response Body

The format for the response body for the **virtualServers GET ALL** is as follows.

```
{
  "value": [
    {
      "resourceRef": "/virtualServers/0dc92d03-5642-420c-8c9a-09df9bf85909",
      "resourceId": "0dc92d03-5642-420c-8c9a-09df9bf85909",
      "etag": "W/\"d5710775-4394-4746-9d38-f8047812aa93\"",
      "instanceId": "5c6146da-97e7-48ce-8484-da3add066acb",
      "properties": {
        "provisioningState": "Succeeded",
        "connections": [
          {
            "managementAddresses": [
              "190.218.0.47"
            ],
            "credential": {
              "resourceRef": "/credentials/5eda8dd3-9fad-4f73-bb46-fa696b2ca894"
            },
            "credentialType": "X509Certificate"
          }
        ],
        "certificate":
        "MIICFjCCAYOgAwIBAgIQQkEUCk8XN7tDJNjwqcDYQjAJBgUrDgMCHQUAMBcxFTATBgNVBAMTDDE5MC4yMTguMC40NzAe
        Fw0xMjA1MTAwNzAwMDBaFw0yMDEyMjIwNzAwMDBaMBcxFTATBgNVBAMTDDE5MC4yMTguMC40NzCBnzANBghkiG9w0BA
        QEFAAOBjQAwgYkCgYEAwSbVTki5HaelHMDef9ugNfqSGr5ZKcUA3nwh6SQV/pJBe41jfwcVUyNhh7SVYv8TPQ1B4tNmx
        nYbKkWH1SRdkOXJ+8DFJDODF9aFfuPUebi8U9gZhbxtfurWkflhNukAx7vpmi9+mta+POB0F27wsmuFNXwlv/JjIz6SKt
        uv2cCAwEAAANrMGkwHQYDVR01BBYwFAYIKwYBBQUHAWEGCCsGAQUFBwMCMEEgGALUdAQRBMD+AEELm0o2+hOxw9qeVual9O
        muehGTAXMRUwEwYDVRQDEwwxOTAuMjE4LjAuNDECEEJBFAPPFze7QyTScKnA2EIwCQYFKw4DAh0FAAOBgQBQDD/zN+T4u
```

```

7UqkuOK9Oc1i7q99kgolonOv96pUBctKMaNaTPVKNXERii7cedvihGMWSWQCBJlJorpFZrfZ09D+tDok50EYSugx/O6ni
VcXah4qN+TAFzGsc/N4FpX+Nge0QsLj4YX9uKUKiCjsmjfljTsX1TBwRtDOWiHkCwNlg==",
  "vmGuid": "44c1b231-b505-41b6-ac3d-5a3cddb82a5d"
},
"markServerReadOnly": true
},
{
  "resourceRef": "/virtualServers/1801d562-54ad-43b4-957f-ce739b955c4b",
  "resourceId": "1801d562-54ad-43b4-957f-ce739b955c4b",
  "etag": "W/\\"ec2e137a-4cd3-4ec7-ac94-39527249ea13\\\"",
  "instanceId": "e5331a63-8af1-43dc-bdc0-e60edf36dfa0",
  "properties": {
    "provisioningState": "Succeeded",
    "connections": [
      {
        "managementAddresses": [
          "190.218.0.45"
        ],
        "credential": {
          "resourceRef": "/credentials/5eda8dd3-9fad-4f73-bb46-fa696b2ca894"
        },
        "credentialType": "X509Certificate"
      }
    ],
    "certificate":
"MIICFjCCAYOgAwIBAgIQNdW6IC0WzLROqrW5yBYYNjAJBgUrDgMCHQUAMBCxFTATBgNVBAMTDDE5MC4yMTguMC40NTAe
Fw0xMjAlMTAwNzAwMDBaFw0yMDEyMjIwNzAwMDBaMBcxFTATBgNVBAMTDDE5MC4yMTguMC40NTCBnzANBQkqhkiG9w0BA
QEFAAOBjQAwgYkCgYEAzSgIbPMq9dWg2hUYBDQfKMuv3MBOCfvmm2WH0e2c0WRexdLR0Q0etIJrv9Gxbo5RW/U53y10ZA
bgFB58NstEHfl0+8UAJVU+tH/g2/L5KOucYa4YzGOGftJKxkPJ85U1rtDXfd+MU9K9loQWgHYElmftdq2LdQ33tFI1YFu
T40MCAwEAANrMGkwHQYDVR01BBYwFAYIKwYBBQUHAWEGCCsGAQUFBwMCMCEgGALUdaAQRBMD+AENepbWjRjtRvYXG30T28
/lShGTAXMRUwEwYDVQQDEwwxOTAwMjE4LjAuNDWCEDXVuiAtFsy0Tqq1ucgWGDYwCQYFKw4DAh0FAAOBgQCFR7J+lxZkf
pLEh6lmWXTquizJiI2av9zR6M31EKdHYM20gia1UsMEFnxbuFamJ4TTXSM4juHfE9kxJ+K5JAhQ13eRA+z6VQwrWAUKU
tJmg+PVuIAaatIGe+tpvRpzAEUMIxyGIC/fTwmqUPDWIBOcoEYKnYDnQ0DvGGBdHCYwA==",
    "vmGuid": "4d258e6b-d058-4b51-ab94-d38af22f9592"
  },
  "markServerReadOnly": true
},
{
  "resourceRef": "/virtualServers/ffbf0739-7de9-4175-8333-83687fc39653",
  "resourceId": "ffbf0739-7de9-4175-8333-83687fc39653",
  "etag": "W/\\"87b4alb5-ccdc-42e1-b7bd-897c83340890\\\"",
  "instanceId": "46306786-f927-42dc-8d12-9ea869497b26",
  "properties": {
    "provisioningState": "Succeeded",
    "connections": [
      {
        "managementAddresses": [
          "190.218.0.46"
        ],
        "credential": {
          "resourceRef": "/credentials/5eda8dd3-9fad-4f73-bb46-fa696b2ca894"
        },
        "credentialType": "X509Certificate"
      }
    ],
    "certificate":
"MIICFjCCAYOgAwIBAgIQNHec33eFI59BpfQhRM5E5jAJBgUrDgMCHQUAMBCxFTATBgNVBAMTDDE5MC4yMTguMC40NjAe
Fw0xMjAlMTAwNzAwMDBaFw0yMDEyMjIwNzAwMDBaMBcxFTATBgNVBAMTDDE5MC4yMTguMC40NjCBnzANBQkqhkiG9w0BA
QEFAAOBjQAwgYkCgYEAq1XZ22AakK1/qpxnh6mZjGrza5KpoilcIkDJNHfD6lbs7t0DrfZa3PPuWkMAaP9bMMBuN9QFeV
e3jh0mLnpeAAAX49sNyY1cxtVKtBYaDd2fG1vJQMMce0WQvEDj+yCN/ND0HXtJ8Icr1thqmx1HerMHOrP/PcA2SJZhWh7
tzC0CAwEAANrMGkwHQYDVR01BBYwFAYIKwYBBQUHAWEGCCsGAQUFBwMCMCEgGALUdaAQRBMD+AEmpq6gkM6zsBHNK13n
JK+hGTAXMRUwEwYDVQQDEwwxOTAwMjE4LjAuNDWCEDR3nN93hSofQaX0IUTOROYwCQYFKw4DAh0FAAOBgQBW6Nj/tzmBW
+KzmI2+YWiFex1PEVrM7ue7yVwLne1c+uH+5Eu9ylqg4DcgeIwxMYRk4AMXBqG6BBtTE9sID7seG2c01yHyn5ZH0SPkPi
I6cnMuDLCC9YuUFEh7HN+9Vo1BjQJ7cHMrqkeOnlpSuPLYSYQYSyPNE+jQPawypuDY2A==",
    "vmGuid": "051e441c-bd92-4c81-9e3d-167b2e357e60"
  },
  "markServerReadOnly": true
}
],
"nextLink": ""

```

}

The JSON schema for the **virtualServers GET ALL** method is located in section 6.18.3.

3.1.5.20.1.3.3 Processing Details

Retrieves all **virtualServers** resources.

3.1.5.20.1.4 DELETE

This method deletes a **virtualServer** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualServer/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
202 (Accepted)
204 (No Content)
412 (Precondition Failed)

3.1.5.20.1.4.1 Request Body

None.

3.1.5.20.1.4.2 Response Body

None.

3.1.5.20.1.4.3 Processing Details

Deletes a **virtualServers** resource.

3.1.5.21 Diagnostics

3.1.5.21.1 Diagnostics ConnectivityCheck

The **ConnectivityCheck** resource initiates a **diagnostics actionAction** to check data path connectivity between two endpoints.

It is invoked through the following URI.

https://<url>/networking/v1/diagnostics/ConnectivityCheck

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.21.1.1.1	Initiates a diagnostics actionAction to check data path connectivity between two endpoints.

The following property elements are valid.

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
SenderIdAddress senderIpAddress	Required	IP Address of the Sender endpoint from which the diagnostics needs to be initiated.
ReceiverIpAddress receiverIpAddress	Required	IP Address of the Receiver endpoint to which the diagnostics needs to be initiated.
SenderVirtualNetwork senderVirtualNetwork	Optional	Virtual Network reference of the Sender endpoint from which the diagnostics needs to be initiated.
ReceiverVirtualNetwork receiverVirtualNetwork	Optional	Virtual Network reference of the Receiver endpoint to which the diagnostics needs to be initiated.
SenderLogicalNetwork senderLogicalNetwork	Optional	Logical Network reference of the Sender endpoint from which the diagnostics needs to be initiated.
ReceiverLogicalNetwork receiverLogicalNetwork	Optional	Logical Network reference of the Receiver endpoint to which the diagnostics needs to be initiated.
Protocol protocol	Required	Protocol to be used for diagnostics.
IcmpProtocolConfig	Optional	ICMP Protocol specific configuration.
IcmpProtocolConfig.Length	Optional	Length of the ICMP packet.
IcmpProtocolConfig.SequenceNumber	Optional	Sequence Number of the ICMP packet.
OperationId operationId	Read-only	Operation ID for this diagnostics operation.
ConnectivityCheckResult	Read-only	Resource Reference of the result resource.
SubmitTime submitTime	Read-only	Submit Time of this diagnostics operation.

3.1.5.21.1.1 HTTP Methods

3.1.5.21.1.1.1 PUT

Initiates a **diagnostics ~~action~~Action** to check data path connectivity between two endpoints.

~~The~~It is invoked through the following ~~URI for this resource is as follows.~~

`https://<url>/networking/v1/diagnostics/ConnectivityCheck`

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.21.1.1.1.1 Request Body

The format for the ~~connectivityCheck~~ConnectivityCheck **PUT** request body is as follows.

```
{
  "properties": {
    "senderVirtualNetwork": {
      "resourceRef": "/virtualNetworks/fcfc99f9-50ce-4644-8a47-a23711c3b704"
    },
    "receiverVirtualNetwork": {
      "resourceRef": "/virtualNetworks/fcfc99f9-50ce-4644-8a47-a23711c3b704"
    },
    "senderIpAddress": "13.168.100.21",
    "receiverIpAddress": "13.168.100.22",
    "disableTracing": false,
    "protocol": "Icmp"
  }
}
```

The JSON schema for the ~~connectivityCheck~~ConnectivityCheck **PUT** method request body is located in section 6.19.1.1.

3.1.5.21.1.1.1.2 Response Body

The format for the ~~connectivityCheck~~ConnectivityCheck **PUT** response body is as follows.

```
{
  "resourceRef": "/diagnostics/connectivityCheckConnectivityCheck/Action",
  "resourceId": "Action",
  "etag": "W/\\"66a5e77a-3c60-46e6-a9d2-4df34c2636fd\\"",
  "instanceId": "178fe70f-c00d-4784-82ac-266e9758d345",
  "properties": {
    "provisioningState": "Updating",
    "senderVirtualNetwork": {
      "resourceRef": "/virtualNetworks/fcfc99f9-50ce-4644-8a47-a23711c3b704"
    }
  }
}
```

```

    "receiverVirtualNetwork": {
      "resourceRef": "/virtualNetworks/fcfc99f9-50ce-4644-8a47-a23711c3b704"
    },
    "senderIpAddress": "13.168.100.21",
    "receiverIpAddress": "13.168.100.22",
    "protocol": "Icmp",
    "operationId": "e5c6e548-9a81-4493-9cad-47e06f830b69",
    "connectivityCheckResult": {
      "resourceRef": "/diagnostics/connectivityCheckResults/e5c6e548-9a81-4493-9cad-47e06f830b69"
    },
    "submitTime": "2016-06-21T03:05:34.2067482Z"
  }
}

```

The JSON schema for the **connectivityCheckConnectivityCheck** PUT method response body is located in section 6.19.1.2

3.1.5.21.1.1.3 Processing Details

Initiates a **diagnostics actionAction** to check data path connectivity between two endpoints and returns the **operationId** to query the status using the **GET** operation on **Diagnostics ConnectivityCheckResults** in section 3.1.5.21.2.1.1.

3.1.5.21.2 Diagnostics ConnectivityCheckResults

The **ConnectivityCheckResults** resource queries the result of a previously initiated **diagnostics actionAction** between two endpoints.

It is invoked through the following URI.

```
https://<url>/networking/v1/diagnostics/ConnectivityCheckResults/{resourceId}
```

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
GET	3.1.5.21.2.1.1	Retrieves the result of the previously initiated diagnostics operation.
GET (All)ALL	3.1.5.21.2.1.2	Lists the result of previously initiated diagnostics operation.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
SenderIpAddresssenderIpAddress	Read-only	IP Address of the Sender endpoint from which the diagnostics needs to be

Element name	Type	Description
		initiated.
ReceiverIpAddress <u>receiverIpAddress</u>	Read-only	IP Address of the Receiver endpoint to which the diagnostics needs to be initiated.
SenderVirtualNetwork <u>senderVirtualNetwork</u>	Read-only	Virtual Network reference of the Sender endpoint from which the diagnostics needs to be initiated.
ReceiverVirtualNetwork <u>receiverVirtualNetwork</u>	Read-only	Virtual Network reference of the Receiver endpoint to which the diagnostics needs to be initiated.
SenderLogicalNetwork <u>senderLogicalNetwork</u>	Read-only	Logical Network reference of the Sender endpoint from which the diagnostics needs to be initiated.
ReceiverLogicalNetwork <u>receiverLogicalNetwork</u>	Read-only	Logical Network reference of the Receiver endpoint to which the diagnostics needs to be initiated.
Protocol <u>protocol</u>	Read-only	Protocol to be used for diagnostics.
IcmpProtocolConfig	Read-only	ICMP Protocol specific configuration .
IcmpProtocolConfig.Length	Read-only	Length of the ICMP

Element name	Type	Description
		packet.
IcmpProtocolConfig.SequenceNumber	Read-only	Sequence Number of the ICMP packet.
<u>OperationId</u>operationId	Read-only	Operation ID for this diagnostics operation.
<u>SubmitTime</u>submitTime	Read-only	Submit Time of this diagnostics operation.
<u>Result</u>result	Read-only	Result output of this diagnostics operation.
<u>Result.Status</u>result.status	Read-only	Status of the diagnostics operation.
<u>Result.RoundTripTimeMSec</u>result.roundTripTimeMSec	Read-only	Round trip time in msec.
<u>Result.ErrorMessage</u>result.errorMessage	Read-only	Error occurred while executing the operation, if any.
<u>Result.NodeOutput</u>result.nodeOutput	Read-only	Diagnostics Trace Output.
<u>Result.NodeOutput.NodeType</u>result.nodeOutput.nodeType	Read-only	Type of the node: sender, receiver, or transit.
<u>Result.NodeOutput.NodeSequenceNumber</u>result.nodeOutput.nodeSequenceNumber	Read-only	Sequence number of the node in the data path.
<u>Result.NodeOutput.TraceOutput</u>result.nodeOutput.traceOutput	Read-only	Trace Output from the node.

3.1.5.21.2.1 HTTP Methods

3.1.5.21.2.1.1 GET

Retrieves the status of **diagnostics ~~connectivity-check-action~~ConnectivityCheck Action**.

The It is invoked through the following URI for this resource is as follows.

```
https://<url>/networking/v1/diagnostics/ConnectivityCheckResults/{operationId}
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.21.2.1.1.1 Request Body

None.

3.1.5.21.2.1.1.2 Response Body

The format for the response body for the **Diagnostics ConnectivityCheckResults GET** method is as follows.

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for ConnectivityCheck",

  "definitions": {
    "networkReference": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },

  "properties": {
    "properties": {
      "type": "object",
      "properties": {
        "senderLogicalNetwork": { "$ref": "#/definitions/networkReference" },
        "receiverLogicalNetwork": { "$ref": "#/definitions/networkReference" },
        "senderVirtualNetwork": { "$ref": "#/definitions/networkReference" },
        "receiverVirtualNetwork": { "$ref": "#/definitions/networkReference" },
        "senderIpAddress": {
          "type": "string",
          "format": "ipv4"
        },
        "receiverIpAddress": {
```

```

        "type": "string",
        "format": "ipv4"
    },
    "disableTracing": {
        "type": "boolean",
        "default": false
    },
    "protocol": {
        "type": "string",
        "enum": [ "Icmp", "Tcp", "Udp" ],
        "default": "Icmp"
    }
},
"required": [
    "senderIpAddress",
    "receiverIpAddress"
]
}
},
"required": [
    "properties"
]
}

```

The JSON schema for the **Diagnostics ConnectivityCheckResults GET** method is located in section 6.19.2.1.

3.1.5.21.2.1.1.3 Processing Details

None.

3.1.5.21.2.1.2 GET ~~(All)~~ALL

Retrieves the status of all available **diagnostics ~~connectivity-check-action~~ConnectivityCheck Action**.

The URI for this resource is as follows.

```
https://<url>/networking/v1/diagnostics/ConnectivityCheckResults
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

3.1.5.21.2.1.2.1 Request Body

None.

3.1.5.21.2.1.2.2 Response Body

The format for the response body for the **Diagnostics ConnectivityCheckResults GET ALL** resource is as follows.

```
{
  "value": [
    {
      "resourceRef": "/diagnostics/connectivityCheckResults/6f637294-e71c-4f61-b563-d002dadb5111",
      "resourceId": "6f637294-e71c-4f61-b563-d002dadb5111",
      "etag": "W/\"d8364719-f6cf-4f5a-af45-7eb7b5088316\"",
      "instanceId": "fd06886f-1659-409d-8f48-82020cf9a6fe",
      "properties": {
        "provisioningState": "Succeeded",
        "senderVirtualNetwork": {
          "resourceRef": "/virtualNetworks/fcfc99f9-50ce-4644-8a47-a23711c3b704"
        },
        "receiverVirtualNetwork": {
          "resourceRef": "/virtualNetworks/fcfc99f9-50ce-4644-8a47-a23711c3b704"
        },
        "senderIpAddress": "13.168.100.21",
        "receiverIpAddress": "13.168.100.22",
        "protocol": "Icmp",
        "operationId": "6f637294-e71c-4f61-b563-d002dadb5111",
        "submitTime": "2016-06-21T05:10:58.7674039Z",
        "result": {
          "status": "Pending",
          "roundTripTimeMsec": 0
        }
      }
    },
    {
      "resourceRef": "/diagnostics/connectivityCheckResults/7ba38ad6-19a2-4f11-b1ec-5c7fc03ba6a8",
      "resourceId": "7ba38ad6-19a2-4f11-b1ec-5c7fc03ba6a8",
      "etag": "W/\"2b815690-115e-4a8f-b257-38fa87e3eb0f\"",
      "instanceId": "ca18a390-42a0-4298-a4dc-72b5440f59da",
      "properties": {
        "provisioningState": "Succeeded",
        "senderVirtualNetwork": {
          "resourceRef": "/virtualNetworks/fcfc99f9-50ce-4644-8a47-a23711c3b704"
        },
        "receiverVirtualNetwork": {
          "resourceRef": "/virtualNetworks/fcfc99f9-50ce-4644-8a47-a23711c3b704"
        },
        "senderIpAddress": "13.168.100.21",
        "receiverIpAddress": "13.168.100.22",
        "protocol": "Icmp",
        "operationId": "7ba38ad6-19a2-4f11-b1ec-5c7fc03ba6a8",
        "submitTime": "2016-06-21T05:10:42.7213297Z",
        "result": {
          "status": "InProgress",
          "roundTripTimeMsec": 0
        }
      }
    }
  ],
  "nextLink": ""
}
```

The JSON schema for the **Diagnostics ConnectivityCheckResultsconnectivityCheckResults GET ALL** method is located in section 6.19.2.2.

3.1.5.21.2.1.2.3 Processing Details

None.

3.1.5.21.3 Diagnostics SlbState

The **SlbState** resource initiates a **diagnostics actionAction** to collect internal state for the software load-balancer.

It is invoked through the following URI.

```
https://<url>/networking/v1/diagnostics/SlbState
```

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.21.3.1.1	Initiates a diagnostics actionAction to check data path connectivity between two endpoints.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
OperationIdoperationId	Read-only	Operation ID for this diagnostics operation.
ConnectivityCheckResult	Read-only	Resource Referenceeference of the result resource.
SubmitTime	Read-only	Submit Time of this diagnostics operation.

3.1.5.21.3.1 HTTP Methods

3.1.5.21.3.1.1 PUT

Initiates a **diagnostics actionAction** to collect internal state for the software load-balancer.

The URI for this resource is as follows.

```
https://<url>/networking/v1/diagnostics/SlbState
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3 .

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.21.3.1.1.1 Request Body

The **slbState PUT** request body is empty JSON- `{}`.



3.1.5.21.3.1.1.2 Response Body

The **slbState PUT** response body is as follows.

```
{
  "resourceRef": "/diagnostics/slbState/Action",
  "resourceId": "Action",
  "etag": "W/\"0ed77291-6ae3-473d-8761-c1bb71369210\"",
  "instanceId": "0e85c90a-2f1f-49e9-9b0c-c24f721846fe",
  "properties": {
    "provisioningState": "Updating",
    "operationId": "f6b8c92c-fd23-4d3e-bdaf-a8375d78a1b4",
    "slbStateResult": {
      "resourceRef": "/diagnostics/slbStateResults/f6b8c92c-fd23-4d3e-bdaf-a8375d78a1b4"
    },
    "submitTime": "2016-06-21T05:00:46.5387407Z"
  }
}
```

The JSON schema for the **slbState PUT** method is located in section 6.19.3.1.

3.1.5.21.3.1.1.3 Processing Details

Initiates a **diagnostics actionAction** to collect internal state for the software load-balancer and returns the **operationId** to query the status using the **GET** operation on **Diagnostics SlbStateResults** in section 3.1.5.21.4.1.1.

3.1.5.21.4 Diagnostics SlbStateResults

The **SlbStateResults** resource queries the result of a previously initiated diagnostics **slbState** action.

It is invoked through the following URI.

```
https://<url>/networking/v1/diagnostics/SlbStateResults/{resourceId}
```

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
GET	3.1.5.21.4.1.1.1	Retrieves the result of the previously initiated diagnostics operation
GET (All)ALL	3.1.5.21.4.1.1.2	Lists the result of previously initiated diagnostics operation

The following property elements are valid:

Element name	Type	Description
etag	Read	Specified

Element name	Type	Description
	- only	in Common JSON Elements, section 2.2.2.
<u>OperationId</u> <u>operationId</u>	Read - only	Operation ID for this diagnostics operation.
<u>SubmitTime</u> <u>submitTime</u>	Read - only	Submit Time of this diagnostics operation.
<u>Status</u> <u>status</u>	Read - only	Status of the diagnostics operation.
<u>Output</u> <u>output</u>	Read - only	Result output of this diagnostics operation. The output is hierarchical with data group as level 1, data section as level 2 and data unit as level 3.
<u>Output.DataGroups</u> <u>output.dataGroups</u>	Read - only	Result output group.
<u>Output.DataGroups.Name</u> <u>output.dataGroups.name</u>	Read - only	Result output group name.
<u>Output.DataGroups.Description</u> <u>output.dataGroups.description</u>	Read - only	Result output group description.
<u>Output.DataGroups.DataSections</u> <u>output.dataGroups.dataSections</u>	Read - only	Result output section (level 2).
<u>Output.DataGroups.DataSections.Name</u> <u>output.dataGroups.dataSections.name</u>	Read - only	Result output section name.

Element name	Type	Description
<u>Output.DataGroups.DataSections.Description</u> <u>output.dataGroups.dataSections.description</u>	Read - only	Result output section description.
<u>Output.DataGroups.DataSections.DataRetrievalFailed</u> <u>output.dataGroups.dataSections.dataRetrievalFailed</u>	Read - only	Flag to indicate if the data section retrieval failed.
<u>Output.DataGroups.DataSections.DataUnits</u> <u>output.dataGroups.dataSections.dataUnits</u>	Read - only	Result output data unit (level 3).
<u>Output.DataGroups.DataSections.DataUnits-Value</u> <u>output.dataGroups.dataSections.dataUnits.value</u>	Read - only	Result output data unit value.

3.1.5.21.4.1 HTTP Methods

3.1.5.21.4.1.1 GET

Retrieves the status of the **diagnostics slbState** action.

The URI for this resource is as follows.

```
https://<url>/networking/v1/diagnostics/SlbStateResults/{operationId}
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.21.4.1.1.1 Request Body

None.

3.1.5.21.4.1.1.2 Response Body

The format for the response body for the **Diagnostics SlbStateResults GET** method is as follows.


```

{
  "resourceRef": "/diagnostics/slbStateResults/1e40106e-61e9-40ca-892d-6fdefd369249",
  "resourceId": "1e40106e-61e9-40ca-892d-6fdefd369249",
  "etag": "W/\"38d22344-97f3-4284-bf01-e6b13ce121de\"",
  "instanceId": "25c6fa83-e890-4cd4-a808-9cblaab94d8d",
  "properties": {
    "provisioningState": "Succeeded",
    "submitTime": "2016-06-22T00:01:31.2015235Z",
    "status": "Success",
    "output": {
      "dataGroups": [
        {
          "name": "Fabric",
          "description": "Fabric Slb State",
          "dataSections": [
            {
              "name": "SlbmVips",
              "description": "Slbm Vips",
              "dataRetrievalFailed": false,
              "dataUnits": [
                {
                  "value": [
                    "\"21.0.0.21\""
                  ]
                }
              ]
            },
            {
              "name": "RouterConfiguration",
              "description": "Router Configuration",
              "dataRetrievalFailed": false,
              "dataUnits": [
                {
                  "value": [
                    "{\r\n  \"goalStateId\": \"\", \r\n  \"routerID\": \"BGPGateway-0\", \r\n
                    \"routerIP\": \"192.216.0.1\", \r\n  \"routerAS\": 1, \r\n  \"bgpSharpAS\": 2\r\n}"
                  ]
                }
              ]
            }
          ]
        },
        {
          "name": "Tenant",
          "description": "Tenant Slb State",
          "dataSections": [
            {
              "name": "VipConsolidatedState",
              "description": "Vip Consolidated State",
              "dataRetrievalFailed": false,
              "dataUnits": [
                {
                  "name": "21.0.0.21",
                  "value": [
                    "\r\nProgramming and Connectivity state for VipAddress:
                    21.0.0.21\r\n===== \r\nSTATE ON
                    SLBM:\r\n\r\nCurrentStatus           : Achieved\r\nEndpointStateAchieved
                    : True\r\nSnatStateAchieved           : True\r\nRoutingStateAchieved
                    : True\r\nNumPendingVipEndpoints       : 0\r\nCurrentStateId
                    : 90dc2516-0b52-4ada-a75c-832ede7c3257\r\nCurrentOwner
                    : 192.216.0.23\r\nGoalStateId           : 90dc2516-0b52-4ada-a75c-
                    832ede7c3257\r\nGoalStateReceivedTimeStamp : 6/21/2016 8:29:12
                    PM\r\nLastStateChangeTimeStamp       : 6/21/2016 10:20:25 PM\r\nErrorMessage
                    : \r\nProgrammingTime                 :
                    01:51:12.8335361\r\nEndpointStateProgrammingTime :
                    00:00:00\r\nSnatStateProgrammingTime :
                    00:00:00.0468756\r\nRoutingStateProgrammingTime : 00:00:00.0156269\r\n\r\nVip
                    Route States                         : \r\n\r\nPrefixRouteStateInfo
                    : \r\n\r\nPrefix                       : 21.0.0.21-21.0.0.21\r\nCidr
                ]
              ]
            }
          ]
        }
      ]
    }
  }
}

```


3.1.5.21.4.1.2 GET ~~(All)~~ALL

Retrieves the status of all available **diagnostics slbState** actions.

The URI for this resource is as follows.

```
https://<url>/networking/v1/diagnostics/SlbStateResults
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

3.1.5.21.4.1.2.1 Request Body

None.

3.1.5.21.4.1.2.2 Response Body

The format for the response body for the **Diagnostics SlbStateResults GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/diagnostics/slbStateResults/f6b8c92c-fd23-4d3e-bdaf-a8375d78a1b4",
      "resourceId": "f6b8c92c-fd23-4d3e-bdaf-a8375d78a1b4",
      "etag": "W/\"68cb7d72-a116-4872-b3b0-a82826a25e54\"",
      "instanceId": "ddce237d-2434-47ca-90cc-39c5dae5a135",
      "properties": {
        "provisioningState": "Succeeded",
        "submitTime": "2016-06-21T05:00:46.4918153Z",
        "status": "Success",
        "output": {
          "dataGroups": [
            {
              "name": "Fabric",
              "description": "Fabric Slb State",
              "dataSections": [
                {
                  "name": "SlbmVips",
                  "description": "Slbm Vips",
                  "dataRetrievalFailed": false,
                  "dataUnits": [
                    {
                      "value": []
                    }
                  ]
                }
              ],
            },
            {
              "name": "MuxState",
              "description": "Mux State",
              "dataRetrievalFailed": false,
            }
          ]
        }
      }
    }
  ]
}
```

```

        "dataUnits": [
            {
                "value": []
            }
        ]
    },
    {
        "name": "RouterConfiguration",
        "description": "Router Configuration",
        "dataRetrievalFailed": false,
        "dataUnits": [
            {
                "value": []
            }
        ]
    },
    {
        "name": "ConnectedHostInfo",
        "description": "Connected Host Info",
        "dataRetrievalFailed": false,
        "dataUnits": [
            {
                "value": []
            }
        ]
    },
    {
        "name": "VipRanges",
        "description": "Vip Ranges",
        "dataRetrievalFailed": false,
        "dataUnits": [
            {
                "value": []
            },
            {
                "value": []
            }
        ]
    },
    {
        "name": "MuxRoutes",
        "description": "Mux Routes",
        "dataRetrievalFailed": false,
        "dataUnits": []
    }
]
},
{
    "name": "Tenant",
    "description": "Tenant Slb State",
    "dataSections": [
        {
            "name": "VipConsolidatedState",
            "description": "Vip Consolidated State",
            "dataRetrievalFailed": false,
            "dataUnits": []
        }
    ]
}
]
}
}
},
"nextLink": ""
}

```

The JSON schema for the **Diagnostics SibStateResults GET ALL** method is located in section 6.19.4.2.

3.1.5.21.4.1.2.3 Processing Details

None.

3.1.5.21.5 Diagnostics NetworkControllerState

The **NetworkControllerState** resource is used to create a dump of internal server data that can be useful for troubleshooting. The format and location of the saved data is implementation-specific.

It is invoked through the following URI.

```
https://<url>/networking/v1/diagnostics/networkcontrollerstate
```

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.21.5.1.1	The server will generate a dump of internal data.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
resourceRef	Read-only	Must be <code>"/networkControllerState/NetworkControllerState"-_.</code>
resourceId	Read-only	Must be <code>"NetworkControllerState"-_.</code>
instanceId	Read-only	Specified in Common JSON Elements, section 2.2.2.
Properties. provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
properties. lastQueryTimeStamp	Read-only	Timestamp of the last query operation in format MMdyyyHHmmssff.

3.1.5.21.5.1 HTTP Methods

3.1.5.21.5.1.1 PUT

The URI for this resource is as follows.

```
https://<url>/networking/v1/diagnostics/diagnostics/networkcontrollerstate
```

There are no parameters for this operation.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.21.5.1.1.1 Request Body

The body MUST be `{ "properties": { } }`.

3.1.5.21.5.1.1.2 Response Body

The format for the response body for the **Diagnostics NetworkControllerState PUT** method is as follows.

```
{
  "resourceRef": "/networkControllerState/NetworkControllerState",
  "resourceId": "NetworkControllerState",
  "etag": "W/\"bc673415-9256-429d-869c-15dc55614616\"",
  "instanceId": "87dabccd-c2db-472e-af07-af92d7ce0283",
  "properties": {
    "provisioningState": "Updating",
    "lastQueryTimeStamp": "06152016163859310"
  }
}
```

The JSON schema for the **Diagnostics NetworkControllerState PUT** method is located in section 6.19.5.1.

3.1.5.21.5.1.1.3 Processing Details

None.

3.1.5.22 networkControllerStatistics

The **NetworkControllerStatistics** resource provides a means to get usage and health information for a few resources:

- Health for **virtualNetworks**, **gateways**, and **loadBalancerMux**/**loadBalancerMuxes**.
- Usage for **publicIPAddresses**, **loadBalancer** backend IPs and **macPools**.

It is invoked through the following URI.

```
https://<URLurl>/networking/v1/monitoring/NetworkControllerStatistics
```

url: the address of the computer on which the Network Controller is running.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
GET	3.1.5.23.1.1	Map one instance ID to resource ID.

The following property elements are valid:

Element name	Type	Description
resourceRef	Read-only	Specified in Common JSON Elements, section 2.2.2. Must be <code>"/monitoring/NetworkControllerStatistics"</code> .
instanceId	Read-only	Specified in Common JSON Elements, section 2.2.2.
Properties. provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
Properties. healthStatistics	Read-only	Array of healthStatisticsItem
Properties. usageStatistics	Read-only	Array of usageStatisticsItem

healthStatisticsItem

Element name	Type	Description
resourceType	Read-only	Can be <code>"VirtualNetworkGateway"</code> or <code>"LoadBalancerMux"</code> . These correspond to the top-level resources virtualNetworks , Gateways , or LoadBalancerMux / loadBalancerMuxes .
totalResourceCount	Read-only	Total count of REST resources of the type of resource specified by resourceType .
healthyResourceCount	Read-only	Count of such resources in healthy state.
errorResourceCount	Read-only	Count of such resources in an error state.
warningResourceCount	Read-only	Count of such resources in a warning state.
healthUnknownCount	Read-only	Count of such resources for which the health cannot be assessed.

usageStatisticsItem

Element name	Type	Description
resourceType	Read-only	Can be <code>"PublicIPUtilization"</code> , <code>"BackendIPUtilization"</code> or <code>"MacPoolUtilization"</code> corresponding to publicIpAddresses / publicIPAddresses resource, IPs in backendAddressPools , or macPools resource.
totalResourceCount	Read-only	Total count of REST resources of the type of resource specified by resourceType .
inUseResourceCount	Read-only	Count of such resources that are in use.

3.1.5.22.1 HTTP Methods

3.1.5.22.1.1 GET

This method retrieves health and usage information.

It is invoked through the following URI.

```
https://<url>/networking/v1/monitoring/networkControllerStatistics
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.22.1.1.1 Request Body

None.

3.1.5.22.1.1.2 Response Body

The format for the response body for the **monitoring/networkControllerStatistics GET** method is as follows:

```
{
  "resourceRef": "/monitoring/networkControllerStatistics/",
  "instanceId": "00000000-0000-0000-0000-000000000000",
  "properties": {
    "provisioningState": "Succeeded",
    "healthStatistics": [
      {
        "resourceType": "VirtualNetwork",
        "totalResourceCount": 1,
        "healthyResourceCount": 0,
        "errorResourceCount": 0,
        "warningResourceCount": 0,
        "healthUnknownCount": 1
      },
      {
        "resourceType": "Gateway",
        "totalResourceCount": 0,
        "healthyResourceCount": 0,
        "errorResourceCount": 0,
        "warningResourceCount": 0,
        "healthUnknownCount": 0
      },
      {
        "resourceType": "LoadBalancerMux",
        "totalResourceCount": 0,
        "healthyResourceCount": 0,
        "errorResourceCount": 0,
        "warningResourceCount": 0,
        "healthUnknownCount": 0
      }
    ],
    "usageStatistics": [
      {
        "resourceType": "PublicIPUtilization",
        "totalResourceCount": 0,
        "inUseResourceCount": 0
      },
      {
        "resourceType": "BackendIPUtilization",
        "totalResourceCount": 65436,
        "inUseResourceCount": 2
      }
    ]
  }
}
```



```

    {
      "resourceType": "MacPoolUtilization",
      "totalResourceCount": 65536,
      "inUseResourceCount": 4
    }
  ]
}

```

The JSON schema for the **monitoring/networkControllerStatistics GET** method is located in section 6.20.1.

3.1.5.22.1.1.3 Processing Details

This method retrieves a health and usage statistics.

3.1.5.23 internalResourceInstances

The **internalResourceInstances** resource provides a means to map instance IDs to resource IDs or to get all the mappings. ~~It is invoked through the following URI.~~

It is invoked through the following URI.

```
https://<URLurl>/networking/v1/internalResourceInstances/{instanceId}
```

url: the address of the computer on which the Network Controller is running.

instanceId: the identifier for the specific resource within the resource type. See section 2.2.2, common JSON Elements.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
GET	3.1.5.23.1.1	Map one instance ID to resource ID.
GET (All) ALL	3.1.5.23.1.2	List all the mappings.

The following property elements are valid:

Element name	Type	Description
resourceRef	Read-only	Specified in Common JSON Elements, section 2.2.2. Reference relative to internalResourceInstances.
resourceId	Read-only	Specified in Common JSON Elements, section 2.2.2.
instanceId	Read-only	Specified in Common JSON Elements, section 2.2.2.
Properties.provisioningState	Read-only	
Properties.resourceReference	Read-only	Actual resource reference

3.1.5.23.1 HTTP Methods

3.1.5.23.1.1 GET

This method retrieves an instance ID to resource ID mapping.

It is invoked through the following URI.

```
https://<url>/networking/v1/internalResourceInstances/{instanceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.23.1.1.1 Request Body

None.

3.1.5.23.1.1.2 Response Body

The format for the response body for the **internalResourceInstances GET** method is as follows:

```
{
  "resourceRef": "/internalResourceInstances/feaceea7-d230-43a8-8432-dc3ecb82c813",
  "resourceId": "feaceea7-d230-43a8-8432-dc3ecb82c813",
  "instanceId": "866a1b81-e241-41bc-a424-aab75fff9ffb",
  "properties": {
    "provisioningState": "Succeeded",
    "resourceReference": "/loadBalancers/d7574599-9ac8-451b-aadf-
bbd3b5d9d311/outboundNatRules/57140aa8-d782-453d-98bc-1df9fd264e50"
  }
}
```

The JSON schema for the **internalResourceInstances GET** method is located in section 6.21.1.

3.1.5.23.1.1.3 Processing Details

This method retrieves an instance ID to resource ID mapping.

3.1.5.23.1.2 GET ~~(All)~~ALL

This method retrieves all instance ID to resource ID mappings.

It is invoked through the following URI.

```
https://<url>/networking/v1/internalResourceInstances/
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.23.1.2.1 Request Body

None.

3.1.5.23.1.2.2 Response Body

The format for the response body for the **internalResourceInstances GET ALL** method is as follows.

```
{
  "value": [
    {
      "resourceRef": "/internalResourceInstances/feaceea7-d230-43a8-8432-dc3ecb82c813",
      "resourceId": "feaceea7-d230-43a8-8432-dc3ecb82c813",
      "instanceId": "866a1b81-e241-41bc-a424-aab75fff9ffb",
      "properties": {
        "provisioningState": "Succeeded",
        "resourceReference": "/loadBalancers/d7574599-9ac8-451b-aadf-
bbd3b5d9d311/outboundNatRules/57140aa8-d782-453d-98bc-1df9fd264e50"
      }
    },
    {
      "resourceRef": "/internalResourceInstances/ffa98c72-fffa-4523-92db-a37bf151074a",
      "resourceId": "ffa98c72-fffa-4523-92db-a37bf151074a",
      "instanceId": "9c5f9ab7-358e-4465-ac0e-ec532761768a",
      "properties": {
        "provisioningState": "Succeeded",
        "resourceReference": "/networkInterfaces/2abde95f-ed76-4245-bcf4-27da32e3a757"
      }
    }
  ],
  "nextLink": ""
}
```

The JSON schema for the **internalResourceInstances GET ALL** method is located in section 6.21.2.

3.1.5.23.1.2.3 Processing Details

This method retrieves all instance ID to resource ID mappings.

3.1.5.24 iDnsServer

The **iDnsServer** resource contains the configuration details for the DNS server in the internal DNS ([iDNS](#)) service.

~~The URI for the **iDnsServer** resource is as follows:~~ [It is invoked through the following URI.](#)

`https://<url>/networking/v1/iDnsServer/configuration`

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	section 3.1.5.24.1.1	Create the iDnsServer resource or update the existing iDnsServer resource.
GET	section 3.1.5.24.1.2	Get the iDnsServer resource.

The following property elements are valid.

Element name	Type	Description
Etagetag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
Connections	Required	Indicates a reference to collection of all the connections on the iDNS Server of the deployment.
Zone	Required	Indicates the DNS zone under which the tenant host DNS resource records as described in [RFC1034] section 3.6 are stored.

3.1.5.24.1 HTTP Methods

3.1.5.24.1.1 PUT

This method creates the **iDnsServer** resource or updates the existing **iDnsServer** resource.

It is invoked through the following URI.

`https://<url>/networking/v1/iDnsServer/configuration`

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes:

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.24.1.1.1 Request Body

The format for the request body for the **iDnsServer PUT** method is as follows.

```
{
  "properties": {
    "connections": [
      {
        "managementAddresses": [
          "192.83.0.23"
        ],
        "credential": {
          "resourceRef": "/credentials/iDnsServer-Credentials"
        },
        "credentialType": "usernamePassword"
      }
    ],
    "zone": "cloudapp.net"
  }
}
```

The JSON schema for the **iDnsServer PUT** method is located in section 6.22.1.

3.1.5.24.1.1.2 Response Body

The format for the response body for the **PUT** method is the same as the **GET iDnsServer** response body (section 3.1.5.24.1.2.2). The JSON schema is located in section 6.22.2.

3.1.5.24.1.1.3 Processing Details

Creates the **iDnsServer** resource or updates an existing **iDnsServer** resource.

3.1.5.24.1.2 GET

This method retrieves the **iDnsServer** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/iDnsServer/configuration
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.24.1.2.1 Request Body

None.

3.1.5.24.1.2.2 Response Body

The format for the response body for the **iDnsServer GET** method is as follows.

```
{
  "resourceRef": "/iDnsServer/configuration",
  "resourceId": "configuration",
  "etag": "W/\\"0ba91307-fe4d-4ed1-8e7c-472f77e942ca\"",
  "instanceId": "ae39e307-f8e6-43f6-9264-4a54c43ee33a",
  "properties": {
    "provisioningState": "Succeeded",
    "connections": [
      {
        "managementAddresses": [
          "192.83.0.23"
        ],
        "credential": {
          "resourceRef": "/credentials/iDnsServer-Credentials"
        },
        "credentialType": "usernamePassword"
      }
    ],
    "zone": "cloudapp.net"
  }
}
```

The JSON schema for the **iDnsServer GET** method is located in section 6.22.2.

3.1.5.24.1.2.3 Processing Details

Retrieves the **iDnsServer** resource.

3.1.5.25 virtualSwitchManager

The **virtualSwitchManager** resource is a singleton resource that configures the virtual switch properties on every server managed by the Network Controller (**NC**), meaning that the NC has server resources for those machines).

It is invoked through the following URI.

`https://<url>/networking/v1/virtualSwitchManager/configuration`

The following HTTP methods can be performed on this resource.

HTTP method	Description
PUT	Create a new virtualNetworkManager resource or update an existing virtualGatewaysVirtualGateways resource.
GET	Get one virtualNetworkManager resource

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
QosSettings	Optional	See table below

QosSettings

Element name	Type	Description
reservationMode		Specifies whether outboundReservedValue is applied as the absolute bandwidth (Mbps) or as a weighted value. Allowed values are " absolute " <u>Absolute</u> or " weight " <u>Weight</u> .
enableSoftwareRevervation		True <u>TRUE</u> to enable software QOS reservation.
enableHardwareLimits		Offloads <u>transmit Tx rings</u> and <u>receive Rx rings capabilities (cap)</u> to hardware.
enableHardwareREservation		Offloads bandwidth reservation to hardware.
linkSpeedPercentage		The percentage of the link speed to be used for calculating reservable bandwidth.
defaultReservation		The default value of the reservation to be used for NICs that do not have any reservation specified (0).

3.1.5.25.1 HTTP Methods

3.1.5.25.1.1 PUT

This method updates the **virtualSwitchManager** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualSwitchManager/configuration
```

3.1.5.25.1.1.1 Request Body

The format for the **virtualSwitchManager PUT** request body is as follows.

```
{
  "resourceId": "configuration",
  "etag": "W/\"14753c1f-5893-45d7-8710-daf66c8dbb1e\"",
  "properties": {
    "qosSettings": {
      "reservationMode": "Weight",
      "linkSpeedPercentage": 50,
      "defaultReservation": 10,
      "enableHardwareLimits": false,
      "enableHardwareReservations": false,
      "enableSoftwareReservations": true
    }
  }
}
```

The JSON schema for the **virtualSwitchManager PUT** method is located in section 6.23.1.

3.1.5.25.1.1.2 Response Body

The format for the response body for the **PUT virtualSwitchManager** method is the same as the format for the **GET virtualSwitchManager** response body (section 3.1.5.25.1.2.2). The JSON schema is located in section 6.23.2.

3.1.5.25.1.1.3 Processing Details

Create or update the global virtual switch settings.

3.1.5.25.1.2 GET

Retrieves the **virtualSwitchManager** configuration

It is invoked through the following URI.

```
https://<url>/networking/v1/virtualSwitchManager/configuration
```

There are no parameters for this query.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)

3.1.5.25.1.2.1 Request Body

None.

3.1.5.25.1.2.2 Response Body

The format for the **virtualSwitchManager GET** response body is as follows.

```
{
  "resourceRef": "/virtualSwitchManager/configuration",
  "resourceId": "configuration",
  "etag": "W/\"ad1807d8-6ba6-4c24-9ad5-771f5e39474f\"",
  "instanceId": "d8ebbd42-6334-4c4a-8a11-5351df46984e",
  "properties": {
    "provisioningState": "Succeeded",
    "qosSettings": {
      "reservationMode": "Absolute",
      "linkSpeedPercentage": 22,
      "defaultReservation": 0,
      "enableHardwareLimits": false,
      "enableHardwareReservations": false,
      "enableSoftwareReservations": true
    },
    "numInterfacesHavingQos": 0
  }
}
```

The JSON schema for the **virtualSwitchManager GET** method is located in section 6.23.2.

3.1.5.25.1.2.3 Processing Details

Retrieves the **virtualSwitchManager** configuration.

3.1.5.26 networkControllerBackup

The **networkControllerBackup** resource<13> is used to persist to disk all the applicable configuration data for a network controller. The backed-up data can be used to restore the configuration of the network controller. For more details, see section 3.1.5.27, **networkControllerRestore**. The format of the backed-up data is implementation-specific and is treated as opaque data.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkControllerBackup/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.26.1.1	Create a new networkControllerBackup resource or update an existing networkControllerBackup resource.
GET	3.1.5.26.1.2	Get a networkControllerBackup resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
instanceId	Read-only	Specified in Common JSON Elements, section 2.2.2.
backupPath	Required	A path to a location where the backup operation persists files.
credential	Optional	A reference (resourceRef in section 2.2.2) to a credentials resource. The credential MUST be of type usernamePassword . The credential is used to access the backupPath .
errorMessage	Read-only	A string that describes an error, such as, backupPath is not accessible. An empty string can be returned.
failedResourcesList	Read-only	An array of strings that are references (resourceRef in section 2.2.2) to resources that could not be backed up. An empty array can be returned.
successfulResourcesList	Read-only	An array of strings that are references (resourceRef in section 2.2.2) to resources that were successfully backed up. An empty array can be returned.
inProgressResourcesList	Read-only	An array of strings that are references (resourceRef in section 2.2.2) to resources that are in progress of being backed up. An empty array can be returned.

3.1.5.26.1 HTTP Methods

3.1.5.26.1.1 PUT

This method creates a new **networkControllerBackup** resource or updates an existing **networkControllerBackup** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkControllerBackup/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.26.1.1.1 Request Body

The format for the request body for the **networkControllerBackup PUT** method is as follows.

```
{
  "properties": {
    "backupPath": "\\cloudshare\backups\09072016",
    "credential": {
      "resourceRef": "/credentials/backuprestore-credential"
    }
  }
}
```

The JSON schema for the **networkControllerBackup PUT** method is located in section 6.24.1.

3.1.5.26.1.1.2 Response Body

The format for the response body for the **PUT networkControllerBackup** method is the same as the format for the **GET networkControllerBackup** response body (section 3.1.5.27.1.2.2). The JSON schema is located in section 6.24.2.

3.1.5.26.1.1.3 Processing Details

Creates a new **networkControllerBackup** resource or updates an existing **networkControllerBackup** resource. The network controller begins an internal operation of backing up all the applicable configuration data.

3.1.5.26.1.2 GET

This method retrieves a **networkControllerBackup** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkControllerBackup/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.26.1.2.1 Request Body

None.

3.1.5.26.1.2.2 Response Body

The format for the response body for the **networkControllerBackup GET** method is as follows.

```
{
  "resourceRef": "/networkControllerBackup/backup3",
  "resourceId": "backup3",
  "etag": "W/\"a7a81dab-826a-4adb-8176-1e2a8b4658c5\"",
  "instanceId": "90c0dbec-afa2-4378-a277-ffe822fb8288",
  "properties": {
    "provisioningState": "Succeeded",
    "backupPath": "\\cloudshare\\backup\\backup3",
    "credential": {
      "resourceRef": "/credentials/host1-credentials"
    },
    "errorMessage": "",
    "failedResourcesList": [],
    "successfulResourcesList": [
      "/networking/v1/credentials/238c0490-71c6-49ea-9189-fb325fa47eb9",
      "/networking/v1/credentials/host1-credentials",
      "/networking/v1/virtualNetworkManager/configuration",
      "/networking/v1/virtualSwitchManager/configuration",
      "/networking/v1/accessControlLists/00269b41-e4c8-4193-a8e3-73a31ad62ebd",
      "/networking/v1/accessControlLists/eb5d4509-f4e5-45ac-befd-05c841d85709",
      "/networking/v1/accessControlLists/f6d79b36-867c-4a8b-9ae7-f7229a511d01",
      "/networking/v1/logicalNetworks/logicalNetworks/a9ff429f-168c-4ed7-8cca-6fc623dfff9c",
      "/networking/v1/macPools/5baae598-b262-477c-8801-207431a9da6b",
      "/networking/v1/servers/host1",
      "/networking/v1/networkInterfaces/52f2414c-0b95-44ce-afab-e2f8c395fb96",
      "/networking/v1/networkInterfaces/e73f7a7f-adfa-47e2-ad2f-8014c9411902",
      "/networking/v1/virtualNetworks/9119efd6-9a34-4073-ba87-e862b2c60140"
    ],
    "inProgressResourcesList": []
  }
}
```

The JSON schema for the **networkControllerBackup GET** method is located in section 6.24.2.

The value for the returned properties depends on when the **GET** method is invoked. The value can contain any or all the following lists: a list of resources that are in progress of being backed up, lists of resources that have been successfully backed up, or a list of resources that could not be backed up. An error message can be returned if not all the resources were backed up successfully.

3.1.5.26.1.2.3 Processing Details

Retrieves the status of the backup operation that was launched when the first **PUT** of the resource occurred.

3.1.5.27 networkControllerRestore

The **networkControllerRestore** resource<14> is used to restore from disk all the applicable configuration data for a network controller. The configuration of the network controller **MUST** first be backed up via a PUT operation on a **networkControllerBackup** resource. For more details, see section 3.1.5.26, **networkControllerBackup**.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkControllerRestore/{resourceId}
```

resourceId: the identifier for the specific resource within the resource type. See section 2.2.3.4, for more details.

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.27.1.1	Create a new networkControllerRestore resource or update an existing networkControllerRestore resource.
GET	3.1.5.27.1.2	Get a networkControllerRestore resource.

The following property elements are valid:

Element name	Type	Description
etag	Read-only	Specified in Common JSON Elements, section 2.2.2.
provisioningState	Read-only	Specified in Common JSON Elements, section 2.2.2.
instanceId	Read-only	Specified in Common JSON Elements, section 2.2.2.
restorePath	Required	Location from which to pick up the backup data. The location MUST contain data previously created by a PUT operation on a networkControllerBackup resource.
credential	Required	A reference (resourceRef in section 2.2.2) to a credentials resource. The credential MUST be of type <code>usernamePassword</code> . The credential is used to access the restorePath .
statusMessages	Read-only	An array of strings that describe the current progress of the restore. The messages are implementation-specific. They can provide time stamps or the time that was spent restoring resources. An empty array can be returned.
successfulResourceList	Read-only	Array of strings that represent references (resourceRef in section

Element name	Type	Description
		2.2.2) for resources that were restored successfully. An empty array can be returned.
failedResourceList	Read-only	Array of strings that represent references (resourceRef in section 2.2.2) for resources that were not restored successfully. An empty array can be returned.

3.1.5.27.1 HTTP Methods

3.1.5.27.1.1 PUT

This method creates a new **networkControllerRestore** resource or updates an existing **networkControllerRestore** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkControllerRestore/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
412 (Precondition Failed)
500 (Internal Server Error)

3.1.5.27.1.1.1 Request Body

The format for the request body for the **networkControllerRestore PUT** method is as follows.

```
{
  "properties": {
    "restorePath": "\\cloudshare\backups\09072016",
    "credential": {
      "resourceRef": "/credentials/backuprestore-credential"
    }
  }
}
```

The JSON schema for the **networkControllerRestore PUT** method is located in section 6.25.1.

3.1.5.27.1.1.2 Response Body

The format for the response body for the **PUT networkControllerRestore** method is the same as the format for the **GET networkControllerRestore** response body (section 3.1.5.27.1.2.2). The JSON schema is located in section 6.25.1.

3.1.5.27.1.1.3 Processing Details

Creates a new **networkControllerRestore** resource or updates an existing **networkControllerRestore** resource. The network controller begins an internal operation of restoring resource configuration from the back-up data on disk. The network controller updates the provisioning state and, optionally, the error message properties depending on the restore status.

3.1.5.27.1.2 GET

This method retrieves a **networkControllerRestore** resource.

It is invoked through the following URI.

```
https://<url>/networking/v1/networkControllerRestore/{resourceId}
```

The query parameters are specified in section 2.2.3.

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.27.1.2.1 Request Body

None.

3.1.5.27.1.2.2 Response Body

The format for the response body for the **networkControllerRestore GET** is as follows.

```
{
  "resourceRef": "/networkControllerRestore/restore09072016",
  "resourceId": "rloc",
  "etag": "W/\"7f448790-3191-46fb-bb80-b13740e1cde1\"",
  "instanceId": "cbfcfdf2-5049-44e9-9776-461029ed78a1",
  "properties": {
    "provisioningState": "Succeeded",
    "restorePath": "\\\"\\\"\\cloudshare\\backups\\09072016",
    "failedResourceList": [],
    "successfulResourceList": [
      "/networking/v1/credentials/9f205df2-d36b-4b81-a2a6-a0aefcd3e557",
      "/networking/v1/credentials/backuprestore-credential",
      "/networking/v1/virtualNetworkManager/configuration",
      "/networking/v1/virtualSwitchManager/configuration",
      "/networking/v1/accessControlLists/357742e1-9cf9-468a-b33a-994ddaa65939",
      "/networking/v1/accessControlLists/3c916a36-fa6e-470b-a945-d3ab8aa76c28",
      "/networking/v1/accessControlLists/6601cb8d-c7b9-43cf-a156-9c98a4c1a3be",
    ]
  }
}
```

```

"/networking/v1/accessControlLists/c11f6c66-4029-4236-a30f-b80fbcdf0e94",
"/networking/v1/accessControlLists/c342db3a-83aa-40d4-b905-e72ed2420f87",
"/networking/v1/logicalnetworks/LogicalNetworks/84188228-6705-4980-b622-be2127d66a5d",
"/networking/v1/macPools/d7b7e3d4-0308-4328-93ef-5bfb97bc2c3a",
"/networking/v1/servers/testhost1",
"/networking/v1/networkInterfaces/64c301dc-b2f4-406e-849d-ef4088337fb5",
"/networking/v1/networkInterfaces/91f93708-7d06-44ca-b10d-d99956b6b1db",
"/networking/v1/networkInterfaces/a6e56a93-cfbd-4a83-917e-a7727d9052d9",
"/networking/v1/networkInterfaces/e1692488-039a-4786-8799-d819724f1fa1",
"/networking/v1/virtualNetworks/a9ec521a-ee88-4e7d-9200-a74f7c31a3f7"
]
"statusMessages": [
  "OverallStatus:Restore is currenty in Stage: GenerateReport",
  "Service : NamedPropertyStore , Stage : RestoreNamedPropertyStoreCompleted, Status :
Success, StartTime : 11/30/2016 11:00:26 AM, EndTime : 11/30/2016 11:00:28 AM",
  "Service : SlbManagerService , Stage : RestoreKVSCompleted, Status : Success, StartTime
: 11/30/2016 11:01:28 AM, EndTime : 11/30/2016 11:01:28 AM",
  "Service : FirewallService , Stage : RestoreKVSCompleted, Status : Success, StartTime :
11/30/2016 11:01:08 AM, EndTime : 11/30/2016 11:01:08 AM",
  "Service : VSwitchService , Stage : RestoreKVSCompleted, Status : Success, StartTime :
11/30/2016 11:01:20 AM, EndTime : 11/30/2016 11:01:20 AM",
  "Service : GatewayManager , Stage : RestoreKVSCompleted, Status : Success, StartTime :
11/30/2016 11:01:01 AM, EndTime : 11/30/2016 11:01:01 AM",
  "Service : ServiceInsertion , Stage : RestoreKVSCompleted, Status : Success, StartTime
: 11/30/2016 11:00:58 AM, EndTime : 11/30/2016 11:00:58 AM",
  "Service : ControllerService , Stage : RestoreKVSCompleted, Status : Success, StartTime
: 11/30/2016 11:01:29 AM, EndTime : 11/30/2016 11:01:29 AM",
  "Service : FnmService , Stage : RestoreKVSCompleted, Status : Success, StartTime :
11/30/2016 11:01:10 AM, EndTime : 11/30/2016 11:01:10 AM",
  "Service : ApiService , Stage : ReplayCompleted, Status : Success, StartTime :
11/30/2016 11:06:04 AM, EndTime : 11/30/2016 11:06:05 AM"
]
}
}
}

```

The JSON schema for the **networkControllerRestore GET** method is located in section 6.25.2.

3.1.5.27.1.2.3 Processing Details

Retrieves the status of the restore operation that was launched when the first **PUT** of the resource occurred.

3.1.5.28 SubnetEgressReset

The **SubnetEgressReset** resource ~~SHOULD~~<15> **be** used to create an action to reset the **UnbilledEgressBytes** and **BilledEgressBytes** properties of virtual network subnets to 0.

3.1.5.28.1 ~~PUT~~

~~The~~ It is invoked through the following v2 URI.

<https://<url>/networking/v2/SubnetEgressReset>

The following HTTP methods can be performed on this resource.

HTTP method	Section	Description
PUT	3.1.5.28.1	Create a new SubnetEgressReset resource.
GET	3.1.5.28.2	Get a SubnetEgressReset resource.

3.1.5.28.1 PUT-method

The **SubnetEgressReset PUT** method creates a new **SubnetEgressReset** resource.

It is invoked through the following v2 URI.

```
https://<url>/networking/v2/SubnetEgressReset
```

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
201 (Created)
404 (Not Found)
500 (Internal Server Error)

3.1.5.28.1.1 Request Body

The format for the request body for the **SubnetEgressReset PUT** method is as follows.

```
{
  "properties": {
    "virtualSubnetResourceReference": "/virtualnetwork/vnet1/subnet/subnet2"
  }
}
```

The **virtualSubnetResourceReference** property must be a reference to an existing virtual network subnet resource. The JSON schema for the **SubnetEgressReset PUT** method is located in section 6.26.1.

3.1.5.28.1.2 Response Body

The format for the response body for the **SubnetEgressReset PUT** method is the same as the format for the **SubnetEgressReset GET** response body (section 3.1.5.28.2.2). The JSON schema is located in section 6.26.2.

3.1.5.28.1.3 Processing Details

The **UnbilledEgressBytes** and **BilledEgressBytes** properties of the referenced virtual network subnet are reset to 0.

3.1.5.28.2 GET

The **SubnetEgressReset GET** method retrieves the result of an action created via **SubnetEgressReset PUT** resource.

It is invoked through the following v2 URI.

`https://<url>/networking/v2/SubnetEgressReset`

The request message for this method contains the HTTP headers defined in section 2.2.1.2.

The response message for this method contains the HTTP headers defined in section 2.2.1.3.

The response message for this method can result in the following status codes.

Status code
200 (OK)
404 (Not Found)

3.1.5.28.2.1 Request Body

None.

3.1.5.28.2.2 Response Body

The format for the response body for the **SubnetEgressReset GET** is as follows.

```
{
  "resourceRef": "/subnetEgressReset/Action",
  "resourceId": "Action",
  "etag": "W/\"d7a4302a-a0c1-4b6f-a612-095c52f32a88\"",
  "instanceId": "c8cac2f9-e5af-4671-a2ae-635f386a87eb",
  "properties": {
    "provisioningState": "Updating",
    "virtualSubnetResourceReference": "/virtualnetwork/vnet1/subnet/subnet2"
  }
}
```

The JSON schema for the **SubnetEgressReset GET** method is located in section 6.26.2.

3.1.5.28.2.3 Processing Details

Retrieves the status of the last action created via the **PUT** operation.

3.1.5.29 Response Content for Errors

If the Network Controller returns an error for any operation, it includes the appropriate HTTP status code ~~(see and a response body. See the [RFC7231], Hypertext Transfer Protocol (HTTP) Status Code Registry, definition of specific response codes) and a response body. [RFC7231].~~ The JSON schema for the response body is given in the appendix, section 6.27. ~~The following property elements are valid for the response body:~~

The following property elements are valid for the response body.

Element name	Type	Description
error	Read-only	Container for the properties defined following.

Element name	Type	Description
error.code	Read-only	A string that is an error identifier. These error identifiers are defined in detail later in this section.
error.message	Read-only	A description of the error. This string is implementation-specific.
error.innerError	Read-only Optional	String description of an error that was the initial cause for a subsequent error (for error.code). This string is implementation-specific.
error.target	Read-only Optional	This string is implementation-specific. It contains extra details about the source of the error.
error.details	Read-only Optional	An array of structures that describe in more detail any errors that happened while the server was processing a REST method call.
error.details.code	Read-only	The same description applies as for error.code above.
error.details.message	Read-only	The same description applies as for error.message above.

Below [Following](#) is an example of a complete error response that include headers and JSON body.

```

HTTP/1.1 400 Bad Request
Content-Length: 1552
Content-Type: application/json; charset=utf-8
Server: Microsoft-HTTPAPI/2.0
x-ms-request-id: 3be9ff32-8097-47ad-8961-8de9caad8475
Date: Thu, 12 Jan 2017 20:11:43 GMT
Connection: close

{
  "error": {
    "code": "InvalidParameterValue",
    "message": "'\u2221'\u2221.1.1.0/24'24' is not a valid argument for
\u201caddressPrefix'\u201caddressPrefix' of a subnet.",
    "target": "SubnetAddress",
    "innerError": "Message: '\u2221'\u2221.1.1.0/24'24' is not a valid argument for
\u201caddressPrefix'\u201caddressPrefix' of a subnet., Target: SubnetAddress, InnerException: null,
Exception:
Microsoft.Windows.Networking.NetworkController.Framework.Utilities.ParameterInvalidException:
'\u2221'\u2221.1.1.0/24'24' is not a valid argument for '\u201caddressPrefix'\u201caddressPrefix' of a
subnet.\r\n at
Microsoft.Windows.Networking.NetworkController.RestApi.Fabric.Fnm.FnmUtility.ParseIpAddressWi
thPrefix(String addressWithPrefix, IPAddress& ipAddress, UInt32& addressPrefix)\r\n at
Microsoft.Windows.Networking.NetworkController.RestApi.Fabric.Fnm.FnmUtility.ValidateLogicalS
ubnet(LogicalSubnet newSubnet, LogicalNetwork logicalNetwork)\r\n at
Microsoft.Windows.Networking.NetworkController.RestApi.Fabric.Fnm.FnmUtility.ValidateLogicalN
etwork(LogicalNetwork logicalNetwork)\r\n at
Microsoft.Windows.Networking.NetworkController.RestApi.Fabric.Fnm.PutLogicalNetworkOperation.
ExecuteInternal(LogicalNetwork logicalNetwork, ITransaction transaction)\r\n at
Microsoft.Windows.Networking.NetworkController.RestApi.Common.Operations.PutResourceDefaultOp
eration`1.DefaultExecuteTopLevelResource()\r\n at
Microsoft.Windows.Networking.NetworkController.RestApi.Common.Operations.PutResourceDefaultOp
eration`1.Execute()\r\n at
Microsoft.WindowsAzure.Networking.Nrp.Frontend.Operations.OperationBase`1.Run()"
  }
}

```

The following table contains all possible error codes returned by servers, along with an explanation.

Error.Code value	Explanation
InternalServerError	An unknown error occurred.
Canceled	Operation was canceled by a different, concurrent operation.
NotFound	The specified resource was not found.
BadRequest	The input contains invalid parameters.
RetryableError	A retry-able error occurred. This error is an indication that the client SHOULD retry the previous operation.
PublicIPAddressInUse	A public IP address specified in the request is already in use.
StaticAllocationMethodNotSupported	Static allocation method for public IP addresses is not supported.
PublicIPAddressMissing	Public IP address is required when IPAllocationMethod is static.
SubnetIsFull	The subnet of the virtual or logical network does not have any more available IP addresses.
PrivateIPAddressMissing	Private IP address is required when privateIPAllocationMethod is static.
SubnetIsRequired	IP configuration resources require subnet resource references.
PrivateIPAddressNotInSubnet	The private static IP address specified does not belong to the range of subnet prefix.
PrivateIPAddressInReservedRange	The specified private static IP address falls within reserved IP range of subnet prefix.
InvalidPrivateIPAddressFormat	The private static IP address value is invalid.
PrivateIPAddressInUse	Another IP configuration <u>Configuration</u> is already using the specified IP address.
FrontendPrivateIPAddressIsNotNull	Frontend Private <u>private</u> IP Address <u>address</u> MUST not be specified when Subnet is not specified.
FrontendPrivateIPAllocationMethodIsNotDynamic	The Frontend Private IP Allocation Method MUST be set to Dynamic when subnet is not specified.
InvalidResourceReference	The specified resource reference is invalid.
InvalidRequestFormat	Cannot parse the request. Note This is a top-level error with InvalidJson , InvalidJsonReferenceWrongType used as error details.
InvalidJson	Errors were encountered while parsing the request body.
InvalidJsonReferenceWrongType	An invalid resource reference was encountered.
InvalidJsonReferenceFormat	The resource reference format is invalid.
PublicIPAddressInUseCannotUpdate	The properties for the specified public IP address cannot be updated because the public IP is in use.
MultipleGatewaysUseSameVnet	More than one gateway is associated with subnets of this vnet.

Error.Code value	Explanation
InvalidGatewayIPCount	The specified VpnGateway <u>VPN Gateway</u> has more than one IPConfiguration <u>IP configuration</u> .
DuplicateLocalVpnGatewayAddress	The specified VpnGateway <u>VPN Gateway</u> defines two local networks with the same LocalVpnGatewayAddress <u>local VPN Gateway address</u> property, but different address space.
ReferencedResourceNotProvisioned	The referenced resource has not been successfully provisioned.
DnsRecordInUse	The specified DNS record is already in use by another public IP.
InvalidDomainNameLabel	The domain name label is invalid.
DomainNameLabelCannotBeNullOrEmpty	The domain name label for a DNS record specified for the public IP address is null or empty. If a DNS record is specified, its domain name label MUST not be null or empty.
InUseSubnetCannotBeDeleted	The specified subnet is in use and cannot be deleted.
SubnetsOldReferencesNotCleanedUp	Subnets cannot be updated or deleted because old references for following subnets have not been released yet.
InUseSubnetCannotBeUpdated	The subnet is in use and cannot be updated.
VnetInUse	Cannot change properties on the virtual network resource since it is in use.
AnotherOperationInProgress	Another operation on this or dependent resource is in progress.
DnsServerCountLimitReached	Reached limit for the number of DNS servers allowed for a virtual network.<16>
NicInUse	The Network Interface resource is in use.
OperationNotSupported	The specified operation on the specified resource is not supported.
OutboundNatRulesAreNotSupported	Outbound NAT rules are not supported.
RuleNameDuplicate	Two rules of different types use the same name.
InvalidFrontendIPCount	Load Balancer resources MUST have one Frontend <u>frontend</u> IP configuration <u>Configuration</u> .
FrontendIPConfigHasNoSubnetOrPublicIP	Frontend IP Configuration MUST reference either a subnet or a public IP address.
FrontendIPConfigHasBothSubnetAndPublicIP	Frontend IP Configuration MUST not reference both a subnet and a public IP address.
RulesUseSameFrontendPort	Multiple load balancer <u>Balancer</u> rules cannot use the same frontend port.
RulesUseSameBackendPort	Multiple load balancer <u>Balancer</u> rules cannot use the same backend port.
InvalidProtocolForProbe	Probe can use only HTTP or TCP protocol.
ProbeRequestPathIsNotNull	Probe request path MUST be null when its protocol is TCP.

Error.Code value	Explanation
ProbeIntervalIsOutOfRange	The Probe Interval is invalid.
ProbeRequestPathIsRequired	Request Path is required for probes that use the HTTP protocol.
PortValueIsOutOfRange	The port value is invalid.
NumberOfProbesIsOutOfRange	The NumberOfProbes value for the probe is invalid.
BackendAndFrontendPortsAreDifferent	The load balancer Balancer rule MUST use the same frontend and backend ports, because its enableFloatingIP flag is set to TRUE.
RuleIdleTimeoutIsOutOfRange	The load balancer Balancer rule has invalid Idle Timeout.
PublicIPIdleTimeoutIsOutOfRange	The Public public IP address has invalid Idle Timeout.
BackendIPConfigurationsDontUseSameVnet	Not all Backend backend IP Configurations referenced by the Load load Balancer use the same Virtual Network.
FrontendIPConfigAndBackendIPConfigsAreInDifferentVnets	Not all Backend backend IP Configurations referenced by the Load Balancer use the same Virtual Network as Frontend frontend IP Configuration of the Load Balancer.
CannotSwitchLbBetweenAvailabilitySets	Load Balancer cannot be reassigned from one availability set to another.
InvalidResourceName	The resource name is invalid.
InvalidRouteAddressPrefix	The AddressPrefix addressPrefix for the specified route is invalid.
AddressPrefixInRestrictedAddressSpace	The AddressPrefix addressPrefix for the specified route is not allowed.
MissingNextHopIpAddress	The NextHopIpAddress cannot be Null or Empty.
InvalidNextHopIpAddress	The NextHopIpAddress for the specified route is invalid.
AddressPrefixMustBeInPublicAddressSpace	Invalid AddressPrefix addressPrefix for route. The NextHopType MUST have AddressPrefix addressPrefix in Public Address Space.
NextHopIpAddressNotAllowed	NextHopIpAddress for route cannot be specified.
InUseRouteTableCannotBeDeleted	The specified route table is in use and cannot be deleted.
RouteCountLimitReached	The number of allowed routes in a route table has been exceeded.
RouteConflict	Two or more routes cannot have the same AddressPrefix addressPrefix .
InUseFrontendIpConfigurationCannotBeDeleted	The specified Frontend IP configuration is in use and cannot be deleted.
InUseBackendAddressPoolCannotBeDeleted	The specified Backend address pool is in use and cannot be deleted.
InUseProbeCannotBeDeleted	The specified Probe is in use and cannot be deleted.
InUseAccessControlListCannotBeDeleted	The specified AccessControlList resource is in use and cannot be deleted.

Error.Code value	Explanation
InvalidParameterValue	An invalid parameter was specified.
ValidationError	A validation error occurred.
ServiceUnavailable	The Network Controller REST service is unavailable.
InvalidLogicalNetworkReference	A logical networkNetwork resource is required for creating a virtual network. Specify a valid reference to an existing logical networkNetwork resource.
InvalidIPAddress	The IPAddress is not in the correct format.
InvalidIPPrefix	The IPPrefix is not in the correct format.
PrivateMacAddressMissing	Private Mac address is required when privateMacAllocationMethod is static.
InvalidPrivateMacAddress	The Private static Mac address is invalid.
InvalidNetworkInterfaceReference	A Network Interface reference is required.
InUseServiceInsertionCannotBeDeleted	The specified ServiceInsertion resource is in use and cannot be deleted.
InUseServerCannotBeDeleted	The specified server resource is in use and cannot be deleted.
InUseVirtualServerCannotBeDeleted	The specified VirtualServer VirtualServers resource is in use and cannot be deleted.
InUseIpPoolCannotBeDeleted	The specified IpPool ipPool resource is in use and cannot be deleted.
ResourceInUse	A resource cannot be deleted because a related resource is in use.
IsHostVirtualNetworkInterfaceCannotBeUpdated	The IsHostVirtualNetworkInterface isHostVirtualNetworkInterface property cannot be updated after the NetworkInterface has been created.
HostVirtualNetworkInterfaceCannotConnectToVirtualNetwork	The Host Virtual NetworkInterface cannot be connected to a Virtual Network.
PrivateMacAllocationMethodCannotBeUpdated	The PrivateMacAllocationMethod privateMacAllocationMethod property cannot be updated after the NetworkInterface has been created.
InUseQosSettingsCannotBeUpdated	The QOS Settings are referenced by one or more Network Interfaces and cannot be modified.
QosGlobalSettingsNotConfigured	The QOS global settings are not configured. The QOS configuration cannot be specified on the NetworkInterface.
InvalidSubnet	An invalid Subnet subnet was specified.
AclRuleNullOrEmptySourceAddressPrefix	The SourceAddressPrefix sourceAddressPrefix property cannot be null or empty.
AclRuleNullOrEmptyDestinationAddressPrefix	The DestinationAddressPrefix destinationAddressPrefix property cannot be null or empty.

Error.Code value	Explanation
AclRuleNullOrEmptySourcePortRange	The SourcePortRange sourcePortRange property cannot be null or empty.
AclRuleNullOrEmptyDestinationPortRange	The DestinationPortRange destinationPortRange property cannot be null or empty.
InvalidAclRuleType	The AclRule Type is invalid.
InvalidAclRuleAction	The AclRule Action is invalid.
InvalidAclRulePriority	The specified priority is invalid.
InvalidAclRuleProtocol	The specified protocol is invalid. Possible values are TCP, UDP, or ALL.
UpgradeInProgress	The operation failed because an internal upgrade is in progress.
NetworkMismatch	Both Networks are not of the same type.
VirtualNetworkMismatch	SenderVirtualNetWork MUST be same as ReceiverVirtualNetwork.
AclRuleTagsNotSupportedOnLogicalNetwork	AclRule does not support Tags on Network Interfaces with an IpConfiguration ipConfiguration in a Logical Subnet logical subnet .
RouteNextHopIpAddressNotFound	The NextHopIpAddress was not found within Virtual Network to which the RouteTable is connected.
UnmanagedAllocationMethodNotSupported	Unmanaged IP allocation is not supported on virtual network or logical networks where virtualization is enabled.
InUseVipPoolCannotBeRemoved	A pool that has VIPs allocated from it cannot be removed from the load balancer Balancer manager.
LbManagerResourceNotConfigured	The Load load Balancer Manager Resource MUST be configured before a load balancer Balancer resource can be configured.
FrontEndIpNotInVipPool	The specified Frontend frontend IP Address is not part of a VIP Pool.
FrontendPrivateIpAllocationMethodIsNotStatic	Frontend Private IP Allocation Method MUST be set to Static when Subnets subnet is specified.
VipRangeTooLarge	The maximum number of addresses allowed in a single VIP range has been exceeded.
PrimaryNicPropertyCannotBeUpdated	The Primary NIC property for a network interface resource cannot be updated after the resource has been created.
OnlyPrimaryNetworkInterfaceCanHaveDnsSettings	Only Primary Network Interfaces can have DNS settings.
RestoreOperationInProgress	A restore operation is in progress.
AclRuleInvalidSourcePortRange	The SourcePortRange sourcePortRange value is invalid.
BackupFolderNotEmpty	The Backup folder path is not empty.
AclRuleInvalidDestinationPortRange	The DestinationPortRange destinationPortRange value is invalid.

Error.Code value	Explanation
AclRuleInvalidSourceAddressPrefix	The SourceAddressPrefix sourceAddressPrefix value is invalid.
AclRuleInvalidDestinationAddressPrefix	The DestinationAddressPrefix destinationAddressPrefix value is invalid.
TransientError	A retry-able error occurred. This error is an indication that the client SHOULD retry the previous operation.

3.1.6 Timer Events

None.

3.1.7 Other Local Events

None.

4 Protocol Examples

4.1 Example of the JSON used to create a default ACL for both inbound and outbound

This example describes the JSON that creates default ACLs for inbound and outbound **aclRules** resources for the **accessControlLists** resource.

```
PUT ~/Networking/v1/accessControlLists/acl3
{
  "properties": {
    "aclRules": [
      {
        "resourceId": "e4dc9ca4-d5b0-459c-a3e2-9212ba1db7af",
        "properties": {
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "0-65535",
          "action": "Allow",
          "sourceAddressPrefix": "13.168.100.0/24",
          "destinationAddressPrefix": "*",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      },
      {
        "resourceId": "a2a19a67-381e-47e9-bdba-8c8e281d303d",
        "properties": {
          "protocol": "All",
          "sourcePortRange": "0-65535",
          "destinationPortRange": "0-65535",
          "action": "Allow",
          "sourceAddressPrefix": "13.168.101.0/24",
          "destinationAddressPrefix": "*",
          "priority": "200",
          "type": "Inbound",
          "logging": "Enabled"
        }
      }
    ]
  }
}
```

4.2 macPools usage

The admin creates a **macPools** resource on the Network Controller.

```
PUT ~/networking/v1/macPools/macPool1
{
  "properties": {
    "startMacAddress": "00-1D-A8-B7-1C-00",
    "endMacAddress": "00-1D-A8-F4-1F-FF"
  }
}
```

5 Security

5.1 Security Considerations for Implementers

This implementation does not have any security considerations.

5.2 Index of Security Parameters

None.

6 Appendix A: Full JSON Schema

6.1 accessControlLists

6.1.1 PUT Schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for Access Control Lists",
  "type": "object",

  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
      "additionalProperties": { "type": "string" }
    },
    "properties": {
      "type": "object",
      "properties": {
        "aclRules": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              },
              "resourceId": {
                "type": "string"
              },
              "resourceMetadata": {
                "$ref": "#/definitions/resourceMetadata"
              }
            }
          }
        }
      }
    }
  }
}
```

```

    "etag": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "protocol": {
          "enum": [ "ALL", "all", "All", "TCP", "Tcp", "tcp", "UDP", "Udp", "udp",
"HTTP", "Http", "http" ]
        },
        "sourcePortRange": {
          "type": "string"
        },
        "destinationPortRange": {
          "type": "string"
        },
        "action": {
          "enum": [ "Allow", "Deny" ]
        },
        "sourceAddressPrefix": {
          "type": "string"
        },
        "destinationAddressPrefix": {
          "type": "string"
        },
        "priority": {
          "type": "string",
          "pattern": "^[1-9][0-9][0-9]+$"
        },
        "type": {
          "enum": [ "Inbound", "Outbound" ]
        },
        "logging": {
          "enum": [ "Enabled", "Disabled" ]
        },
        "description": {
          "type": "string"
        }
      }
    },
    "required": [
      "protocol",
      "sourcePortRange",
      "destinationPortRange",
      "action",
      "sourceAddressPrefix",
      "destinationAddressPrefix",
      "priority",
      "type",
      "logging"
    ]
  },
  "required": [
    "resourceId",
    "properties"
  ]
}
},
"required": [
  "aclRules"
]
}
},
"required": [
  "properties"
]
}

```

6.1.2 GET Schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for Access Control Lists",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  },
  "detailedInfo": {
    "type": "array",
    "items": {
      "additionalProperties": false,
      "properties": {
        "status": {
          "enum": [ "Success", "Failure" ]
        },
        "id": {
          "$ref": "#/definitions/GUID"
        },
        "lastUpdatedTime": {
          "type": "string"
        },
        "detailedInfo": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "source": {
                "type": "string"
              },
              "message": {
                "type": "string"
              },
              "code": {
                "type": "string"
              }
            }
          }
        }
      }
    }
  },
  "required": [ "status", "id", "lastUpdatedTime" ]
}
```

```

    },
    "configurationState":
    {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "status": {
          "enum": [ "Success", "Failure" ]
        },
        "id": {
          "$ref": "#/definitions/GUID"
        },
        "lastUpdatedTime": {
          "type": "string"
        },
        "virtualNetworkInterfaceErrors": {
          "$ref": "#/definitions/detailedInfo"
        }
      },
      "required": [
        "status",
        "id",
        "lastUpdatedTime"
      ]
    }
  },
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
      "additionalProperties": { "type": "string" }
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "aclRules": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              },
              "resourceId": {
                "type": "string"
              },
              "resourceMetadata": {
                "$ref": "#/definitions/resourceMetadata"
              },
              "etag": {
                "type": "string"
              },
              "instanceId": {

```

```

    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "protocol": {
        "enum": [ "All", "TCP", "UDP", "HTTP" ]
      },
      "sourcePortRange": {
        "type": "string"
      },
      "destinationPortRange": {
        "type": "string"
      },
      "action": {
        "enum": [ "Allow", "Deny" ]
      },
      "sourceAddressPrefix": {
        "type": "string"
      },
      "destinationAddressPrefix": {
        "type": "string"
      },
      "priority": {
        "type": "string",
        "pattern": "^[1-9][0-9][0-9]+$"
      },
      "type": {
        "enum": [ "Inbound", "Outbound" ]
      },
      "logging": {
        "enum": [ "Enabled", "Disabled" ]
      },
      "description": {
        "type": "string"
      }
    }
  },
  "required": [
    "provisioningState",
    "protocol",
    "sourcePortRange",
    "destinationPortRange",
    "action",
    "sourceAddressPrefix",
    "destinationAddressPrefix",
    "priority",
    "type",
    "logging"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"ipConfigurations": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  }
}

```

```

    }
  },
  "required": [
    "resourceRef"
  ]
}
},
"subnets": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  },
  "required": [
    "resourceRef"
  ]
}
},
"configurationState": {
  "$ref": "#/definitions/configurationState"
}
},
"required": [
  "provisioningState",
  "aclRules"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.1.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for Access Control Lists",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        }
      }
    },
    "originalHref": {

```



```

        "type": "string"
    }
},
},
"provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
},
"detailedInfo": {
    "type": "array",
    "items": {
        "additionalProperties": false,
        "properties": {
            "status": {
                "enum": [ "Success", "Failure" ]
            },
            "id": {
                "$ref": "#/definitions/GUID"
            },
            "lastUpdatedTime": {
                "type": "string"
            },
            "detailedInfo": {
                "type": "array",
                "items": {
                    "type": "object",
                    "properties": {
                        "source": {
                            "type": "string"
                        },
                        "message": {
                            "type": "string"
                        },
                        "code": {
                            "type": "string"
                        }
                    }
                }
            }
        }
    },
    "required": [ "status", "id", "lastUpdatedTime" ]
},
},
"configurationState": {
    {
        "type": "object",
        "additionalProperties": false,
        "properties": {
            "status": {
                "enum": [ "Success", "Failure" ]
            },
            "id": {
                "$ref": "#/definitions/GUID"
            },
            "lastUpdatedTime": {
                "type": "string"
            },
            "virtualNetworkInterfaceErrors": {
                "$ref": "#/definitions/detailedInfo"
            }
        }
    },
    "required": [
        "status",
        "id",
        "lastUpdatedTime"
    ]
},
},
"AccessControlList": {
    "type": "object",
    "properties": {
        "resourceRef": {

```

```

    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "tags": {
    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "aclRules": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "resourceRef": {
              "type": "string"
            },
            "resourceId": {
              "type": "string"
            },
            "resourceMetadata": {
              "$ref": "#/definitions/resourceMetadata"
            },
            "etag": {
              "type": "string"
            },
            "instanceId": {
              "$ref": "#/definitions/GUID"
            },
            "properties": {
              "type": "object",
              "properties": {
                "provisioningState": {
                  "$ref": "#/definitions/provisioningState"
                },
                "protocol": {
                  "enum": [ "All", "TCP", "UDP", "HTTP" ]
                },
                "sourcePortRange": {
                  "type": "string"
                },
                "destinationPortRange": {
                  "type": "string"
                },
                "action": {
                  "enum": [ "Allow", "Deny" ]
                },
                "sourceAddressPrefix": {
                  "type": "string"
                },
                "destinationAddressPrefix": {
                  "type": "string"
                },
                "priority": {
                  "type": "string",
                  "pattern": "^[1-9][0-9][0-9]+$"
                }
              }
            }
          }
        }
      }
    }
  }
}

```

```

    },
    "type": {
      "enum": [ "Inbound", "Outbound" ]
    },
    "logging": {
      "enum": [ "Enabled", "Disabled" ]
    },
    "description": {
      "type": "string"
    }
  },
  "required": [
    "provisioningState",
    "protocol",
    "sourcePortRange",
    "destinationPortRange",
    "action",
    "sourceAddressPrefix",
    "destinationAddressPrefix",
    "priority",
    "type",
    "logging"
  ]
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"ipConfigurations": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    },
    "required": [
      "resourceRef"
    ]
  }
},
"subnets": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    },
    "required": [
      "resourceRef"
    ]
  }
},
"configurationState": {
  "$ref": "#/definitions/configurationState"
}
},
"required": [
  "provisioningState",
  "aclRules"
]
]

```

```

    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
},
"AccessControlListArray": {
  "type": "array",
  "minItems": 0,
  "uniqueItems": true,
  "items": { "$ref": "#/definitions/AccessControlList" }
}
},
"properties": {
  "value": { "$ref": "#/definitions/AccessControlListArray" },
  "nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
  }
},
"required": ["nextLink"]
}

```

6.1.4 aclRules

6.1.4.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for Access Control List Rules",
  "type": "object",

  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },

  "properties": {
    "resourceId": {
      "type": "string"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    }
  },

```

```

    "properties": {
      "type": "object",
      "properties": {
        "protocol": {
          "enum": [ "ALL", "all", "All", "TCP", "Tcp", "tcp", "UDP", "Udp", "udp", "HTTP",
"Http", "http" ]
        },
        "sourcePortRange": {
          "type": "string"
        },
        "destinationPortRange": {
          "type": "string"
        },
        "action": {
          "enum": [ "Allow", "Deny" ]
        },
        "sourceAddressPrefix": {
          "type": "string"
        },
        "destinationAddressPrefix": {
          "type": "string"
        },
        "priority": {
          "type": "string",
          "pattern": "^[1-9][0-9][0-9]+$"
        },
        "type": {
          "enum": [ "Inbound", "Outbound" ]
        },
        "logging": {
          "enum": [ "Enabled", "Disabled" ]
        },
        "description": {
          "type": "string"
        }
      }
    },
    "required": [
      "protocol",
      "sourcePortRange",
      "destinationPortRange",
      "action",
      "sourceAddressPrefix",
      "destinationAddressPrefix",
      "priority",
      "type",
      "logging"
    ]
  }
},
"required": [
  "properties"
]
}

```

6.1.4.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for Access Control List Rules",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {

```

```

    "properties": {
      "client": {
        "type": "string"
      },
      "tenantId": {
        "type": "string"
      },
      "groupId": {
        "type": "string"
      },
      "resourceName": {
        "type": "string"
      },
      "originalHref": {
        "type": "string"
      }
    }
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "type": "string"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "protocol": {
        "enum": [ "All", "TCP", "UDP", "HTTP" ]
      },
      "sourcePortRange": {
        "type": "string"
      },
      "destinationPortRange": {
        "type": "string"
      },
      "action": {
        "enum": [ "Allow", "Deny" ]
      },
      "sourceAddressPrefix": {
        "type": "string"
      },
      "destinationAddressPrefix": {
        "type": "string"
      },
      "priority": {
        "type": "string",
        "pattern": "^[1-9][0-9][0-9]+$"
      },
      "type": {
        "enum": [ "Inbound", "Outbound" ]
      }
    }
  }
},

```

```

    "logging": {
      "enum": [ "Enabled", "Disabled" ]
    },
    "description": {
      "type": "string"
    }
  },
  "required": [
    "provisioningState",
    "protocol",
    "sourcePortRange",
    "destinationPortRange",
    "action",
    "sourceAddressPrefix",
    "destinationAddressPrefix",
    "priority",
    "type",
    "logging"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.1.4.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for Access Control List Rules",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "aclRule": {
      "type": "object",
      "properties": {

```

```

"resourceRef": {
  "type": "string"
},
"resourceId": {
  "type": "string"
},
"resourceMetadata": {
  "$ref": "#/definitions/resourceMetadata"
},
"etag": {
  "type": "string"
},
"instanceId": {
  "$ref": "#/definitions/GUID"
},
"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "protocol": {
      "enum": [ "All", "TCP", "UDP", "HTTP" ]
    },
    "sourcePortRange": {
      "type": "string"
    },
    "destinationPortRange": {
      "type": "string"
    },
    "action": {
      "enum": [ "Allow", "Deny" ]
    },
    "sourceAddressPrefix": {
      "type": "string"
    },
    "destinationAddressPrefix": {
      "type": "string"
    },
    "priority": {
      "type": "string",
      "pattern": "^[1-9][0-9][0-9]+$"
    },
    "type": {
      "enum": [ "Inbound", "Outbound" ]
    },
    "logging": {
      "enum": [ "Enabled", "Disabled" ]
    },
    "description": {
      "type": "string"
    }
  }
},
"required": [
  "provisioningState",
  "protocol",
  "sourcePortRange",
  "destinationPortRange",
  "action",
  "sourceAddressPrefix",
  "destinationAddressPrefix",
  "priority",
  "type",
  "logging"
]
}
},
"required": [
  "resourceRef",
  "resourceId",

```



```

        "etag",
        "instanceId",
        "properties"
    ]
},
"aclRuleArray": {
    "type": "array",
    "minItems": 0,
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/aclRule" }
}
},
"properties": {
    "value": { "$ref": "#/definitions/aclRuleArray" },
    "nextLink": {
        "type": "string",
        "format": "uri",
        "default": ""
    }
}
},
"required": ["nextLink"]
}

```

6.2 credentials

6.2.1 PUT schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "PUT JSON Schema for credentials",
    "type": "object",

    "definitions": {
        "resourceMetadata": {
            "properties": {
                "client": {
                    "type": "string"
                },
                "tenantId": {
                    "type": "string"
                },
                "groupId": {
                    "type": "string"
                },
                "resourceName": {
                    "type": "string"
                },
                "originalHref": {
                    "type": "string"
                }
            }
        }
    },
    "certType": {
        "type": "object",
        "properties": {
            "type": {
                "enum": [ "X509Certificate" ]
            },
            "value": {
                "type": "string"
            }
        }
    },
    "required": [
        "type",
        "value"
    ]
}

```

```

    },
    "usernameType": {
      "type": "object",
      "properties": {
        "type": {
          "enum": [ "usernamePassword" ]
        },
        "userName": {
          "type": "string"
        },
        "value": {
          "type": "string"
        }
      },
      "required": [
        "type",
        "userName",
        "value"
      ]
    }
  },
  "properties": {
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
      "additionalProperties": { "type": "string" }
    },
    "properties": {
      "oneOf": [
        { "$ref": "#/definitions/certType" },
        { "$ref": "#/definitions/usernameType" }
      ]
    }
  },
  "required": [
    "properties"
  ]
}

```

6.2.2 GET schema v1

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for credentials",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        }
      }
    }
  }
}

```

```

    "groupId": {
      "type": "string"
    },
    "resourceName": {
      "type": "string"
    },
    "originalHref": {
      "type": "string"
    }
  }
},
"provisioningState": {
  "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
},
"certType": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "type": {
      "enum": [ "X509Certificate" ]
    },
    "value": {
      "type": "string"
    }
  },
  "required": [
    "provisioningState",
    "type",
    "value"
  ]
},
"usernameType": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "type": {
      "enum": [ "usernamePassword" ]
    },
    "userName": {
      "type": "string"
    },
    "value": {
      "type": "string"
    }
  },
  "required": [
    "provisioningState",
    "type",
    "userName",
    "value"
  ]
}
},
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  }
}

```

```

    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
      "additionalProperties": { "type": "string" }
    },
    "properties": {
      "oneOf": [
        { "$ref": "#/definitions/certType" },
        { "$ref": "#/definitions/usernameType" }
      ]
    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}

```

6.2.3 GET schema v2

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for credentials",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "certType": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "type": {
          "enum": [ "X509Certificate" ]
        }
      }
    }
  }
}

```

```

    "value": {
      "type": "string"
    },
    "networks": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },
  "required": [
    "provisioningState",
    "type",
    "value"
  ]
},
"usernameType": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "type": {
      "enum": [ "usernamePassword" ]
    },
    "userName": {
      "type": "string"
    },
    "value": {
      "type": "string"
    }
  },
  "required": [
    "provisioningState",
    "type",
    "userName",
    "value"
  ]
}
},
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "tags": {
    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "oneOf": [

```

```

    { "$ref": "#/definitions/certType" },
    { "$ref": "#/definitions/usernameType" }
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.2.4 GET ALL schema v1

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for credentials",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "certType": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "type": {
          "enum": [ "X509Certificate" ]
        },
        "value": {
          "type": "string"
        }
      }
    },
    "required": [
      "provisioningState",
      "type",
      "value"
    ]
  }
}

```

```

    },
    "usernameType": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "type": {
          "enum": [ "usernamePassword" ]
        },
        "userName": {
          "type": "string"
        },
        "value": {
          "type": "string"
        }
      },
      "required": [
        "provisioningState",
        "type",
        "userName",
        "value"
      ]
    },
    "credential": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "resourceMetadata": {
          "$ref": "#/definitions/resourceMetadata"
        },
        "tags": {
          "additionalProperties": { "type": "string" }
        },
        "properties": {
          "oneOf": [
            { "$ref": "#/definitions/certType" },
            { "$ref": "#/definitions/usernameType" }
          ]
        }
      },
      "required": [
        "resourceRef",
        "resourceId",
        "etag",
        "instanceId",
        "properties"
      ]
    },
    "credentialArray": {
      "type": "array",
      "minItems": 0,
      "uniqueItems": true,
      "items": { "$ref": "#/definitions/credential" }
    },
    "properties": {
      "value": { "$ref": "#/definitions/credentialArray" },

```

```

    "nextLink": {
      "type": "string",
      "format": "uri",
      "default": ""
    }
  },
  "required": ["nextLink"]
}

```

6.2.5 GET ALL schema v2

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for credentials",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "certType": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "type": {
          "enum": [ "X509Certificate" ]
        },
        "value": {
          "type": "string"
        }
      },
      "networks": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "resourceRef": {
              "type": "string"
            }
          }
        },
        "required": [

```



```

        "resourceRef"
      ]
    }
  },
  "required": [
    "provisioningState",
    "type",
    "value"
  ]
},
"usernameType": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "type": {
      "enum": [ "usernamePassword" ]
    },
    "userName": {
      "type": "string"
    },
    "value": {
      "type": "string"
    }
  },
  "required": [
    "provisioningState",
    "type",
    "userName",
    "value"
  ]
},
"credential": {
  "type" : "object",
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
      "additionalProperties": { "type": "string" }
    },
    "properties": {
      "oneOf": [
        { "$ref": "#/definitions/certType" },
        { "$ref": "#/definitions/usernameType" }
      ]
    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
},

```

```

    "credentialArray": {
      "type": "array",
      "minItems": 0,
      "uniqueItems": true,
      "items": { "$ref": "#/definitions/credential" }
    },
    "properties": {
      "value": { "$ref": "#/definitions/credentialArray" },
      "nextLink": {
        "type": "string",
        "format": "uri",
        "default": ""
      }
    },
    "required": ["nextLink"]
  }
}

```

6.3—gatewayPools

6.3 GatewayPools

6.3.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for GatewayPools",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "type": "object",
  "properties": {
    "resourceId": {
      "type": "string"
    },
    "properties": {

```

```

"type": "object",
"properties": {
  "ipConfiguration": {
    "type": "object",
    "properties": {
      "greVipSubnets": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "resourceRef": {
              "type": "string"
            }
          }
        },
        "required": [
          "resourceRef"
        ]
      },
      "publicIPAddresses": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "resourceRef": {
              "type": "string"
            }
          }
        },
        "required": [
          "resourceRef"
        ]
      }
    },
    "required": [
      "greVipSubnets",
      "publicIPAddresses"
    ]
  },
  "redundantGatewayCount": {
    "type": "integer"
  },
  "gatewayCapacityKiloBitsPerSecond": {
    "type": "integer"
  },
  "RadiusServer": {
    "type": "string"
  },
  "RadiusSecret": {
    "type": "string"
  },
  "type": {
    "type": "string"
  }
},
"required": [
  "ipConfiguration",
  "redundantGatewayCount",
  "gatewayCapacityKiloBitsPerSecond",
  "RadiusServer",
  "RadiusSecret",
  "type"
]
}
},
"required": [
  "resourceId",
  "properties"
]
]

```

```
}
```

6.3.2 GET schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for GatewayPools",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "type": "object",
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "type": {
          "type": "string"
        }
      }
    },
    "ipConfiguration": {
      "type": "object",
      "properties": {
        "greVipSubnets": {
          "type": "array",
          "items": {
            "type": "object",

```

```

        "properties": {
            "resourceRef": {
                "type": "string"
            }
        },
        "required": [
            "resourceRef"
        ]
    },
    "publicIPAddresses": {
        "type": "array",
        "items": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            },
            "required": [
                "resourceRef"
            ]
        }
    },
    "required": [
        "greVipSubnets",
        "publicIPAddresses"
    ]
},
"redundantGatewayCount": {
    "type": "integer"
},
"gatewayCapacityKiloBitsPerSecond": {
    "type": "integer"
},
"gateways": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            }
        },
        "required": [
            "resourceRef"
        ]
    }
},
"virtualGatewaysVirtualGateways": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            }
        },
        "required": [
            "resourceRef"
        ]
    }
},
"required": [
    "provisioningState",
    "type",
    "ipConfiguration",
    "redundantGatewayCount",

```

```

        "gatewayCapacityKiloBitsPerSecond",
        "gateways",
        "virtualGatewaysVirtualGateways"
    ]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
}

```

6.3.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for GatewayPools",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "type": "object",
  "properties": {
    "value": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "etag": {
            "type": "string"
          },
          "instanceId": {

```

```

    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "type": {
        "type": "string"
      },
      "ipConfiguration": {
        "type": "object",
        "properties": {
          "greVipSubnets": {
            "type": "array",
            "items": {
              "type": "object",
              "properties": {
                "resourceRef": {
                  "type": "string"
                }
              }
            },
            "required": [
              "resourceRef"
            ]
          },
          "publicIPAddresses": {
            "type": "array",
            "items": {
              "type": "object",
              "properties": {
                "resourceRef": {
                  "type": "string"
                }
              }
            },
            "required": [
              "resourceRef"
            ]
          }
        },
        "required": [
          "greVipSubnets",
          "publicIPAddresses"
        ]
      },
      "redundantGatewayCount": {
        "type": "integer"
      },
      "gatewayCapacityKiloBitsPerSecond": {
        "type": "integer"
      },
      "gateways": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "resourceRef": {
              "type": "string"
            }
          }
        },
        "required": [
          "resourceRef"
        ]
      }
    },
    "virtualGatewaysVirtualGateways": {
      "type": "array",

```

```

        "items": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            },
            "required": [
                "resourceRef"
            ]
        }
    },
    "required": [
        "provisioningState",
        "type",
        "ipConfiguration",
        "redundantGatewayCount",
        "gatewayCapacityKiloBitsPerSecond",
        "gateways",
        "virtualGatewaysVirtualGateways"
    ]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"nextLink": {
    "type": "string"
}
},
"required": [
    "value",
    "nextLink"
]
}
}

```

6.4 gateways

6.4.1 PUT schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "PUT JSON Schema for Gatewaysgateways",

    "definitions": {
        "GUID": {
            "type": "string",
            "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
        },
        "resourceMetadata": {
            "properties": {
                "client": {
                    "type": "string"
                },
                "tenantId": {
                    "type": "string"
                },
                "groupId": {
                    "type": "string"
                }
            }
        }
    }
}

```



```

    },
    "resourceName": {
      "type": "string"
    },
    "originalHref": {
      "type": "string"
    }
  }
},
"provisioningState": {
  "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
}
},
"type": "object",
"properties": {
  "resourceId": {
    "type": "string"
  },
  "properties": {
    "type": "object",
    "properties": {
      "pool": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        },
        "required": [
          "resourceRef"
        ]
      },
      "types": {
        "type": "array",
        "items": {
          "enum": [ "s2sipsec", "s2sgre", "forwarding", "vpn" ]
        }
      },
      "virtualServer": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        },
        "required": [
          "resourceRef"
        ]
      },
      "networkInterfaces": {
        "type": "object",
        "properties": {
          "externalNetworkInterface": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              }
            },
            "required": [
              "resourceRef"
            ]
          },
          "internalNetworkInterface": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              }
            }
          }
        }
      }
    }
  }
}

```

```

        },
        "required": [
            "resourceRef"
        ]
    }
},
"required": [
    "externalNetworkInterface",
    "internalNetworkInterface"
]
},
"bgpConfig": {
    "type": "object",
    "properties": {
        "extASNumber": {
            "type": "string"
        },
        "bgpPeer": {
            "type": "array",
            "items": {
                "type": "object",
                "properties": {
                    "peerIP": {
                        "type": "string"
                    },
                    "peerExtAsNumber": {
                        "type": "string"
                    }
                },
                "required": [
                    "peerIP",
                    "peerExtAsNumber"
                ]
            }
        }
    },
    "required": [
        "extASNumber",
        "bgpPeer"
    ]
}
},
"required": [
    "pool",
    "types",
    "virtualServer",
    "networkInterfaces"
]
},
"required": [
    "resourceId",
    "properties"
]
}
}

```

6.4.2 GET schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for Gatewaysgateways",

    "definitions": {
        "GUID": {
            "type": "string",
            "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
        },
    },
}

```

```

"resourceMetadata": {
  "properties": {
    "client": {
      "type": "string"
    },
    "tenantId": {
      "type": "string"
    },
    "groupId": {
      "type": "string"
    },
    "resourceName": {
      "type": "string"
    },
    "originalHref": {
      "type": "string"
    }
  }
},
"provisioningState": {
  "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
}
},
"type": "object",
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "virtualGatewaysVirtualGateways": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "virtualGateway": {
              "type": "object",
              "properties": {
                "resourceRef": {
                  "type": "string"
                }
              }
            },
            "required": [
              "resourceRef"
            ]
          }
        },
        "networkConnections": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              }
            },
            "required": [

```

```

        "resourceRef"
      ]
    },
    "bgpRouter": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "required": [
      "virtualGateway",
      "networkConnections",
      "bgpRouter"
    ]
  },
  "configurationState": {
    "type": "object",
    "properties": {
      "status": {
        "type": "string"
      },
      "lastUpdatedTime": {
        "type": "string"
      }
    },
    "required": [
      "status",
      "lastUpdatedTime"
    ]
  },
  "virtualServer": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "networkInterfaces": {
    "type": "object",
    "properties": {
      "externalNetworkInterface": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "internalNetworkInterface": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    }
  },

```

```

        "required": [
            "resourceRef"
        ]
    },
    "required": [
        "externalNetworkInterface",
        "internalNetworkInterface"
    ]
},
"type": {
    "type": "string"
},
"state": {
    "type": "string"
},
"healthState": {
    "type": "string"
},
"totalCapacity": {
    "type": "integer"
},
"availableCapacity": {
    "type": "integer"
},
"bgpConfig": {
    "type": "object",
    "properties": {
        "extASNumber": {
            "type": "string"
        },
        "bgpPeer": {
            "type": "array",
            "items": {
                "type": "object",
                "properties": {
                    "peerIP": {
                        "type": "string"
                    },
                    "peerExtASNumber": {
                        "type": "string"
                    }
                }
            },
            "required": [
                "peerIP",
                "peerExtASNumber"
            ]
        }
    }
},
"required": [
    "extASNumber",
    "bgpPeer"
]
},
"connections": {
    "type": "array",
    "items": { }
},
"certificate": {
    "type": "string"
},
"externalIPAddress": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "ipAddress": {
                "type": "string"
            }
        }
    },

```

```

        "prefixLength": {
            "type": "integer"
        }
    },
    "required": [
        "ipAddress",
        "prefixLength"
    ]
},
"pool": {
    "type": "object",
    "properties": {
        "resourceRef": {
            "type": "string"
        }
    },
    "required": [
        "resourceRef"
    ]
},
"required": [
    "provisioningState",
    "configurationState",
    "networkInterfaces",
    "type",
    "state",
    "healthState",
    "totalCapacity",
    "availableCapacity",
    "bgpConfig",
    "connections",
    "externalIPAddress",
    "pool"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
}

```

6.4.3 GET ALL schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET ALL JSON Schema for Gatewaysgateways",

    "definitions": {
        "GUID": {
            "type": "string",
            "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
        },
        "resourceMetadata": {
            "properties": {
                "client": {
                    "type": "string"
                },
                "tenantId": {
                    "type": "string"
                },
                "groupId": {

```

```

        "type": "string"
    },
    "resourceName": {
        "type": "string"
    },
    "originalHref": {
        "type": "string"
    }
}
},
"provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
}
},
"type": "object",
"properties": {
    "value": {
        "type": "array",
        "items": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                },
                "resourceId": {
                    "type": "string"
                },
                "etag": {
                    "type": "string"
                },
                "instanceId": {
                    "$ref": "#/definitions/GUID"
                },
                "properties": {
                    "type": "object",
                    "properties": {
                        "provisioningState": {
                            "$ref": "#/definitions/provisioningState"
                        },
                        "virtualGatewaysVirtualGateways": {
                            "type": "array",
                            "items": {
                                "type": "object",
                                "properties": {
                                    "virtualGateway": {
                                        "type": "object",
                                        "properties": {
                                            "resourceRef": {
                                                "type": "string"
                                            }
                                        }
                                    },
                                    "required": [
                                        "resourceRef"
                                    ]
                                }
                            },
                            "networkConnections": {
                                "type": "array",
                                "items": {
                                    "type": "object",
                                    "properties": {
                                        "resourceRef": {
                                            "type": "string"
                                        }
                                    },
                                    "required": [
                                        "resourceRef"
                                    ]
                                }
                            }
                        }
                    }
                }
            }
        }
    }
}
},

```

```

        "bgpRouter": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            },
            "required": [
                "resourceRef"
            ]
        },
        "required": [
            "virtualGateway",
            "networkConnections",
            "bgpRouter"
        ]
    },
    "configurationState": {
        "type": "object",
        "properties": {
            "status": {
                "type": "string"
            },
            "lastUpdatedTime": {
                "type": "string"
            }
        },
        "required": [
            "status",
            "lastUpdatedTime"
        ]
    },
    "virtualServer": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            }
        },
        "required": [
            "resourceRef"
        ]
    },
    "networkInterfaces": {
        "type": "object",
        "properties": {
            "externalNetworkInterface": {
                "type": "object",
                "properties": {
                    "resourceRef": {
                        "type": "string"
                    }
                }
            },
            "required": [
                "resourceRef"
            ]
        },
        "internalNetworkInterface": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            },
            "required": [
                "resourceRef"
            ]
        }
    }
}

```



```

    },
    "required": [
        "externalNetworkInterface",
        "internalNetworkInterface"
    ]
},
"type": {
    "type": "string"
},
"state": {
    "type": "string"
},
"healthState": {
    "type": "string"
},
"totalCapacity": {
    "type": "integer"
},
"availableCapacity": {
    "type": "integer"
},
"bgpConfig": {
    "type": "object",
    "properties": {
        "extASNumber": {
            "type": "string"
        },
        "bgpPeer": {
            "type": "array",
            "items": {
                "type": "object",
                "properties": {
                    "peerIP": {
                        "type": "string"
                    },
                    "peerExtASNumber": {
                        "type": "string"
                    }
                },
                "required": [
                    "peerIP",
                    "peerExtASNumber"
                ]
            }
        }
    }
},
"required": [
    "extASNumber",
    "bgpPeer"
]
},
"connections": {
    "type": "array",
    "items": {}
},
"externalIPAddress": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "ipAddress": {
                "type": "string"
            },
            "prefixLength": {
                "type": "integer"
            }
        },
        "required": [
            "ipAddress",
            "prefixLength"
        ]
    }
}

```

```

    ]
  },
  "pool": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  },
  "required": [
    "resourceRef"
  ]
}
},
"required": [
  "provisioningState",
  "configurationState",
  "type",
  "state",
  "healthState",
  "totalCapacity",
  "availableCapacity",
  "pool"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"nextLink": {
  "type": "string"
}
},
"required": [
  "value",
  "nextLink"
]
}
}

```

6.5 loadBalancers

6.5.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for loadbalancersloadBalancers",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  }
}

```

```

    },
    "protocol": {
      "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
    },
    "loadDistribution": {
      "enum": [ "Default", "SourceIP", "SourceIPProtocol" ]
    },
    "ipAllocationMethod": {
      "enum": [ "Dynamic", "Static", "Unmanaged" ]
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "instanceId": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "frontendIPConfigurations": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              },
              "resourceId": {
                "type": "string"
              },
              "instanceId": {
                "type": "string"
              },
              "properties": {
                "type": "object",
                "properties": {
                  "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                  },
                  "privateIPAddress": {
                    "type": "string",
                    "format": "ipv4"
                  },
                  "privateIPAllocationMethod": {
                    "$ref": "#/definitions/ipAllocationMethod"
                  },
                  "subnet": {
                    "$ref": "#/definitions/resourceRef"
                  },
                  "loadBalancingRules": {
                    "type": "array",
                    "items": {
                      "$ref": "#/definitions/resourceRef"
                    }
                  },
                  "inboundNatRules": {
                    "type": "array",
                    "items": {

```

```

        "$ref": "#/definitions/resourceRef"
      }
    },
    "outboundNatRules": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/resourceRef"
      }
    }
  }
},
"required": [
  "properties"
]
}
},
"backendAddressPools": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "instanceId": {
        "type": "string"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "backendIPConfigurations": {
            "type": "array",
            "items": {
              "$ref": "#/definitions/resourceRef"
            }
          },
          "outboundNatRules": {
            "type": "array",
            "items": {
              "$ref": "#/definitions/resourceRef"
            }
          },
          "loadBalancingRules": {
            "type": "array",
            "items": {
              "$ref": "#/definitions/resourceRef"
            }
          }
        }
      },
      "required": [
        "backendIPConfigurations"
      ]
    }
  },
  "required": [
    "properties"
  ]
}
},
"loadBalancingRules": {
  "type": "array",
  "items": {
    "type": "object",

```

```

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "instanceId": {
    "type": "string"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "frontendIPConfigurations": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "protocol": {
        "$ref": "#/definitions/protocol"
      },
      "frontendPort": {
        "type": "integer"
      },
      "backendPort": {
        "type": "integer"
      },
      "enableFloatingIP": {
        "type": "boolean"
      },
      "idleTimeoutInMinutes": {
        "type": "integer"
      },
      "backendAddressPool": {
        "$ref": "#/definitions/resourceRef"
      },
      "loadDistribution": {
        "$ref": "#/definitions/loadDistribution"
      }
    }
  },
  "required": [
    "frontendIPConfigurations",
    "protocol",
    "frontendPort"
  ]
}
},
"required": [
  "properties"
]
}
},
"probes": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "instanceId": {
        "type": "string"
      }
    }
  }
}

```

```

"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "protocol": {
      "$ref": "#/definitions/protocol"
    },
    "port": {
      "type": "integer"
    },
    "intervalInSeconds": {
      "type": "integer"
    },
    "numberOfProbes": {
      "type": "integer"
    },
    "loadBalancingRules": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/resourceRef"
      }
    }
  },
  "required": [
    "protocol",
    "port"
  ]
},
"required": [
  "properties"
]
},
"outboundNatRules": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "instanceId": {
        "type": "string"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "frontendIPConfigurations": {
            "type": "array",
            "items": {
              "$ref": "#/definitions/resourceRef"
            }
          },
          "protocol": {
            "$ref": "#/definitions/protocol"
          },
          "backendAddressPool": {
            "$ref": "#/definitions/resourceRef"
          }
        }
      },
      "required": [

```

```

        "frontendIPConfigurations",
        "protocol",
        "backendAddressPool"
    ]
    },
    },
    "required": [
        "properties"
    ]
}
},
"required": [
    "frontendIPConfigurations"
]
}
},
"required": [
    "properties"
]
}
}

```

6.5.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for loadbalancersloadBalancers",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "resourceRef": {
        "type": "object",
        "additionalProperties": false,
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "protocol": {
      "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
    },
    "loadDistribution": {
      "enum": [ "Default", "SourceIP", "SourceIPProtocol" ]
    },
    "ipAllocationMethod": {
      "enum": [ "Dynamic", "Static", "Unmanaged" ]
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    }
  },
}

```

```

"etag": {
  "type": "string"
},
"instanceId": {
  "$ref": "#/definitions/GUID"
},
"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "frontendIPConfigurations": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "etag": {
            "type": "string"
          },
          "instanceId": {
            "$ref": "#/definitions/GUID"
          },
          "properties": {
            "type": "object",
            "properties": {
              "provisioningState": {
                "$ref": "#/definitions/provisioningState"
              },
              "privateIPAddress": {
                "type": "string",
                "format": "ipv4"
              },
              "privateIPAllocationMethod": {
                "$ref": "#/definitions/ipAllocationMethod"
              },
              "subnet": {
                "$ref": "#/definitions/resourceRef"
              },
              "loadBalancingRules": {
                "type": "array",
                "items": {
                  "$ref": "#/definitions/resourceRef"
                }
              },
              "inboundNatRules": {
                "type": "array",
                "items": {
                  "$ref": "#/definitions/resourceRef"
                }
              },
              "outboundNatRules": {
                "type": "array",
                "items": {
                  "$ref": "#/definitions/resourceRef"
                }
              }
            }
          },
          "required": [
            "provisioningState"
          ]
        }
      },
      "required": [

```



```

        "resourceRef",
        "resourceId",
        "etag",
        "instanceId",
        "properties"
    ]
}
},
"backendAddressPools": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            },
            "resourceId": {
                "type": "string"
            },
            "etag": {
                "type": "string"
            },
            "instanceId": {
                "$ref": "#/definitions/GUID"
            },
            "properties": {
                "type": "object",
                "properties": {
                    "provisioningState": {
                        "$ref": "#/definitions/provisioningState"
                    },
                    "backendIPConfigurations": {
                        "type": "array",
                        "items": {
                            "$ref": "#/definitions/resourceRef"
                        }
                    },
                    "outboundNatRules": {
                        "type": "array",
                        "items": {
                            "$ref": "#/definitions/resourceRef"
                        }
                    },
                    "loadBalancingRules": {
                        "type": "array",
                        "items": {
                            "$ref": "#/definitions/resourceRef"
                        }
                    }
                }
            },
            "required": [
                "provisioningState",
                "backendIPConfigurations"
            ]
        }
    },
    "required": [
        "resourceRef",
        "resourceId",
        "etag",
        "instanceId",
        "properties"
    ]
}
},
"probes": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {

```

```

    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "protocol": {
          "$ref": "#/definitions/protocol"
        },
        "port": {
          "type": "integer"
        },
        "intervalInSeconds": {
          "type": "integer"
        },
        "numberOfProbes": {
          "type": "integer"
        },
        "loadBalancingRules": {
          "type": "array",
          "items": {
            "$ref": "#/definitions/resourceRef"
          }
        }
      }
    },
    "required": [
      "provisioningState",
      "protocol",
      "port"
    ]
  }
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"inboundNatRules": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      }
    }
  }
},

```

```

"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "frontendIPConfigurations": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/resourceRef"
      }
    },
    "protocol": {
      "$ref": "#/definitions/protocol"
    },
    "frontendPort": {
      "type": "integer"
    },
    "backendPort": {
      "type": "integer"
    },
    "enableFloatingIP": {
      "type": "boolean"
    },
    "idleTimeoutInMinutes": {
      "type": "integer"
    },
    "backendIPConfiguration": {
      "$ref": "#/definitions/resourceRef"
    }
  },
  "required": [
    "provisioningState",
    "frontendIPConfigurations",
    "protocol",
    "frontendPort",
    "enableFloatingIP"
  ]
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
},
"outboundNatRules": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {

```

```

        "$ref": "#/definitions/provisioningState"
    },
    "frontendIPConfigurations": {
        "type": "array",
        "items": {
            "$ref": "#/definitions/resourceRef"
        }
    },
    "protocol": {
        "$ref": "#/definitions/protocol"
    },
    "backendAddressPool": {
        "$ref": "#/definitions/resourceRef"
    }
},
"required": [
    "provisioningState",
    "frontendIPConfigurations",
    "protocol",
    "backendAddressPool"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"loadBalancingRules": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            },
            "resourceId": {
                "type": "string"
            },
            "instanceId": {
                "$ref": "#/definitions/GUID"
            },
            "properties": {
                "type": "object",
                "properties": {
                    "provisioningState": {
                        "$ref": "#/definitions/provisioningState"
                    },
                    "frontendIPConfigurations": {
                        "type": "array",
                        "items": {
                            "$ref": "#/definitions/resourceRef"
                        }
                    },
                    "protocol": {
                        "$ref": "#/definitions/protocol"
                    },
                    "frontendPort": {
                        "type": "integer"
                    },
                    "backendPort": {
                        "type": "integer"
                    },
                    "enableFloatingIP": {
                        "type": "boolean"
                    }
                }
            }
        }
    }
}

```

```

        "idleTimeoutInMinutes": {
            "type": "integer"
        },
        "backendAddressPool": {
            "$ref": "#/definitions/resourceRef"
        },
        "loadDistribution": {
            "$ref": "#/definitions/loadDistribution"
        }
    },
    "required": [
        "provisioningState",
        "frontendIPConfigurations",
        "protocol",
        "frontendPort",
        "loadDistribution"
    ]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "instanceId",
    "properties"
]
}
},
"required": [
    "provisioningState",
    "frontendIPConfigurations"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
}

```

6.5.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for ALL loadbalancersloadBalancers",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",
    "pattern": "[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
}

```

```

"protocol": {
  "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
},
"loadDistribution": {
  "enum": [ "Default", "SourceIP", "SourceIPProtocol" ]
},
"ipAllocationMethod": {
  "enum": [ "Dynamic", "Static", "Unmanaged" ]
},
"provisioningState": {
  "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
}
},
"properties": {
  "value": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "properties": {
          "type": "object",
          "properties": {
            "provisioningState": {
              "$ref": "#/definitions/provisioningState"
            },
            "frontendIPConfigurations": {
              "type": "array",
              "items": {
                "type": "object",
                "properties": {
                  "resourceRef": {
                    "type": "string"
                  },
                  "resourceId": {
                    "type": "string"
                  },
                  "etag": {
                    "type": "string"
                  },
                  "instanceId": {
                    "$ref": "#/definitions/GUID"
                  },
                  "properties": {
                    "type": "object",
                    "properties": {
                      "provisioningState": {
                        "$ref": "#/definitions/provisioningState"
                      },
                      "privateIPAddress": {
                        "type": "string",
                        "format": "ipv4"
                      },
                      "privateIPAllocationMethod": {
                        "$ref": "#/definitions/ipAllocationMethod"
                      },
                      "subnet": {

```

```

        "$ref": "#/definitions/resourceRef"
    },
    "loadBalancingRules": {
        "type": "array",
        "items": {
            "$ref": "#/definitions/resourceRef"
        }
    },
    "inboundNatRules": {
        "type": "array",
        "items": {
            "$ref": "#/definitions/resourceRef"
        }
    },
    "outboundNatRules": {
        "type": "array",
        "items": {
            "$ref": "#/definitions/resourceRef"
        }
    }
},
"required": [
    "provisioningState"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"backendAddressPools": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            },
            "resourceId": {
                "type": "string"
            },
            "etag": {
                "type": "string"
            },
            "instanceId": {
                "$ref": "#/definitions/GUID"
            },
            "properties": {
                "type": "object",
                "properties": {
                    "provisioningState": {
                        "$ref": "#/definitions/provisioningState"
                    },
                    "backendIPConfigurations": {
                        "type": "array",
                        "items": {
                            "$ref": "#/definitions/resourceRef"
                        }
                    },
                    "outboundNatRules": {
                        "type": "array",
                        "items": {
                            "$ref": "#/definitions/resourceRef"
                        }
                    }
                }
            }
        }
    }
},

```

```

        "loadBalancingRules": {
            "type": "array",
            "items": {
                "$ref": "#/definitions/resourceRef"
            }
        },
        "required": [
            "provisioningState",
            "backendIPConfigurations"
        ]
    },
    "required": [
        "resourceRef",
        "resourceId",
        "etag",
        "instanceId",
        "properties"
    ]
},
"probes": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            },
            "resourceId": {
                "type": "string"
            },
            "etag": {
                "type": "string"
            },
            "instanceId": {
                "$ref": "#/definitions/GUID"
            },
            "properties": {
                "type": "object",
                "properties": {
                    "provisioningState": {
                        "$ref": "#/definitions/provisioningState"
                    },
                    "protocol": {
                        "$ref": "#/definitions/protocol"
                    },
                    "port": {
                        "type": "integer"
                    },
                    "intervalInSeconds": {
                        "type": "integer"
                    },
                    "numberOfProbes": {
                        "type": "integer"
                    },
                    "loadBalancingRules": {
                        "type": "array",
                        "items": {
                            "$ref": "#/definitions/resourceRef"
                        }
                    }
                }
            },
            "required": [
                "provisioningState",
                "protocol",
                "port"
            ]
        }
    }
}

```



```

    },
    "required": [
      "resourceRef",
      "resourceId",
      "etag",
      "instanceId",
      "properties"
    ]
  }
},
"inboundNatRules": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "frontendIPConfigurations": {
            "type": "array",
            "items": {
              "$ref": "#/definitions/resourceRef"
            }
          },
          "protocol": {
            "$ref": "#/definitions/protocol"
          },
          "frontendPort": {
            "type": "integer"
          },
          "backendPort": {
            "type": "integer"
          },
          "enableFloatingIP": {
            "type": "boolean"
          },
          "idleTimeoutInMinutes": {
            "type": "integer"
          },
          "backendIPConfiguration": {
            "$ref": "#/definitions/resourceRef"
          }
        }
      },
      "required": [
        "provisioningState",
        "frontendIPConfigurations",
        "protocol",
        "frontendPort",
        "enableFloatingIP"
      ]
    }
  },
  "required": [
    "resourceRef",
    "resourceId",

```

```

        "etag",
        "instanceId",
        "properties"
    ]
}
},
"outboundNatRules": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            },
            "resourceId": {
                "type": "string"
            },
            "etag": {
                "type": "string"
            },
            "instanceId": {
                "$ref": "#/definitions/GUID"
            },
            "properties": {
                "type": "object",
                "properties": {
                    "provisioningState": {
                        "$ref": "#/definitions/provisioningState"
                    },
                    "frontendIPConfigurations": {
                        "type": "array",
                        "items": {
                            "$ref": "#/definitions/resourceRef"
                        }
                    },
                    "protocol": {
                        "$ref": "#/definitions/protocol"
                    },
                    "backendAddressPool": {
                        "$ref": "#/definitions/resourceRef"
                    }
                }
            },
            "required": [
                "provisioningState",
                "frontendIPConfigurations",
                "protocol",
                "backendAddressPool"
            ]
        }
    },
    "required": [
        "resourceRef",
        "resourceId",
        "etag",
        "instanceId",
        "properties"
    ]
}
},
"loadBalancingRules": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            },
            "resourceId": {
                "type": "string"
            }
        }
    },
}

```

```

    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "frontendIPConfigurations": {
          "type": "array",
          "items": {
            "$ref": "#/definitions/resourceRef"
          }
        },
        "protocol": {
          "$ref": "#/definitions/protocol"
        },
        "frontendPort": {
          "type": "integer"
        },
        "backendPort": {
          "type": "integer"
        },
        "enableFloatingIP": {
          "type": "boolean"
        },
        "idleTimeoutInMinutes": {
          "type": "integer"
        },
        "backendAddressPool": {
          "$ref": "#/definitions/resourceRef"
        },
        "loadDistribution": {
          "$ref": "#/definitions/loadDistribution"
        }
      },
      "required": [
        "provisioningState",
        "frontendIPConfigurations",
        "protocol",
        "frontendPort",
        "loadDistribution"
      ]
    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "instanceId",
    "properties"
  ]
}
},
"required": [
  "provisioningState",
  "frontendIPConfigurations"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},

```

```

    "nextLink": {
      "type": "string",
      "format": "uri",
      "default": ""
    }
  },
  "required": [
    "nextLink"
  ]
}

```

6.5.4 backendAddressPools

6.5.4.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for loadbalancersbackendaddresspoolsloadBalancersbackendAddressPools",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  },
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "instanceId": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "backendIPConfigurations": {
          "type": "array",
          "items": {
            "$ref": "#/definitions/resourceRef"
          }
        },
        "outboundNatRules": {
          "type": "array",
          "items": {
            "$ref": "#/definitions/resourceRef"
          }
        }
      }
    }
  },
}

```

```

        "loadBalancingRules": {
            "type": "array",
            "items": {
                "$ref": "#/definitions/resourceRef"
            }
        },
        "required": [
            "backendIPConfigurations"
        ]
    }
},
"required": [
    "properties"
]
}
}

```

6.5.4.2 GET schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for loadbalancers backendaddresspools loadbalancers backendAddressPools",
    "type": "object",

    "definitions": {
        "resourceRef": {
            "type": "object",
            "additionalProperties": false,
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            },
            "required": [
                "resourceRef"
            ]
        },
        "GUID": {
            "type": "string",
            "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
        },
        "provisioningState": {
            "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
        }
    },

    "properties": {
        "resourceRef": {
            "type": "string"
        },
        "resourceId": {
            "type": "string"
        },
        "etag": {
            "type": "string"
        },
        "instanceId": {
            "$ref": "#/definitions/GUID"
        },
        "properties": {
            "type": "object",
            "properties": {
                "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                },
                "backendIPConfigurations": {

```

```

        "type": "array",
        "items": {
            "$ref": "#/definitions/resourceRef"
        }
    },
    "outboundNatRules": {
        "type": "array",
        "items": {
            "$ref": "#/definitions/resourceRef"
        }
    },
    "loadBalancingRules": {
        "type": "array",
        "items": {
            "$ref": "#/definitions/resourceRef"
        }
    }
},
"required": [
    "provisioningState",
    "backendIPConfigurations"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
}

```

6.5.4.3 GET ALL schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for loadbalancers backendaddresspools loadBalancers backendAddressPools",
    "type": "object",

    "definitions": {
        "resourceRef": {
            "type": "object",
            "additionalProperties": false,
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            }
        },
        "required": [
            "resourceRef"
        ]
    },
    "GUID": {
        "type": "string",
        "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
        "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
},

"properties": {
    "value": {
        "type": "array",
        "items": {

```

```

"type": "object",
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "backendIPConfigurations": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "outboundNatRules": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "loadBalancingRules": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      }
    },
    "required": [
      "provisioningState",
      "backendIPConfigurations"
    ]
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
},
"nextLink": {
  "type": "string",
  "format": "uri",
  "default": ""
},
"required": [
  "nextLink"
]
}

```

6.5.5 ~~frontendIpConfigurations~~

6.5.5 frontendIPConfigurations

6.5.5.1 PUT schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for loadbalancersfrontendipconfigurationsloadBalancersfrontendIPConfigurations",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "ipAllocationMethod": {
    "enum": [ "Dynamic", "Static", "Unmanaged" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "instanceId": {
    "type": "string"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "privateIPAddress": {
        "type": "string",
        "format": "ipv4"
      },
      "privateIPAllocationMethod": {
        "$ref": "#/definitions/ipAllocationMethod"
      },
      "subnet": {
        "$ref": "#/definitions/resourceRef"
      },
      "loadBalancingRules": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      }
    }
  }
}
```



```

    },
    "inboundNatRules": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/resourceRef"
      }
    },
    "outboundNatRules": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/resourceRef"
      }
    }
  }
},
"required": [
  "properties"
]
}

```

6.5.5.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for loadbalancersfrontendipconfigurationsloadBalancersfrontendIPConfigurations",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",
    "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "ipAllocationMethod": {
    "enum": [ "Dynamic", "Static", "Unmanaged" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  }
},

```

```

    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "privateIPAddress": {
          "type": "string",
          "format": "ipv4"
        },
        "privateIPAllocationMethod": {
          "$ref": "#/definitions/ipAllocationMethod"
        },
        "subnet": {
          "$ref": "#/definitions/resourceRef"
        },
        "loadBalancingRules": {
          "type": "array",
          "items": {
            "$ref": "#/definitions/resourceRef"
          }
        },
        "inboundNatRules": {
          "type": "array",
          "items": {
            "$ref": "#/definitions/resourceRef"
          }
        },
        "outboundNatRules": {
          "type": "array",
          "items": {
            "$ref": "#/definitions/resourceRef"
          }
        }
      }
    },
    "required": [
      "provisioningState"
    ]
  }
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
]
}

```

6.5.5.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for ALL loadbalancers frontenipconfigurationsloadbalancers frontendIPConfigurations",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    }
  }
}

```

```

    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",
    "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "ipAllocationMethod": {
    "enum": [ "Dynamic", "Static", "Unmanaged" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},
"properties": {
  "value": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "properties": {
          "type": "object",
          "properties": {
            "provisioningState": {
              "$ref": "#/definitions/provisioningState"
            },
            "privateIPAddress": {
              "type": "string",
              "format": "ipv4"
            },
            "privateIPAllocationMethod": {
              "$ref": "#/definitions/ipAllocationMethod"
            },
            "subnet": {
              "$ref": "#/definitions/resourceRef"
            },
            "loadBalancingRules": {
              "type": "array",
              "items": {
                "$ref": "#/definitions/resourceRef"
              }
            },
            "inboundNatRules": {
              "type": "array",
              "items": {
                "$ref": "#/definitions/resourceRef"
              }
            },
            "outboundNatRules": {
              "type": "array",
              "items": {

```

```

        "$ref": "#/definitions/resourceRef"
      }
    },
    "required": [
      "provisioningState"
    ]
  }
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"nextLink": {
  "type": "string",
  "format": "uri",
  "default": ""
}
},
"required": [
  "nextLink"
]
}
}

```

6.5.6 inboundNatRules

6.5.6.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for loadbalancers inboundnatrulesinboundNatRules",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "instanceId": {

```

```

    "type": "string"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "frontendIPConfigurations": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "protocol": {
        "$ref": "#/definitions/protocol"
      },
      "frontendPort": {
        "type": "integer"
      },
      "backendPort": {
        "type": "integer"
      },
      "enableFloatingIP": {
        "type": "boolean"
      },
      "idleTimeoutInMinutes": {
        "type": "integer"
      },
      "backendIPConfiguration": {
        "$ref": "#/definitions/resourceRef"
      }
    }
  },
  "required": [
    "frontendIPConfigurations",
    "protocol",
    "frontendPort"
  ]
}
},
"required": [
  "properties"
]
}

```

6.5.6.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for loadbalancersoutboundnatrulesloadBalancersoutboundNatRules",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",

```

```

    "pattern": "[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "frontendIPConfigurations": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "protocol": {
        "$ref": "#/definitions/protocol"
      },
      "frontendPort": {
        "type": "integer"
      },
      "backendPort": {
        "type": "integer"
      },
      "enableFloatingIP": {
        "type": "boolean"
      },
      "idleTimeoutInMinutes": {
        "type": "integer"
      },
      "backendIPConfiguration": {
        "$ref": "#/definitions/resourceRef"
      }
    }
  },
  "required": [
    "provisioningState",
    "frontendIPConfigurations",
    "protocol",
    "frontendPort"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]

```

```
}
```

6.5.6.3 GET ALL schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for loadbalancers inboundnatrulesloadBalancers inboundNatRules",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "resourceRef": {
        "type": "object",
        "additionalProperties": false,
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "protocol": {
      "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "value": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "etag": {
            "type": "string"
          },
          "instanceId": {
            "$ref": "#/definitions/GUID"
          },
          "properties": {
            "type": "object",
            "properties": {
              "provisioningState": {
                "$ref": "#/definitions/provisioningState"
              },
              "frontendIPConfigurations": {
                "type": "array",
                "items": {
                  "$ref": "#/definitions/resourceRef"
                }
              },
              "protocol": {
                "$ref": "#/definitions/protocol"
              }
            }
          }
        }
      }
    }
  }
}
```

```

        "frontendPort": {
            "type": "integer"
        },
        "backendPort": {
            "type": "integer"
        },
        "enableFloatingIP": {
            "type": "boolean"
        },
        "idleTimeoutInMinutes": {
            "type": "integer"
        },
        "backendIPConfiguration": {
            "$ref": "#/definitions/resourceRef"
        }
    },
    "required": [
        "provisioningState",
        "frontendIPConfigurations",
        "protocol",
        "frontendPort"
    ]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
}
},
"required": [
    "nextLink"
]
}
}

```

6.5.7 loadBalancingRules

6.5.7.1 PUT schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "PUT JSON Schema for loadbalancers loadbalancingrules loadbalancers loadBalancingRules",
    "type": "object",

    "definitions": {
        "resourceRef": {
            "type": "object",
            "additionalProperties": false,
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            },
            "required": [
                "resourceRef"
            ]
        }
    },
}

```



```

    "protocol": {
      "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
    },
    "loadDistribution": {
      "enum": [ "Default", "SourceIP", "SourceIPProtocol" ]
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "instanceId": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "frontendIPConfigurations": {
          "type": "array",
          "items": {
            "$ref": "#/definitions/resourceRef"
          }
        },
        "protocol": {
          "$ref": "#/definitions/protocol"
        },
        "frontendPort": {
          "type": "integer"
        },
        "backendPort": {
          "type": "integer"
        },
        "enableFloatingIP": {
          "type": "boolean"
        },
        "idleTimeoutInMinutes": {
          "type": "integer"
        },
        "backendAddressPool": {
          "$ref": "#/definitions/resourceRef"
        },
        "loadDistribution": {
          "$ref": "#/definitions/loadDistribution"
        }
      }
    },
    "required": [
      "frontendIPConfigurations",
      "protocol",
      "frontendPort"
    ]
  }
},
"required": [
  "properties"
]
}

```

6.5.7.2 GET schema

```
{
```

```

"$schema": "http://json-schema.org/draft-04/schema#",
"title": "GET JSON Schema for loadbalancers loadbalancingrulesloadBalancingRules",
"type": "object",

"definitions": {
  "resourceRef": {
    "type": "object",
    "additionalProperties": false,
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",
    "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "loadDistribution": {
    "enum": [ "Default", "SourceIP", "SourceIPProtocol" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "frontendIPConfigurations": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "protocol": {
        "$ref": "#/definitions/protocol"
      },
      "frontendPort": {
        "type": "integer"
      },
      "backendPort": {
        "type": "integer"
      },
      "enableFloatingIP": {
        "type": "boolean"
      },
      "idleTimeoutInMinutes": {
        "type": "integer"
      }
    }
  }
},

```

```

        "backendAddressPool": {
            "$ref": "#/definitions/resourceRef"
        },
        "loadDistribution": {
            "$ref": "#/definitions/loadDistribution"
        }
    },
    "required": [
        "provisioningState",
        "frontendIPConfigurations",
        "protocol",
        "frontendPort"
    ]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "instanceId",
    "properties"
]
}
}

```

6.5.7.3 GET ALL schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for ALL loadbalancers loadbalancingrules loadBalancers loadBalancingRules",
    "type": "object",

    "definitions": {
        "resourceRef": {
            "type": "object",
            "additionalProperties": false,
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            }
        },
        "required": [
            "resourceRef"
        ]
    },
    "GUID": {
        "type": "string",
        "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "protocol": {
        "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
    },
    "loadDistribution": {
        "enum": [ "Default", "SourceIP", "SourceIPProtocol" ]
    },
    "provisioningState": {
        "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
},

"properties": {
    "value": {
        "type": "array",
        "items": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            }
        }
    }
}

```

```

    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "frontendIPConfigurations": {
          "type": "array",
          "items": {
            "$ref": "#/definitions/resourceRef"
          }
        },
        "protocol": {
          "$ref": "#/definitions/protocol"
        },
        "frontendPort": {
          "type": "integer"
        },
        "backendPort": {
          "type": "integer"
        },
        "enableFloatingIP": {
          "type": "boolean"
        },
        "idleTimeoutInMinutes": {
          "type": "integer"
        },
        "backendAddressPool": {
          "$ref": "#/definitions/resourceRef"
        },
        "loadDistribution": {
          "$ref": "#/definitions/loadDistribution"
        }
      }
    },
    "required": [
      "provisioningState",
      "frontendIPConfigurations",
      "protocol",
      "frontendPort"
    ]
  }
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"nextLink": {
  "type": "string",
  "format": "uri",
  "default": ""
}
},
"required": [
  "nextLink"
]
]

```

```
}
```

6.5.8 outboundNatRules

6.5.8.1 PUT schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for loadbalancersoutboundnatrulesloadBalancersoutboundNatRules",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "instanceId": {
    "type": "string"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "frontendIPConfigurations": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "protocol": {
        "$ref": "#/definitions/protocol"
      },
      "backendAddressPool": {
        "$ref": "#/definitions/resourceRef"
      }
    }
  },
  "required": [
    "frontendIPConfigurations",
    "protocol",
    "backendAddressPool"
  ]
}
```

```

    }
  },
  "required": [
    "properties"
  ]
}

```

6.5.8.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for loadbalancersoutboundnatrulesloadBalancersoutboundNatRules",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",
    "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "frontendIPConfigurations": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      }
    }
  },
  "protocol": {
    "$ref": "#/definitions/protocol"
  }
}

```

```

    },
    "backendAddressPool": {
      "$ref": "#/definitions/resourceRef"
    }
  },
  "required": [
    "provisioningState",
    "frontendIPConfigurations",
    "protocol",
    "backendAddressPool"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.5.8.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for ALL loadbalancersoutboundnatrulesloadBalancersoutboundNatRules",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",
    "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "value": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        }
      }
    }
  }
}

```

```

    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "frontendIPConfigurations": {
          "type": "array",
          "items": {
            "$ref": "#/definitions/resourceRef"
          }
        },
        "protocol": {
          "$ref": "#/definitions/protocol"
        },
        "backendAddressPool": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "required": [
        "provisioningState",
        "frontendIPConfigurations",
        "protocol",
        "backendAddressPool"
      ]
    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}
},
"nextLink": {
  "type": "string",
  "format": "uri",
  "default": ""
}
},
"required": [
  "nextLink"
]
}
}

```

6.5.9 probes

6.5.9.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for loadbalancersloadBalancers probes",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {

```



```

        "resourceRef": {
            "type": "string"
        }
    },
    "required": [
        "resourceRef"
    ]
},
"protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
},
"provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
}
},
"properties": {
    "resourceRef": {
        "type": "string"
    },
    "resourceId": {
        "type": "string"
    },
    "instanceId": {
        "type": "string"
    },
    "properties": {
        "type": "object",
        "properties": {
            "provisioningState": {
                "$ref": "#/definitions/provisioningState"
            },
            "protocol": {
                "$ref": "#/definitions/protocol"
            },
            "port": {
                "type": "integer"
            },
            "intervalInSeconds": {
                "type": "integer"
            },
            "numberOfProbes": {
                "type": "integer"
            },
            "loadBalancingRules": {
                "type": "array",
                "items": {
                    "$ref": "#/definitions/resourceRef"
                }
            }
        }
    },
    "required": [
        "protocol",
        "port"
    ]
}
},
"required": [
    "properties"
]
}
}

```

6.5.9.2 GET schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for loadbalancersloadBalancers probes",
    "type": "object",

```

```

"definitions": {
  "resourceRef": {
    "type": "object",
    "additionalProperties": false,
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",
    "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "protocol": {
        "$ref": "#/definitions/protocol"
      },
      "port": {
        "type": "integer"
      },
      "intervalInSeconds": {
        "type": "integer"
      },
      "numberOfProbes": {
        "type": "integer"
      },
      "loadBalancingRules": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        }
      }
    }
  },
  "required": [
    "provisioningState",
    "protocol",
    "port"
  ]
}

```

```

    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}

```

6.5.9.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for ALL loadbalancersloadBalancers probes",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",
    "pattern": "^([a-fA-F0-9]{8})-([a-fA-F0-9]{4})-([a-fA-F0-9]{4})-([a-fA-F0-9]{4})-([a-fA-F0-9]{12})$"
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"type": "object",
"properties": {
  "value": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "properties": {
          "type": "object",
          "properties": {
            "provisioningState": {
              "$ref": "#/definitions/provisioningState"
            }
          }
        }
      }
    }
  }
}

```

```

        "protocol": {
            "$ref": "#/definitions/protocol"
        },
        "port": {
            "type": "integer"
        },
        "intervalInSeconds": {
            "type": "integer"
        },
        "numberOfProbes": {
            "type": "integer"
        },
        "loadBalancingRules": {
            "type": "array",
            "items": {
                "$ref": "#/definitions/resourceRef"
            }
        }
    },
    "required": [
        "provisioningState",
        "protocol",
        "port"
    ]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
}
},
"required": [
    "nextLink"
]
}
}

```

6.6 loadBalancerManager

6.6.1 PUT schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "PUT JSON Schema for loadBalancerManagerloadBalancerManager",
    "type": "object",

    "definitions": {
        "provisioningState": {
            "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
        },
        "resourceRef": {
            "type": "object",
            "additionalProperties": false,
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            }
        }
    },
}

```

```

        "required": [
            "resourceRef"
        ]
    },
    "properties": {
        "resourceRef": {
            "type": "string"
        },
        "resourceId": {
            "type": "string"
        },
        "instanceId": {
            "type": "string"
        },
        "properties": {
            "type": "object",
            "properties": {
                "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                },
                "loadBalancerManagerIPAddress": {
                    "type": "string",
                    "format": "ipv4"
                },
                "outboundNatIPExemptions": {
                    "type": "array",
                    "items": {
                        "type": "string",
                        "format": "ipv4"
                    }
                },
                "vipIpPools": {
                    "type": "array",
                    "items": {
                        "$ref": "#/definitions/resourceRef"
                    },
                    "minItems": 1
                }
            },
            "required": [
                "loadBalancerManagerIPAddress",
                "outboundNatIPExemptions",
                "vipIpPools"
            ]
        }
    },
    "required": [
        "properties"
    ]
}

```

6.6.2 GET schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for loadbalancerManagerloadBalancerManager",
    "type": "object",

    "definitions": {
        "GUID": {
            "type": "string",
            "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
        },
        "provisioningState": {
            "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
        }
    }
}

```

```

    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  }
},
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "loadBalancerManagerIPAddress": {
        "type": "string",
        "format": "ipv4"
      },
      "outboundNatIPExemptions": {
        "type": "array",
        "items": {
          "type": "string",
          "format": "ipv4"
        }
      },
      "vipIpPools": {
        "type": "array",
        "items": {
          "$ref": "#/definitions/resourceRef"
        },
        "minItems": 1
      }
    }
  },
  "required": [
    "provisioningState",
    "loadBalancerManagerIPAddress",
    "outboundNatIPExemptions",
    "vipIpPools"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}

```

~~6.7 loadBalancerMux~~

6.7 loadBalancerMuxes

6.7.1 PUT schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for loadBalancerMuxesloadBalancerMuxes",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "protocol": {
    "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  },
  "peerRouterConfigurations": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "routerName": {
          "type": "string"
        },
        "routerIPAddress": {
          "type": "string",
          "format": "ipv4"
        },
        "peerASN": {
          "type": "integer"
        },
        "id": {
          "type": "string"
        }
      },
      "required": [
        "routerName",
        "routerIPAddress",
        "peerASN",
        "id"
      ]
    }
  },
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "instanceId": {
```

```

    "type": "string"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "routerConfiguration": {
        "type": "object",
        "properties": {
          "localASN": {
            "type": "integer"
          },
          "peerRouterConfigurations": {
            "$ref": "#/definitions/peerRouterConfigurations"
          }
        },
        "required": [
          "localASN",
          "peerRouterConfigurations"
        ]
      },
      "virtualServer": {
        "$ref": "#/definitions/resourceRef"
      },
      "connections": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "managementAddresses": {
              "type": "array",
              "items": {
                "type": "string",
                "format": "ipv4"
              }
            },
            "credential": {
              "$ref": "#/definitions/resourceRef"
            },
            "credentialType": {
              "type": "string"
            },
            "protocol": {
              "$ref": "#/definitions/protocol"
            },
            "port": {
              "type": "string"
            }
          },
          "required": [
            "managementAddresses",
            "credential",
            "credentialType"
          ]
        }
      },
      "required": [
        "routerConfiguration",
        "virtualServer"
      ]
    }
  },
  "required": [
    "properties"
  ]
}

```


6.7.2 GET schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for loadBalancerMuxesloadBalancerMuxes",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "protocol": {
      "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "peerRouterConfigurations": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "routerName": {
            "type": "string"
          },
          "routerIPAddress": {
            "type": "string",
            "format": "ipv4"
          },
          "peerASN": {
            "type": "integer"
          },
          "id": {
            "type": "string"
          }
        },
        "required": [
          "routerName",
          "routerIPAddress",
          "peerASN",
          "id"
        ]
      }
    },
    "configurationState": {
      "type": "object",
      "items": {
        "additionalProperties": false,
        "properties": {
          "status": {
            "enum": [
              "Uninitialized",
              "InProgress",
              "Success",
              "Warning",
            ]
          }
        }
      }
    }
  }
}
```

```

        "Failure"
      ]
    },
    "lastUpdatedTime": {
      "type": "string"
    },
    "detailedInfo": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "source": {
            "enum": [
              "ResourceGlobal",
              "SoftwareLoadBalancerManager",
              "VirtualNetwork",
              "VirtualSwitch",
              "Firewall"
            ]
          },
          "message": {
            "type": "string"
          },
          "code": {
            "enum": [
              "Unknown",
              "Success",
              "InProgress",
              "HostUnreachable",
              "PAIpAddressExhausted",
              "PAMacAddressExhausted",
              "PAAddressConfigurationFailure",
              "CertificateNotTrusted",
              "CertificateNotAuthorized",
              "PolicyConfigurationFailureOnVfp",
              "PolicyConfigurationFailure",
              "HostNotConnectedToController",
              "MultipleVfpEnabledSwitches",
              "DhcpAddressAllocationFailure",
              "DistributedRouterConfigurationFailure",
              "PortBlocked",
              "Overloaded",
              "RoutePublicationFailure",
              "VirtualServerUnreachable",
              "QosConfigurationFailure",
              "InfrastructurePortsBlocked"
            ]
          }
        }
      }
    },
    "required": [
      "status",
      "lastUpdatedTime"
    ]
  },
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    }
  },

```

```

"instanceId": {
  "$ref": "#/definitions/GUID"
},
"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "routerConfiguration": {
      "type": "object",
      "properties": {
        "localASN": {
          "type": "integer"
        },
        "peerRouterConfigurations": {
          "$ref": "#/definitions/peerRouterConfigurations"
        }
      },
      "required": [
        "localASN",
        "peerRouterConfigurations"
      ]
    },
    "virtualServer": {
      "$ref": "#/definitions/resourceRef"
    },
    "connections": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "managementAddresses": {
            "type": "array",
            "items": {
              "type": "string",
              "format": "ipv4"
            }
          },
          "credential": {
            "$ref": "#/definitions/resourceRef"
          },
          "credentialType": {
            "type": "string"
          },
          "protocol": {
            "$ref": "#/definitions/protocol"
          },
          "port": {
            "type": "string"
          }
        },
        "required": [
          "managementAddresses",
          "credential",
          "credentialType"
        ]
      }
    },
    "configurationState": {
      "$ref": "#/definitions/configurationState"
    }
  },
  "required": [
    "provisioningState",
    "routerConfiguration",
    "virtualServer",
    "configurationState"
  ]
}

```

```

    },
    "required": [
      "resourceRef",
      "resourceId",
      "etag",
      "instanceId",
      "properties"
    ]
  }
}

```

6.7.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for loadbalancerMuxesloadBalancerMuxes",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "resourceRef": {
        "type": "object",
        "additionalProperties": false,
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "protocol": {
      "enum": [ "Tcp", "Udp", "Http", "Https", "GRE", "ESP", "All" ]
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "peerRouterConfigurations": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "routerName": {
            "type": "string"
          },
          "routerIPAddress": {
            "type": "string",
            "format": "ipv4"
          },
          "peerASN": {
            "type": "integer"
          },
          "id": {
            "type": "string"
          }
        },
        "required": [
          "routerName",
          "routerIPAddress",
          "peerASN",
          "id"
        ]
      }
    }
  },
}

```

```

"configurationState": {
  "type": "object",
  "items": {
    "additionalProperties": false,
    "properties": {
      "status": {
        "enum": [
          "Uninitialized",
          "InProgress",
          "Success",
          "Warning",
          "Failure"
        ]
      },
      "lastUpdatedTime": {
        "type": "string"
      },
      "detailedInfo": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "source": {
              "enum": [
                "ResourceGlobal",
                "SoftwareLoadBalancerManager",
                "VirtualNetwork",
                "VirtualSwitch",
                "Firewall"
              ]
            },
            "message": {
              "type": "string"
            },
            "code": {
              "enum": [
                "Unknown",
                "Success",
                "InProgress",
                "HostUnreachable",
                "PAIpAddressExhausted",
                "PAMacAddressExhausted",
                "PAAddressConfigurationFailure",
                "CertificateNotTrusted",
                "CertificateNotAuthorized",
                "PolicyConfigurationFailureOnVfp",
                "PolicyConfigurationFailure",
                "HostNotConnectedToController",
                "MultipleVfpEnabledSwitches",
                "DhcpAddressAllocationFailure",
                "DistributedRouterConfigurationFailure",
                "PortBlocked",
                "Overloaded",
                "RoutePublicationFailure",
                "VirtualServerUnreachable",
                "QosConfigurationFailure",
                "InfrastructurePortsBlocked"
              ]
            }
          }
        }
      },
      "required": [
        "status",
        "lastUpdatedTime"
      ]
    }
  }
},

```

```

"properties": {
  "value": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {

        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "properties": {
          "type": "object",
          "properties": {
            "provisioningState": {
              "$ref": "#/definitions/provisioningState"
            },
            "routerConfiguration": {
              "type": "object",
              "properties": {
                "localASN": {
                  "type": "integer"
                },
                "peerRouterConfigurations": {
                  "$ref": "#/definitions/peerRouterConfigurations"
                }
              }
            },
            "required": [
              "localASN",
              "peerRouterConfigurations"
            ]
          },
          "virtualServer": {
            "$ref": "#/definitions/resourceRef"
          },
          "connections": {
            "type": "array",
            "items": {
              "type": "object",
              "properties": {
                "managementAddresses": {
                  "type": "array",
                  "items": {
                    "type": "string",
                    "format": "ipv4"
                  }
                },
                "credential": {
                  "$ref": "#/definitions/resourceRef"
                },
                "credentialType": {
                  "type": "string"
                },
                "protocol": {
                  "$ref": "#/definitions/protocol"
                },
                "port": {
                  "type": "string"
                }
              }
            },
            "required": [

```

```

        "managementAddresses",
        "credential",
        "credentialType"
    ]
    },
    "configurationState": {
        "$ref": "#/definitions/configurationState"
    }
},
"required": [
    "provisioningState",
    "routerConfiguration",
    "virtualServer",
    "configurationState"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
}
},
"required": [
    "nextLink"
]
}
}

```

6.8 logicalNetworks

6.8.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for logicalnetworkslogicalNetworks",
  "type": "object",

  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  }
},

```

```

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "tags": {
    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "properties": {
      "subnets": {
        "type": "array",
        "items": {
          "type": "object",
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "resourceMetadata": {
            "$ref": "#/definitions/resourceMetadata"
          },
          "etag": {
            "type": "string"
          },
          "properties": {
            "type": "object",
            "properties": {
              "addressPrefix": {
                "type": "string"
              },
              "vlanID": {
                "type": "string"
              },
              "routes": {
                "type": "array",
                "items": {
                  "type": "object",
                  "properties": {
                    "resourceRef": {
                      "type": "string"
                    },
                    "resourceId": {
                      "type": "string"
                    },
                    "resourceMetadata": {
                      "$ref": "#/definitions/resourceMetadata"
                    },
                    "etag": {
                      "type": "string"
                    },
                    "properties": {
                      "type": "object",
                      "properties": {
                        "destination": {
                          "type": "string"
                        },
                        "nextHop": {
                          "type": "string"
                        }
                      }
                    }
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}

```



```

        }
      },
      "required": [
        "resourceId",
        "properties"
      ]
    }
  },
  "dnsServers": {
    "type": "array",
    "items": {
      "type": "string"
    }
  },
  "defaultGateways": {
    "type": "array",
    "items": {
      "type": "string"
    }
  },
  "isPublic": {
    "type": "boolean"
  }
},
"required": [
  "addressPrefix"
]
}
},
"required": [
  "resourceId",
  "properties"
]
}
},
"networkVirtualizationEnabled": {
  "type": "string"
}
}
},
"required": [
  "resourceId",
  "properties"
]
}
}

```

6.8.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for LogicalNetworksLogicalNetworks",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        }
      }
    }
  }
}

```

```

    },
    "groupId": {
      "type": "string"
    },
    "resourceName": {
      "type": "string"
    },
    "originalHref": {
      "type": "string"
    }
  }
},
"provisioningState": {
  "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
}
},
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "type": "string"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "tags": {
    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "subnets": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "resourceRef": {
              "type": "string"
            },
            "resourceId": {
              "type": "string"
            },
            "etag": {
              "type": "string"
            },
            "instanceId": {
              "$ref": "#/definitions/GUID"
            },
            "resourceMetadata": {
              "$ref": "#/definitions/resourceMetadata"
            },
            "tags": {
              "additionalProperties": { "type": "string" }
            },
            "properties": {
              "type": "object",
              "properties": {
                "provisioningState": {
                  "$ref": "#/definitions/provisioningState"
                }
              }
            }
          }
        }
      }
    }
  }
}

```

```

    },
    "addressPrefix": {
      "type": "string"
    },
    "networkInterfaces": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    },
  },
  "gatewayPoolsGatewayPools": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },
  "networkConnections": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },
  "vlanID": {
    "type": "string"
  },
  "ipPools": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "resourceMetadata": {
          "$ref": "#/definitions/resourceMetadata"
        },
        "properties": {

```

```

        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "startIpAddress": {
            "type": "string"
          },
          "endIpAddress": {
            "type": "string"
          }
        },
        "required": [
          "provisioningState",
          "startIpAddress",
          "endIpAddress"
        ]
      },
      "required": [
        "resourceRef",
        "resourceId",
        "etag",
        "instanceId",
        "properties"
      ]
    },
    "routes": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "etag": {
            "type": "string"
          },
          "instanceId": {
            "$ref": "#/definitions/GUID"
          },
          "resourceMetadata": {
            "$ref": "#/definitions/resourceMetadata"
          },
          "tags": {
            "additionalProperties": { "type": "string" }
          },
          "properties": {
            "type": "object",
            "properties": {
              "provisioningState": {
                "$ref": "#/definitions/provisioningState"
              },
              "destination": {
                "type": "string"
              },
              "nextHop": {
                "type": "string"
              }
            }
          },
          "required": [
            "provisioningState",
            "destination",
            "nextHop"
          ]
        }
      }
    }
  }
}

```



```

    }
  }
},
"required": [
  "provisioningState"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.8.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for logicalnetworkslogicalNetworks",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "logicalnetwork": {
      "type": "object",
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "type": "string"
      }
    },
  }
}

```

```

"resourceMetadata": {
  "$ref": "#/definitions/resourceMetadata"
},
"tags": {
  "additionalProperties": { "type": "string" }
},
"properties": {
  "provisioningState": {
    "$ref": "#/definitions/provisioningState"
  },
  "subnets": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "resourceMetadata": {
          "$ref": "#/definitions/resourceMetadata"
        },
        "tags": {
          "additionalProperties": { "type": "string" }
        },
        "properties": {
          "type": "object",
          "properties": {
            "provisioningState": {
              "$ref": "#/definitions/provisioningState"
            },
            "addressPrefix": {
              "type": "string"
            },
            "networkInterfaces": {
              "type": "array",
              "items": {
                "type": "object",
                "properties": {
                  "resourceRef": {
                    "type": "string"
                  }
                }
              },
              "required": [
                "resourceRef"
              ]
            }
          }
        },
        "gatewayPoolsGatewayPools": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              }
            }
          },
          "required": [
            "resourceRef"
          ]
        }
      }
    }
  },
  "gatewayPoolsGatewayPools": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  }
}

```

```

"networkConnections": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  },
  "required": [
    "resourceRef"
  ]
},
"vlanID": {
  "type": "string"
},
"ipPools": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "startIpAddress": {
            "type": "string"
          },
          "endIpAddress": {
            "type": "string"
          }
        }
      },
      "required": [
        "provisioningState",
        "startIpAddress",
        "endIpAddress"
      ]
    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
},
"routes": {
  "type": "array",
  "items": {
    "type": "object",

```



```

    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "tags": {
        "additionalProperties": { "type": "string" }
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "destination": {
            "type": "string"
          },
          "nextHop": {
            "type": "string"
          }
        }
      },
      "required": [
        "provisioningState",
        "destination",
        "nextHop"
      ]
    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}
},
"dnsServers": {
  "type": "array",
  "items": {
    "type": "string"
  }
},
"defaultGateways": {
  "type": "array",
  "items": {
    "type": "string"
  }
},
"isPublic": {
  "type": "boolean"
}
},
"required": [
  "provisioningState",
  "addressPrefix",
  "isPublic"
]
}
}

```

```

    },
    "required": [
      "resourceRef",
      "resourceId",
      "etag",
      "instanceId",
      "properties"
    ]
  }
},
"virtualNetworks": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    },
    "required": [
      "resourceRef"
    ]
  }
},
"networkVirtualizationEnabled": {
  "type": "string"
},
"usage": {
  "type": "object",
  "properties": {
    "numberOfIPAddresses": {
      "type": "string"
    },
    "numberOfIPAddressesAllocated": {
      "type": "string"
    },
    "numberOfIPAddressesInTransition": {
      "type": "string"
    }
  }
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
},
"logicalnetworkArray": {
  "type": "array",
  "minItems": 0,
  "uniqueItems": true,
  "items": { "$ref": "#/definitions/logicalnetwork" }
}
},
"properties": {
  "value": { "$ref": "#/definitions/logicalnetworkArray" },
  "nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
  }
}
},
"required": [ "nextLink" ]
}

```

6.8.4 ~~logicalSubnets~~

6.8.4 subnets

6.8.4.1 ipPools

6.8.4.1.1 PUT schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for ipPoolsipPools",
  "type": "object",

  "properties": {
    "resourceId": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "startIpAddress": {
          "type": "string"
        },
        "endIpAddress": {
          "type": "string"
        }
      }
    },
    "required": [
      "startIpAddress",
      "endIpAddress"
    ]
  },
  "required": [
    "resourceId",
    "properties"
  ]
}
```

6.8.4.1.2 GET schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for ipPoolsipPools",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
```

```

        "type": "string"
    },
    "instanceId": {
        "$ref": "#/definitions/GUID"
    },
    "properties": {
        "type": "object",
        "properties": {
            "provisioningState": {
                "$ref": "#/definitions/provisioningState"
            },
            "startIpAddress": {
                "type": "string"
            },
            "endIpAddress": {
                "type": "string"
            }
        }
    },
    "required": [
        "startIpAddress",
        "endIpAddress",
        "provisioningState"
    ]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
}

```

6.8.4.1.3 GET ALL schema

6.9 macPools

6.9.1 PUT schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "PUT JSON Schema for maepoolmacPools",
    "type": "object",

    "definitions": {
        "resourceMetadata": {
            "properties": {
                "client": {
                    "type": "string"
                },
                "tenantId": {
                    "type": "string"
                },
                "groupId": {
                    "type": "string"
                },
                "resourceName": {
                    "type": "string"
                },
                "originalHref": {
                    "type": "string"
                }
            }
        }
    }
}

```

```

"properties": {
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "tags": {
    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "type": "object",
    "properties": {
      "startMacAddress": {
        "type": "string",
        "pattern": "^[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}$"
      },
      "endMacAddress": {
        "type": "string",
        "pattern": "^[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}$"
      }
    },
    "required": [
      "startMacAddress",
      "endMacAddress"
    ]
  }
},
"required": [
  "properties"
]
}

```

6.9.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for macPools",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {

```

```

        "type": "string"
    }
}
},
"provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
}
},
"properties": {
    "resourceRef": {
        "type": "string"
    },
    "resourceId": {
        "type": "string"
    },
    "etag": {
        "type": "string"
    },
    "instanceId": {
        "$ref": "#/definitions/GUID"
    },
    "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
        "additionalProperties": { "type": "string" }
    },
    "properties": {
        "type": "object",
        "properties": {
            "provisioningState": {
                "$ref": "#/definitions/provisioningState"
            },
            "startMacAddress": {
                "type": "string",
                "pattern": "^[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}$"
            },
            "endMacAddress": {
                "type": "string",
                "pattern": "^[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}$"
            },
            "usage": {
                "type": "object",
                "properties": {
                    "numberOfMacAddresses": {
                        "type": "integer"
                    },
                    "numberOfMacAddressesAllocated": {
                        "type": "integer"
                    }
                },
                "required": [
                    "numberOfMacAddresses",
                    "numberOfMacAddressesAllocated"
                ]
            }
        },
        "required": [
            "provisioningState",
            "startMacAddress",
            "endMacAddress",
            "usage"
        ]
    }
}
},
"required": [

```

```

    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}

```

6.9.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for macPools",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "macpool": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "resourceMetadata": {
          "$ref": "#/definitions/resourceMetadata"
        },
        "tags": {
          "additionalProperties": { "type": "string" }
        },
        "properties": {
          "type": "object",
          "properties": {
            "provisioningState": {

```

```

        "$ref": "#/definitions/provisioningState"
    },
    "startMacAddress": {
        "type": "string",
        "pattern": "[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}$"
    },
    "endMacAddress": {
        "type": "string",
        "pattern": "[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}-[a-fA-F0-9]{2}$"
    },
    "usage": {
        "type": "object",
        "properties": {
            "numberOfMacAddresses": {
                "type": "integer"
            },
            "numberOfMacAddressesAllocated": {
                "type": "integer"
            }
        },
        "required": [
            "numberOfMacAddresses",
            "numberOfMacAddressesAllocated"
        ]
    }
},
"required": [
    "provisioningState",
    "startMacAddress",
    "endMacAddress",
    "usage"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
},
"macpoolArray": {
    "type": "array",
    "minItems": 0,
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/macpool" }
}
},
"properties": {
    "value": { "$ref": "#/definitions/macpoolArray" },
    "nextLink": {
        "type": "string",
        "format": "uri",
        "default": ""
    }
},
"required": [ "nextLink" ]
}

```


6.10 routeTables

6.10.1 PUT schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for Route Tables",
  "type": "object",

  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },

  "properties": {
    "resourceId": {
      "type": "string"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "properties": {
      "type": "object",
      "properties": {
        "routes": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "resourceId": {
                "type": "string"
              },
              "resourceMetadata": {
                "$ref": "#/definitions/resourceMetadata"
              },
              "properties": {
                "type": "object",
                "properties": {
                  "addressPrefix": {
                    "type": "string"
                  },
                  "nextHopType": {
                    "enum": [ "VirtualAppliance", "VnetLocal", "Internet",
"VirtualNetworkGateway", "None" ]
                  },
                  "nextHopIpAddress": {
                    "type": "string"
                  }
                }
              },
              "required": [
                "addressPrefix",

```

```

        "nextHopType"
      ]
    }
  },
  "required": [
    "resourceId",
    "properties"
  ]
}
},
"required": [
  "routes"
]
}
},
"required": [
  "properties"
]
}
}

```

6.10.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for Route Tables",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    }
  },
}

```

```

"instanceId": {
  "type": "string"
},
"resourceMetadata": {
  "$ref": "#/definitions/resourceMetadata"
},
"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "routes": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "resourceMetadata": {
            "$ref": "#/definitions/resourceMetadata"
          },
          "etag": {
            "type": "string"
          },
          "instanceId": {
            "$ref": "#/definitions/GUID"
          },
          "properties": {
            "type": "object",
            "properties": {
              "provisioningState": {
                "$ref": "#/definitions/provisioningState"
              },
              "addressPrefix": {
                "type": "string"
              },
              "nextHopType": {
                "enum": [ "VirtualAppliance", "VnetLocal", "Internet",
"VirtualNetworkGateway", "None" ]
              },
              "nextHopIpAddress": {
                "type": "string"
              }
            }
          },
          "required": [
            "provisioningState",
            "addressPrefix",
            "nextHopType"
          ]
        }
      },
      "required": [
        "resourceRef",
        "resourceId",
        "etag",
        "instanceId",
        "properties"
      ]
    }
  },
  "subnets": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {

```

```

        "resourceRef": {
            "type": "string"
        }
    },
    "required": [
        "resourceRef"
    ]
}
},
"required": [
    "provisioningState",
    "routes"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
}

```

6.10.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for Route Tables",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "RouteTables": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        }
      }
    }
  }
}

```

```

    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "type": "string"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "routes": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              },
              "resourceId": {
                "type": "string"
              },
              "resourceMetadata": {
                "$ref": "#/definitions/resourceMetadata"
              },
              "etag": {
                "type": "string"
              },
              "instanceId": {
                "$ref": "#/definitions/GUID"
              },
              "properties": {
                "type": "object",
                "properties": {
                  "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                  },
                  "addressPrefix": {
                    "type": "string"
                  },
                  "nextHopType": {
                    "enum": [ "VirtualAppliance", "VnetLocal", "Internet",
"VirtualNetworkGateway", "None" ]
                  },
                  "nextHopIpAddress": {
                    "type": "string"
                  }
                }
              },
              "required": [
                "provisioningState",
                "addressPrefix",
                "nextHopType"
              ]
            }
          },
          "required": [
            "resourceRef",
            "resourceId",
            "etag",
            "instanceId",
            "properties"
          ]
        }
      },
      "subnets": {

```

```

        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "resourceRef": {
              "type": "string"
            }
          },
          "required": [
            "resourceRef"
          ]
        }
      },
      "required": [
        "provisioningState",
        "routes"
      ]
    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
},
"RouteTablesArray": {
  "type": "array",
  "minItems": 0,
  "uniqueItems": true,
  "items": { "$ref": "#/definitions/RouteTables" }
}
},
"properties": {
  "value": { "$ref": "#/definitions/RouteTablesArray" },
  "nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
  }
},
"required": ["nextLink"]
}

```

6.10.4 routes

6.10.4.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for Route Table Routes",
  "type": "object",

  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        }
      }
    }
  }
}

```

```

    },
    "resourceName": {
      "type": "string"
    },
    "originalHref": {
      "type": "string"
    }
  }
}
},
"properties": {
  "resourceId": {
    "type": "string"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "tags": {
    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "type": "object",
    "properties": {
      "addressPrefix": {
        "type": "string"
      },
      "nextHopType": {
        "enum": [ "VirtualAppliance", "VnetLocal", "Internet", "VirtualNetworkGateway",
"None" ]
      },
      "nextHopIpAddress": {
        "type": "string"
      }
    },
    "required": [
      "addressPrefix",
      "nextHopType"
    ]
  },
  "required": [
    "properties"
  ]
}
}

```

6.10.4.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for Route Table Routes",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {

```

```

        "type": "string"
      },
      "resourceName": {
        "type": "string"
      },
      "originalHref": {
        "type": "string"
      }
    }
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "type": "string"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "tags": {
    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "addressPrefix": {
        "type": "string"
      },
      "nextHopType": {
        "enum": [ "VirtualAppliance", "VnetLocal", "Internet", "VirtualNetworkGateway",
"None" ]
      },
      "nextHopIpAddress": {
        "type": "string"
      }
    }
  },
  "required": [
    "provisioningState",
    "addressPrefix",
    "nextHopType"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}

```


6.10.4.3 GET ALL schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for Route Table Routes",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  },
  "routes": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "tags": {
        "additionalProperties": { "type": "string" }
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "addressPrefix": {
            "type": "string"
          },
          "nextHopType": {
            "enum": [ "VirtualAppliance", "VnetLocal", "Internet", "VirtualNetworkGateway",
"None" ]
          }
        }
      }
    }
  },
}
```

```

        "nextHopIpAddress": {
            "type": "string"
        }
    },
    "required": [
        "provisioningState",
        "addressPrefix",
        "nextHopType"
    ]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
},
"routesArray": {
    "type": "array",
    "minItems": 0,
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/routes" }
}
},
"properties": {
    "value": { "$ref": "#/definitions/routesArray" },
    "nextLink": {
        "type": "string",
        "format": "uri",
        "default": ""
    }
}
},
"required": ["nextLink"]
}

```

6.11 networkInterfaces

6.11.1 PUT schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for NetworkInterfacesnetworkInterfaces",
    "type": "object",

    "definitions": {
        "resourceMetadata": {
            "properties": {
                "client": {
                    "type": "string"
                },
                "tenantId": {
                    "type": "string"
                },
                "groupId": {
                    "type": "string"
                },
                "resourceName": {
                    "type": "string"
                },
                "originalHref": {
                    "type": "string"
                }
            }
        }
    }
}

```

```

    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "portSettings": {
    "type": "object",
    "additionalProperties": false,
    "properties": {
      "macSpoofingEnabled": {
        "enum": [ "Eanbled", "Disabled" ],
        "default" : "Disabled"
      },
      "arpGuardEnabled": {
        "enum": [ "Eanbled", "Disabled" ],
        "default" : "Disabled"
      },
      "dhcpGuardEnabled": {
        "enum": [ "Eanbled", "Disabled" ],
        "default" : "Disabled"
      },
      "stormLimit": {
        "type": "integer",
        "default": 0
      },
      "portFlowLimit": {
        "type": "integer",
        "default": 0
      },
      "iovWeight": {
        "type": "integer",
        "default": 0
      },
      "iovInterruptModeration": {
        "enum": [ "On", "Off" ],
        "default" : "Off"
      },
      "iovQueuePairsRequested": {
        "type": "integer",
        "default": 0
      },
      "vmqWeight": {
        "type": "integer",
        "default": 100
      }
    }
  },
  "ipConfigurations": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceId": {
          "type": "string"
        },
        "resourceMetadata": {
          "$ref": "#/definitions/resourceMetadata"
        },
        "properties": {
          "type": "object",
          "properties": {
            "privateIPAllocationMethod": {

```

```

        "enum": [ "Static", "Dynamic", "Unmanaged" ]
    },
    "privateIPAddress": {
        "type": "string",
        "format": "ipv4"
    },
    "subnet": {
        "$ref": "#/definitions/resourceRef"
    },
    "accessControlList": {
        "$ref": "#/definitions/resourceRef"
    }
},
"required": [
    "privateIPAllocationMethod",
    "privateIPAddress",
    "subnet"
]
}
},
"required": [
    "resourceId",
    "properties"
]
}
},
"properties": {
    "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
        "additionalProperties": { "type": "string" }
    },
    "properties": {
        "type": "object",
        "properties": {
            "ipConfigurations": {
                "$ref": "#/definitions/ipConfigurations"
            },
            "isHostVirtualNetworkInterface": {
                "type": "boolean",
                "default" : false
            },
            "isMultitenantStack": {
                "type": "boolean",
                "default": false
            },
            "isPrimary": {
                "type": "boolean",
                "default" : true
            },
            "internalDnsNameLabel": {
                "type": "string"
            },
            "privateMacAddress": {
                "type": "string",
                "pattern": "^[a-fA-F0-9]{12}$"
            },
            "privateMacAllocationMethod": {
                "enum": [ "Static", "Dynamic" ]
            },
            "dnsSettings": {
                "type": "object",
                "properties": {
                    "DnsServers": {
                        "type": "array",
                        "items": {
                            "type": "string",

```

```

        "format": "ipv4"
      }
    }
  },
  "serviceInsertionElements": {
    "type": "array",
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/resourceRef" }
  },
  "portSettings": {
    "$ref": "#/definitions/portSettings"
  }
},
"required": [
  "provisioningState",
  "privateMacAddress",
  "privateMacAllocationMethod"
]
}
},
"required": [
  "properties"
]
}
}

```

6.11.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for NetworkInterfacesnetworkInterfaces",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    }
  }
}

```

```

    },
    "required": [
      "resourceRef"
    ]
  },
  "portSettings": {
    "type": "object",
    "additionalProperties": false,
    "properties": {
      "macSpoofingEnabled": {
        "enum": [ "Eanbled", "Disabled" ],
        "default" : "Disabled"
      },
      "arpGuardEnabled": {
        "enum": [ "Eanbled", "Disabled" ],
        "default" : "Disabled"
      },
      "dhcpGuardEnabled": {
        "enum": [ "Eanbled", "Disabled" ],
        "default" : "Disabled"
      },
      "stormLimit": {
        "type": "integer",
        "default": 0
      },
      "portFlowLimit": {
        "type": "integer",
        "default": 0
      },
      "iovWeight": {
        "type": "integer",
        "default": 0
      },
      "iovInterruptModeration": {
        "enum": [ "On", "Off" ],
        "default" : "Off"
      },
      "iovQueuePairsRequested": {
        "type": "integer",
        "default": 0
      },
      "vmqWeight": {
        "type": "integer",
        "default": 100
      }
    }
  },
  "configurationState":
  {
    "type": "object",
    "additionalProperties": false,
    "properties": {
      "status": {
        "enum": [ "Success", "Failure" ]
      },
      "id": {
        "type": "string"
      },
      "lastUpdatedTime": {
        "type": "string"
      },
      "detailedInfo": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "source": {
              "type": "string"
            },
            "message": {

```

```

        "type": "string"
      },
      "code": {
        "type": "string"
      }
    }
  }
},
"required": [
  "status",
  "id",
  "lastUpdatedTime"
]
},
"ipConfigurations": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "privateIPAllocationMethod": {
            "enum": [ "Static", "Dynamic", "Unmanaged" ]
          },
          "privateIPAddress": {
            "type": "string",
            "format": "ipv4"
          },
          "subnet": {
            "$ref": "#/definitions/resourceRef"
          },
          "accessControlList": {
            "$ref": "#/definitions/resourceRef"
          },
          "loadBalancerBackendAddressPools": {
            "type": "array",
            "uniqueItems": true,
            "items": { "$ref": "#/definitions/resourceRef" }
          },
          "loadBalancerInboundNatRules": {
            "type": "array",
            "uniqueItems": true,
            "items": { "$ref": "#/definitions/resourceRef" }
          }
        }
      },
      "required": [
        "provisioningState",
        "privateIPAllocationMethod",
        "privateIPAddress",
        "subnet"
      ]
    }
  }
}

```

```

    ]
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}
},
},
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "tags": {
    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "ipConfigurations": {
        "$ref": "#/definitions/ipConfigurations"
      },
      "isHostVirtualNetworkInterface": {
        "type": "boolean",
        "default": false
      },
      "isMultitenantStack": {
        "type": "boolean",
        "default": false
      },
      "isPrimary": {
        "type": "boolean",
        "default": true
      },
      "server": {
        "$ref": "#/definitions/resourceRef"
      },
      "internalDnsNameLabel": {
        "type": "string"
      },
      "configurationState": {
        "$ref": "#/definitions/configurationState"
      },
      "privateMacAddress": {
        "type": "string",
        "pattern": "^[a-fA-F0-9]{12}$"
      },
      "privateMacAllocationMethod": {
        "enum": [ "Static", "Dynamic" ]
      }
    }
  }
}

```



```

    "dnsSettings": {
      "type": "object",
      "properties": {
        "DnsServers": {
          "type": "array",
          "items": {
            "type": "string",
            "format": "ipv4"
          }
        }
      }
    },
    "serviceInsertionElements": {
      "type": "array",
      "uniqueItems": true,
      "items": { "$ref": "#/definitions/resourceRef" }
    },
    "portSettings": {
      "$ref": "#/definitions/portSettings"
    }
  },
  "required": [
    "provisioningState"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.11.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for NetworkInterfaces/networkInterfaces",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },
  "provisioningState": {

```

```

    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  },
  "resourceRef": {
    "type": "object",
    "additionalProperties": false,
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  },
  "required": [
    "resourceRef"
  ]
},
"portSettings": {
  "type": "object",
  "additionalProperties": false,
  "properties": {
    "macSpoofingEnabled": {
      "enum": [ "Eanbled", "Disabled" ],
      "default" : "Disabled"
    },
    "arpGuardEnabled": {
      "enum": [ "Eanbled", "Disabled" ],
      "default" : "Disabled"
    },
    "dhcpGuardEnabled": {
      "enum": [ "Eanbled", "Disabled" ],
      "default" : "Disabled"
    },
    "stormLimit": {
      "type": "integer",
      "default": 0
    },
    "portFlowLimit": {
      "type": "integer",
      "default": 0
    },
    "iovWeight": {
      "type": "integer",
      "default": 0
    },
    "iovInterruptModeration": {
      "enum": [ "On", "Off" ],
      "default" : "Off"
    },
    "iovQueuePairsRequested": {
      "type": "integer",
      "default": 0
    },
    "vmqWeight": {
      "type": "integer",
      "default": 100
    }
  }
},
"configurationState":
{
  "type": "object",
  "additionalProperties": false,
  "properties": {
    "status": {
      "enum": [ "Success", "Failure" ]
    },
    "id": {
      "type": "string"
    },
    "lastUpdatedTime": {
      "type": "string"
    }
  },
},

```

```

"detailedInfo": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "source": {
        "type": "string"
      },
      "message": {
        "type": "string"
      },
      "code": {
        "type": "string"
      }
    }
  }
},
"required": [
  "status",
  "id",
  "lastUpdatedTime"
]
},
"ipConfigurations": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "privateIPAllocationMethod": {
            "enum": [ "Static", "Dynamic", "Unmanaged" ]
          },
          "privateIPAddress": {
            "type": "string",
            "format": "ipv4"
          },
          "subnet": {
            "$ref": "#/definitions/resourceRef"
          },
          "accessControlList": {
            "$ref": "#/definitions/resourceRef"
          },
          "loadBalancerBackendAddressPools": {
            "type": "array",
            "uniqueItems": true,
            "items": { "$ref": "#/definitions/resourceRef" }
          },
          "loadBalancerInboundNatRules": {
            "type": "array",

```

```

        "uniqueItems": true,
        "items": { "$ref": "#/definitions/resourceRef" }
    },
    "required": [
        "provisioningState",
        "privateIPAllocationMethod",
        "privateIPAddress",
        "subnet"
    ]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"networkInterface": {
    "type": "object",
    "properties": {
        "resourceRef": {
            "type": "string"
        },
        "resourceId": {
            "type": "string"
        },
        "etag": {
            "type": "string"
        },
        "instanceId": {
            "$ref": "#/definitions/GUID"
        },
        "resourceMetadata": {
            "$ref": "#/definitions/resourceMetadata"
        },
        "tags": {
            "additionalProperties": { "type": "string" }
        },
        "properties": {
            "type": "object",
            "properties": {
                "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                },
                "ipConfigurations": {
                    "$ref": "#/definitions/ipConfigurations"
                },
                "isHostVirtualNetworkInterface": {
                    "type": "boolean",
                    "default": false
                },
                "isMultitenantStack": {
                    "type": "boolean",
                    "default": false
                },
                "isPrimary": {
                    "type": "boolean",
                    "default": true
                },
                "server": {
                    "$ref": "#/definitions/resourceRef"
                },
                "internalDnsNameLabel": {
                    "type": "string"
                },
                "configurationState": {

```

```

        "$ref": "#/definitions/configurationState"
    },
    "privateMacAddress": {
        "type": "string",
        "pattern": "^[a-fA-F0-9]{12}$"
    },
    "privateMacAllocationMethod": {
        "enum": [ "Static", "Dynamic" ]
    },
    "dnsSettings": {
        "type": "object",
        "properties": {
            "DnsServers": {
                "type": "array",
                "items": {
                    "type": "string",
                    "format": "ipv4"
                }
            }
        }
    },
    "serviceInsertionElements": {
        "type": "array",
        "uniqueItems": true,
        "items": { "$ref": "#/definitions/resourceRef" }
    },
    "portSettings": {
        "$ref": "#/definitions/portSettings"
    }
},
"required": [
    "provisioningState",
    "privateMacAddress",
    "privateMacAllocationMethod"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
},
"networkInterfaceArray": {
    "type": "array",
    "minItems": 0,
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/networkInterface" }
}
},
"properties": {
    "value": { "$ref": "#/definitions/networkInterfaceArray" },
    "nextLink": {
        "type": "string",
        "format": "uri",
        "default": ""
    }
}
},
"required": ["value", "nextLink"]
}
}

```

6.11.4 ipConfigurations

6.11.4.1 GET schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for IP Configurations",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
```

```

    "$ref": "#/definitions/provisioningState"
  },
  "privateIPAllocationMethod": {
    "enum": [ "Static", "Dynamic", "Unmanaged" ]
  },
  "privateIPAddress": {
    "type": "string",
    "format": "ipv4"
  },
  "subnet": {
    "$ref": "#/definitions/resourceRef"
  },
  "accessControlList": {
    "$ref": "#/definitions/resourceRef"
  },
  "loadBalancerBackendAddressPools": {
    "type": "array",
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/resourceRef" }
  },
  "loadBalancerInboundNatRules": {
    "type": "array",
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/resourceRef" }
  }
},
"required": [
  "provisioningState",
  "privateIPAllocationMethod",
  "privateIPAddress",
  "subnet"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.11.4.2 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for IP Configurations",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {

```



```

    },
    "required": [
      "provisioningState",
      "privateIPAllocationMethod",
      "privateIPAddress",
      "subnet"
    ]
  }
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
},
"properties": {
  "value": { "$ref": "#/definitions/ipConfigurations" },
  "nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
  }
},
"required": ["value", "nextLink"]
}

```

~~6.12 publicIpAddresses~~

6.12 publicIPAddresses

6.12.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for public IP Addresses",
  "type": "object",

  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },
  "staticIP": {
    "type": "object",
    "properties": {

```

```

        "ipAddress": {
            "type": "string",
            "format": "ipv4"
        },
        "publicIPAllocationMethod": {
            "enum": [ "Static" ]
        },
        "idleTimeoutInMinutes": {
            "type": "integer",
            "minimum": 1
        }
    },
    "required": [
        "ipAddress",
        "publicIPAllocationMethod"
    ]
},
"dynamicIP": {
    "type": "object",
    "properties": {
        "ipAddress": {
            "type": "string",
            "format": "ipv4"
        },
        "publicIPAllocationMethod": {
            "enum": [ "Dynamic" ]
        },
        "idleTimeoutInMinutes": {
            "type": "integer",
            "minimum": 1
        }
    },
    "required": [
        "publicIPAllocationMethod"
    ]
}
},
"properties": {
    "resourceId": {
        "type": "string"
    },
    "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
        "additionalProperties": { "type": "string" }
    },
    "properties": {
        "oneOf": [
            { "$ref": "#/definitions/staticIP" },
            { "$ref": "#/definitions/dynamicIP" }
        ]
    }
},
"required": [
    "properties"
]
}

```

6.12.2 GET schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for public IP Addresses",
    "type": "object",

    "definitions": {

```

```

    "GUID": {
      "type" : "string",
      "pattern": "[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
      "additionalProperties": { "type": "string" }
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "ipAddress": {
          "type": "string",
          "format": "ipv4"
        },
        "publicIPAllocationMethod": {
          "enum": [ "Static", "Dynamic" ]
        },
        "idleTimeoutInMinutes": {
          "type": "integer",
          "minimum": 1
        }
      }
    },
    "required": [
      "ipAddress",
      "publicIPAllocationMethod",
      "idleTimeoutInMinutes"
    ]
  }
}

```

```

    ]
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}

```

6.12.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for Access Control Listspublic IP Addresses",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  },
  "publicIP": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "tags": {
        "additionalProperties": { "type": "string" }
      }
    }
  },

```

```

    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "ipAddress": {
          "type": "string",
          "format": "ipv4"
        },
        "publicIPAllocationMethod": {
          "enum": [ "Static", "Dynamic" ]
        },
        "idleTimeoutInMinutes": {
          "type": "integer",
          "minimum": 1
        }
      },
      "required": [
        "ipAddress",
        "publicIPAllocationMethod",
        "idleTimeoutInMinutes"
      ]
    },
    "required": [
      "resourceRef",
      "resourceId",
      "etag",
      "instanceId",
      "properties"
    ]
  },
  "publicIPArray": {
    "type": "array",
    "minItems": 0,
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/publicIP" }
  }
},
"properties": {
  "value": { "$ref": "#/definitions/publicIPArray" },
  "nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
  }
},
"required": ["nextLink"]
}

```

6.13 servers

6.13.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for servers",
  "type": "object",
  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {

```

```

        "type": "string"
    },
    "groupId": {
        "type": "string"
    },
    "resourceName": {
        "type": "string"
    },
    "originalHref": {
        "type": "string"
    }
}
}
},
"properties": {
    "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
    },
    "properties": {
        "type": "object",
        "properties": {
            "connections": {
                "type": "array",
                "items": {
                    "type": "object",
                    "properties": {
                        "managementAddresses": {
                            "type": "array",
                            "items": {
                                "type": "string"
                            }
                        },
                    },
                },
            },
            "credential": {
                "type": "object",
                "properties": {
                    "resourceRef": {
                        "type": "string"
                    }
                },
            },
            "required": [
                "resourceRef"
            ],
            "credentialType": {
                "type": "string"
            }
        },
        "required": [
            "managementAddresses",
            "credential",
            "credentialType"
        ]
    }
},
"certificate": {
    "type": "string"
},
"rackSlot": {
    "type": "string"
},
"os": {
    "type": "string"
},
"model": {
    "type": "string"
},
"vendor": {
    "type": "string"
},
"serial": {

```

```

    "type": "string"
  },
  "networkInterfaces": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceId": {
          "type": "string"
        },
        "properties": {
          "type": "object",
          "properties": {
            "interfaceName": {
              "type": "string"
            },
            "mac": {
              "type": "string"
            },
            "ipConfiguration": {
              "type": "array",
              "items": {
                "type": "object",
                "properties": {
                  "ipAddress": {
                    "type": "string"
                  },
                  "networkPrefix": {
                    "type": "string"
                  },
                  "isDhcpEnabled": {
                    "type": "string"
                  }
                }
              }
            },
            "vlanIds": {
              "type": "array",
              "items": {
                "type": "string"
              }
            },
            "interfaceIndex": {
              "type": "string"
            },
            "interfaceSpeed": {
              "type": "string"
            },
            "isBMC": {
              "type": "string"
            },
            "logicalSubnets": {
              "type": "array",
              "items": {
                "type": "object",
                "properties": {
                  "resourceRef": {
                    "type": "string"
                  }
                }
              },
              "required": [
                "resourceRef"
              ]
            }
          }
        },
        "required": [
          "logicalSubnets"
        ]
      }
    }
  }
}

```

```

        },
        "required": [
            "resourceId",
            "properties"
        ]
    }
},
"required": [
    "connections"
]
},
"tags": {
    "additionalProperties": { "type": "string" }
}
},
"required": [
    "resourceId",
    "properties"
]
}
}

```

6.13.2 GET schema v1

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for servers",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "resourceMetadata": {

```



```

    "$ref": "#/definitions/resourceMetadata"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "connections": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "managementAddresses": {
              "type": "array",
              "items": {
                "type": "string"
              }
            },
            "credential": {
              "type": "object",
              "properties": {
                "resourceRef": {
                  "type": "string"
                }
              }
            },
            "required": [
              "resourceRef"
            ]
          },
          "credentialType": {
            "type": "string"
          }
        },
        "required": [
          "managementAddresses",
          "credential",
          "credentialType"
        ]
      }
    },
    "virtualServers": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        },
        "required": [
          "resourceRef"
        ]
      }
    },
    "virtualSwitches": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      }
    }
  }
}

```

```

        },
        "required": [
            "resourceRef"
        ]
    }
},
"certificate": {
    "type": "string"
},
"rackSlot": {
    "type": "string"
},
"os": {
    "type": "string"
},
"model": {
    "type": "string"
},
"vendor": {
    "type": "string"
},
"serial": {
    "type": "string"
},
"configurationState": {
    "type": "object",
    "properties": {
        "status": {
            "type": "string"
        },
        "detailedInfo": {
            "type": "array",
            "items": {
                "type": "object",
                "properties": {
                    "source": {
                        "type": "string"
                    },
                    "message": {
                        "type": "string"
                    },
                    "code": {
                        "type": "string"
                    }
                }
            },
            "required": [
                "source",
                "message",
                "code"
            ]
        }
    },
    "lastUpdatedTime": {
        "type": "string"
    }
},
"required": [
    "status",
    "detailedInfo",
    "lastUpdatedTime"
]
},
"networkInterfaces": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            }
        }
    }
}

```

```

    },
    "resourceId": {
      "type": "string"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "interfaceName": {
          "type": "string"
        },
        "mac": {
          "type": "string"
        },
        "ipConfiguration": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "ipAddress": {
                "type": "string"
              },
              "networkPrefix": {
                "type": "string"
              },
              "isDhcpEnabled": {
                "type": "string"
              }
            }
          },
          "required": [
          ]
        }
      },
      "vlanIds": {
        "type": "array",
        "items": {
          "type": "string"
        }
      },
      "adminStatus": {
        "type": "string"
      },
      "operationalStatus": {
        "type": "string"
      },
      "interfaceIndex": {
        "type": "string"
      },
      "interfaceSpeed": {
        "type": "string"
      },
      "isBMC": {
        "type": "string"
      },
      "logicalSubnets": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {

```

```

        "resourceRef": {
            "type": "string"
        }
    },
    "required": [
        "resourceRef"
    ]
}
}
},
"required": [
    "provisioningState",
    "interfaceName",
    "mac",
    "ipConfiguration",
    "vlanIds",
    "adminStatus",
    "operationalStatus",
    "interfaceIndex",
    "interfaceSpeed",
    "isBMC",
    "logicalSubnets"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "resourceMetadata",
    "etag",
    "instanceId",
    "properties"
]
},
"required": [
    "provisioningState",
    "connections",
    "configurationState",
    "networkInterfaces"
]
},
"tags": {
    "additionalProperties": { "type": "string" }
}
},
"required": [
    "resourceRef",
    "resourceId",
    "resourceMetadata",
    "etag",
    "instanceId",
    "properties",
]
}
}

```

6.13.3 GET schema v2

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for servers",
    "type": "object",

    "definitions": {
        "GUID": {
            "type": "string",

```

```

    "pattern": "[a-zA-F0-9]{8}-[a-zA-F0-9]{4}-[a-zA-F0-9]{4}-[a-zA-F0-9]{4}-[a-zA-F0-9]{12}$"
  },
  "resourceMetadata": {
    "properties": {
      "client": {
        "type": "string"
      },
      "tenantId": {
        "type": "string"
      },
      "groupId": {
        "type": "string"
      },
      "resourceName": {
        "type": "string"
      },
      "originalHref": {
        "type": "string"
      }
    }
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
},

"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "connections": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "managementAddresses": {
            "type": "array",
            "items": {
              "type": "string"
            }
          }
        },
        "credential": {
          "type": "object",
          "properties": {
            "resourceRef": {
              "type": "string"
            }
          }
        },
        "required": [
          "resourceRef"
        ]
      }
    }
  }
}

```

```

    ]
    },
    "credentialType": {
      "type": "string"
    }
  },
  "required": [
    "managementAddresses",
    "credential",
    "credentialType"
  ]
}
},
"virtualServers": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  },
  "required": [
    "resourceRef"
  ]
}
},
"virtualSwitches": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  },
  "required": [
    "resourceRef"
  ]
}
},
"certificate": {
  "type": "string"
},
"rackSlot": {
  "type": "string"
},
"os": {
  "type": "string"
},
"model": {
  "type": "string"
},
"vendor": {
  "type": "string"
},
"serial": {
  "type": "string"
},
"configurationState": {
  "type": "object",
  "properties": {
    "status": {
      "type": "string"
    },
    "detailedInfo": {
      "type": "array",
      "items": {
        "type": "object",

```

```

        "properties": {
            "source": {
                "type": "string"
            },
            "message": {
                "type": "string"
            },
            "code": {
                "type": "string"
            }
        },
        "required": [
            "source",
            "message",
            "code"
        ]
    },
    "lastUpdatedTime": {
        "type": "string"
    }
},
"required": [
    "status",
    "detailedInfo",
    "lastUpdatedTime"
]
},
"virtualNetworkInterfaces": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            }
        },
        "required": [
            "resourceRef"
        ]
    }
},
"networkInterfaces": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            },
            "resourceId": {
                "type": "string"
            },
            "resourceMetadata": {
                "$ref": "#/definitions/resourceMetadata"
            },
            "etag": {
                "type": "string"
            },
            "instanceId": {
                "$ref": "#/definitions/GUID"
            },
            "properties": {
                "type": "object",
                "properties": {
                    "provisioningState": {
                        "$ref": "#/definitions/provisioningState"
                    },
                    "interfaceName": {
                        "type": "string"
                    }
                }
            }
        }
    }
}

```

```

    },
    "mac": {
      "type": "string"
    },
    "ipConfiguration": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "ipAddress": {
            "type": "string"
          },
          "networkPrefix": {
            "type": "string"
          },
          "isDhcpEnabled": {
            "type": "string"
          }
        }
      },
      "required": [
      ]
    }
  },
  "vlanIds": {
    "type": "array",
    "items": {
      "type": "string"
    }
  },
  "adminStatus": {
    "type": "string"
  },
  "operationalStatus": {
    "type": "string"
  },
  "interfaceIndex": {
    "type": "string"
  },
  "interfaceSpeed": {
    "type": "string"
  },
  "isBMC": {
    "type": "string"
  },
  "logicalSubnets": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  }
}
},
"required": [
  "provisioningState",
  "interfaceName",
  "mac",
  "ipConfiguration",
  "vlanIds",
  "adminStatus",
  "operationalStatus",
  "interfaceIndex",
  "interfaceSpeed",

```



```

        "isBMC",
        "logicalSubnets"
    ]
    }
},
"required": [
    "resourceRef",
    "resourceId",
    "resourceMetadata",
    "etag",
    "instanceId",
    "properties"
]
},
"required": [
    "provisioningState",
    "connections",
    "configurationState",
    "networkInterfaces"
]
},
"tags": {
    "additionalProperties": { "type": "string" }
}
},
"required": [
    "resourceRef",
    "resourceId",
    "resourceMetadata",
    "etag",
    "instanceId",
    "properties"
]
}
}

```

6.13.4 GET ALL schema v1

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for servers",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  }
}

```

```

},
"provisioningState": {
  "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
},
"server": {
  "type": "object",
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      }
    },
    "connections": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "managementAddresses": {
            "type": "array",
            "items": {
              "type": "string"
            }
          },
          "credential": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              }
            }
          },
          "required": [
            "resourceRef"
          ]
        },
        "credentialType": {
          "type": "string"
        }
      },
      "required": [
        "managementAddresses",
        "credential",
        "credentialType"
      ]
    }
  },
  "virtualServers": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  }
}

```

```

    ]
  },
  "virtualSwitches": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  }
},
"certificate": {
  "type": "string"
},
"rackSlot": {
  "type": "string"
},
"os": {
  "type": "string"
},
"model": {
  "type": "string"
},
"vendor": {
  "type": "string"
},
"serial": {
  "type": "string"
},
"configurationState": {
  "type": "object",
  "properties": {
    "status": {
      "type": "string"
    },
    "detailedInfo": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "source": {
            "type": "string"
          },
          "message": {
            "type": "string"
          },
          "code": {
            "type": "string"
          }
        }
      }
    },
    "required": [
      "source",
      "message",
      "code"
    ]
  }
},
"lastUpdatedTime": {
  "type": "string"
}
},
"required": [
  "status",

```

```

    "detailedInfo",
    "lastUpdatedTime"
  ]
},
"networkInterfaces": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "interfaceName": {
            "type": "string"
          },
          "mac": {
            "type": "string"
          },
          "ipConfiguration": {
            "type": "array",
            "items": {
              "type": "object",
              "properties": {
                "ipAddress": {
                  "type": "string"
                },
                "networkPrefix": {
                  "type": "string"
                },
                "isDhcpEnabled": {
                  "type": "string"
                }
              }
            }
          }
        }
      },
      "vlanIds": {
        "type": "array",
        "items": {
          "type": "string"
        }
      },
      "adminStatus": {
        "type": "string"
      },
      "operationalStatus": {
        "type": "string"
      },
      "interfaceIndex": {
        "type": "string"
      },
      "interfaceSpeed": {
        "type": "string"
      }
    }
  }
}

```

```

    },
    "isBMC": {
      "type": "string"
    },
    "logicalSubnets": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        },
        "required": [
          "resourceRef"
        ]
      }
    }
  },
  "required": [
    "provisioningState",
    "interfaceName",
    "mac",
    "ipConfiguration",
    "vlanIds",
    "adminStatus",
    "operationalStatus",
    "interfaceIndex",
    "interfaceSpeed",
    "isBMC",
    "logicalSubnets"
  ]
},
"required": [
  "resourceRef",
  "resourceId",
  "resourceMetadata",
  "etag",
  "instanceId",
  "properties"
]
},
"required": [
  "provisioningState",
  "connections",
  "configurationState",
  "networkInterfaces"
],
"tags": {
  "additionalProperties": { "type": "string" }
}
},
"required": [
  "resourceRef",
  "resourceId",
  "resourceMetadata",
  "etag",
  "instanceId",
  "properties",
]
},
"serverArray": {
  "type": "array",
  "minItems": 0,
  "uniqueItems": true,
  "items": { "$ref": "#/definitions/server" }
}
},

```

```

    "properties": {
      "value": { "$ref": "#/definitions/serverArray" },
      "nextLink": {
        "type": "string",
        "format": "uri",
        "default": ""
      }
    },
    "required": ["nextLink"]
  }
}

```

6.13.5 GET ALL schema v2

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for servers",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "server": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "resourceMetadata": {
          "$ref": "#/definitions/resourceMetadata"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "properties": {

```

```

"provisioningState": {
  "$ref": "#/definitions/provisioningState"
},
"connections": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "managementAddresses": {
        "type": "array",
        "items": {
          "type": "string"
        }
      },
      "credential": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "credentialType": {
      "type": "string"
    }
  },
  "required": [
    "managementAddresses",
    "credential",
    "credentialType"
  ]
},
"virtualServers": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  },
  "required": [
    "resourceRef"
  ]
},
"virtualSwitches": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  },
  "required": [
    "resourceRef"
  ]
},
"certificate": {
  "type": "string"
},
"rackSlot": {
  "type": "string"
}

```

```

},
"os": {
  "type": "string"
},
"model": {
  "type": "string"
},
"vendor": {
  "type": "string"
},
"serial": {
  "type": "string"
},
"configurationState": {
  "type": "object",
  "properties": {
    "status": {
      "type": "string"
    },
    "detailedInfo": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "source": {
            "type": "string"
          },
          "message": {
            "type": "string"
          },
          "code": {
            "type": "string"
          }
        }
      },
      "required": [
        "source",
        "message",
        "code"
      ]
    },
    "lastUpdatedTime": {
      "type": "string"
    }
  },
  "required": [
    "status",
    "detailedInfo",
    "lastUpdatedTime"
  ]
},
"virtualNetworkInterfaces": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    },
    "required": [
      "resourceRef"
    ]
  }
},
"networkInterfaces": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {

```



```

"resourceRef": {
  "type": "string"
},
"resourceId": {
  "type": "string"
},
"resourceMetadata": {
  "$ref": "#/definitions/resourceMetadata"
},
"etag": {
  "type": "string"
},
"instanceId": {
  "$ref": "#/definitions/GUID"
},
"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "interfaceName": {
      "type": "string"
    },
    "mac": {
      "type": "string"
    },
    "ipConfiguration": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "ipAddress": {
            "type": "string"
          },
          "networkPrefix": {
            "type": "string"
          },
          "isDhcpEnabled": {
            "type": "string"
          }
        }
      }
    },
    "vlanIds": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "adminStatus": {
      "type": "string"
    },
    "operationalStatus": {
      "type": "string"
    },
    "interfaceIndex": {
      "type": "string"
    },
    "interfaceSpeed": {
      "type": "string"
    },
    "isBMC": {
      "type": "string"
    },
    "logicalSubnets": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {

```

```

        "resourceRef": {
            "type": "string"
        }
    },
    "required": [
        "resourceRef"
    ]
}
},
"required": [
    "provisioningState",
    "interfaceName",
    "mac",
    "ipConfiguration",
    "vlanIds",
    "adminStatus",
    "operationalStatus",
    "interfaceIndex",
    "interfaceSpeed",
    "isBMC",
    "logicalSubnets"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "resourceMetadata",
    "etag",
    "instanceId",
    "properties"
]
},
"required": [
    "provisioningState",
    "connections",
    "rackSlot",
    "os",
    "model",
    "vendor",
    "serial",
    "configurationState",
    "networkInterfaces"
],
"tags": {
    "additionalProperties": { "type": "string" }
}
},
"required": [
    "resourceRef",
    "resourceId",
    "resourceMetadata",
    "etag",
    "instanceId",
    "properties",
    "tags"
]
},
"serverArray": {
    "type": "array",
    "minItems": 0,
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/server" }
}
},
"properties": {
    "value": { "$ref": "#/definitions/serverArray" },

```

```

    "nextLink": {
      "type": "string",
      "format": "uri",
      "default": ""
    }
  },
  "required": ["nextLink"]
}

```

6.14 serviceInsertions

6.14.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for Service Insertionsservice Insertions",
  "type": "object",

  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },

  "properties": {
    "resourceId": {
      "type": "string"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "properties": {
      "type": "object",
      "properties": {
        "serviceInsertionRules": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "resourceId": {
                "type": "string"
              },
              "resourceMetadata": {
                "$ref": "#/definitions/resourceMetadata"
              },
              "properties": {
                "type": "object",
                "properties": {
                  "description": {
                    "type": "string"
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}

```

```

    },
    "protocol": {
      "enum": [ "All", "Tcp", "Udp", "Http" ]
    },
    "sourcePortRangeStart": {
      "type": "integer"
    },
    "sourcePortRangeEnd": {
      "type": "integer"
    },
    "destinationPortRangeStart": {
      "type": "integer"
    },
    "destinationPortRangeEnd": {
      "type": "integer"
    },
    "sourceSubnets": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "destinationSubnets": {
      "type": "array",
      "items": {
        "type": "string"
      }
    }
  },
  "required": [
    "protocol",
    "sourcePortRangeStart",
    "sourcePortRangeEnd",
    "destinationPortRangeStart",
    "destinationPortRangeEnd",
    "sourceSubnets",
    "destinationSubnets"
  ]
}
},
"required": [
  "resourceId",
  "properties"
]
}
},
"serviceInsertionElements": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceId": {
        "type": "string"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "properties": {
        "type": "object",
        "properties": {
          "description": {
            "type": "string"
          },
          "order": {
            "type": "integer"
          }
        }
      }
    }
  },
  "required": [
    "order"
  ]
}

```

```

        }
      },
      "required": [
        "resourceId",
        "properties"
      ]
    }
  },
  "priority": {
    "type": "integer"
  }
},
"required": [
  "serviceInsertionRules",
  "serviceInsertionElements",
  "priority"
]
}
},
"required": [
  "resourceId",
  "properties"
]
}
}

```

6.14.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for Service Insertionsservice Insertions",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    }
  }
}

```

```

},
"etag": {
  "type": "string"
},
"instanceId": {
  "type": "string"
},
"resourceMetadata": {
  "$ref": "#/definitions/resourceMetadata"
},
"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "serviceInsertionRules": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "resourceMetadata": {
            "$ref": "#/definitions/resourceMetadata"
          },
          "etag": {
            "type": "string"
          },
          "instanceId": {
            "$ref": "#/definitions/GUID"
          },
          "properties": {
            "type": "object",
            "properties": {
              "provisioningState": {
                "$ref": "#/definitions/provisioningState"
              },
              "description": {
                "type": "string"
              },
              "protocol": {
                "enum": [ "All", "Tcp", "Udp", "Http" ]
              },
              "sourcePortRangeStart": {
                "type": "integer"
              },
              "sourcePortRangeEnd": {
                "type": "integer"
              },
              "destinationPortRangeStart": {
                "type": "integer"
              },
              "destinationPortRangeEnd": {
                "type": "integer"
              },
              "sourceSubnets": {
                "type": "array",
                "items": {
                  "type": "string"
                }
              },
              "destinationSubnets": {
                "type": "array",
                "items": {
                  "type": "string"
                }
              }
            }
          }
        }
      }
    }
  }
}

```

```

    }
  },
  "required": [
    "provisioningState",
    "protocol",
    "sourcePortRangeStart",
    "sourcePortRangeEnd",
    "destinationPortRangeStart",
    "destinationPortRangeEnd",
    "sourceSubnets",
    "destinationSubnets"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"serviceInsertionElements": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "description": {
            "type": "string"
          },
          "order": {
            "type": "integer"
          }
        }
      },
      "required": [
        "provisioningState",
        "order"
      ]
    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}
}

```



```

    },
    "tenantId": {
      "type": "string"
    },
    "groupId": {
      "type": "string"
    },
    "resourceName": {
      "type": "string"
    },
    "originalHref": {
      "type": "string"
    }
  }
},
"provisioningState": {
  "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
},
"ServiceInsertionsserviceInsertions": {
  "type": "object",
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "type": "string"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "serviceInsertionRules": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              },
              "resourceId": {
                "type": "string"
              },
              "resourceMetadata": {
                "$ref": "#/definitions/resourceMetadata"
              },
              "etag": {
                "type": "string"
              },
              "instanceId": {
                "$ref": "#/definitions/GUID"
              },
              "properties": {
                "type": "object",
                "properties": {
                  "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                  },
                  "description": {
                    "type": "string"
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}

```

```

    },
    "protocol": {
      "enum": [ "All", "Tcp", "Udp", "Http" ]
    },
    "sourcePortRangeStart": {
      "type": "integer"
    },
    "sourcePortRangeEnd": {
      "type": "integer"
    },
    "destinationPortRangeStart": {
      "type": "integer"
    },
    "destinationPortRangeEnd": {
      "type": "integer"
    },
    "sourceSubnets": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "destinationSubnets": {
      "type": "array",
      "items": {
        "type": "string"
      }
    }
  },
  "required": [
    "provisioningState",
    "protocol",
    "sourcePortRangeStart",
    "sourcePortRangeEnd",
    "destinationPortRangeStart",
    "destinationPortRangeEnd",
    "sourceSubnets",
    "destinationSubnets"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"serviceInsertionElements": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      }
    }
  }
},

```

```

        "properties": {
            "type": "object",
            "properties": {
                "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                },
                "description": {
                    "type": "string"
                },
                "order": {
                    "type": "integer"
                }
            },
            "required": [
                "provisioningState",
                "order"
            ]
        },
        "required": [
            "resourceRef",
            "resourceId",
            "etag",
            "instanceId",
            "properties"
        ]
    },
    "priority": {
        "type": "integer"
    },
    "ipConfigurations": {
        "type": "array",
        "items": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            },
            "required": [
                "resourceRef"
            ]
        }
    },
    "subnets": {
        "type": "array",
        "items": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            },
            "required": [
                "resourceRef"
            ]
        }
    },
    "required": [
        "provisioningState",
        "serviceInsertionRules",
        "serviceInsertionElements",
        "priority"
    ]
},
"required": [
    "resourceRef",

```

```

        "resourceId",
        "etag",
        "instanceId",
        "properties"
    ]
},
"ServiceInsertionsArray": {
    "type": "array",
    "minItems": 0,
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/ServiceInsertionsServiceInsertions" }
}
},
"properties": {
    "value": { "$ref": "#/definitions/ServiceInsertionsArray" },
    "nextLink": {
        "type": "string",
        "format": "uri",
        "default": ""
    }
},
"required": [ "nextLink" ]
}

```

~~6.15 virtualGateways~~

6.15 VirtualGateways

6.15.1 PUT schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for VirtualGateways",

    "definitions": {
        "GUID": {
            "type": "string",
            "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
        },
        "resourceMetadata": {
            "properties": {
                "client": {
                    "type": "string"
                },
                "tenantId": {
                    "type": "string"
                },
                "groupId": {
                    "type": "string"
                },
                "resourceName": {
                    "type": "string"
                },
                "originalHref": {
                    "type": "string"
                }
            }
        },
        "provisioningState": {
            "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
        }
    },
}

```

```

"type": "object",
"properties": {
  "resourceId": {
    "type": "string"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "gatewaypool": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "gatewaypoolsGatewayPools": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },
  "gatewaySubnets": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },
  "vpnClientAddressSpace": {
    "type": "null"
  },
  "networkConnections": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceId": {
          "type": "string"
        },
        "properties": {
          "type": "object",
          "properties": {
            "connectionType": {
              "enum": [ "IPSec", "GRE", "L3" ]
            },
            "outboundKiloBitsPerSecond": {
              "type": "integer"
            }
          }
        }
      }
    }
  }
}

```

```

    "inboundKiloBitsPerSecond": {
      "type": "integer"
    },
    "outboundBytes": {
      "type": "integer"
    },
    "inboundBytes": {
      "type": "integer"
    },
    "outboundDroppedPackets": {
      "type": "integer"
    },
    "inboundDroppedPackets": {
      "type": "integer"
    },
    "ipSecConfiguration": {
      "type": "object",
      "properties": {
        "authenticationMethod": {
          "enum": [ "Certificates", "PSK" ]
        },
        "sharedSecret": {
          "type": "string"
        },
        "quickMode": {
          "type": "object",
          "properties": {
            "perfectForwardSecrecy": {
              "enum": [ "None", "PFS1", "PFS2", "PFS2048", "ECP256", "ECP384",
"PFSMM", "PFS24" ]
            },
            "authenticationTransformationConstant": {
              "enum": [ "MD596", "SHA196", "SHA256128", "GCM_AES128",
"GCM_AES192", "GCM_AES256", "None" ]
            },
            "cipherTransformationConstant": {
              "enum": [ "DES", "DES3", "AES128", "AES192", "AES256",
"GCM_AES128", "GCM_AES192", "GCM_AES256" ]
            },
            "saLifeTimeSeconds": {
              "type": "integer"
            },
            "idleDisconnectSeconds": {
              "type": "integer"
            },
            "saLifeTimeKiloBytes": {
              "type": "integer"
            }
          }
        },
        "required": [
          "perfectForwardSecrecy",
          "authenticationTransformationConstant",
          "cipherTransformationConstant",
          "saLifeTimeSeconds",
          "idleDisconnectSeconds",
          "saLifeTimeKiloBytes"
        ]
      }
    },
    "mainMode": {
      "type": "object",
      "properties": {
        "diffieHellmanGroup": {
          "enum": [ "Group1", "Group2", "Group14", "ECP258", "ECP384" ]
        },
        "integrityAlgorithm": {
          "enum": [ "MD5", "SHA1", "SHA256", "SHA384" ]
        },
        "encryptionAlgorithm": {

```

```

        "enum": [ "DES", "DES3", "AES128", "AES192", "AES256" ]
    },
    "saLifeTimeSeconds": {
        "type": "integer"
    },
    "saLifeTimeKiloBytes": {
        "type": "integer"
    }
},
"required": [
    "diffieHellmanGroup",
    "integrityAlgorithm",
    "encryptionAlgorithm",
    "saLifeTimeSeconds",
    "saLifeTimeKiloBytes"
]
}
},
"required": [
    "authenticationMethod",
    "sharedSecret",
    "quickMode",
    "mainMode"
]
},
"greConfiguration": {
    "type": "object",
    "properties": {
        "greKey": {
            "type": "string"
        }
    }
},
"required": [
    "greKey"
]
},
"l3Configuration": {
    "type": "object",
    "properties": {
        "vlanSubnet": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            }
        },
        "required": [
            "resourceRef"
        ]
    }
},
"required": [
    "vlanSubnet"
]
},
"ipAddresses": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "ipAddress": {
                "type": "string"
            },
            "prefixLength": {
                "type": "integer"
            }
        }
    }
},

```

```

        "required": [
            "ipAddress",
            "prefixLength"
        ]
    },
    "PeerIPAddresses": {
        "type": "array",
        "items": {
            "type": "string"
        }
    },
    "destinationIPAddress": {
        "type": "string"
    },
    "routes": {
        "type": "array",
        "items": {
            "type": "object",
            "properties": {
                "Metric": {
                    "type": "integer"
                },
                "DestinationPrefix": {
                    "type": "string"
                }
            }
        },
        "required": [
            "Metric",
            "DestinationPrefix"
        ]
    }
},
"required": [
    "connectionType",
    "outboundKiloBitsPerSecond",
    "inboundKiloBitsPerSecond",
    "outboundBytes",
    "inboundBytes",
    "outboundDroppedPackets",
    "inboundDroppedPackets"
]
},
"required": [
    "resourceId",
    "properties"
]
},
"bgpRouters": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceId": {
                "type": "string"
            },
            "etag": {
                "type": "string"
            },
            "instanceId": {
                "type": "string"
            }
        },
        "properties": {
            "type": "object",
            "properties": {

```



```

    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "isEnabled": {
      "type": "string"
    },
    "requireIGPSync": {
      "type": "string"
    },
    "extASNumber": {
      "type": "string"
    },
    "routerIP": {
      "type": "array",
      "items": { }
    },
    "bgpNetworks": {
      "type": "array",
      "items": { }
    },
    "isGenerated": {
      "type": "boolean"
    },
    "bgpPeers": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceId": {
            "type": "string"
          },
          "properties": {
            "type": "object",
            "properties": {
              "peerIpAddress": {
                "type": "string"
              },
              "asNumber": {
                "type": "string"
              },
              "extAsNumber": {
                "type": "string"
              },
              "policyMapIn": {
                "type": "null"
              },
              "policyMapOut": {
                "type": "null"
              }
            }
          },
          "required": [
            "peerIpAddress",
            "asNumber",
            "extAsNumber",
            "policyMapIn",
            "policyMapOut"
          ]
        }
      }
    },
    "required": [
      "resourceId",
      "properties"
    ]
  }
},
"required": [
  "isEnabled",
  "requireIGPSync",
  "extASNumber",

```

```

        "routerIP",
        "bgpNetworks",
        "isGenerated",
        "bgpPeers"
    ]
}
},
"required": [
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"policyMaps": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceId": {
                "type": "string"
            },
            "etag": {
                "type": "string"
            },
            "instanceId": {
                "type": "string"
            },
            "properties": {
                "type": "object",
                "policyMapEntryList": {
                    "type": "array",
                    "items": {
                        "type": "object",
                        "properties": {
                            "policyName": {
                                "type": "string"
                            },
                            "action": {
                                "type": "string"
                            },
                            "matchCriteria": {
                                "type": "array",
                                "items": {
                                    "type": "object",
                                    "properties": {
                                        "property": {
                                            "type": "string"
                                        },
                                        "value": {
                                            "type": "array",
                                            "items": {
                                                "type": "string"
                                            }
                                        }
                                    }
                                }
                            },
                            "required": [
                                "property",
                                "value"
                            ]
                        }
                    },
                    "setActions": {
                        "type": "array",
                        "items": { }
                    }
                }
            },
            "required": [
                "policyName",

```

```

        "action",
        "matchCriteria",
        "setActions"
    ]
    }
}
}
},
"required": [
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
},
"routingType": {
    "type": "string"
}
},
"required": [
    "gatewaypool",
    "gatewaypoolsGatewayPools",
    "gatewaySubnets",
    "networkConnections",
    "bgpRouters"
]
}
},
"required": [
    "resourceId",
    "properties"
]
}
}

```

6.15.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for VirtualGateways",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  }
},

```

```

    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },
  "type": "object",
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "networkConnections": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              },
              "resourceId": {
                "type": "string"
              },
              "etag": {
                "type": "string"
              },
              "instanceId": {
                "$ref": "#/definitions/GUID"
              },
              "properties": {
                "type": "object",
                "properties": {
                  "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                  },
                  "connectionType": {
                    "enum": [ "IPSec", "GRE", "L3" ]
                  },
                  "outboundKiloBitsPerSecond": {
                    "type": "integer"
                  },
                  "inboundKiloBitsPerSecond": {
                    "type": "integer"
                  },
                  "ipSecConfiguration": {
                    "type": "object",
                    "properties": {
                      "authenticationMethod": {
                        "enum": [ "Certificates", "PSK" ]
                      },
                      "quickMode": {
                        "type": "object",
                        "properties": {
                          "perfectForwardSecrecy": {
                            "enum": [ "None", "PFS1", "PFS2", "PFS2048", "ECP256", "ECP384",
"PFSMM", "PFS24" ]
                          }
                        }
                      }
                    }
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}

```

```

        "cipherTransformationConstant": {
            "enum": [ "DES", "DES3", "AES128", "AES192", "AES256",
"GCM AES128", "GCM AES192", "GCM AES256" ]
        },
        "authenticationTransformationConstant": {
            "enum": [ "MD596", "SHA196", "SHA256128", "GCM AES128",
"GCM AES192", "GCM AES256", "None" ]
        },
        "idleDisconnectSeconds": {
            "type": "integer"
        },
        "saLifeTimeSeconds": {
            "type": "integer"
        },
        "saLifeTimeKiloBytes": {
            "type": "integer"
        }
    },
    "required": [
        "perfectForwardSecrecy",
        "cipherTransformationConstant",
        "authenticationTransformationConstant",
        "idleDisconnectSeconds",
        "saLifeTimeSeconds",
        "saLifeTimeKiloBytes"
    ]
},
"mainMode": {
    "type": "object",
    "properties": {
        "diffieHellmanGroup": {
            "enum": [ "Group1", "Group2", "Group14", "ECP258", "ECP384" ]
        },
        "encryptionAlgorithm": {
            "enum": [ "DES", "DES3", "AES128", "AES192", "AES256" ]
        },
        "integrityAlgorithm": {
            "enum": [ "MD5", "SHA1", "SHA256", "SHA384" ]
        },
        "saLifeTimeSeconds": {
            "type": "integer"
        },
        "saLifeTimeKiloBytes": {
            "type": "integer"
        }
    },
    "required": [
        "diffieHellmanGroup",
        "encryptionAlgorithm",
        "integrityAlgorithm",
        "saLifeTimeSeconds",
        "saLifeTimeKiloBytes"
    ]
},
"localVpnTrafficSelector": {
    "type": "array",
    "items": {
        "type": "string"
    }
},
"remoteVpnTrafficSelector": {
    "type": "array",
    "items": {
        "type": "string"
    }
}
}
},
},

```

```

"greConfiguration": {
  "type": "object",
  "properties": {
    "greKey": {
      "type": "string"
    }
  }
},
"l3Configuration": {
  "type": "object",
  "properties": {
    "vlanSubnet": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    }
  }
},
"ipAddresses": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "ipAddress": {
        "type": "string"
      },
      "prefixLength": {
        "type": "integer"
      }
    },
    "required": [
      "ipAddress",
      "prefixLength"
    ]
  }
},
"peerIPAddresses": {
  "type": "array",
  "items": {
    "type": "string"
  }
},
"routes": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "destinationPrefix": {
        "type": "string"
      },
      "nextHop": {
        "type": "string"
      },
      "metric": {
        "type": "integer"
      },
      "protocol": {
        "type": "string"
      }
    },
    "required": [
      "destinationPrefix",
      "nextHop",
      "metric",
      "protocol"
    ]
  }
}

```

```

    },
    "connectionStatus": {
      "type": "string"
    },
    "connectionState": {
      "type": "string"
    },
    "connectionUpTime": {
      "type": "string"
    },
    "connectionErrorReason": {
      "type": "string"
    },
    "unreachabilityReason": {
      "type": "string"
    },
    "statistics": {
      "type": "object",
      "properties": {
        "outboundBytes": {
          "type": "integer"
        },
        "inboundBytes": {
          "type": "integer"
        },
        "rxTotalPacketsDropped": {
          "type": "integer"
        },
        "txTotalPacketsDropped": {
          "type": "integer"
        },
        "txRateKbps": {
          "type": "integer"
        },
        "rxRateKbps": {
          "type": "integer"
        },
        "txRateLimitedPacketsDropped": {
          "type": "integer"
        },
        "rxRateLimitedPacketsDropped": {
          "type": "integer"
        },
        "lastUpdated": {
          "type": "string"
        }
      }
    },
    "required": [
      "outboundBytes",
      "inboundBytes",
      "rxTotalPacketsDropped",
      "txTotalPacketsDropped",
      "txRateKbps",
      "rxRateKbps",
      "txRateLimitedPacketsDropped",
      "rxRateLimitedPacketsDropped",
      "lastUpdated"
    ]
  },
  "configurationState": {
    "type": "object",
    "properties": {
      "status": {
        "type": "string"
      },
      "lastUpdatedTime": {
        "type": "string"
      }
    }
  },
  "required": [

```

```

        "status",
        "lastUpdatedTime"
    ]
},
"gateway": {
    "type": "object",
    "properties": {
        "resourceRef": {
            "type": "string"
        }
    },
    "required": [
        "resourceRef"
    ]
}
},
"required": [
    "provisioningState",
    "connectionType",
    "outboundKiloBitsPerSecond",
    "inboundKiloBitsPerSecond",
    "ipAddresses",
    "routes",
    "connectionStatus",
    "connectionState",
    "connectionUpTime",
    "statistics",
    "configurationState",
    "gateway"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"bgpRouters": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            },
            "resourceId": {
                "type": "string"
            },
            "etag": {
                "type": "string"
            },
            "instanceId": {
                "$ref": "#/definitions/GUID"
            },
            "properties": {
                "type": "object",
                "properties": {
                    "provisioningState": {
                        "$ref": "#/definitions/provisioningState"
                    },
                    "isEnabled": {
                        "type": "boolean"
                    }
                },
                "requireIgpSync": {
                    "type": "boolean"
                }
            }
        }
    }
}
}

```



```

"extAsNumber": {
  "type": "string"
},
"routerId": {
  "type": "string"
},
"routerIP": {
  "type": "array",
  "items": {
    "type": "string"
  }
},
"isGenerated": {
  "type": "boolean"
},
"bgpPeers": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "asNumber": {
            "type": "string"
          },
          "extAsNumber": {
            "type": "string"
          },
          "peerIpAddress": {
            "type": "string"
          },
          "connectionState": {
            "type": "string"
          },
          "statistics": {
            "type": "object",
            "properties": {
              "tcpConnectionClosed": {
                "type": "string"
              },
              "openMessageStats": {
                "type": "object",
                "properties": {
                  "sentCount": {
                    "type": "integer"
                  },
                  "receivedCount": {
                    "type": "integer"
                  }
                }
              },
              "required": [
                "sentCount",
                "receivedCount"
              ]
            }
          }
        }
      }
    }
  }
}

```

```

},
"notificationMessageStats": {
  "type": "object",
  "properties": {
    "sentCount": {
      "type": "integer"
    },
    "receivedCount": {
      "type": "integer"
    }
  },
  "required": [
    "sentCount",
    "receivedCount"
  ]
},
"keepAliveMessageStats": {
  "type": "object",
  "properties": {
    "sentCount": {
      "type": "integer"
    },
    "receivedCount": {
      "type": "integer"
    }
  },
  "required": [
    "sentCount",
    "receivedCount"
  ]
},
"routeRefreshMessageStats": {
  "type": "object",
  "properties": {
    "sentCount": {
      "type": "integer"
    },
    "receivedCount": {
      "type": "integer"
    }
  },
  "required": [
    "sentCount",
    "receivedCount"
  ]
},
"updateMessageStats": {
  "type": "object",
  "properties": {
    "sentCount": {
      "type": "integer"
    },
    "receivedCount": {
      "type": "integer"
    }
  },
  "required": [
    "sentCount",
    "receivedCount"
  ]
},
"ipv4Route": {
  "type": "object",
  "properties": {
    "updateSentCount": {
      "type": "integer"
    },
    "updateReceivedCount": {
      "type": "integer"
    }
  },

```

```

        "withdrawlSentCount": {
            "type": "integer"
        },
        "withdrawlReceivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "updateSentCount",
        "updateReceivedCount",
        "withdrawlSentCount",
        "withdrawlReceivedCount"
    ]
},
"ipv6Route": {
    "type": "object",
    "properties": {
        "updateSentCount": {
            "type": "integer"
        },
        "updateReceivedCount": {
            "type": "integer"
        },
        "withdrawlSentCount": {
            "type": "integer"
        },
        "withdrawlReceivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "updateSentCount",
        "updateReceivedCount",
        "withdrawlSentCount",
        "withdrawlReceivedCount"
    ]
},
"lastUpdated": {
    "type": "string"
}
},
"required": [
    "tcpConnectionClosed",
    "openMessageStats",
    "notificationMessageStats",
    "keepAliveMessageStats",
    "routeRefreshMessageStats",
    "updateMessageStats",
    "ipv4Route",
    "ipv6Route",
    "lastUpdated"
]
},
"isGenerated": {
    "type": "boolean"
}
},
"required": [
    "provisioningState",
    "asNumber",
    "extAsNumber",
    "peerIpAddress",
    "connectionState",
    "statistics",
    "isGenerated"
]
}
},
"required": [
    "resourceRef",

```

```

        "resourceId",
        "etag",
        "instanceId",
        "properties"
    ]
}
},
"configurationState": {
    "type": "object",
    "properties": {
        "status": {
            "type": "string"
        },
        "lastUpdatedTime": {
            "type": "string"
        }
    },
    "required": [
        "status",
        "lastUpdatedTime"
    ]
}
},
"required": [
    "provisioningState",
    "configurationState"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"policyMaps": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            },
            "resourceId": {
                "type": "string"
            },
            "etag": {
                "type": "string"
            },
            "instanceId": {
                "$ref": "#/definitions/GUID"
            },
            "properties": {
                "type": "object",
                "properties": {
                    "provisioningState": {
                        "$ref": "#/definitions/provisioningState"
                    },
                    "bgpPeersWithPolicyMapIn": {
                        "type": "array",
                        "items": { }
                    },
                    "bgpPeersWithPolicyMapOut": {
                        "type": "array",
                        "items": { }
                    }
                },
                "policyMapEntryList": {

```

```

        "type": "array",
        "items": {
            "type": "object",
            "properties": {
                "action": {
                    "type": "string"
                },
                "matchCriteria": {
                    "type": "array",
                    "items": {
                        "type": "object",
                        "properties": {
                            "property": {
                                "type": "string"
                            },
                            "value": {
                                "type": "array",
                                "items": {
                                    "type": "string"
                                }
                            }
                        }
                    }
                },
                "required": [
                    "property",
                    "value"
                ]
            }
        },
        "setActions": {
            "type": "array",
            "items": { }
        }
    },
    "required": [
        "action",
        "matchCriteria",
        "setActions"
    ]
}
},
"required": [
    "provisioningState",
    "bgpPeersWithPolicyMapIn",
    "bgpPeersWithPolicyMapOut",
    "policyMapEntryList"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"routingType": {
    "type": "string"
},
"gatewayPeersGatewayPools": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            }
        }
    }
},

```

```

        "required": [
            "resourceRef"
        ]
    },
    "configurationState": {
        "type": "object",
        "properties": {
            "status": {
                "type": "string"
            },
            "lastUpdatedTime": {
                "type": "string"
            }
        }
    },
    "required": [
        "status",
        "lastUpdatedTime"
    ]
},
"gatewaySubnets": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            }
        },
        "required": [
            "resourceRef"
        ]
    }
},
"required": [
    "provisioningState",
    "networkConnections",
    "bgpRouters",
    "routingType",
    "gatewayPoolsGatewayPools",
    "configurationState",
    "gatewaySubnets"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}

```

6.15.3 GET ALL schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET ALL JSON Schema for VirtualGateways",

    "definitions": {
        "GUID": {
            "type": "string",
            "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
        },
        "resourceMetadata": {

```

```

    "properties": {
      "client": {
        "type": "string"
      },
      "tenantId": {
        "type": "string"
      },
      "groupId": {
        "type": "string"
      },
      "resourceName": {
        "type": "string"
      },
      "originalHref": {
        "type": "string"
      }
    }
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

```

```

"type": "object",
"properties": {
  "value": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        }
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "networkConnections": {
            "type": "array",
            "items": {
              "type": "object",
              "properties": {
                "resourceRef": {
                  "type": "string"
                },
                "resourceId": {
                  "type": "string"
                },
                "etag": {
                  "type": "string"
                },
                "instanceId": {
                  "$ref": "#/definitions/GUID"
                },
                "properties": {
                  "type": "object",
                  "properties": {
                    "provisioningState": {

```

```

    "$ref": "#/definitions/provisioningState"
  },
  "connectionType": {
    "enum": [ "IPSec", "GRE", "L3" ]
  },
  "outboundKiloBitsPerSecond": {
    "type": "integer"
  },
  "inboundKiloBitsPerSecond": {
    "type": "integer"
  },
  "ipSecConfiguration": {
    "type": "object",
    "properties": {
      "authenticationMethod": {
        "enum": [ "Certificates", "PSK" ]
      },
      "quickMode": {
        "type": "object",
        "properties": {
          "perfectForwardSecrecy": {
            "enum": [ "None", "PFS1", "PFS2", "PFS2048", "ECP256", "ECP384",
"PFSSMM", "PFS24" ]
          },
          "cipherTransformationConstant": {
            "enum": [ "DES", "DES3", "AES128", "AES192", "AES256",
"GCMAES128", "GCMAES192", "GCMAES256" ]
          },
          "authenticationTransformationConstant": {
            "enum": [ "MD596", "SHA196", "SHA256128", "GCMAES128",
"GCMAES192", "GCMAES256", "None" ]
          },
          "idleDisconnectSeconds": {
            "type": "integer"
          },
          "saLifeTimeSeconds": {
            "type": "integer"
          },
          "saLifeTimeKiloBytes": {
            "type": "integer"
          }
        }
      },
      "required": [
        "perfectForwardSecrecy",
        "cipherTransformationConstant",
        "authenticationTransformationConstant",
        "idleDisconnectSeconds",
        "saLifeTimeSeconds",
        "saLifeTimeKiloBytes"
      ]
    }
  },
  "mainMode": {
    "type": "object",
    "properties": {
      "diffieHellmanGroup": {
        "enum": [ "Group1", "Group2", "Group14", "ECP258", "ECP384" ]
      },
      "encryptionAlgorithm": {
        "enum": [ "DES", "DES3", "AES128", "AES192", "AES256" ]
      },
      "integrityAlgorithm": {
        "enum": [ "MD5", "SHA1", "SHA256", "SHA384" ]
      },
      "saLifeTimeSeconds": {
        "type": "integer"
      },
      "saLifeTimeKiloBytes": {
        "type": "integer"
      }
    }
  }
},

```



```

        "required": [
            "diffieHellmanGroup",
            "encryptionAlgorithm",
            "integrityAlgorithm",
            "saLifetimeSeconds",
            "saLifetimeKiloBytes"
        ]
    },
    "localVpnTrafficSelector": {
        "type": "array",
        "items": {
            "type": "string"
        }
    },
    "remoteVpnTrafficSelector": {
        "type": "array",
        "items": {
            "type": "string"
        }
    }
},
"greConfiguration": {
    "type": "object",
    "properties": {
        "greKey": {
            "type": "string"
        }
    }
},
"l3Configuration": {
    "type": "object",
    "properties": {
        "vlanSubnet": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            }
        }
    }
},
"ipAddresses": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "ipAddress": {
                "type": "string"
            },
            "prefixLength": {
                "type": "integer"
            }
        }
    },
    "required": [
        "ipAddress",
        "prefixLength"
    ]
},
"peerIPAddresses": {
    "type": "array",
    "items": {
        "type": "string"
    }
},
"routes": {

```

```

"type": "array",
"items": {
  "type": "object",
  "properties": {
    "destinationPrefix": {
      "type": "string"
    },
    "nextHop": {
      "type": "string"
    },
    "metric": {
      "type": "integer"
    },
    "protocol": {
      "type": "string"
    }
  },
  "required": [
    "destinationPrefix",
    "nextHop",
    "metric",
    "protocol"
  ]
}
},
"connectionStatus": {
  "type": "string"
},
"connectionState": {
  "type": "string"
},
"connectionUpTime": {
  "type": "string"
},
"connectionErrorReason": {
  "type": "string"
},
"unreachabilityReason": {
  "type": "string"
},
"statistics": {
  "type": "object",
  "properties": {
    "outboundBytes": {
      "type": "integer"
    },
    "inboundBytes": {
      "type": "integer"
    },
    "rxTotalPacketsDropped": {
      "type": "integer"
    },
    "txTotalPacketsDropped": {
      "type": "integer"
    },
    "txRateKbps": {
      "type": "integer"
    },
    "rxRateKbps": {
      "type": "integer"
    },
    "txRateLimitedPacketsDropped": {
      "type": "integer"
    },
    "rxRateLimitedPacketsDropped": {
      "type": "integer"
    },
    "lastUpdated": {
      "type": "string"
    }
  }
}

```

```

    },
    "required": [
      "outboundBytes",
      "inboundBytes",
      "rxTotalPacketsDropped",
      "txTotalPacketsDropped",
      "txRateKbps",
      "rxRateKbps",
      "txRateLimitedPacketsDropped",
      "rxRateLimitedPacketsDropped",
      "lastUpdated"
    ]
  },
  "configurationState": {
    "type": "object",
    "properties": {
      "status": {
        "type": "string"
      },
      "lastUpdatedTime": {
        "type": "string"
      }
    }
  },
  "required": [
    "status",
    "lastUpdatedTime"
  ]
},
"gateway": {
  "type": "object",
  "properties": {
    "resourceRef": {
      "type": "string"
    }
  }
},
"required": [
  "resourceRef"
]
}
},
"required": [
  "provisioningState",
  "connectionType",
  "outboundKiloBitsPerSecond",
  "inboundKiloBitsPerSecond",
  "ipAddresses",
  "routes",
  "connectionStatus",
  "connectionState",
  "connectionUpTime",
  "statistics",
  "configurationState",
  "gateway"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"bgpRouters": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {

```

```

"resourceRef": {
  "type": "string"
},
"resourceId": {
  "type": "string"
},
"etag": {
  "type": "string"
},
"instanceId": {
  "$ref": "#/definitions/GUID"
},
"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "isEnabled": {
      "type": "boolean"
    },
    "requireIgpSync": {
      "type": "boolean"
    },
    "extAsNumber": {
      "type": "string"
    },
    "routerId": {
      "type": "string"
    },
    "routerIP": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "isGenerated": {
      "type": "boolean"
    },
    "bgpPeers": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "etag": {
            "type": "string"
          },
          "instanceId": {
            "$ref": "#/definitions/GUID"
          },
          "properties": {
            "type": "object",
            "properties": {
              "provisioningState": {
                "$ref": "#/definitions/provisioningState"
              },
              "asNumber": {
                "type": "string"
              },
              "extAsNumber": {
                "type": "string"
              },
              "peerIpAddress": {
                "type": "string"
              }
            }
          }
        }
      }
    }
  }
}

```

```

    },
    "connectionState": {
      "type": "string"
    },
    "statistics": {
      "type": "object",
      "properties": {
        "tcpConnectionClosed": {
          "type": "string"
        },
        "openMessageStats": {
          "type": "object",
          "properties": {
            "sentCount": {
              "type": "integer"
            },
            "receivedCount": {
              "type": "integer"
            }
          }
        },
        "required": [
          "sentCount",
          "receivedCount"
        ]
      },
      "notificationMessageStats": {
        "type": "object",
        "properties": {
          "sentCount": {
            "type": "integer"
          },
          "receivedCount": {
            "type": "integer"
          }
        },
        "required": [
          "sentCount",
          "receivedCount"
        ]
      },
      "keepAliveMessageStats": {
        "type": "object",
        "properties": {
          "sentCount": {
            "type": "integer"
          },
          "receivedCount": {
            "type": "integer"
          }
        },
        "required": [
          "sentCount",
          "receivedCount"
        ]
      },
      "routeRefreshMessageStats": {
        "type": "object",
        "properties": {
          "sentCount": {
            "type": "integer"
          },
          "receivedCount": {
            "type": "integer"
          }
        },
        "required": [
          "sentCount",
          "receivedCount"
        ]
      }
    },
  },
}

```

```

"updateMessageStats": {
  "type": "object",
  "properties": {
    "sentCount": {
      "type": "integer"
    },
    "receivedCount": {
      "type": "integer"
    }
  },
  "required": [
    "sentCount",
    "receivedCount"
  ]
},
"ipv4Route": {
  "type": "object",
  "properties": {
    "updateSentCount": {
      "type": "integer"
    },
    "updateReceivedCount": {
      "type": "integer"
    },
    "withdrawlSentCount": {
      "type": "integer"
    },
    "withdrawlReceivedCount": {
      "type": "integer"
    }
  },
  "required": [
    "updateSentCount",
    "updateReceivedCount",
    "withdrawlSentCount",
    "withdrawlReceivedCount"
  ]
},
"ipv6Route": {
  "type": "object",
  "properties": {
    "updateSentCount": {
      "type": "integer"
    },
    "updateReceivedCount": {
      "type": "integer"
    },
    "withdrawlSentCount": {
      "type": "integer"
    },
    "withdrawlReceivedCount": {
      "type": "integer"
    }
  },
  "required": [
    "updateSentCount",
    "updateReceivedCount",
    "withdrawlSentCount",
    "withdrawlReceivedCount"
  ]
},
"lastUpdated": {
  "type": "string"
}
},
"required": [
  "tcpConnectionClosed",
  "openMessageStats",
  "notificationMessageStats",
  "keepAliveMessageStats",

```

```

        "routeRefreshMessageStats",
        "updateMessageStats",
        "ipv4Route",
        "ipv6Route",
        "lastUpdated"
    ]
},
"isGenerated": {
    "type": "boolean"
}
},
"required": [
    "provisioningState",
    "asNumber",
    "extAsNumber",
    "peerIpAddress",
    "connectionState",
    "statistics",
    "isGenerated"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
},
"configurationState": {
    "type": "object",
    "properties": {
        "status": {
            "type": "string"
        },
        "lastUpdatedTime": {
            "type": "string"
        }
    },
    "required": [
        "status",
        "lastUpdatedTime"
    ]
}
},
"required": [
    "provisioningState",
    "configurationState"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "instanceId",
    "properties"
]
},
"policyMaps": {
    "type": "array",
    "items": {
        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            },
            "resourceId": {

```

```

    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "bgpPeersWithPolicyMapIn": {
        "type": "array",
        "items": { }
      },
      "bgpPeersWithPolicyMapOut": {
        "type": "array",
        "items": { }
      },
      "policyMapEntryList": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "action": {
              "type": "string"
            },
            "matchCriteria": {
              "type": "array",
              "items": {
                "type": "object",
                "properties": {
                  "property": {
                    "type": "string"
                  },
                  "value": {
                    "type": "array",
                    "items": {
                      "type": "string"
                    }
                  }
                }
              }
            },
            "required": [
              "property",
              "value"
            ]
          }
        },
        "setActions": {
          "type": "array",
          "items": { }
        }
      },
      "required": [
        "action",
        "matchCriteria",
        "setActions"
      ]
    }
  },
  "required": [
    "provisioningState",
    "bgpPeersWithPolicyMapIn",
    "bgpPeersWithPolicyMapOut",
    "policyMapEntryList"
  ]
}

```



```

    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}
},
"routingType": {
  "type": "string"
},
"gatewayPeelsGatewayPools": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    },
    "required": [
      "resourceRef"
    ]
  }
},
"configurationState": {
  "type": "object",
  "properties": {
    "status": {
      "type": "string"
    },
    "lastUpdatedTime": {
      "type": "string"
    }
  },
  "required": [
    "status",
    "lastUpdatedTime"
  ]
},
"gatewaySubnets": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    },
    "required": [
      "resourceRef"
    ]
  }
},
"required": [
  "provisioningState",
  "networkConnections",
  "bgpRouters",
  "routingType",
  "gatewayPeelsGatewayPools",
  "configurationState",
  "gatewaySubnets"
]
},
"required": [

```

```

        "resourceRef",
        "resourceId",
        "instanceId",
        "properties"
    ]
}
},
"nextLink": {
    "type": "string"
}
},
"required": [
    "value",
    "nextLink"
]
}
}

```

6.15.4 bgpRouters

6.15.4.1 PUT schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "type": "object",
    "properties": {
        "resourceId": {
            "type": "string"
        },
        "etag": {
            "type": "string"
        },
        "instanceId": {
            "type": "string"
        },
        "properties": {
            "type": "object",
            "properties": {
                "provisioningState": {
                    "type": "string"
                },
                "isEnabled": {
                    "type": "string"
                },
                "requireIGPSync": {
                    "type": "string"
                },
                "extASNumber": {
                    "type": "string"
                },
                "routerIP": {
                    "type": "array",
                    "items": {}
                },
                "bgpNetworks": {
                    "type": "array",
                    "items": {}
                },
                "isGenerated": {
                    "type": "boolean"
                },
                "bgpPeers": {
                    "type": "array",
                    "items": {
                        "type": "object",
                        "properties": {
                            "resourceId": {
                                "type": "string"
                            }
                        }
                    }
                }
            }
        }
    }
}

```

```

    },
    "properties": {
      "type": "object",
      "properties": {
        "peerIpAddress": {
          "type": "string"
        },
        "asNumber": {
          "type": "string"
        },
        "extAsNumber": {
          "type": "string"
        },
        "policyMapIn": {
          "type": "null"
        },
        "policyMapOut": {
          "type": "null"
        }
      }
    },
    "required": [
      "peerIpAddress",
      "asNumber",
      "extAsNumber",
      "policyMapIn",
      "policyMapOut"
    ]
  },
  "required": [
    "resourceId",
    "properties"
  ]
}
},
"required": [
  "provisioningState",
  "isEnabled",
  "requireIGPSync",
  "extASNumber",
  "routerIP",
  "bgpNetworks",
  "isGenerated",
  "bgpPeers"
]
}
},
"required": [
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.15.4.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "type": "object",
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    }
  }
}

```

```

"etag": {
  "type": "string"
},
"instanceId": {
  "type": "string"
},
"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "type": "string"
    },
    "isEnabled": {
      "type": "boolean"
    },
    "requireIgpSync": {
      "type": "boolean"
    },
    "extAsNumber": {
      "type": "string"
    },
    "routerId": {
      "type": "string"
    },
    "routerIP": {
      "type": "array",
      "items": {
        "type": "string"
      }
    },
    "isGenerated": {
      "type": "boolean"
    },
    "bgpPeers": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "etag": {
            "type": "string"
          },
          "instanceId": {
            "type": "string"
          },
          "properties": {
            "type": "object",
            "properties": {
              "provisioningState": {
                "type": "string"
              },
              "asNumber": {
                "type": "string"
              },
              "extAsNumber": {
                "type": "string"
              },
              "peerIpAddress": {
                "type": "string"
              },
              "connectionState": {
                "type": "string"
              },
              "statistics": {
                "type": "object",

```

```

"properties": {
  "tcpConnectionClosed": {
    "type": "string"
  },
  "openMessageStats": {
    "type": "object",
    "properties": {
      "sentCount": {
        "type": "integer"
      },
      "receivedCount": {
        "type": "integer"
      }
    },
    "required": [
      "sentCount",
      "receivedCount"
    ]
  },
  "notificationMessageStats": {
    "type": "object",
    "properties": {
      "sentCount": {
        "type": "integer"
      },
      "receivedCount": {
        "type": "integer"
      }
    },
    "required": [
      "sentCount",
      "receivedCount"
    ]
  },
  "keepAliveMessageStats": {
    "type": "object",
    "properties": {
      "sentCount": {
        "type": "integer"
      },
      "receivedCount": {
        "type": "integer"
      }
    },
    "required": [
      "sentCount",
      "receivedCount"
    ]
  },
  "routeRefreshMessageStats": {
    "type": "object",
    "properties": {
      "sentCount": {
        "type": "integer"
      },
      "receivedCount": {
        "type": "integer"
      }
    },
    "required": [
      "sentCount",
      "receivedCount"
    ]
  },
  "updateMessageStats": {
    "type": "object",
    "properties": {
      "sentCount": {
        "type": "integer"
      },
    },
  }
}

```

```

        "receivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "sentCount",
        "receivedCount"
    ]
},
"ipv4Route": {
    "type": "object",
    "properties": {
        "updateSentCount": {
            "type": "integer"
        },
        "updateReceivedCount": {
            "type": "integer"
        },
        "withdrawlSentCount": {
            "type": "integer"
        },
        "withdrawlReceivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "updateSentCount",
        "updateReceivedCount",
        "withdrawlSentCount",
        "withdrawlReceivedCount"
    ]
},
"ipv6Route": {
    "type": "object",
    "properties": {
        "updateSentCount": {
            "type": "integer"
        },
        "updateReceivedCount": {
            "type": "integer"
        },
        "withdrawlSentCount": {
            "type": "integer"
        },
        "withdrawlReceivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "updateSentCount",
        "updateReceivedCount",
        "withdrawlSentCount",
        "withdrawlReceivedCount"
    ]
},
"lastUpdated": {
    "type": "string"
}
},
"required": [
    "tcpConnectionClosed",
    "openMessageStats",
    "notificationMessageStats",
    "keepAliveMessageStats",
    "routeRefreshMessageStats",
    "updateMessageStats",
    "ipv4Route",
    "ipv6Route",
    "lastUpdated"
]
]

```

```

        },
        "isGenerated": {
            "type": "boolean"
        }
    },
    "required": [
        "provisioningState",
        "asNumber",
        "extAsNumber",
        "peerIpAddress",
        "connectionState",
        "statistics",
        "isGenerated"
    ]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"configurationState": {
    "type": "object",
    "properties": {
        "status": {
            "type": "string"
        },
        "lastUpdatedTime": {
            "type": "string"
        }
    }
},
"required": [
    "status",
    "lastUpdatedTime"
]
}
},
"required": [
    "provisioningState",
    "isEnabled",
    "requireIgpSync",
    "extAsNumber",
    "routerId",
    "routerIP",
    "isGenerated",
    "bgpPeers",
    "configurationState"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
}

```

6.15.4.3 GET ALL schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "type": "object",

```

```

"properties": {
  "value": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "type": "string"
        },
        "properties": {
          "type": "object",
          "properties": {
            "provisioningState": {
              "type": "string"
            },
            "isEnabled": {
              "type": "boolean"
            },
            "requireIgpSync": {
              "type": "boolean"
            },
            "extAsNumber": {
              "type": "string"
            },
            "routerId": {
              "type": "string"
            },
            "routerIP": {
              "type": "array",
              "items": {
                "type": "string"
              }
            },
            "isGenerated": {
              "type": "boolean"
            },
            "bgpPeers": {
              "type": "array",
              "items": {
                "type": "object",
                "properties": {
                  "resourceRef": {
                    "type": "string"
                  },
                  "resourceId": {
                    "type": "string"
                  },
                  "etag": {
                    "type": "string"
                  },
                  "instanceId": {
                    "type": "string"
                  },
                  "properties": {
                    "type": "object",
                    "properties": {
                      "provisioningState": {
                        "type": "string"
                      },
                      "asNumber": {
                        "type": "string"
                      }
                    }
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}

```



```

    },
    "extAsNumber": {
      "type": "string"
    },
    "peerIpAddress": {
      "type": "string"
    },
    "connectionState": {
      "type": "string"
    },
    "statistics": {
      "type": "object",
      "properties": {
        "tcpConnectionClosed": {
          "type": "string"
        },
        "openMessageStats": {
          "type": "object",
          "properties": {
            "sentCount": {
              "type": "integer"
            },
            "receivedCount": {
              "type": "integer"
            }
          }
        },
        "required": [
          "sentCount",
          "receivedCount"
        ]
      }
    },
    "notificationMessageStats": {
      "type": "object",
      "properties": {
        "sentCount": {
          "type": "integer"
        },
        "receivedCount": {
          "type": "integer"
        }
      },
      "required": [
        "sentCount",
        "receivedCount"
      ]
    },
    "keepAliveMessageStats": {
      "type": "object",
      "properties": {
        "sentCount": {
          "type": "integer"
        },
        "receivedCount": {
          "type": "integer"
        }
      },
      "required": [
        "sentCount",
        "receivedCount"
      ]
    },
    "routeRefreshMessageStats": {
      "type": "object",
      "properties": {
        "sentCount": {
          "type": "integer"
        },
        "receivedCount": {
          "type": "integer"
        }
      }
    }
  }
}

```

```

    },
    "required": [
      "sentCount",
      "receivedCount"
    ]
  },
  "updateMessageStats": {
    "type": "object",
    "properties": {
      "sentCount": {
        "type": "integer"
      },
      "receivedCount": {
        "type": "integer"
      }
    }
  },
  "required": [
    "sentCount",
    "receivedCount"
  ]
},
"ipv4Route": {
  "type": "object",
  "properties": {
    "updateSentCount": {
      "type": "integer"
    },
    "updateReceivedCount": {
      "type": "integer"
    },
    "withdrawlSentCount": {
      "type": "integer"
    },
    "withdrawlReceivedCount": {
      "type": "integer"
    }
  },
  "required": [
    "updateSentCount",
    "updateReceivedCount",
    "withdrawlSentCount",
    "withdrawlReceivedCount"
  ]
},
"ipv6Route": {
  "type": "object",
  "properties": {
    "updateSentCount": {
      "type": "integer"
    },
    "updateReceivedCount": {
      "type": "integer"
    },
    "withdrawlSentCount": {
      "type": "integer"
    },
    "withdrawlReceivedCount": {
      "type": "integer"
    }
  },
  "required": [
    "updateSentCount",
    "updateReceivedCount",
    "withdrawlSentCount",
    "withdrawlReceivedCount"
  ]
},
"lastUpdated": {
  "type": "string"
}
}

```

```

    },
    "required": [
      "tcpConnectionClosed",
      "openMessageStats",
      "notificationMessageStats",
      "keepAliveMessageStats",
      "routeRefreshMessageStats",
      "updateMessageStats",
      "ipv4Route",
      "ipv6Route",
      "lastUpdated"
    ]
  },
  "isGenerated": {
    "type": "boolean"
  }
},
"required": [
  "provisioningState",
  "asNumber",
  "extAsNumber",
  "peerIpAddress",
  "connectionState",
  "statistics",
  "isGenerated"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"configurationState": {
  "type": "object",
  "properties": {
    "status": {
      "type": "string"
    },
    "lastUpdatedTime": {
      "type": "string"
    }
  }
},
"required": [
  "status",
  "lastUpdatedTime"
]
}
},
"required": [
  "provisioningState",
  "isEnabled",
  "requireIgpSync",
  "extAsNumber",
  "routerId",
  "routerIP",
  "isGenerated",
  "bgpPeers",
  "configurationState"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",

```

```

        "instanceId",
        "properties"
    ]
    },
    "nextLink": {
        "type": "string"
    }
},
"required": [
    "value",
    "nextLink"
]
}

```

6.15.4.4 bgpPeers

6.15.4.4.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "type": "object",
  "properties": {
    "resourceId": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "peerIpAddress": {
          "type": "string"
        },
        "asNumber": {
          "type": "string"
        },
        "extAsNumber": {
          "type": "string"
        },
        "policyMapIn": {
          "type": "null"
        },
        "policyMapOut": {
          "type": "null"
        }
      }
    },
    "required": [
      "peerIpAddress",
      "asNumber",
      "extAsNumber",
      "policyMapIn",
      "policyMapOut"
    ]
  }
},
"required": [
  "resourceId",
  "properties"
]
}

```

6.15.4.4.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "type": "object",

```

```

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "type": "string"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "type": "string"
      },
      "asNumber": {
        "type": "string"
      },
      "extAsNumber": {
        "type": "string"
      },
      "peerIpAddress": {
        "type": "string"
      },
      "connectionState": {
        "type": "string"
      },
      "statistics": {
        "type": "object",
        "properties": {
          "tcpConnectionClosed": {
            "type": "string"
          },
          "openMessageStats": {
            "type": "object",
            "properties": {
              "sentCount": {
                "type": "integer"
              },
              "receivedCount": {
                "type": "integer"
              }
            }
          },
          "required": [
            "sentCount",
            "receivedCount"
          ]
        },
        "notificationMessageStats": {
          "type": "object",
          "properties": {
            "sentCount": {
              "type": "integer"
            },
            "receivedCount": {
              "type": "integer"
            }
          },
          "required": [
            "sentCount",
            "receivedCount"
          ]
        },
        "keepAliveMessageStats": {
          "type": "object",
          "properties": {

```

```

        "sentCount": {
            "type": "integer"
        },
        "receivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "sentCount",
        "receivedCount"
    ]
},
"routeRefreshMessageStats": {
    "type": "object",
    "properties": {
        "sentCount": {
            "type": "integer"
        },
        "receivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "sentCount",
        "receivedCount"
    ]
},
"updateMessageStats": {
    "type": "object",
    "properties": {
        "sentCount": {
            "type": "integer"
        },
        "receivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "sentCount",
        "receivedCount"
    ]
},
"ipv4Route": {
    "type": "object",
    "properties": {
        "updateSentCount": {
            "type": "integer"
        },
        "updateReceivedCount": {
            "type": "integer"
        },
        "withdrawalSentCount": {
            "type": "integer"
        },
        "withdrawalReceivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "updateSentCount",
        "updateReceivedCount",
        "withdrawalSentCount",
        "withdrawalReceivedCount"
    ]
},
"ipv6Route": {
    "type": "object",
    "properties": {
        "updateSentCount": {
            "type": "integer"
        }
    }
}

```

```

        },
        "updateReceivedCount": {
            "type": "integer"
        },
        "withdrawlSentCount": {
            "type": "integer"
        },
        "withdrawlReceivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "updateSentCount",
        "updateReceivedCount",
        "withdrawlSentCount",
        "withdrawlReceivedCount"
    ]
},
"lastUpdated": {
    "type": "string"
}
},
"required": [
    "tcpConnectionClosed",
    "openMessageStats",
    "notificationMessageStats",
    "keepAliveMessageStats",
    "routeRefreshMessageStats",
    "updateMessageStats",
    "ipv4Route",
    "ipv6Route",
    "lastUpdated"
]
},
"isGenerated": {
    "type": "boolean"
}
},
"required": [
    "provisioningState",
    "asNumber",
    "extAsNumber",
    "peerIpAddress",
    "connectionState",
    "statistics",
    "isGenerated"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
}

```

6.15.4.4.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "type": "object",
  "properties": {
    "value": {
      "type": "array",
      "items": {
        "type": "object",

```

```

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "type": "string"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "type": "string"
      },
      "asNumber": {
        "type": "string"
      },
      "extAsNumber": {
        "type": "string"
      },
      "peerIpAddress": {
        "type": "string"
      },
      "connectionState": {
        "type": "string"
      },
      "statistics": {
        "type": "object",
        "properties": {
          "tcpConnectionClosed": {
            "type": "string"
          },
          "openMessageStats": {
            "type": "object",
            "properties": {
              "sentCount": {
                "type": "integer"
              },
              "receivedCount": {
                "type": "integer"
              }
            }
          },
          "required": [
            "sentCount",
            "receivedCount"
          ]
        },
        "notificationMessageStats": {
          "type": "object",
          "properties": {
            "sentCount": {
              "type": "integer"
            },
            "receivedCount": {
              "type": "integer"
            }
          },
          "required": [
            "sentCount",
            "receivedCount"
          ]
        },
        "keepAliveMessageStats": {
          "type": "object",
          "properties": {

```



```

        "sentCount": {
            "type": "integer"
        },
        "receivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "sentCount",
        "receivedCount"
    ]
},
"routeRefreshMessageStats": {
    "type": "object",
    "properties": {
        "sentCount": {
            "type": "integer"
        },
        "receivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "sentCount",
        "receivedCount"
    ]
},
"updateMessageStats": {
    "type": "object",
    "properties": {
        "sentCount": {
            "type": "integer"
        },
        "receivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "sentCount",
        "receivedCount"
    ]
},
"ipv4Route": {
    "type": "object",
    "properties": {
        "updateSentCount": {
            "type": "integer"
        },
        "updateReceivedCount": {
            "type": "integer"
        },
        "withdrawalSentCount": {
            "type": "integer"
        },
        "withdrawalReceivedCount": {
            "type": "integer"
        }
    },
    "required": [
        "updateSentCount",
        "updateReceivedCount",
        "withdrawalSentCount",
        "withdrawalReceivedCount"
    ]
},
"ipv6Route": {
    "type": "object",
    "properties": {
        "updateSentCount": {
            "type": "integer"
        }
    }
}

```

```

    },
    "updateReceivedCount": {
      "type": "integer"
    },
    "withdrawlSentCount": {
      "type": "integer"
    },
    "withdrawlReceivedCount": {
      "type": "integer"
    }
  },
  "required": [
    "updateSentCount",
    "updateReceivedCount",
    "withdrawlSentCount",
    "withdrawlReceivedCount"
  ]
},
"lastUpdated": {
  "type": "string"
}
},
"required": [
  "tcpConnectionClosed",
  "openMessageStats",
  "notificationMessageStats",
  "keepAliveMessageStats",
  "routeRefreshMessageStats",
  "updateMessageStats",
  "ipv4Route",
  "ipv6Route",
  "lastUpdated"
]
},
"isGenerated": {
  "type": "boolean"
}
},
"required": [
  "provisioningState",
  "asNumber",
  "extAsNumber",
  "peerIpAddress",
  "connectionState",
  "statistics",
  "isGenerated"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
},
"nextLink": {
  "type": "string"
}
},
"required": [
  "value",
  "nextLink"
]
}
}

```

6.15.5 policyMaps

6.15.5.1 PUT schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "type": "object",
  "properties": {
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "type": "string"
        },
        "policyMapEntryList": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "policyName": {
                "type": "string"
              },
              "action": {
                "type": "string"
              },
              "matchCriteria": {
                "type": "array",
                "items": {
                  "type": "object",
                  "properties": {
                    "property": {
                      "type": "string"
                    },
                    "value": {
                      "type": "array",
                      "items": {
                        "type": "string"
                      }
                    }
                  }
                }
              },
              "required": [
                "property",
                "value"
              ]
            }
          },
          "setActions": {
            "type": "array",
            "items": {}
          }
        },
        "required": [
          "policyName",
          "action",
          "matchCriteria",
          "setActions"
        ]
      }
    }
  }
}
```

```

    },
    "required": [
      "provisioningState",
      "policyMapEntryList"
    ]
  }
},
"required": [
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.15.5.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "type": "object",
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "type": "string"
        },
        "bgpPeersWithPolicyMapIn": {
          "type": "array",
          "items": {}
        },
        "bgpPeersWithPolicyMapOut": {
          "type": "array",
          "items": {}
        },
        "policyMapEntryList": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "action": {
                "type": "string"
              },
              "matchCriteria": {
                "type": "array",
                "items": {
                  "type": "object",
                  "properties": {
                    "property": {
                      "type": "string"
                    },
                    "value": {
                      "type": "array",
                      "items": {
                        "type": "string"
                      }
                    }
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}

```

```

        }
      },
      "required": [
        "property",
        "value"
      ]
    }
  },
  "setActions": {
    "type": "array",
    "items": {}
  }
},
"required": [
  "action",
  "matchCriteria",
  "setActions"
]
}
},
"required": [
  "provisioningState",
  "bgpPeersWithPolicyMapIn",
  "bgpPeersWithPolicyMapOut",
  "policyMapEntryList"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.15.5.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "type": "object",
  "properties": {
    "value": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "etag": {
            "type": "string"
          },
          "instanceId": {
            "type": "string"
          },
          "properties": {
            "type": "object",
            "properties": {
              "provisioningState": {
                "type": "string"
              },
              "bgpPeersWithPolicyMapIn": {

```

```

        "type": "array",
        "items": {}
    },
    "bgpPeersWithPolicyMapOut": {
        "type": "array",
        "items": {}
    },
    "policyMapEntryList": {
        "type": "array",
        "items": {
            "type": "object",
            "properties": {
                "action": {
                    "type": "string"
                },
                "matchCriteria": {
                    "type": "array",
                    "items": {
                        "type": "object",
                        "properties": {
                            "property": {
                                "type": "string"
                            }
                        },
                        "value": {
                            "type": "array",
                            "items": {
                                "type": "string"
                            }
                        }
                    }
                },
                "required": [
                    "property",
                    "value"
                ]
            }
        },
        "setActions": {
            "type": "array",
            "items": {}
        },
        "required": [
            "action",
            "matchCriteria",
            "setActions"
        ]
    }
},
"required": [
    "provisioningState",
    "bgpPeersWithPolicyMapIn",
    "bgpPeersWithPolicyMapOut",
    "policyMapEntryList"
]
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
},
"nextLink": {
    "type": "string"
}
},

```

```

    "required": [
      "value",
      "nextLink"
    ]
  }
}

```

6.16 virtualNetworks

6.16.1 PUT schema v1

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for virtualNetworks",
  "type": "object",

  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },
  "resourceRef": {
    "type": "object",
    "additionalProperties": false,
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  },
  "required": [
    "resourceRef"
  ],
  "subnets": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceId": {
          "type": "string"
        },
        "resourceMetadata": {
          "$ref": "#/definitions/resourceMetadata"
        },
        "etag": {
          "type": "string"
        }
      },
      "properties": {
        "type": "object",
        "properties": {
          "addressPrefix": {
            "type": "string"
          }
        }
      }
    }
  }
}

```

```

        "routeTable": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            },
            "required": [
                "resourceRef"
            ]
        },
        "required": [
            "addressPrefix"
        ]
    },
    "required": [
        "resourceId",
        "properties"
    ]
}
},
},
"properties": {
    "resourceId": {
        "type": "string"
    },
    "etag": {
        "type": "string"
    },
    "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
        "additionalProperties": { "type": "string" }
    },
    "properties": {
        "type": "object",
        "properties": {
            "addressSpace": {
                "type": "object",
                "properties": {
                    "addressPrefixes": {
                        "type": "array",
                        "items": {
                            "type": "string"
                        }
                    },
                    "minItems": 1
                }
            },
            "required": [
                "addressPrefixes"
            ]
        },
        "dhcpOptions": {
            "type": "object",
            "properties": {
                "DnsServers": {
                    "type": "array",
                    "items": {
                        "type": "string",
                        "format": "ipv4"
                    }
                }
            }
        },
        "subnets": {
            "$ref": "#/definitions/subnets"
        }
    }
}

```



```

    },
    "logicalNetwork": {
      "$ref": "#/definitions/resourceRef"
    }
  },
  "required": [
    "addressSpace",
    "logicalNetwork"
  ]
}
},
"required": [
  "properties"
]
}

```

6.16.2 PUT schema v2

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for virtualNetworks",
  "type": "object",

  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "subnets": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceId": {
            "type": "string"
          },
          "resourceMetadata": {
            "$ref": "#/definitions/resourceMetadata"
          }
        },
        "etag": {

```

```

        "type": "string"
    },
    "properties": {
        "type": "object",
        "properties": {
            "addressPrefix": {
                "type": "string"
            },
            "routeTable": {
                "type": "object",
                "properties": {
                    "resourceRef": {
                        "type": "string"
                    }
                },
                "required": [
                    "resourceRef"
                ]
            },
            "encryptionEnabled": {
                "type": "boolean",
                "default": false
            }
        },
        "required": [
            "addressPrefix"
        ]
    },
    "required": [
        "resourceId",
        "properties"
    ]
}
},
"properties": {
    "resourceId": {
        "type": "string"
    },
    "etag": {
        "type": "string"
    },
    "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
        "additionalProperties": { "type": "string" }
    },
    "properties": {
        "type": "object",
        "properties": {
            "addressSpace": {
                "type": "object",
                "properties": {
                    "addressPrefixes": {
                        "type": "array",
                        "items": {
                            "type": "string"
                        }
                    },
                    "minItems": 1
                }
            },
            "required": [
                "addressPrefixes"
            ]
        },
        "dhcpOptions": {
            "type": "object",

```

```

        "properties": {
            "DnsServers": {
                "type": "array",
                "items": {
                    "type": "string",
                    "format": "ipv4"
                }
            }
        },
        "subnets": {
            "$ref": "#/definitions/subnets"
        },
        "logicalNetwork": {
            "$ref": "#/definitions/resourceRef"
        },
        "encryptionCredential": {
            "$ref": "#/definitions/resourceRef"
        }
    },
    "required": [
        "addressSpace",
        "logicalNetwork"
    ]
}
},
"required": [
    "properties"
]
}
}

```

6.16.3 GET schema v1

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "GET JSON Schema for virtualNetworks",
    "type": "object",

    "definitions": {
        "GUID": {
            "type": "string",
            "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
        },
        "resourceMetadata": {
            "properties": {
                "client": {
                    "type": "string"
                },
                "tenantId": {
                    "type": "string"
                },
                "groupId": {
                    "type": "string"
                },
                "resourceName": {
                    "type": "string"
                },
                "originalHref": {
                    "type": "string"
                }
            }
        },
        "provisioningState": {
            "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
        },
        "detailedInfo": {

```

```

"type": "array",
"items": {
  "additionalProperties": false,
  "properties": {
    "status": {
      "enum": [ "Success", "Failure" ]
    },
    "id": {
      "$ref": "#/definitions/GUID"
    },
    "lastUpdatedTime": {
      "type": "string"
    },
    "detailedInfo": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "source": {
            "type": "string"
          },
          "message": {
            "type": "string"
          },
          "code": {
            "type": "string"
          }
        }
      }
    }
  }
},
"required": [ "status", "id", "lastUpdatedTime" ]
},
"configurationState":
{
  "type": "object",
  "additionalProperties": false,
  "properties": {
    "status": {
      "enum": [ "Success", "Failure" ]
    },
    "id": {
      "$ref": "#/definitions/GUID"
    },
    "lastUpdatedTime": {
      "type": "string"
    },
    "virtualNetworkInterfaceErrors": {
      "$ref": "#/definitions/detailedInfo"
    },
    "hostErrors": {
      "$ref": "#/definitions/detailedInfo"
    }
  },
  "required": [
    "status",
    "id",
    "lastUpdatedTime"
  ]
},
"resourceRef":
{
  "type": "object",
  "additionalProperties": false,
  "properties": {
    "resourceRef": {
      "type": "string"
    }
  }
},

```

```

    "required": [
      "resourceRef"
    ]
  },
  "subnets": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "resourceMetadata": {
          "$ref": "#/definitions/resourceMetadata"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "properties": {
          "type": "object",
          "properties": {
            "provisioningState": {
              "$ref": "#/definitions/provisioningState"
            },
            "addressPrefix": {
              "type": "string"
            },
            "accessControlList": {
              "$ref": "#/definitions/resourceRef"
            },
            "ipConfigurations": {
              "type": "array",
              "uniqueItems": true,
              "items": { "$ref": "#/definitions/resourceRef" }
            },
            "routeTable": {
              "type": "object",
              "properties": {
                "resourceRef": {
                  "type": "string"
                }
              }
            },
            "required": [
              "resourceRef"
            ]
          }
        },
        "required": [
          "provisioningState",
          "addressPrefix"
        ]
      }
    },
    "required": [
      "resourceRef",
      "resourceId",
      "etag",
      "instanceId",
      "properties"
    ]
  }
},

```

```

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "tags": {
    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "addressSpace": {
        "type": "object",
        "properties": {
          "addressPrefixes": {
            "type": "array",
            "items": {
              "type": "string"
            },
            "minItems": 1
          }
        }
      },
      "required": [
        "addressPrefixes"
      ]
    },
    "dhcpOptions": {
      "type": "object",
      "properties": {
        "DnsServers": {
          "type": "array",
          "items": {
            "type": "string",
            "format": "ipv4"
          }
        }
      }
    },
    "subnets": {
      "$ref": "#/definitions/subnets"
    },
    "logicalNetwork": {
      "$ref": "#/definitions/resourceRef"
    },
    "configurationState": {
      "$ref": "#/definitions/configurationState"
    }
  },
  "required": [
    "addressSpace"
  ]
},
"required": [
  "resourceRef",
  "resourceId",

```

```

    "etag",
    "instanceId",
    "properties"
  ]
}

```

6.16.4 GET schema v2

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for virtualNetworks",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "detailedInfo": {
      "type": "array",
      "items": {
        "additionalProperties": false,
        "properties": {
          "status": {
            "enum": [ "Success", "Failure" ]
          },
          "id": {
            "$ref": "#/definitions/GUID"
          },
          "lastUpdatedTime": {
            "type": "string"
          }
        },
        "detailedInfo": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "source": {
                "type": "string"
              },
              "message": {
                "type": "string"
              },
              "code": {

```

```

        "type": "string"
      }
    }
  },
  "required": [ "status", "id", "lastUpdatedTime" ]
}
},
"configurationState":
{
  "type": "object",
  "additionalProperties": false,
  "properties": {
    "status": {
      "enum": [ "Success", "Failure" ]
    },
    "id": {
      "$ref": "#/definitions/GUID"
    },
    "lastUpdatedTime": {
      "type": "string"
    },
    "virtualNetworkInterfaceErrors": {
      "$ref": "#/definitions/detailedInfo"
    },
    "hostErrors": {
      "$ref": "#/definitions/detailedInfo"
    }
  },
  "required": [
    "status",
    "id",
    "lastUpdatedTime"
  ]
},
"resourceRef":
{
  "type": "object",
  "additionalProperties": false,
  "properties": {
    "resourceRef": {
      "type": "string"
    }
  },
  "required": [
    "resourceRef"
  ]
},
"subnets": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {

```



```

    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "addressPrefix": {
        "type": "string"
      },
      "accessControlList": {
        "$ref": "#/definitions/resourceRef"
      },
      "ipConfigurations": {
        "type": "array",
        "uniqueItems": true,
        "items": { "$ref": "#/definitions/resourceRef" }
      },
      "routeTable": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "unbilledEgressBytes": {
      "type": "integer",
      "minimum": 0
    },
    "billedEgressBytes": {
      "type": "integer",
      "minimum": 0
    },
    "encryptionEnabled": {
      "type": "boolean",
      "default": false
    }
  },
  "required": [
    "provisioningState",
    "addressPrefix"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
},
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  }
},

```

```

"resourceMetadata": {
  "$ref": "#/definitions/resourceMetadata"
},
"tags": {
  "additionalProperties": { "type": "string" }
},
"properties": {
  "type": "object",
  "properties": {
    "provisioningState": {
      "$ref": "#/definitions/provisioningState"
    },
    "addressSpace": {
      "type": "object",
      "properties": {
        "addressPrefixes": {
          "type": "array",
          "items": {
            "type": "string"
          },
          "minItems": 1
        }
      },
      "required": [
        "addressPrefixes"
      ]
    },
    "dhcpOptions": {
      "type": "object",
      "properties": {
        "DnsServers": {
          "type": "array",
          "items": {
            "type": "string",
            "format": "ipv4"
          }
        }
      }
    },
    "subnets": {
      "$ref": "#/definitions/subnets"
    },
    "encryptionCredential": {
      "$ref": "#/definitions/resourceRef"
    },
    "logicalNetwork": {
      "$ref": "#/definitions/resourceRef"
    },
    "configurationState": {
      "$ref": "#/definitions/configurationState"
    }
  },
  "required": [
    "addressSpace"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}

```

6.16.5 GET ALL schema v1

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for virtualNetworks",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  },
  "detailedInfo": {
    "type": "array",
    "items": {
      "additionalProperties": false,
      "properties": {
        "status": {
          "enum": [ "Success", "Failure" ]
        },
        "id": {
          "$ref": "#/definitions/GUID"
        },
        "lastUpdatedTime": {
          "type": "string"
        },
        "detailedInfo": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "source": {
                "type": "string"
              },
              "message": {
                "type": "string"
              },
              "code": {
                "type": "string"
              }
            }
          }
        }
      }
    }
  },
  "required": [ "status", "id", "lastUpdatedTime" ]
}
```

```

},
"configurationState":
{
  "type": "object",
  "additionalProperties": false,
  "properties": {
    "status": {
      "enum": [ "Success", "Failure" ]
    },
    "id": {
      "$ref": "#/definitions/GUID"
    },
    "lastUpdatedTime": {
      "type": "string"
    },
    "virtualNetworkInterfaceErrors": {
      "$ref": "#/definitions/detailedInfo"
    },
    "hostErrors": {
      "$ref": "#/definitions/detailedInfo"
    }
  },
  "required": [
    "status",
    "id",
    "lastUpdatedTime"
  ]
},
"resourceRef": {
  "type": "object",
  "additionalProperties": false,
  "properties": {
    "resourceRef": {
      "type": "string"
    }
  },
  "required": [
    "resourceRef"
  ]
},
"subnets": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "addressPrefix": {
            "type": "string"
          },
          "accessControlList": {

```



```

    }
  },
  "required": [
    "addressPrefixes"
  ]
},
"dhcpOptions": {
  "type": "object",
  "properties": {
    "DnsServers": {
      "type": "array",
      "items": {
        "type": "string",
        "format": "ipv4"
      }
    }
  }
},
"subnets": {
  "$ref": "#/definitions/subnets"
},
"logicalNetwork": {
  "$ref": "#/definitions/resourceRef"
},
"configurationState": {
  "$ref": "#/definitions/configurationState"
}
},
"required": [
  "addressSpace"
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
},
"virtualNetworkArray": {
  "type": "array",
  "minItems": 0,
  "uniqueItems": true,
  "items": { "$ref": "#/definitions/virtualNetwork" }
}
},
"properties": {
  "value": { "$ref": "#/definitions/virtualNetworkArray" },
  "nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
  }
}
},
"required": ["nextLink"]
}

```

6.16.6 GET ALL schema v2

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for virtualNetworks",
  "type": "object",

```

```

"definitions": {
  "GUID": {
    "type": "string",
    "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "resourceMetadata": {
    "properties": {
      "client": {
        "type": "string"
      },
      "tenantId": {
        "type": "string"
      },
      "groupId": {
        "type": "string"
      },
      "resourceName": {
        "type": "string"
      },
      "originalHref": {
        "type": "string"
      }
    }
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  },
  "detailedInfo": {
    "type": "array",
    "items": {
      "additionalProperties": false,
      "properties": {
        "status": {
          "enum": [ "Success", "Failure" ]
        },
        "id": {
          "$ref": "#/definitions/GUID"
        },
        "lastUpdatedTime": {
          "type": "string"
        },
        "detailedInfo": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "source": {
                "type": "string"
              },
              "message": {
                "type": "string"
              },
              "code": {
                "type": "string"
              }
            }
          }
        }
      }
    }
  },
  "required": [ "status", "id", "lastUpdatedTime" ]
},
"configurationState": {
  "type": "object",
  "additionalProperties": false,
  "properties": {
    "status": {
      "enum": [ "Success", "Failure" ]
    }
  }
}

```

```

    },
    "id": {
      "$ref": "#/definitions/GUID"
    },
    "lastUpdatedTime": {
      "type": "string"
    },
    "virtualNetworkInterfaceErrors": {
      "$ref": "#/definitions/detailedInfo"
    },
    "hostErrors": {
      "$ref": "#/definitions/detailedInfo"
    }
  },
  "required": [
    "status",
    "id",
    "lastUpdatedTime"
  ]
},
"resourceRef": {
  "type": "object",
  "additionalProperties": false,
  "properties": {
    "resourceRef": {
      "type": "string"
    }
  }
},
"required": [
  "resourceRef"
]
},
"subnets": {
  "type": "array",
  "items": {
    "type": "object",
    "properties": {
      "resourceRef": {
        "type": "string"
      },
      "resourceId": {
        "type": "string"
      },
      "resourceMetadata": {
        "$ref": "#/definitions/resourceMetadata"
      },
      "etag": {
        "type": "string"
      },
      "instanceId": {
        "$ref": "#/definitions/GUID"
      },
      "properties": {
        "type": "object",
        "properties": {
          "provisioningState": {
            "$ref": "#/definitions/provisioningState"
          },
          "addressPrefix": {
            "type": "string"
          },
          "accessControlList": {
            "$ref": "#/definitions/resourceRef"
          },
          "ipConfigurations": {
            "type": "array",
            "uniqueItems": true,
            "items": { "$ref": "#/definitions/resourceRef" }
          },
          "routeTable": {

```



```

        "type": "object",
        "properties": {
            "resourceRef": {
                "type": "string"
            }
        },
        "required": [
            "resourceRef"
        ]
    },
    "unbilledEgressBytes": {
        "type": "integer",
        "minimum": 0
    },
    "billedEgressBytes": {
        "type": "integer",
        "minimum": 0
    },
    "encryptionEnabled": {
        "type": "boolean",
        "default": false
    }
},
"required": [
    "provisioningState",
    "addressPrefix"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}
},
"virtualNetwork": {
    "type": "object",
    "properties": {
        "resourceRef": {
            "type": "string"
        },
        "resourceId": {
            "type": "string"
        },
        "etag": {
            "type": "string"
        },
        "instanceId": {
            "$ref": "#/definitions/GUID"
        },
        "resourceMetadata": {
            "$ref": "#/definitions/resourceMetadata"
        },
        "tags": {
            "additionalProperties": { "type": "string" }
        },
        "properties": {
            "type": "object",
            "properties": {
                "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                },
                "addressSpace": {
                    "type": "object",
                    "properties": {
                        "addressPrefixes": {
                            "type": "array",

```

```

        "items": {
            "type": "string"
        },
        "minItems": 1
    }
},
"required": [
    "addressPrefixes"
]
},
"dhcpOptions": {
    "type": "object",
    "properties": {
        "DnsServers": {
            "type": "array",
            "items": {
                "type": "string",
                "format": "ipv4"
            }
        }
    }
},
"subnets": {
    "$ref": "#/definitions/subnets"
},
"logicalNetwork": {
    "$ref": "#/definitions/resourceRef"
},
"configurationState": {
    "$ref": "#/definitions/configurationState"
},
"encryptionCredential": {
    "$ref": "#/definitions/resourceRef"
}
},
"required": [
    "addressSpace"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
},
"virtualNetworkArray": {
    "type": "array",
    "minItems": 0,
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/virtualNetwork" }
}
},
"properties": {
    "value": { "$ref": "#/definitions/virtualNetworkArray" },
    "nextLink": {
        "type": "string",
        "format": "uri",
        "default": ""
    }
}
},
"required": ["nextLink"]
}
}

```

6.16.7 subnets

6.16.7.1 PUT schema v1

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for subnet",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },

  "properties": {
    "resourceId": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "addressPrefix": {
          "type": "string"
        },
        "accessControlList": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "required": [
        "addressPrefix"
      ]
    }
  },
  "required": [
    "properties"
  ]
}
```

6.16.7.2 PUT schema v2

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for subnet",
  "type": "object",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
```

```

        "resourceRef"
      ]
    }
  },
  "properties": {
    "resourceId": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "addressPrefix": {
          "type": "string"
        },
        "accessControlList": {
          "$ref": "#/definitions/resourceRef"
        },
        "encryptionEnabled": {
          "type": "boolean",
          "default": false
        }
      }
    },
    "required": [
      "addressPrefix"
    ]
  }
},
"required": [
  "properties"
]
}

```

6.16.7.3 GET schema v1

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for subnet",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  }
}

```

```

    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  }
},
"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "addressPrefix": {
        "type": "string"
      },
      "accessControlList": {
        "$ref": "#/definitions/resourceRef"
      },
      "ipConfigurations": {
        "type": "array",
        "uniqueItems": true,
        "items": { "$ref": "#/definitions/resourceRef" }
      },
      "routeTable": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },
  "required": [
    "provisioningState",
    "addressPrefix"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",

```

```

    "instanceId",
    "properties"
  ]
}

```

6.16.7.4 GET schema v2

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for subnet",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    }
  },
}

```



```

    "GUID": {
      "type": "string",
      "pattern": "[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "subnets": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {
          "$ref": "#/definitions/GUID"
        },
        "properties": {
          "type": "object",
          "properties": {
            "provisioningState": {
              "$ref": "#/definitions/provisioningState"
            },
            "addressPrefix": {
              "type": "string"
            },
            "accessControlList": {
              "$ref": "#/definitions/resourceRef"
            },
            "ipConfigurations": {
              "type": "array",
              "uniqueItems": true,
              "items": { "$ref": "#/definitions/resourceRef" }
            },
            "routeTable": {
              "type": "object",
              "properties": {
                "resourceRef": {
                  "type": "string"
                }
              }
            },
            "required": [
              "resourceRef"
            ]
          }
        },
        "required": [
          "provisioningState",
          "addressPrefix"
        ]
      }
    }
  ]
}

```



```

    }
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}
}
},
"properties": {
  "value": { "$ref": "#/definitions/subnets" },
  "nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
  }
},
"required": ["nextLink"]
}

```

6.16.7.6 GET ALL schema v2

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for subnets",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "subnets": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        },
        "resourceId": {
          "type": "string"
        },
        "etag": {
          "type": "string"
        },
        "instanceId": {

```

```

    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "addressPrefix": {
        "type": "string"
      },
      "accessControlList": {
        "$ref": "#/definitions/resourceRef"
      },
      "ipConfigurations": {
        "type": "array",
        "uniqueItems": true,
        "items": { "$ref": "#/definitions/resourceRef" }
      },
      "routeTable": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          }
        },
        "required": [
          "resourceRef"
        ]
      },
      "unbilledEgressBytes": {
        "type": "integer",
        "minimum": 0
      },
      "billedEgressBytes": {
        "type": "integer",
        "minimum": 0
      },
      "encryptionEnabled": {
        "type": "boolean",
        "default": false
      }
    },
    "required": [
      "provisioningState",
      "addressPrefix"
    ]
  }
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
},
"properties": {
  "value": { "$ref": "#/definitions/subnets" },
  "nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
  }
},
"required": ["nextLink"]
}

```

6.17 virtualNetworkManager

6.17.1 PUT schema v1

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for virtualNetworkManager configuration",
  "type": "object",

  "properties": {
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "distributedRouterState": {
          "enum": [ "Enabled" ]
        },
        "networkVirtualizationProtocol": {
          "enum": [ "VXLAN", "NVGRE" ],
          "default": "VXLAN"
        }
      }
    }
  },
  "required": [
    "properties"
  ]
}
```

6.17.2 PUT schema v2

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for virtualNetworkManager configuration",
  "type": "object",

  "definitions": {
    "virtualSubnetIdRange": {
      "properties": {
        "startId": {
          "type": "integer",
          "minimum": 4096,
          "maximum": 16777215
        },
        "endId": {
          "type": "integer",
          "minimum": 4096,
          "maximum": 16777215
        }
      }
    }
  },

  "properties": {
    "resourceId": {
      "type": "string"
    },
  },
}
```

```

    "etag": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "distributedRouterState": {
          "enum": [ "Enabled" ]
        },
        "networkVirtualizationProtocol": {
          "enum": [ "VXLAN", "NVGRE" ],
          "default": "VXLAN"
        },
        "virtualSubnetIdRange": {
          "$ref": "#/definitions/virtualSubnetIdRange"
        }
      }
    }
  },
  "required": [
    "properties"
  ]
}

```

6.17.3 GET schema v1

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for virtualNetworkManager configuration",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "distributedRouterState": {
          "enum": [ "Enabled" ]
        },
        "networkVirtualizationProtocol": {
          "enum": [ "VXLAN", "NVGRE" ],
          "default": "VXLAN"
        }
      }
    }
  }
}

```

```

    }
  },
  "required": [
    "provisioningState",
    "distributedRouterState",
    "networkVirtualizationProtocol"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.17.4 GET schema v2

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for virtualNetworkManager configuration",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "virtualSubnetIdRange": {
      "properties": {
        "startId": {
          "type": "integer",
          "minimum": 4096,
          "maximum": 16777215
        },
        "endId": {
          "type": "integer",
          "minimum": 4096,
          "maximum": 16777215
        }
      }
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        }
      }
    }
  }
}

```

```

    },
    "distributedRouterState": {
      "enum": [ "Enabled" ]
    },
    "networkVirtualizationProtocol": {
      "enum": [ "VXLAN", "NVGRE" ],
      "default": "VXLAN"
    },
    "virtualSubnetIdRange": {
      "$ref": "#/definitions/virtualSubnetIdRange"
    }
  },
  "required": [
    "provisioningState",
    "distributedRouterState",
    "networkVirtualizationProtocol"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.18 virtualServers

6.18.1 PUT schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for Virtual Servers",
  "type": "object",

  "definitions": {
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    }
  },

  "properties": {
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    }
  },
}

```

```

"resourceMetadata": {
  "$ref": "#/definitions/resourceMetadata"
},
"properties": {
  "type": "object",
  "properties": {
    "connections": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "managementAddresses": {
            "type": "array",
            "items": {
              "type": "string"
            },
            "minItems": 1
          },
          "credential": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              }
            },
            "required": [
              "resourceRef"
            ]
          },
          "credentialType": {
            "enum": [ "usernamePassword", "X509Certificate" ]
          }
        },
        "required": [
          "managementAddresses",
          "credential",
          "credentialType"
        ]
      }
    },
    "vmGuid": {
      "type": "string"
    }
  },
  "required": [
    "connections",
    "vmGuid"
  ]
},
"markServerReadOnly": {
  "type": "boolean"
},
"tags": {
  "additionalProperties": { "type": "string" }
}
},
"required": [
  "properties",
  "markServerReadOnly"
]
}

```

6.18.2 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for VirtualServers",
  "type": "object",

```

```

"definitions": {
  "GUID": {
    "type": "string",
    "pattern": "[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "resourceMetadata": {
    "properties": {
      "client": {
        "type": "string"
      },
      "tenantId": {
        "type": "string"
      },
      "groupId": {
        "type": "string"
      },
      "resourceName": {
        "type": "string"
      },
      "originalHref": {
        "type": "string"
      }
    }
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string"
  },
  "resourceId": {
    "type": "string"
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "connections": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "managementAddresses": {
              "type": "array",
              "items": {
                "type": "string"
              }
            },
            "minItems": 1
          },
          "credential": {
            "type": "object",
            "properties": {
              "resourceRef": {
                "type": "string"
              }
            }
          }
        }
      }
    }
  }
}

```



```

        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "credentialType": {
      "enum": [ "usernamePassword", "X509Certificate" ]
    }
  },
  "required": [
    "managementAddresses",
    "credential",
    "credentialType"
  ]
}
},
"vmGuid": {
  "type": "string"
}
},
"required": [
  "provisioningState",
  "connections",
  "vmGuid"
]
},
"markServerReadOnly": {
  "type": "boolean"
},
"tags": {
  "additionalProperties": { "type": "string" }
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties",
  "markServerReadOnly"
]
}
}

```

6.18.3 GET ALL schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for VirtualServers",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        }
      }
    }
  }
}

```

```

        "resourceName": {
            "type": "string"
        },
        "originalHref": {
            "type": "string"
        }
    }
},
"provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
},
"virtualServer": {
    "type" : "object",
    "properties": {
        "resourceRef": {
            "type": "string"
        },
        "resourceId": {
            "type": "string"
        },
        "etag": {
            "type": "string"
        },
        "instanceId": {
            "type": "string"
        },
        "resourceMetadata": {
            "$ref": "#/definitions/resourceMetadata"
        },
        "markServerReadOnly": {
            "type": "boolean"
        },
        "tags": {
            "additionalProperties": { "type": "string" }
        },
        "properties": {
            "type": "object",
            "properties": {
                "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                },
                "connections": {
                    "type": "array",
                    "items": {
                        "type": "object",
                        "properties": {
                            "managementAddresses": {
                                "type": "array",
                                "items": {
                                    "type": "string"
                                }
                            },
                            "minItems": 1
                        },
                        "credential": {
                            "type": "object",
                            "properties": {
                                "resourceRef": {
                                    "type": "string"
                                }
                            }
                        },
                        "required": [
                            "resourceRef"
                        ]
                    },
                    "credentialType": {
                        "enum": [ "usernamePassword", "X509Certificate" ]
                    }
                },
                "required": [
                    "managementAddresses",

```

```

        "credential",
        "credentialType"
    ]
    },
    "vmGuid": {
        "type": "string"
    }
},
"required": [
    "provisioningState",
    "connections",
    "vmGuid"
]
}
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties",
    "markServerReadOnly"
]
},
"virtualServerArray": {
    "type": "array",
    "minItems": 0,
    "uniqueItems": true,
    "items": { "$ref": "#/definitions/virtualServer" }
}
},
"properties": {
    "value": { "$ref": "#/definitions/virtualServerArray" },
    "nextLink": {
        "type": "string",
        "format": "uri",
        "default": ""
    }
}
},
"required": ["nextLink"]
}

```

6.19 Diagnostics

6.19.1 Diagnostics ConnectivityCheck

6.19.1.1 PUT Schema Request

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "PUT JSON Schema for ConnectivityCheck",

    "definitions": {
        "networkReference": {
            "type": "object",
            "properties": {
                "resourceRef": {
                    "type": "string"
                }
            }
        },
        "required": [
            "resourceRef"
        ]
    }
}

```

```

    },
    "properties": {
      "properties": {
        "type": "object",
        "properties": {
          "senderLogicalNetwork": { "$ref": "#/definitions/networkReference" },
          "receiverLogicalNetwork": { "$ref": "#/definitions/networkReference" },
          "senderVirtualNetwork": { "$ref": "#/definitions/networkReference" },
          "receiverVirtualNetwork": { "$ref": "#/definitions/networkReference" },
          "senderIpAddress": {
            "type": "string",
            "format": "ipv4"
          },
          "receiverIpAddress": {
            "type": "string",
            "format": "ipv4"
          },
          "disableTracing": {
            "type": "boolean",
            "default": false
          },
          "protocol": {
            "type": "string",
            "enum": [ "Icmp", "Tcp", "Udp" ],
            "default": "Icmp"
          }
        },
        "required": [
          "senderIpAddress",
          "receiverIpAddress"
        ]
      }
    },
    "required": [
      "properties"
    ]
  }
}

```

6.19.1.2 PUT Schema Response

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for ConnectivityCheck",

  "definitions": {
    "networkReference": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },
  "properties": {
    "properties": {
      "type": "object",
      "properties": {
        "senderLogicalNetwork": { "$ref": "#/definitions/networkReference" },
        "receiverLogicalNetwork": { "$ref": "#/definitions/networkReference" },
        "senderVirtualNetwork": { "$ref": "#/definitions/networkReference" },

```

```

    "receiverVirtualNetwork": { "$ref": "#/definitions/networkReference" },
    "senderIpAddress": {
      "type": "string",
      "format": "ipv4"
    },
    "receiverIpAddress": {
      "type": "string",
      "format": "ipv4"
    },
    "disableTracing": {
      "type": "boolean",
      "default": false
    },
    "protocol": {
      "type": "string",
      "enum": [ "Icmp", "Tcp", "Udp" ],
      "default": "Icmp"
    }
  },
  "required": [
    "senderIpAddress",
    "receiverIpAddress"
  ]
},
"required": [
  "properties"
]
}

```

6.19.2 Diagnostics ConnectivityCheckResults

6.19.2.1 GET Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for ConnectivityCheckResults",

  "definitions": {
    "networkReference": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    },
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    }
  }
}

```

```

    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "senderLogicalNetwork": { "$ref": "#/definitions/networkReference" },
        "receiverLogicalNetwork": { "$ref": "#/definitions/networkReference" },
        "senderVirtualNetwork": { "$ref": "#/definitions/networkReference" },
        "receiverVirtualNetwork": { "$ref": "#/definitions/networkReference" },
        "senderIpAddress": {
          "type": "string",
          "format": "ipv4"
        },
        "receiverIpAddress": {
          "type": "string",
          "format": "ipv4"
        },
        "disableTracing": {
          "type": "boolean",
          "default": false
        },
        "protocol": {
          "type": "string",
          "enum": [ "Icmp", "Tcp", "Udp" ]
        },
        "operationId": {
          "$ref": "#/definitions/GUID"
        },
        "submitTime": {
          "type": "string"
        },
        "result": {
          "type": "object",
          "properties": {
            "status": {
              "type": "string",
              "enum": [ "Pending", "InProgress", "Failure", "Success" ]
            },
            "roundTripTimeMSec": {
              "type": "integer",
              "default": 0
            },
            "nodeOutput": {
              "type": "array",
              "items": {
                "type": "object",
                "properties": {
                  "nodeType": {
                    "type": "string",
                    "enum": [ "Sender", "Transit", "Receiver" ]
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}

```

```

        },
        "nodeSequenceNumber": {
            "type": "integer"
        },
        "errorMessage": {
            "type": "string"
        },
        "traceOutput": {
            "type": "array",
            "items": {
                "type": "string"
            }
        }
    },
    "required": [
        "nodeType",
        "nodeSequenceNumber"
    ]
}
}
},
"required": [
    "status",
    "roundTripTimeMSec",
    "nodeOutput"
]
}
},
"required": [
    "senderIpAddress",
    "receiverIpAddress",
    "provisioningState",
    "protocol",
    "submitTime",
    "result"
]
}
},
"required": [
    "properties",
    "resourceRef",
    "etag",
    "instanceId"
]
}
}

```

6.19.2.2 GET ALL Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for connectivityCheckResults",
  "type": "object",

  "definitions": {
    "networkReference": {
      "type": "object",
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",

```

```

    "pattern": "[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  },
  "resourceRef": {
    "type": "object",
    "additionalProperties": false,
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    }
  },
  "required": [
    "resourceRef"
  ]
},
"checkResult": {
  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "senderLogicalNetwork": { "$ref": "#/definitions/networkReference" },
        "receiverLogicalNetwork": { "$ref": "#/definitions/networkReference" },
        "senderVirtualNetwork": { "$ref": "#/definitions/networkReference" },
        "receiverVirtualNetwork": { "$ref": "#/definitions/networkReference" },
        "senderIpAddress": {
          "type": "string",
          "format": "ipv4"
        },
        "receiverIpAddress": {
          "type": "string",
          "format": "ipv4"
        },
        "disableTracing": {
          "type": "boolean",
          "default": false
        },
        "protocol": {
          "type": "string",
          "enum": [ "Icmp", "Tcp", "Udp" ]
        },
        "operationId": {
          "$ref": "#/definitions/GUID"
        },
        "submitTime": {
          "type": "string"
        },
        "result": {
          "type": "object",
          "properties": {
            "status": {
              "type": "string",
              "enum": [ "Pending", "InProgress", "Failure", "Success" ]
            }
          }
        }
      }
    }
  }
}

```



```

    },
    "roundTripTimeMSec": {
      "type": "integer",
      "default": 0
    },
    "nodeOutput": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "nodeType": {
            "type": "string",
            "enum": [ "Sender", "Transit", "Receiver" ]
          },
          "nodeSequenceNumber": {
            "type": "integer"
          },
          "errorMessage": {
            "type": "string"
          },
          "traceOutput": {
            "type": "array",
            "items": {
              "type": "string"
            }
          }
        }
      },
      "required": [
        "nodeType",
        "nodeSequenceNumber"
      ]
    },
    "required": [
      "status"
    ]
  }
},
"required": [
  "senderIpAddress",
  "receiverIpAddress",
  "provisioningState",
  "protocol",
  "submitTime",
  "result"
]
},
"required": [
  "properties",
  "resourceRef",
  "etag",
  "instanceId"
]
},
"checkResultArray": {
  "type": "array",
  "minItems": 0,
  "uniqueItems": true,
  "items": { "$ref": "#/definitions/checkResult" }
}
},
"properties": {
  "value": { "$ref": "#/definitions/checkResultArray" },
  "nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
  }
}

```

```

    }
  },
  "required": ["value", "nextLink"]
}

```

6.19.3 Diagnostics SlbState

6.19.3.1 PUT Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for SlbState PUT Response",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",
    "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  }
},

"properties": {
  "resourceRef": {
    "type": "string",
    "enum": ["/diagnostics/slbState/Action"]
  },
  "resourceId": {
    "type": "string",
    "enum": ["Action"]
  },
  "etag": {
    "type": "string"
  },
  "instanceId": {
    "$ref": "#/definitions/GUID"
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "operationId": {
        "$ref": "#/definitions/GUID"
      },
      "slbStateResult": {
        "$ref": "#/definitions/resourceRef"
      },
      "submitTime": {
        "type": "string"
      }
    }
  }
},

```

```

    "required": [
      "operationId",
      "slbStateResult",
      "submitTime"
    ]
  },
  "required": [
    "properties",
    "resourceRef",
    "etag",
    "instanceId",
    "resourceId"
  ]
}

```

6.19.4 Diagnostics SlbStateResults

6.19.4.1 GET Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for SlbStateResults",

  "definitions": {
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "GUID": {
    "type": "string",
    "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "provisioningState": {
    "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
  },
  "dataGroups": {
    "type": "array",
    "items": {
      "additionalProperties": false,
      "properties": {
        "name": {
          "enum": [ "Fabric", "Tenant" ]
        },
        "description": {
          "type": "string"
        }
      },
      "dataSections": {
        "type": "array",
        "items": {
          "type": "object",
          "properties": {
            "name": {
              "type": "string",
              "enum": [ "SlbmVips", "MuxState", "RouterConfiguration",
"ConnectedHostInfo", "VipRanges", "MuxRoutes", "VipConsolidatedState" ]
            }
          }
        }
      }
    }
  }
}

```



```

    },
    "required": [
      "provisioningState",
      "status",
      "submitTime"
    ]
  }
},
"required": [
  "properties",
  "resourceRef",
  "etag",
  "instanceId",
  "resourceId"
]
}
}

```

6.19.4.2 GET ALL Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for slbStateResults",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "dataGroups": {
      "type": "array",
      "items": {
        "additionalProperties": false,
        "properties": {
          "name": {
            "enum": [ "Fabric", "Tenant" ]
          },
          "description": {
            "type": "string"
          },
          "dataSections": {
            "type": "array",
            "items": {
              "type": "object",

```

```

        "properties": {
            "name": {
                "type": "string",
                "enum": [ "SlbmVips", "MuxState", "RouterConfiguration",
"ConnectedHostInfo", "VipRanges", "MuxRoutes", "VipConsolidatedState" ]
            },
            "description": {
                "type": "string",
                "enum": [ "Slbm Vips", "Mux State", "Router Configuration", "Connected Host
Info", "Vip Ranges", "Mux Routes", "Vip Consolidated State" ]
            },
            "dataRetrievalFailed": {
                "type": "boolean"
            },
            "dataUnits": {
                "type": "array",
                "items": {
                    "additionalProperties": false,
                    "properties": {
                        "name": {
                            "type": "string"
                        },
                        "value": {
                            "type": "array",
                            "items": {
                                "type": "string"
                            }
                        }
                    }
                },
                "required": [ "value" ]
            }
        },
        "required": [ "name", "description", "dataRetrievalFailed", "dataUnits" ]
    },
    "required": [ "name", "description", "dataSections" ]
}
},
"slbState": {
    "type": "object",
    "properties": {
        "resourceRef": {
            "type": "string"
        },
        "resourceId": {
            "type": "string"
        },
        "etag": {
            "type": "string"
        },
        "instanceId": {
            "$ref": "#/definitions/GUID"
        },
        "properties": {
            "type": "object",
            "properties": {
                "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                },
                "submitTime": {
                    "type": "string"
                },
                "status": {
                    "type": "string",
                    "enum": [ "Pending", "InProgress", "Failure", "Success" ]
                },
                "output": {
                    "type": "object",

```

```

        "properties": {
          "dataGroups": {
            "$ref": "#/definitions/dataGroups"
          }
        }
      },
      "required": [
        "provisioningState",
        "status",
        "submitTime"
      ]
    }
  },
  "required": [
    "properties",
    "resourceRef",
    "etag",
    "instanceId",
    "resourceId"
  ]
},
"slbStateArray": {
  "type": "array",
  "minItems": 0,
  "uniqueItems": true,
  "items": { "$ref": "#/definitions/slbState" }
}
},
"properties": {
  "value": { "$ref": "#/definitions/slbStateArray" },
  "nextLink": {
    "type": "string",
    "format": "uri",
    "default": ""
  }
},
"required": [ "nextLink" ]
}

```

6.19.5 Diagnostics NetworkControllerState

6.19.5.1 PUT Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for networkControllerState",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string",
      "enum": [ "/networkControllerState/NetworkControllerState" ]
    },
    "resourceId": {

```

```

        "type": "string",
        "enum": ["NetworkControllerState"]
    },
    "etag": {
        "type": "string"
    },
    "instanceId": {
        "$ref": "#/definitions/GUID"
    },
    "properties": {
        "type": "object",
        "properties": {
            "provisioningState": {
                "$ref": "#/definitions/provisioningState"
            },
            "lastQueryTimeStamp": {
                "type": "string"
            }
        },
        "required": [
            "provisioningState",
            "lastQueryTimeStamp"
        ]
    }
},
"required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
]
}

```

6.20 networkControllerStatistics

6.20.1 GET Schema

```

{
    "$schema": "http://json-schema.org/draft-04/schema#",
    "title": "PUT JSON Schema for networkControllerStatistics",
    "type": "object",

    "definitions": {
        "provisioningState": {
            "enum": [ "Succeeded", "Failed" ]
        },
        "GUID": {
            "type": "string",
            "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
        }
    },

    "properties": {
        "resourceRef": {
            "type": "string"
        },
        "instanceId": {
            "$ref": "#/definitions/GUID"
        },
        "properties": {
            "type": "object",
            "properties": {
                "provisioningState": {
                    "$ref": "#/definitions/provisioningState"
                }
            }
        }
    }
}

```



```

    },
    "healthStatistics": {
      "type": "array",
      "items": {
        "type": "object",
        "properties": {
          "resourceType": {
            "enum": [ "VirtualNetwork", "Gateway", "LoadBalancerMux" ]
          },
          "totalResourceCount": {
            "type": "integer",
            "minimum": 0
          },
          "healthyResourceCount": {
            "type": "integer",
            "minimum": 0
          },
          "errorResourceCount": {
            "type": "integer",
            "minimum": 0
          },
          "warningResourceCount": {
            "type": "integer",
            "minimum": 0
          },
          "healthUnknownCount": {
            "type": "integer",
            "minimum": 0
          }
        }
      },
      "required": [
        "errorResourceCount",
        "healthUnknownCount",
        "healthyResourceCount",
        "resourceType",
        "totalResourceCount",
        "warningResourceCount"
      ]
    }
  },
  "usageStatistics": {
    "type": "array",
    "items": {
      "type": "object",
      "properties": {
        "resourceType": {
          "enum": [ "PublicIPUtilization", "BackendIPUtilization", "MacPoolUtilization"
        ]
      },
      "totalResourceCount": {
        "type": "integer",
        "minimum": 0
      },
      "inUseResourceCount": {
        "type": "integer",
        "minimum": 0
      }
    },
    "required": [
      "inUseResourceCount",
      "resourceType",
      "totalResourceCount"
    ]
  }
},
"required": [
  "provisioningState",
  "healthStatistics",
  "usageStatistics"
]

```

```

    ]
  }
},
"required": [
  "resourceRef",
  "instanceId",
  "properties"
]
}

```

6.21 internalResourceInstances

6.21.1 GET schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for internalResourceInstances",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "resourceRef": {
        "type": "string"
      },
    },
    "resourceId": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "resourceReference": {
          "type": "string"
        }
      }
    },
    "required": [
      "provisioningState",
      "resourceReference"
    ]
  }
},
"required": [
  "resourceRef",
  "resourceId",
  "instanceId",
  "properties"
]
}

```

6.21.2 GET ALL schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET ALL JSON Schema for internalResourceInstances",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "internalResourceInstances": {
      "type": "array",
      "uniqueItems": true,
      "items": {
        "type": "object",
        "properties": {
          "resourceRef": {
            "type": "string"
          },
          "resourceId": {
            "type": "string"
          },
          "instanceId": {
            "$ref": "#/definitions/GUID"
          },
          "properties": {
            "type": "object",
            "properties": {
              "provisioningState": {
                "$ref": "#/definitions/provisioningState"
              },
              "resourceReference": {
                "type": "string"
              }
            }
          },
          "required": [
            "provisioningState",
            "resourceReference"
          ]
        }
      }
    },
    "required": [
      "resourceRef",
      "resourceId",
      "instanceId",
      "properties"
    ]
  },
  "properties": {
    "value": { "$ref": "#/definitions/internalResourceInstances" },
    "nextLink": {
      "type": "string",
      "format": "uri",
      "default": ""
    }
  },
  "required": ["nextLink"]
}
```

6.22 iDnsServer

6.22.1 PUT schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for iDNSServer/configuration",
  "type": "object",

  "properties": {
    "properties": {
      "properties": {
        "type": "object",
        "properties": {
          "connections": {
            "type": "array",
            "items": {
              "type": "object",
              "properties": {
                "managementAddresses": {
                  "type": "array",
                  "items": {
                    "type": "string"
                  }
                },
                "credential": {
                  "type": "object",
                  "properties": {
                    "resourceRef": {
                      "type": "string"
                    }
                  }
                },
                "required": [
                  "resourceRef"
                ]
              },
              "credentialType": {
                "type": "string",
                "enum": ["X509Certificate", "usernamePassword" ]
              }
            },
            "required": [
              "managementAddresses",
              "credential",
              "credentialType"
            ]
          },
          "zone": {
            "type": "string"
          }
        },
        "required": [
          "connections",
          "zone"
        ]
      }
    },
    "required": [
      "properties"
    ]
  }
}
```

6.22.2 GET schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for iDNSServer/configuration",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string",
      "enum": ["/iDnsServer/configuration"]
    },
    "resourceId": {
      "type": "string",
      "enum": ["configuration"]
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "connections": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "managementAddresses": {
                "type": "array",
                "items": {
                  "type": "string"
                }
              },
              "credential": {
                "type": "object",
                "properties": {
                  "resourceRef": {
                    "type": "string"
                  }
                }
              },
              "required": [
                "resourceRef"
              ]
            },
            "credentialType": {
              "type": "string",
              "enum": ["X509Certificate", "usernamePassword" ]
            }
          },
          "required": [
            "managementAddresses",

```

```

        "credential",
        "credentialType"
    ]
    }
  },
  "zone": {
    "type": "string"
  }
},
"required": [
  "connections",
  "provisioningState",
  "zone"
]
]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
]
}

```

6.23 virtualSwitchManager

6.23.1 PUT Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for virtualSwitchManager configuration",
  "type": "object",

  "definitions": {
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "numInterfacesHavingQos": {
          "type": "integer"
        },
        "qosSettings": {
          "type": "object",
          "properties": {
            "reservationMode": {
              "enum": [ "Absolute", "Weight" ],
              "default": "Weight"
            },
            "linkSpeedPercentage": {
              "type": "integer",
              "minimum": 0,

```

```

        "maximum": 100
      },
      "defaultReservation": {
        "type": "integer"
      },
      "enableHardwareLimits": {
        "type": "boolean"
      },
      "enableHardwareReservations": {
        "type": "boolean"
      },
      "enableSoftwareReservations": {
        "type": "integer"
      }
    }
  },
  "required": [
    "qosSettings"
  ]
},
"required": [
  "properties"
]
}

```

6.23.2 GET Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for virtualSwitchManager configuration",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
  },
}

```

```

    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "type": "string"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "numInterfacesHavingQos": {
          "type": "integer"
        },
        "qosSettings": {
          "type": "object",
          "properties": {
            "reservationMode": {
              "enum": [ "Absolute", "Weight" ]
            },
            "linkSpeedPercentage": {
              "type": "integer",
              "minimum": 0,
              "maximum": 100
            },
            "defaultReservation": {
              "type": "integer"
            },
            "enableHardwareLimits": {
              "type": "boolean"
            },
            "enableHardwareReservations": {
              "type": "boolean"
            },
            "enableSoftwareReservations": {
              "type": "boolean"
            }
          }
        }
      }
    },
    "required": [
      "provisioningState",
      "qosSettings",
      "numInterfacesHavingQos"
    ]
  },
  "required": [
    "resourceRef",
    "resourceId",
    "etag",
    "instanceId",
    "properties"
  ]
}

```


6.24 networkControllerBackup

6.24.1 PUT Schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for networkControllerBackup",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },

  "properties": {
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
      "additionalProperties": { "type": "string" }
    },
    "properties": {
      "type": "object",
      "properties": {
        "backupPath": {
          "type": "string"
        },
        "credential": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "required": [
        "backupPath",
        "credential"
      ]
    }
  }
}
```

```

    ]
  },
  "required": [
    "properties"
  ]
}

```

6.24.2 GET Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for networkControllerBackup",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      }
    },
    "required": [
      "resourceRef"
    ]
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {

```

```

    "$ref": "#/definitions/GUID"
  },
  "resourceMetadata": {
    "$ref": "#/definitions/resourceMetadata"
  },
  "tags": {
    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "backupPath": {
        "type": "string"
      },
      "credential": {
        "$ref": "#/definitions/resourceRef"
      },
      "errorMessage": {
        "type": "string"
      },
      "failedResourcesList": {
        "type": "array",
        "minItems": 0,
        "uniqueItems": true,
        "items": { "type": "string" }
      },
      "successfulResourcesList": {
        "type": "array",
        "minItems": 0,
        "uniqueItems": true,
        "items": { "type": "string" }
      },
      "inProgressResourcesList": {
        "type": "array",
        "minItems": 0,
        "uniqueItems": true,
        "items": { "type": "string" }
      }
    }
  },
  "required": [
    "provisioningState",
    "backupPath",
    "credential",
    "errorMessage",
    "failedResourcesList",
    "successfulResourcesList",
    "inProgressResourcesList"
  ]
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}

```

6.25 networkControllerRestore

6.25.1 PUT Schema

```
{
```

```

"$schema": "http://json-schema.org/draft-04/schema#",
"title": "PUT JSON Schema for networkControllerRestore",
"type": "object",

"definitions": {
  "GUID": {
    "type": "string",
    "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
  },
  "resourceMetadata": {
    "properties": {
      "client": {
        "type": "string"
      },
      "tenantId": {
        "type": "string"
      },
      "groupId": {
        "type": "string"
      },
      "resourceName": {
        "type": "string"
      },
      "originalHref": {
        "type": "string"
      }
    }
  },
  "resourceRef": {
    "type": "object",
    "additionalProperties": false,
    "properties": {
      "resourceRef": {
        "type": "string"
      }
    },
    "required": [
      "resourceRef"
    ]
  },
  "properties": {
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
      "additionalProperties": { "type": "string" }
    },
    "properties": {
      "type": "object",
      "properties": {
        "restorePath": {
          "type": "string"
        },
        "credential": {
          "$ref": "#/definitions/resourceRef"
        }
      },
      "required": [
        "restorePath",
        "credential"
      ]
    }
  },
  "required": [
    "properties"
  ]
}

```

```
}
```

6.25.2 GET Schema

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for networkControllerRestore",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "resourceMetadata": {
      "properties": {
        "client": {
          "type": "string"
        },
        "tenantId": {
          "type": "string"
        },
        "groupId": {
          "type": "string"
        },
        "resourceName": {
          "type": "string"
        },
        "originalHref": {
          "type": "string"
        }
      }
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    },
    "resourceRef": {
      "type": "object",
      "additionalProperties": false,
      "properties": {
        "resourceRef": {
          "type": "string"
        }
      },
      "required": [
        "resourceRef"
      ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "resourceMetadata": {
      "$ref": "#/definitions/resourceMetadata"
    },
    "tags": {
```

```

    "additionalProperties": { "type": "string" }
  },
  "properties": {
    "type": "object",
    "properties": {
      "provisioningState": {
        "$ref": "#/definitions/provisioningState"
      },
      "restorePath": {
        "type": "string"
      },
      "statusMessages": {
        "type": "array",
        "minItems": 0,
        "uniqueItems": true,
        "items": { "type": "string" }
      },
      "failedResources": {
        "type": "array",
        "minItems": 0,
        "uniqueItems": true,
        "items": { "type": "string" }
      },
      "successfulResources": {
        "type": "array",
        "minItems": 0,
        "uniqueItems": true,
        "items": { "type": "string" }
      }
    }
  },
  "required": [
    "provisioningState",
    "restorePath",
    "statusMessages",
    "failedResources",
    "successfulResources"
  ]
}
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}
}

```

6.26 SubnetEgressReset

6.26.1 PUT Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "PUT JSON Schema for SubnetEgressReset",
  "type": "object",

  "properties": {
    "properties": {
      "type": "object",
      "properties": {
        "virtualSubnetResourceReference": {
          "type": "string"
        }
      }
    },
    "required": [
      "virtualSubnetResourceReference"
    ]
  }
}

```

```

    ]
  },
  "required": [
    "properties"
  ]
}

```

6.26.2 GET Schema

```

{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for SubnetEgressReset",
  "type": "object",

  "definitions": {
    "GUID": {
      "type": "string",
      "pattern": "^[a-fA-F0-9]{8}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{4}-[a-fA-F0-9]{12}$"
    },
    "provisioningState": {
      "enum": [ "Succeeded", "Updating", "Deleting", "Failed" ]
    }
  },

  "properties": {
    "resourceRef": {
      "type": "string"
    },
    "resourceId": {
      "type": "string"
    },
    "etag": {
      "type": "string"
    },
    "instanceId": {
      "$ref": "#/definitions/GUID"
    },
    "properties": {
      "type": "object",
      "properties": {
        "provisioningState": {
          "$ref": "#/definitions/provisioningState"
        },
        "virtualSubnetResourceReference": {
          "type": "string"
        }
      }
    },
    "required": [
      "provisioningState",
      "virtualSubnetResourceReference"
    ]
  }
},
"required": [
  "resourceRef",
  "resourceId",
  "etag",
  "instanceId",
  "properties"
]
}

```

6.27 Schema for Error Response

```
{
  "$schema": "http://json-schema.org/draft-04/schema#",
  "title": "GET JSON Schema for error responses",
  "type": "object",
  "properties": {
    "error": {
      "type": "object",
      "properties": {
        "code": {
          "type": "string"
        },
        "message": {
          "type": "string"
        },
        "target": {
          "type": "string"
        },
        "innerError": {
          "type": "string"
        },
        "details": {
          "type": "array",
          "items": {
            "type": "object",
            "properties": {
              "code": {
                "type": "string"
              },
              "message": {
                "type": "string"
              }
            },
            "required": [
              "code"
            ]
          }
        },
        "required": [
          "code"
        ]
      }
    },
    "required": [
      "code"
    ]
  },
  "required": [
    "error"
  ]
}
```


7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include updates to those products.

- Windows Server 2016 operating system
- Windows Server operating system

Exceptions, if any, are noted in this section. If an update version, service pack or Knowledge Base (KB) number appears with a product name, the behavior changed in that update. The new behavior also applies to subsequent updates unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms "SHOULD" or "SHOULD NOT" implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term "MAY" implies that the product does not follow the prescription.

<1> Section 1.7: Version 2 (v2) ~~was introduced~~is not supported in Windows Server ~~operating system~~2016.

<2> Section 3.1: In applicable Windows Server releases, the server does not paginate, and "nextLink" is always set to "" (empty string).

<3> Section 3.1.5.2: Support for the **networks** property ~~was introduced with in~~ v2 is not available in Windows Server ~~operating system~~2016.

<4> Section 3.1.5.5.7: In Windows, the default value for the probe interval is 15 seconds, the minimum value is 5, and the maximum value is 2147483646.

<5> Section 3.1.5.7: The reference is used only to keep track of REST resource relationships. The server does not do anything with the network interface resource reference.

<6> Section 3.1.5.7: The reference is used only to keep track of REST resource relationships. The server does not do anything with the network interface resource reference.

<7> Section 3.1.5.10: The server limits the number of routes per table to 100.

<8> Section 3.1.5.15: Support for the **VirtualNetworkInterfaces** property ~~was introduced with in~~ v2 is not available in Windows Server ~~operating system~~2016.

<9> Section 3.1.5.18: Support for the **UnbilledAddressRanges** and **EncryptionCredential** properties ~~was introduced within~~ v2 is not available in Windows Server ~~operating system~~2016.

<10> Section 3.1.5.18: In applicable Windows Server releases, the server limits the number of DNS servers per virtual network to 9.

<11> Section 3.1.5.18.2: Support for the **VirtualSubnetId**, **UnbilledEgressBytes**, **BilledEgressBytes**, and **EncryptionEnabled** properties ~~was introduced with in~~ v2 is not available in Windows Server ~~operating system~~2016.

<12> Section 3.1.5.19: Support for the **VirtualSubnetIdRange**, **StartId**, and **EndId** properties ~~was introduced within~~ v2 is not available in Windows Server ~~operating system~~2016.

<13> Section 3.1.5.26: The **networkControllerBackup** resource ~~was introduced in~~is not available prior to Windows Server 2016 with the [MSKB-3216755] update.

<14> Section 3.1.5.27: The **networkControllerRestore** resource ~~was introduced in~~is not available prior to Windows Server 2016 with the [MSKB-3216755] update.

<15> Section 3.1.5.28: Support for **SubnetEgressReset** ~~was introduced with in v2~~ is not available in Windows Server ~~operating system~~2016.

<16> Section 3.1.5.29: In applicable Windows Server releases, the server limits the number of DNS servers per virtual network to 9.

8 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as Major, Minor, or None.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements.
- A document revision that captures changes to protocol functionality.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **None** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the relevant technical content is identical to the last released version.

The changes made to this document are listed in the following table. For more information, please contact dochelp@microsoft.com.

Section	Description	Revision class
1.3 Overview	Updated for this version of Windows Server.	Minor
1.3.1.1 ETag usage	8386 : Updated GatewayPools and etag capitalization.	Major
1.3.1.1 ETag usage	Updated for this version of Windows Server.	Minor
1.3.2.1 POST and DELETE Operations	8385 : Updated operationId capitalization.	Major
1.3.2.2 PUT Operation	8385 : Updated operationId element capitalization.	Major
1.3.2.3 Differences between operations and operationResults	8386 : Updated Azure-AsyncOperation header and operations resource names.	Major
1.3.2.6 State Diagrams for Asynchronous Operations	Updated for this version of Windows Server.	Minor
1.3.3.1 Concurrent operations on the same resource	8386 : Updated etag capitalization.	Major
1.3.3.1 Concurrent operations on the same resource	Updated for this version of Windows Server.	Minor
1.3.3.2 Concurrent operations when there are dependent resources	8386 : Updated GatewayPools capitalization.	Major
1.3.3.3 Network Controller dependent resources	8386 : Updated GatewayPools capitalization.	Major
1.3.3.3 Network Controller dependent resources	Updated for this version of Windows Server.	Minor
2.2.1.1 Content-Type	8386 : Updated Content-Type header capitalization.	Major
2.2.1.2.2 If-Match	8386 : Updated If-Match section name.	Major

Section	Description	Revision class
2.2.1.3.4 ETag	Updated for this version of Windows Server.	Minor
2.2.3 Common URI Parameters	8385 : Updated operationId capitalization.	Major
2.2.3.1 grandParentResourceId	8386 : Updated grandParentResourceId parameter name in index.	Major
2.2.3.1 grandParentResourceId	Updated for this version of Windows Server.	Minor
2.2.3.2 operationId	8385 : Updated operationId section name.	Major
2.2.3.3 parentResourceId	Updated for this version of Windows Server.	Minor
2.2.3.4 resourceId	8386 : Updated GatewayPools, VirtualGateways, and loadBalancerMuxes resource names capitalization.	Major
2.2.3.4 resourceId	Updated for this version of Windows Server.	Minor
2.2.4 Data Structures	8387 : Updated accessControlLists, dnsSettings networkInterfaces section references.	Major
2.2.4 Data Structures	8386 : Updated resource names backendAddressPools, VirtualGateways, etag, frontendIPConfigurations, vipIpPools, GatewayPools, networkInterfaces, IpConfiguration, loadBalancerMuxes, loadBalancer, peerIPAddresses, and routerIPAddress.	Major
2.2.4 Data Structures	8388 : Updated resource names backendAddressPools and peerIPAddresses.	Major
2.2.4 Data Structures	8389 : Changed frontendIpPools to vipIpPools.	Major
2.2.4 Data Structures	8390 : Updated resource name networkInterfaces.	Major
2.2.4 Data Structures	8391 : Added bgpNetworks replaces Networks, localVpnTrafficSelector, and remoteVpnTrafficSelector. Removed internalIpAddresses, internalPeerIpAddresses, networks, and TrafficSelector.	Major
2.2.4 Data Structures	8392 : Added note on when configurationState.status is uninitialized.	Major
2.2.4 Data Structures	8393 : Removed vlans and updated vlansId section references.	Major
2.2.4 Data Structures	Updated for this version of Windows Server.	Minor
2.2.4 Data Structures	8386 : Updated ipConfiguration and ipConfigurations.	Minor
3.1.5 Message Processing Events and Sequencing Rules	8386 : Updated resource names GatewayPools, VirtualGateways, loadBalancerMuxes, gateways, etag, Location header, and the Azure-AsyncOperation header.	Major
3.1.5 Message Processing Events and Sequencing Rules	Updated for this version of Windows Server.	Minor
3.1.5.1 accessControlLists	8388 : Updated resource name networkInterfaces.	Major
3.1.5.1.1.2.3 Processing Details	8386 : Updated resource name accessControlLists.	Major
3.1.5.1.1.3.3 Processing Details	8386 : Updated resource name accessControlLists.	Major

Section	Description	Revision class
3.1.5.1.1.4.3 Processing Details	8386 : Updated resource name accessControlLists.	Major
3.1.5.1.2 aclRules	Updated for this version of Windows Server.	Minor
3.1.5.2 credentials	8472 : Updated resource name credentials and X509Certificate description as thumbprint.	Major
3.1.5.2 credentials	Changed glossary term SSL to full name SSL/TLS for this version of Windows Server.	Minor
3.1.5.2 credentials	Updated for this version of Windows Server.	Major
3.1.5.2.1.1 PUT	Updated for this version of Windows Server.	Major
3.1.5.2.1.2 GET	Updated for this version of Windows Server.	Major
3.1.5.2.1.3 GET ALL	Updated for this version of Windows Server.	Major
3.1.5.2.1.4 DELETE	Updated for this version of Windows Server.	Major
3.1.5.3 GatewayPools	8386 : Updated resource names GatewayPools and VirtualGateways.	Major
3.1.5.3.1.1 PUT	8386 : Updated resource name GatewayPools.	Major
3.1.5.3.1.1.1 Request Body	8386 : Updated resource name GatewayPools and publicIPAddresses.	Major
3.1.5.3.1.1.1 Request Body	Updated for this version of Windows Server.	Minor
3.1.5.3.1.2 GET	8386 : Updated resource name GatewayPools.	Major
3.1.5.3.1.2.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.3.1.3.2 Response Body	8386 : Updated resource names GatewayPools and VirtualGateways.	Major
3.1.5.3.1.3.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.3.1.4 DELETE	8386 : Updated resource name GatewayPools .	Major
3.1.5.3.1.4.3 Processing Details	8386 : Updated resource name GatewayPools .	Major
3.1.5.4 gateways	8386 : Updated resource names GatewayPools and VirtualGateways.	Major
3.1.5.4.1.2.2 Response Body	8386 : Updated resource names gateways and VirtualGateways.	Major
3.1.5.4.1.3 GET ALL	8386 : Updated resource name gateways.	Major
3.1.5.4.1.3.2 Response Body	8386 : Updated resource names gateways and VirtualGateways.	Major
3.1.5.5 loadBalancers	8386 : Updated resource name probes.	Major
3.1.5.5.1.1.1 Request Body	Updated for this version of Windows Server.	Minor
3.1.5.5.1.2.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.5.1.3.2 Response Body	Updated for this version of Windows Server.	Minor

Section	Description	Revision class
3.1.5.5.2 backendAddressPools	8386 : Updated resource names load Balancing MUX, ipConfigurations, backendAddressPools.	Major
3.1.5.5.2.1.1 PUT	8386 : Updated resource name backendAddressPools in code.	Major
3.1.5.5.3 frontendIPConfigurations	8386 : Updated resource names frontendIPConfigurations, privateIPAllocationMethod, publicIPaAddress, and privateIPAddresses.	Major
3.1.5.5.3.1.1 PUT	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.1.1 Request Body	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.1.2 Response Body	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.1.3 Processing Details	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.2 GET	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.2.2 Response Body	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.2.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.5.3.1.2.3 Processing Details	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.3 GET ALL	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.3.2 Response Body	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.3.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.5.3.1.3.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.5.3.1.3.3 Processing Details	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.4 DELETE	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.3.1.4.3 Processing Details	8386 : Updated resource name frontendIPConfigurations.	Major
3.1.5.5.4 inboundNatRules	8386 : Updated resource name backendAddressPools.	Major
3.1.5.5.5 loadBalancingRules	8386 : Updated resource names backendAddressPools, loadbBalancers.	Major
3.1.5.5.6 outboundNatRules	8386 : Updated resource names frontendIPpConfigurations and backendAddressPools.	Major
3.1.5.6 loadBalancerManager	8389 : Updated descriptons for loadBalancerManagerIPAddress, vipIpPools, and ipPools.	Major
3.1.5.6.1.1.1 Request Body	Updated for this version of Windows Server.	Minor
3.1.5.6.1.2.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.7 loadBalancerMuxes	Updated resource name from loadBalancerMux to loadBalancerMuxes for this version of Windows Server.	Major

Section	Description	Revision class
3.1.5.7 loadBalancerMuxes	Updated for this version of Windows Server.	Minor
3.1.5.7.1.1.1 Request Body	Updated resource name from loadBalancerMux to loadBalancerMuxes and updated code snippet for this version of Windows Server.	Major
3.1.5.7.1.1.2 Response Body	Updated resource name from loadBalancerMux to loadBalancerMuxes for this version of Windows Server.	Major
3.1.5.7.1.1.3 Processing Details	Updated resource name from loadBalancerMux to loadBalancerMuxes for this version of Windows Server.	Major
3.1.5.7.1.2 GET	Updated resource name from loadBalancerMux to loadBalancerMuxes for this version of Windows Server.	Major
3.1.5.7.1.2.3 Processing Details	Updated resource name from loadBalancerMux to loadBalancerMuxes for this version of Windows Server.	Major
3.1.5.7.1.3 GET ALL	Updated resource name from loadBalancerMux to loadBalancerMuxes for this version of Windows Server.	Major
3.1.5.7.1.3.2 Response Body	Updated resource name from loadBalancerMux to loadBalancerMuxes for this version of Windows Server.	Major
3.1.5.7.1.3.3 Processing Details	Updated resource name from loadBalancerMux to loadBalancerMuxes for this version of Windows Server.	Major
3.1.5.7.1.4 DELETE	Updated resource name from loadBalancerMux to loadBalancerMuxes for this version of Windows Server.	Major
3.1.5.7.1.4.3 Processing Details	Updated resource name from loadBalancerMux to loadBalancerMuxes for this version of Windows Server.	Major
3.1.5.8 logicalNetworks	Updated for this version of Windows Server.	Minor
3.1.5.8.1.1.1 Request Body	8386 : Updated resource name GatewayPools.	Major
3.1.5.8.1.1.1 Request Body	8393 : Updated resource name vlanId.	Major
3.1.5.8.1.2.2 Response Body	8386 : Updated resource name GatewayPools.	Major
3.1.5.8.1.2.2 Response Body	8393 : Updated resource name vlanId.	Major
3.1.5.8.1.2.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.8.1.3.2 Response Body	8386 : Updated resource name GatewayPools.	Major
3.1.5.8.1.3.2 Response Body	8393 : Updated resource name vlanId.	Major
3.1.5.8.1.3.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.8.2 subnets	8393 : Updated resource name vlanId.	Major
3.1.5.8.2 subnets	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1 PUT	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1.1 Request Body	8393 : Updated resource name vlanId.	Major
3.1.5.8.2.1.1.1 Request Body	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1.2 Response Body	Updated for this version of Windows Server.	Major

Section	Description	Revision class
3.1.5.8.2.1.1.3 Processing Details	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1.2 GET	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1.2.2 Response Body	8393 : Updated resource name vlanId.	Major
3.1.5.8.2.1.1.2.2 Response Body	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1.2.3 Processing Details	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1.3 GET ALL	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1.3.2 Response Body	8393 : Updated resource name vlanId.	Major
3.1.5.8.2.1.1.3.2 Response Body	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1.3.3 Processing Details	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1.4 DELETE	Updated for this version of Windows Server.	Major
3.1.5.8.2.1.1.4.3 Processing Details	Updated for this version of Windows Server.	Major
3.1.5.8.2.2 ipPools	8386 : Updated resource names grandParentResourceId, subnets, startIpAddress, endIpAddress.	Major
3.1.5.8.2.2.1.1 PUT	8386 : Updated resource names grandParentResourceId and subnets	Major
3.1.5.8.2.2.1.2 GET	8386 : Updated resource names logicalNetworks, grandParentResourceId, and subnets.	Major
3.1.5.8.2.2.1.2 GET	Updated for this version of Windows Server.	Major
3.1.5.8.2.2.1.2.2 Response Body	8386 : Updated resource name logicalNetworks.	Major
3.1.5.8.2.2.1.3 GET ALL	8386 : Updated resource names logicalNetworks, grandParentResourceId, subnets, and parentResourceId.	Major
3.1.5.8.2.2.1.3.2 Response Body	8386 : Updated resource names logicalNetworks.	Major
3.1.5.8.2.2.1.4 DELETE	8386 : Updated resource names logicalNetworks, grandParentResourceId, subnets, and parentResourceId.	Major
3.1.5.8.2.3 routes	8386 : Updated resource names grandParentResourceId and subnets.	Major
3.1.5.8.2.3.1.1 PUT	8386 : Updated resource names grandParentResourceId and subnets.	Major
3.1.5.8.2.3.1.2 GET	8386 : Updated resource names grandParentResourceId and subnets.	Major
3.1.5.8.2.3.1.2.2 Response Body	8386 : Updated resource name logicalNetworks.	Major
3.1.5.8.2.3.1.3 GET ALL	8386 : Updated resource names grandParentResourceId and	Major

Section	Description	Revision class
	subnets.	
3.1.5.8.2.3.1.3.2 Response Body	8386 : Updated resource name logicalNetworks.	Major
3.1.5.8.2.3.1.4 DELETE	8386 : Updated resource names grandParentResourceId and subnets.	Major
3.1.5.9 macPools	Updated for this version of Windows Server.	Major
3.1.5.10.2.1.4 DELETE	Updated for this version of Windows Server.	Major
3.1.5.11.2 ipConfigurations	8386 : Updated resource names publicIPAddress, serviceInsertions, and subnets.	Major
3.1.5.12 operations	8386 : Updated Azure-AsyncOperation header name.	Major
3.1.5.13 operationResults	8386 : Updated resource name Location header.	Major
3.1.5.14 publicIPAddresses	8386 : Updated resource names publicIPAddresses, VirtualGateways, publicIPAllocationMethod, and load Balancer.	Major
3.1.5.14.1.1 PUT	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.14.1.1.1 Request Body	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.14.1.1.2 Response Body	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.14.1.1.3 Processing Details	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.14.1.2 GET	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.14.1.2.2 Response Body	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.14.1.3 GET ALL	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.14.1.3.2 Response Body	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.14.1.3.3 Processing Details	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.14.1.4 DELETE	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.14.1.4.3 Processing Details	8386 : Updated resource name publicIPAddresses.	Major
3.1.5.15 servers	Updated for this version of Windows Server.	Minor
3.1.5.15.1.1 PUT	8386 : Updated resource name servers.	Major
3.1.5.15.1.1.1 Request Body	8386 : Updated resource name servers.	Major
3.1.5.15.1.1.1 Request Body	Updated for this version of Windows Server.	Minor
3.1.5.15.1.1.2 Response Body	8386 : Updated resource name servers.	Major
3.1.5.15.1.1.3 Processing Details	8386 : Updated resource name servers.	Major
3.1.5.15.1.2 GET	8386 : Updated resource name servers.	Major

Section	Description	Revision class
3.1.5.15.1.3 GET ALL	8386 : Updated resource name servers.	Major
3.1.5.15.1.4 DELETE	8386 : Updated resource name servers.	Major
3.1.5.15.1.4.3 Processing Details	8386 : Updated resource name servers.	Major
3.1.5.15.2 networkInterfaces	8393 : Removed IpConfiguration.vlans	Major
3.1.5.15.2 networkInterfaces	Updated for this version of Windows Server.	Major
3.1.5.15.2.1.1.1 Request Body	Updated for this version of Windows Server.	Minor
3.1.5.15.2.1.2.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.15.2.1.3.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.16 serviceInsertions	8393 : Updated resource name serviceInsertions.	Major
3.1.5.16 serviceInsertions	Updated for this version of Windows Server.	Major
3.1.5.17 VirtualGateways	8386 : Updated resource names VirtualGateways and GatewayPools.	Major
3.1.5.17.1.1 PUT	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.1.1.1 Request Body	8386 : Updated resource names VirtualGateways and GatewayPools.	Major
3.1.5.17.1.1.1 Request Body	Updated for this version of Windows Server.	Minor
3.1.5.17.1.1.2 Response Body	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.1.1.3 Processing Details	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.1.2 GET	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.1.2.2 Response Body	8386 : Updated resource names VirtualGateways and GatewayPools.	Major
3.1.5.17.1.2.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.17.1.2.3 Processing Details	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.1.3 GET ALL	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.1.3.2 Response Body	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.1.3.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.17.1.3.3 Processing Details	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.1.4 DELETE	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.1.4.3 Processing Details	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.2 bgpRouters	8386 : Updated resource names VirtualGateways and routerIPAddress.	Major

Section	Description	Revision class
3.1.5.17.2.1.1 PUT	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.2.1.2 GET	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.2.1.3 GET ALL	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.2.1.3.2 Response Body	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.2.1.4 DELETE	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.2.2.1.2 GET	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.2.2.1.3 GET ALL	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.2.2.1.4 DELETE	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.3 policyMaps	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.3.1.1 PUT	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.3.1.2 GET	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.3.1.3 GET ALL	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.3.1.4 DELETE	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.4 networkConnections	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.4.1.1 PUT	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.4.1.1.1 Request Body	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.4.1.2 GET	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.4.1.3 GET ALL	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.4.1.3.2 Response Body	8386 : Updated resource name VirtualGateways.	Major
3.1.5.17.4.1.4 DELETE	8386 : Updated resource name VirtualGateways.	Major
3.1.5.18 virtualNetworks	Updated for this version of Windows Server.	Major
3.1.5.18.1.1.1 Request Body	Updated for this version of Windows Server.	Minor
3.1.5.18.1.2.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.18.1.3.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.18.2 subnets	Updated for this version of Windows Server.	Major
3.1.5.18.2 subnets	Updated for this version of Windows Server.	Major
3.1.5.18.2.1.1 PUT	8386 : Updated resource name subnets.	Major
3.1.5.18.2.1.1 PUT	Updated for this version of Windows Server.	Major
3.1.5.18.2.1.1.3 Processing Details	8386 : Updated resource name subnets.	Major
3.1.5.18.2.1.2 GET	8386 : Updated resource name subnets.	Major
3.1.5.18.2.1.2 GET	Updated for this version of Windows Server.	Major

Section	Description	Revision class
3.1.5.18.2.1.2.2 Response Body	8386 : Updated resource name subnets.	Major
3.1.5.18.2.1.2.3 Processing Details	8386 : Updated resource name subnets.	Major
3.1.5.18.2.1.3 GET ALL	8386 : Updated resource name subnets.	Major
3.1.5.18.2.1.3 GET ALL	Updated for this version of Windows Server.	Major
3.1.5.18.2.1.4 DELETE	8386 : Updated resource name subnets.	Major
3.1.5.18.2.1.4 DELETE	Updated for this version of Windows Server.	Major
3.1.5.18.2.1.4.3 Processing Details	8386 : Updated resource name subnets.	Major
3.1.5.20 virtualServers	Updated for this version of Windows Server.	Major
3.1.5.21.1 Diagnostics ConnectivityCheck	8385 : Updated resource name operationId.	Major
3.1.5.21.2 Diagnostics ConnectivityCheckResults	8385 : Updated resource name operationId.	Major
3.1.5.21.3 Diagnostics SlbState	8385 : Updated resource name operationId.	Major
3.1.5.21.4 Diagnostics SlbStateResults	8385 : Updated resource name operationId.	Major
3.1.5.22 networkControllerStatistics	Updated resource name loadBalancerMuxes for this version of Windows Server.	Major
3.1.5.24 iDnsServer	8386 : Updated resource name etag.	Major
3.1.5.25 virtualSwitchManager	8386 : Updated resource name VirtualGateways.	Major
3.1.5.26.1.2.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.27.1.2.2 Response Body	Updated for this version of Windows Server.	Minor
3.1.5.28 SubnetEgressReset	Updated for this version of Windows Server.	Major
3.1.5.29 Response Content for Errors	Updated for this version of Windows Server.	Minor
6.5.5.1 PUT schema	8386 : Updated frontendIPConfigurations.	Minor
6.5.5.2 GET schema	8386 : Updated frontendIPConfigurations.	Minor
6.5.5.3 GET ALL schema	8386 : Updated frontendIPConfigurations.	Minor
6.8.2 GET schema	8386 : Updated resource name GatewayPools.	Major
6.8.3 GET ALL schema	8386 : Updated resource name GatewayPools.	Major
6.14.3 GET ALL schema	8386 : Updated resource name serviceInsertions.	Major
6.15.1 PUT schema	8386 : Updated resource name GatewayPools.	Major
6.15.2 GET schema	8386 : Updated resource name GatewayPools.	Major
6.15.3 GET ALL schema	8386 : Updated resource name GatewayPools.	Major

9 Index

A

- Abstract data model 53
- accessControlLists 58
- aclRules 79
- Applicability 35
- Asynchronous operations 26
 - operations and operationResults differences 29
 - POST and DELETE 28
 - properties.provisioningState 29
 - PUT 29
 - state diagram for asynchronous operations 30
 - state diagram for synchronous operations 30

B

- backendAddressPools 128
- bgpPeers 328
- bgpRouters 318

C

- Capability negotiation 36
- Change tracking 715
- Client-server interactions 25
 - eTag 25
 - idempotency 26
- Common data structures 44
- Common JSON elements 40
- Common URI parameters 41
 - grandParentResourceId 42
 - operationId 42
 - parentResourceId 42
 - resourceId 43
 - url 44
- Communication certificate - initialization 53
- Concurrent operations
 - on same resource 32
 - with dependent resources 34
- ConnectivityCheck - diagnostics 380
- ConnectivityCheckResults - diagnostics 383
- Content-Type header 37
- credentials 85

D

- Data model - abstract 53
- Data structures - common 44
- Diagnostics
 - ConnectivityCheck 380
 - ConnectivityCheckResults 383
 - NetworkControllerState 397
 - SlbState 389
 - SlbStateResults 390
- Diagrams
 - asynchronous (section 1.3.2 26, section 1.3.2.6 30)
 - Network Controller and industry standard protocols 35
 - synchronous (section 1.3.2.5 30, section 1.3.3.1 32)
- Differences between operations and operationResults 29

E

- Enumeration 53
- etag behavior examples 25
- Examples
 - Example of the JSON used to create a default ACL for both inbound and outbound example 425
 - macPools usage example 425

F

- Fields - vendor-extensible 36
- frontendIPConfigurations 133

G

- GatewayPools 90
- gateways 97
- Get All - response body pattern 53
- Glossary 21
- grandParentResourceId 42

H

- Higher-layer triggered events 53
- HTTP headers 37
 - Content-Type header 37
 - Request headers 37
 - Response headers 39

I

- Idempotency 26
- iDnsServer 403
- Implementer - security considerations 426
- inboundNatRules 139
- Index of security parameters 426
- Informative references 25
- Initialization 53
- internalResourceInstances 401
- Introduction 21
- IP Addresses - configurations 228
- IP configuration 58
- ipConfigurations 228

J

- JSON elements - Common 40
- JSON used to create a default ACL for both inbound and outbound example 425

L

- loadBalancerManager 160
- loadBalancerMuxes 163
- loadBalancers 113
 - backendAddressPools 128
 - frontendIPConfigurations 133
 - inboundNatRules 139
 - loadBalancingRules 145
 - logicalSubnets 178
 - outboundNatRules 150
 - probes 155
- loadBalancingRules 145
- Local events 424
- logicalNetworks 171
- logicalSubnets 178

M

- macPools
 - initialization 53
 - resource 193
- Message processing events 54
- Messages
 - transport 37
- monitoring/NetworkControllerStatistics 398

N

- Network Controller
 - dependent resources 34
 - error returned by 53
 - initialization 53
- networkConnections 343
- NetworkControllerState - diagnostics 397
- NetworkControllerStatistics 398
- networkInterfaces 208
- Normative references 24

O

- operationId 42
- operationResults 237
- Operations 235
 - asynchronous 26
 - concurrent on same resource 32
 - concurrent with dependent resources 34
 - Network Controller dependent resources - concurrent 34
 - synchronous 30
- outboundNatRules 150
- Overview (synopsis) 25

P

- Parameters - security index 426
- parentResourceId (section 2.2.3.3 42, section 2.2.3.4 43)
- policyMaps 337
- POST and DELETE operations 28
- Preconditions 35
- Prerequisites 35
- probes 155
- Product behavior 713
- properties.provisioningState usage 29
- Protocol Details
 - Server 53
- Protocol examples
 - Example of the JSON used to create a default ACL for both inbound and outbound 425
 - macPools usage 425
- publicIPAddresses 239
- PUT operation 29

R

- References
 - informative 25
 - normative 24
- Relationship to other protocols 35
- Request headers 37
- Resource
 - JSON array 53

- Resource code table 54
- Resource processing - resourceId omitted 54
- resourceId 43
- Response body - Get All format 53
- Response headers 39
- routes 203
- routeTables 198

S

- Security
 - implementer considerations 426
 - parameter index 426
- Sequencing rules 54
 - accessControlLists 58
 - credentials 85
 - Diagnostics
 - ConnectivityCheck 380
 - ConnectivityCheckResults 383
 - NetworkControllerState 397
 - SlbState 389
 - SlbStateResults 390
 - GatewayPools 90
 - gateways 97
 - iDnsServer 403
 - internalResourceInstances 401
 - loadBalancerManager 160
 - loadBalancerMuxes 163
 - loadBalancers 113
 - logicalNetworks 171
 - macPools 193
 - NetworkControllerStatistics 398
 - networkInterfaces 208
 - operationResults 237
 - operations 235
 - publicIPAddresses 239
 - routeTables 198
 - servers 245
 - serviceInsertions 257
 - VirtualGateways 265
 - virtualNetworkManager 371
 - virtualNetworks 355
 - virtualServers 374
 - virtualSwitchManager 406
- Server
 - Abstract data model 53
 - Higher-layer triggered events 53
 - Initialization 53
 - Message processing events and sequencing rules 54
 - Other local events 424
 - Timer events 424
 - Timers 53
 - servers 245
 - serviceInsertions 257
 - Singletons - enumeration 53
 - SlbState - diagnostics 389
 - SlbStateResults - diagnostics 390
 - Standards assignments 36
 - State diagrams for asynchronous operations 30
 - State diagrams for synchronous operations 30
 - Status code
 - definition source 53
 - table 54
 - subnets 365

T

Timer events 424
Timers 53
Tracking changes 715
Transport 37
Triggered events - higher-layer 53

U

URI parameters - common 41

V

Vendor-extensible fields 36
Versioning 36
Virtual subnets 58
VirtualGateways 265
virtualNetworkManager 371
virtualNetworks 355
virtualServers 374
virtualSwitchManager 406