

# [MS-RDWR]:

## Remote Desktop Workspace Runtime Protocol

---

### Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
12/16/2011	1.0	New	Released new document.
3/30/2012	1.0	None	No changes to the meaning, language, or formatting of the technical content.
7/12/2012	1.0	None	Significantly changed the technical content.
10/25/2012	1.0	None	No changes to the meaning, language, or formatting of the technical content.
1/31/2013	1.0	None	No changes to the meaning, language, or formatting of the technical content.
8/8/2013	1.0	None	No changes to the meaning, language, or formatting of the technical content.
11/14/2013	1.0	None	No changes to the meaning, language, or formatting of the technical content.
2/13/2014	1.0	None	No changes to the meaning, language, or formatting of the technical content.
5/15/2014	1.0	None	No changes to the meaning, language, or formatting of the technical content.
6/30/2015	2.0	Major	Significantly changed the technical content.
10/16/2015	2.0	No Change	No changes to the meaning, language, or formatting of the technical content.

# Table of Contents

<b>1</b>	<b>Introduction .....</b>	<b>5</b>
1.1	Glossary .....	5
1.2	References .....	6
1.2.1	Normative References .....	6
1.2.2	Informative References .....	7
1.3	Overview .....	7
1.4	Relationship to Other Protocols .....	7
1.5	Prerequisites/Preconditions .....	7
1.6	Applicability Statement .....	8
1.7	Versioning and Capability Negotiation .....	8
1.8	Vendor-Extensible Fields .....	8
1.9	Standards Assignments.....	8
<b>2</b>	<b>Messages.....</b>	<b>9</b>
2.1	Transport .....	9
2.2	Common Message Syntax .....	9
2.2.1	Namespaces .....	9
2.2.2	Messages.....	9
2.2.3	Elements .....	9
2.2.4	Complex Types.....	9
2.2.5	Simple Types .....	9
2.2.6	Attributes .....	9
2.2.7	Groups .....	10
2.2.8	Attribute Groups.....	10
2.2.9	Common Data Structures .....	10
<b>3</b>	<b>Protocol Details .....</b>	<b>11</b>
3.1	RDWebServiceSoap Server Details .....	11
3.1.1	Abstract Data Model.....	11
3.1.2	Timers .....	11
3.1.3	Initialization.....	11
3.1.4	Message Processing Events and Sequencing Rules .....	11
3.1.4.1	GetRDPFiles .....	11
3.1.4.1.1	Messages .....	11
3.1.4.1.1.1	RDWebService_GetRDPFiles_InputMessage Message .....	12
3.1.4.1.1.2	RDWebService_GetRDPFiles_OutputMessage Message .....	12
3.1.4.1.2	Elements.....	12
3.1.4.1.2.1	GetRDPFiles .....	13
3.1.4.1.2.2	GetRDPFilesResponse .....	13
3.1.4.1.3	Complex Types .....	13
3.1.4.1.3.1	ArrayOfReconnectContent .....	13
3.1.4.1.3.2	ReconnectContent.....	14
3.1.4.1.3.3	ReconnectContents .....	14
3.1.4.1.4	Simple Types .....	14
3.1.4.1.4.1	ReconnectContentType .....	14
3.1.5	Timer Events.....	15
3.1.6	Other Local Events.....	15
3.2	RDWebServiceSoap Client Details.....	15
3.2.1	Abstract Data Model.....	15
3.2.2	Timers .....	15
3.2.3	Initialization.....	15
3.2.4	Message Processing Events and Sequencing Rules .....	15
3.2.5	Timer Events.....	15
3.2.6	Other Local Events.....	16

<b>4</b>	<b>Protocol Examples</b> .....	<b>17</b>
4.1	An HTTP post request for data from the web service .....	17
4.2	A sample of the resources returned .....	17
<b>5</b>	<b>Security</b> .....	<b>24</b>
5.1	Security Considerations for Implementers .....	24
5.2	Index of Security Parameters .....	24
<b>6</b>	<b>Appendix A: Full WSDL</b> .....	<b>25</b>
<b>7</b>	<b>Appendix B: Product Behavior</b> .....	<b>27</b>
<b>8</b>	<b>Change Tracking</b> .....	<b>28</b>
<b>9</b>	<b>Index</b> .....	<b>29</b>

# 1 Introduction

The Remote Desktop Workspace Runtime Protocol is a Web service-based protocol used to remotely retrieve the contents of the Remote Desktop Protocol (RDP) file that is associated to a user's remote desktop or application-sharing session on a remote computer.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are specific to this document:

**Hypertext Transfer Protocol Secure (HTTPS)**: An extension of HTTP that securely encrypts and decrypts web page requests. In some older protocols, "Hypertext Transfer Protocol over Secure Sockets Layer" is still used (Secure Sockets Layer has been deprecated). For more information, see [\[SSL3\]](#) and [\[RFC5246\]](#).

**remote application**: An application running on a remote server.

**Remote Desktop Protocol (RDP)**: A multi-channel protocol that allows a user to connect to a computer running Microsoft Terminal Services (TS). RDP enables the exchange of client and server settings and also enables negotiation of common settings to use for the duration of the connection, so that input, graphics, and other data can be exchanged and processed between client and server.

**SOAP**: A lightweight protocol for exchanging structured information in a decentralized, distributed environment. **SOAP** uses **XML** technologies to define an extensible messaging framework, which provides a message construct that can be exchanged over a variety of underlying protocols. The framework has been designed to be independent of any particular programming model and other implementation-specific semantics. SOAP 1.2 supersedes SOAP 1.1. See [\[SOAP1.2-1/2003\]](#).

**SOAP action**: The HTTP request header field used to indicate the intent of the **SOAP** request, using a **URI** value. See [\[SOAP1.1\]](#) section 6.1.1 for more information.

**SOAP body**: A container for the payload data being delivered by a **SOAP message** to its recipient. See [\[SOAP1.2-1/2007\]](#) section 5.3 for more information.

**SOAP message**: An **XML** document consisting of a mandatory SOAP envelope, an optional SOAP header, and a mandatory **SOAP body**. See [\[SOAP1.2-1/2007\]](#) section 5 for more information.

**terminal services (TS)**: A service on a server computer that allows delivery of applications, or the desktop itself, to various computing devices. When a user runs an application on a terminal server, the application execution takes place on the server computer and only keyboard, mouse, and display information is transmitted over the network. Each user sees only his or her individual session, which is managed transparently by the server operating system and is independent of any other client session.

**Uniform Resource Identifier (URI)**: A string that identifies a resource. The URI is an addressing mechanism defined in Internet Engineering Task Force (IETF) Uniform Resource Identifier (URI): Generic Syntax [\[RFC3986\]](#).

**Uniform Resource Locator (URL)**: A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [\[RFC1738\]](#).

**WSDL message:** An abstract, typed definition of the data that is communicated during a **WSDL operation** [WSDL]. Also, an element that describes the data being exchanged between web service providers and clients.

**WSDL operation:** A single action or function of a web service. The execution of a WSDL operation typically requires the exchange of messages between the service requestor and the service provider.

**XML:** The Extensible Markup Language, as described in [XML1.0].

**XML namespace:** A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [RFC3986]. A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [XMLNS-2ED].

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as defined in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information.

[MS-TSWP] Microsoft Corporation, "[Terminal Services Workspace Provisioning Protocol](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[SOAP1.2-1/2003] Gudgin, M., Hadley, M., Mendelsohn, N., et al., "SOAP Version 1.2 Part 1: Messaging Framework", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part1-20030624>

[SOAP1.2-2/2003] Gudgin, M., Hadley, M., Mendelsohn, N., et al., "SOAP Version 1.2 Part 2: Adjuncts", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part2-20030624>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS-2ED] World Wide Web Consortium, "Namespaces in XML 1.0 (Second Edition)", August 2006, <http://www.w3.org/TR/2006/REC-xml-names-20060816/>

[XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

### 1.2.2 Informative References

[MS-RDPBCGR] Microsoft Corporation, "[Remote Desktop Protocol: Basic Connectivity and Graphics Remoting](#)".

[MSDN-TSCCRDP] Microsoft Corporation, "Terminal Services Client Configuration through the .rdp File", <http://msdn.microsoft.com/en-us/library/aa915001.aspx>


### 1.3 Overview

The Remote Desktop Workspace Runtime Protocol retrieves **Remote Desktop Protocol (RDP)** files, as described in [\[MSDN-TSCCRDP\]](#), that are required to reestablish connections to a user's session(s) on a remote server(s). The protocol returns the number of resources that corresponds to the number of connected and disconnected sessions the user has in the deployment. In addition, the type of session (desktop, remote application, or virtual machine (VM)) and the RDP file for reconnecting are returned. In order to reconnect the sessions, the presence of the **Terminal Services** client is required to launch the application, and the Terminal Services client will use the RDP protocol [\[MS-RDPBCGR\]](#) to connect.

### 1.4 Relationship to Other Protocols

The Remote Desktop Workspace Runtime Protocol uses **SOAP** over **Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**, as specified in [\[RFC2818\]](#).

The following diagram illustrates the layering of the protocol stack.

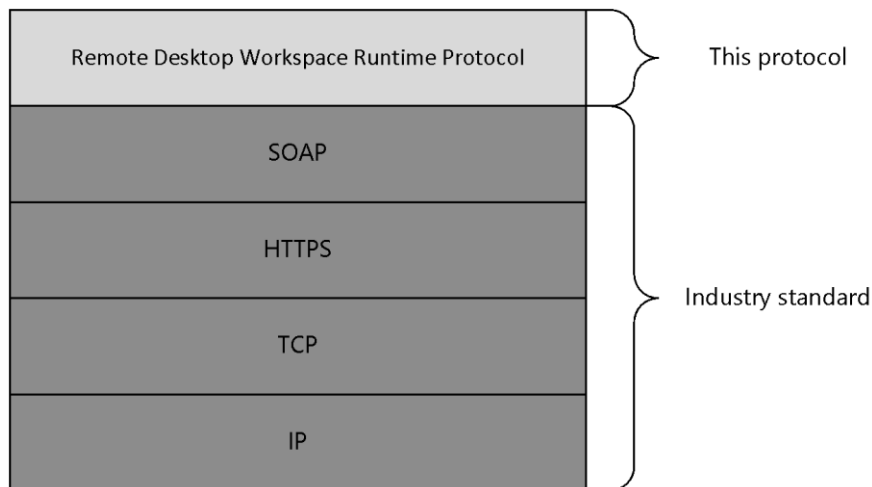

**Figure 1: Protocol Stack**

### 1.5 Prerequisites/Preconditions

The following are prerequisites for the operation of the Remote Desktop Workspace Runtime Protocol:

- The Remote Desktop Workspace Runtime Protocol does not provide a mechanism for a client to discover the **Uniform Resource Locator (URL)** to the server; consequently, the client requires a valid URL to the server.

- The client machine has the necessary applications to launch any of the Remote Desktop Protocol (RDP) configuration files [\[MSDN-TSCCRDP\]](#) returned by the protocol. For example, the Terminal Services client is required to launch the application or desktop and will use the RDP protocol [\[MS-RDPBCGR\]](#) to connect.
- Both client and server implementations of the Remote Desktop Workspace Runtime Protocol are present and running.
- The Remote Desktop Workspace Runtime Protocol uses the authentication model based on [\[MS-TSWP\]](#). For example, the re-use of the authentication cookie negotiated prior to this protocol starting, as described in [\[MS-TSWP\]](#) section 3.1.1.1.

## 1.6 Applicability Statement

The use of the Remote Desktop Workspace Runtime Protocol is appropriate when the client requires the resource files required to reconnect to the user's remotely connected sessions. These resources represent the remote applications and or desktops that are associated to the user, in the form of RDP file contents.

## 1.7 Versioning and Capability Negotiation

The Remote Desktop Workspace Runtime Protocol defines a version field to facilitate the process of identifying the protocol version.

## 1.8 Vendor-Extensible Fields

The Remote Desktop Workspace Runtime Protocol does not define any vendor-extensible fields.

## 1.9 Standards Assignments

**XML namespaces** used by SOAP-based protocols are listed in section [2.2.1](#).



## 2 Messages

### 2.1 Transport

The Remote Desktop Workspace Runtime Protocol uses SOAP over HTTPS for communication. The Remote Desktop Workspace Runtime Protocol is used as the transport to provide access to the user's RDP file contents that are associated with their active **remote application** sessions and/or remote desktop sessions.

### 2.2 Common Message Syntax

This section contains common definitions used by this protocol. The syntax of the definitions uses XML Schema, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and Web Services Description Language, as defined in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This specification defines and references various XML namespaces using the mechanisms specified in [\[XMLNS-2ED\]](#). Although this specification associates a specific XML namespace prefix for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	NameSpaces URI	Reference
soap	<a href="http://schemas.xmlsoap.org/wsdl/soap/">http://schemas.xmlsoap.org/wsdl/soap/</a>	<a href="#">[SOAP1.1]</a>
xsd	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA1]</a> , <a href="#">[XMLSCHEMA2]</a>
soap12	<a href="http://schemas.xmlsoap.org/wsdl/soap12/">http://schemas.xmlsoap.org/wsdl/soap12/</a>	<a href="#">[SOAP1.2-1/2003]</a> , <a href="#">[SOAP1.2-2/2003]</a>
tns	<a href="http://schemas.microsoft.com/ts/2010/09/rdweb">http://schemas.microsoft.com/ts/2010/09/rdweb</a>	
wsaw	<a href="http://www.w3.org/2006/05/addressing/wsdl">http://www.w3.org/2006/05/addressing/wsdl</a>	
wsdl	<a href="http://schemas.xmlsoap.org/wsdl/">http://schemas.xmlsoap.org/wsdl/</a>	<a href="#">[WSDL]</a>

#### 2.2.2 Messages

This specification does not define any common XML schema message definitions.

#### 2.2.3 Elements

This specification does not define any common XML schema element definitions.

#### 2.2.4 Complex Types

This specification does not define any common XML schema complex type definitions.

#### 2.2.5 Simple Types

This specification does not define any common XML schema simple type definitions.

#### 2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

### **2.2.7 Groups**

This specification does not define any common XML schema group definitions.

### **2.2.8 Attribute Groups**

This specification does not define any common XML schema attribute group definitions.

### **2.2.9 Common Data Structures**

This specification does not define any common XML schema data structures.

## 3 Protocol Details

### 3.1 RDWebServiceSoap Server Details

The following sections describe the behavior of the Remote Desktop Workspace Runtime Protocol. This protocol follows a client-server model, whereby a client sends a **SOAP message** that contains a request (a GetRDPFiles operation) to the server, and the server responds with a SOAP message that contains the response.

The following sections describe the behavior of the Remote Desktop Workspace Runtime Protocol.

#### 3.1.1 Abstract Data Model

None.

#### 3.1.2 Timers

None.

#### 3.1.3 Initialization

When this protocol initializes, it **MUST** begin listening for SOAP requests using the standard SOAP protocol and ports.

#### 3.1.4 Message Processing Events and Sequencing Rules

This specification includes the following **WSDL operations**.

WSDL Operation	Description
GetRDPFiles	Retrieves an array of resources.

##### 3.1.4.1 GetRDPFiles

A server processes a GetRDPFiles request using the Remote Desktop Workspace Runtime Protocol upon receiving a SOAP message that contains the specified **Uniform Resource Identifier (URI)** as the **SOAP action**:

```
soapAction="http://schemas.microsoft.com/ts/2010/09/rdweb/GetRDPFiles"
```

This operation is specified by the following WSDL.

```
<wsdl:operation name="GetRDPFiles">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/ts/2010/09/rdweb/GetRDPFiles"
name="RDWebService_GetRDPFiles_InputMessage"
message="tns:RDWebService_GetRDPFiles_InputMessage"/>
  <wsdl:output wsaw:Action="http://schemas.microsoft.com/ts/2010/09/rdweb/GetRDPFiles"
name="RDWebService_GetRDPFiles_OutputMessage"
message="tns:RDWebService_GetRDPFiles_OutputMessage"/>
</wsdl:operation>
```

##### 3.1.4.1.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
RDWebService_GetRDPFiles_InputMessage	Contains a GetRDPFiles element. A message MUST NOT contain anything in the <b>SOAP body</b> .
RDWebService_GetRDPFiles_OutputMessage	The response to a GetRDPFilesSoapIn message, which contains a GetRDPFilesResponse element. A message that either MUST NOT contain anything if no resources are available to connect to or MUST contain resource-specific <b>XML</b> in the SOAP body for resources to connect to.

### 3.1.4.1.1.1 RDWebService\_GetRDPFiles\_InputMessage Message

A WSDL message containing the request for **GetRDPFiles** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/ts/2010/09/rdweb/GetRDPFiles
```

The SOAP body contains **GetRDPFiles** element.

```
<wsdl:message name="RDWebService_GetRDPFiles_InputMessage">
  <wsdl:part name="GetRDPFiles" element="tns:GetRDPFiles"/>
</wsdl:message>
```

The GetRDPFilesSoapIn message contains a GetRDPFiles element, as specified in section [3.1.4.1.2.1](#).

### 3.1.4.1.1.2 RDWebService\_GetRDPFiles\_OutputMessage Message

A WSDL message containing the response for **GetRDPFiles** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/ts/2010/09/rdweb/GetRDPFiles
```

The SOAP body contains **GetRDPFilesResponse** element.

```
<wsdl:message name="RDWebService_GetRDPFiles_OutputMessage">
  <wsdl:part name="GetRDPFilesResponse" element="tns:GetRDPFilesResponse"/>
</wsdl:message>
```

The GetRDPFilesSoapOut message contains a GetRDPFileResponse element in response to a GetRDPFilesSoapIn message. The GetRDPFileResponse element is specified in section [3.1.4.1.2.2](#).

### 3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetRDPFiles	Forms the body of GetRDPFiles request. An empty type that is used when making the request for RDP files.
GetRDPFilesResponse	Contains the response to a GetRDPFiles request. The overall container that defines the protocol configuration.

### 3.1.4.1.2.1 GetRDPFiles

The GetRDPFiles element forms the body of the request. This element contains no child elements and conveys no information.

```
<xsd:element name="GetRDPFiles" nillable="true">
  <xsd:complexType/>
</xsd:element>
```

### 3.1.4.1.2.2 GetRDPFilesResponse

The GetRDPFilesResponse contains the response to a GetRDPFiles request.

```
<xsd:element name="GetRDPFilesResponse" nillable="true">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element minOccurs="1" maxOccurs="1" name="GetRDPFilesResult" nillable="true"
type="tns:ReconnectContents"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

#### GetRDPFilesResult:

GetRDPFilesResult is a complex type that contains a container called ReconnectContents types. The ReconnectContents container is described in section [3.1.4.1.3.3](#). GetRDPFilesResult contains the complex data type ReconnectContents.

The GetRDPFileResponse MUST contain at least one GetRDPFilesResult.

### 3.1.4.1.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

ComplexType	Description
ArrayOfReconnectContent	The container for the ReconnectContent complex type.
ReconnectContent	Used to contain the remote desktop file stream and type of resource defined.
ReconnectContents	The container that defines the version and array of contents received by the web server.

#### 3.1.4.1.3.1 ArrayOfReconnectContent

ArrayOfReconnectContent is a complex type that specifies the collection of ReconnectContent types, as specified in section [3.1.4.1.3.2](#).

**Namespace:** <http://schemas.microsoft.com/ts/2010/09/rdweb>

```
<xsd:complexType name="ArrayOfReconnectContent">
  <xsd:sequence>
    <xsd:element minOccurs="0" maxOccurs="unbounded" name="ReconnectContent" nillable="true"
type="tns:ReconnectContent"/>
  </xsd:sequence>
</xsd:complexType>
```

**ReconnectContent:** A collection of ReconnectContent types.

### 3.1.4.1.3.2 ReconnectContent

ReconnectContent has a string element that contains the RDP file stream, and a simple type called ReconnectContentType that is used to specify the type of RDP file stream. ReconnectContentType is specified in section [3.1.4.1.4.1](#). The RDP file stream consists of RDP files as described in [\[MSDN-TSCCRDP\]](#).

**Namespace:** http://schemas.microsoft.com/ts/2010/09/rdweb

```
<xsd:complexType name="ReconnectContent">
  <xsd:sequence>
    <xsd:element minOccurs="0" maxOccurs="1" name="rdpStream" nillable="true"
type="xsd:string"/>
    <xsd:element minOccurs="1" maxOccurs="1" name="rct" type="tns:ReconnectContentType"/>
  </xsd:sequence>
</xsd:complexType>
```

**rct:** ReconnectContentType is specified in section 3.1.4.1.4.1.

**rdpStream:** A file stream that consists of RDP files as described in [\[MSDN-TSCCRDP\]](#).

### 3.1.4.1.3.3 ReconnectContents

The ReconnectContents type has a version string element and either zero or one type of ArrayOfReconnectContent type. The ArrayOfReconnectContent type is specified in section [3.1.4.1.3.1](#).

**Namespace:** http://schemas.microsoft.com/ts/2010/09/rdweb

```
<xsd:complexType name="ReconnectContents">
  <xsd:sequence>
    <xsd:element minOccurs="0" maxOccurs="1" name="version" nillable="true"
type="xsd:string"/>
    <xsd:element minOccurs="0" maxOccurs="1" name="wkspRC" nillable="true"
type="tns:ArrayOfReconnectContent"/>
  </xsd:sequence>
</xsd:complexType>
```

**version:** A complex type that contains a string to represent versioning of the Remote Desktop Workspace Runtime protocol. A value should be defined in this operation when it is implemented.

**wkspRC:** An element of type ArrayOfReconnectContent.

### 3.1.4.1.4 Simple Types

The following table shows the Simple types included in the operation.

SimpleType	Description
ReconnectContentType	An enumerated type to indicate whether the user's resource is remote desktop, remote application, or virtual machine-based.

#### 3.1.4.1.4.1 ReconnectContentType

The valid values for this enumeration are "REMOTEDESKTOP", "VMREMOTEDESKTOP", or "REMOTEAPPLICATION".

**Namespace:** http://schemas.microsoft.com/ts/2010/09/rdweb

```
<xsd:simpleType name="ReconnectContentType">  
  <xsd:restriction base="xsd:string">  
    <xsd:enumeration value="REMOTEDESKTOP"/>  
    <xsd:enumeration value="VMREMOTEDESKTOP"/>  
    <xsd:enumeration value="REMOTEAPPLICATION"/>  
  </xsd:restriction>  
</xsd:simpleType>
```

The following table specifies the allowable values for **ReconnectContentType**.

Value	Meaning
REMOTEDESKTOP	Specifies a session type of remote desktop.
VMREMOTEDESKTOP	Specifies a session type of virtual machine.
REMOTEAPPLICATION	Specifies a session type of remote application.

### 3.1.5 Timer Events

None.

### 3.1.6 Other Local Events

None.

## 3.2 RDWebServiceSoap Client Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

### 3.2.1 Abstract Data Model

None.

### 3.2.2 Timers

None.

### 3.2.3 Initialization

None.

### 3.2.4 Message Processing Events and Sequencing Rules

None.

### 3.2.5 Timer Events

None.

### **3.2.6 Other Local Events**

None.



## 4 Protocol Examples

### 4.1 An HTTP post request for data from the web service

The following is a request and response operation for RDP files resources.

```
POST /RDWeb/myWeb/rdwebservice.asmx HTTP/1.1
Host: localhost
Content-Type: text/xml; charset=utf-8
Content-Length: length
SOAPAction: "http://schemas.microsoft.com/ts/2010/09/rdweb/GetRDPFiles"

<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <GetRDPFiles xmlns="http://schemas.microsoft.com/ts/2010/09/rdweb" />
  </soap:Body>
</soap:Envelope>
HTTP/1.1 200 OK
Content-Type: text/xml; charset=utf-8
Content-Length: length

<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <GetRDPFilesResponse xmlns="http://schemas.microsoft.com/ts/2010/09/rdweb">
      <GetRDPFilesResult>
        <version>string</version>
        <wkspRC>
          <ReconnectContent>
            <rdpStream>string</rdpStream>
            <rct>REMOTEAPPLICATION or REMOTEDESKTOP or VMREMOTEDESKTOP</rct>
          </ReconnectContent>
          <ReconnectContent>
            <rdpStream>string</rdpStream>
            <rct>REMOTEAPPLICATION or REMOTEDESKTOP or VMREMOTEDESKTOP</rct>
          </ReconnectContent>
        </wkspRC>
      </GetRDPFilesResult>
    </GetRDPFilesResponse>
  </soap:Body>
</soap:Envelope>
```

### 4.2 A sample of the resources returned

The request in section [4.1](#) is made and the return is an xml payload consisting of three resources (RDP file streams) that are associated to the user's remote desktop session, remote application session, or virtual machine.

```
<?xml version="1.0" encoding="UTF-8"?>
<ReconnectContents xmlns="http://schemas.microsoft.com/ts/2010/09/rdweb"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <version>8.0</version>
  <wkspRC>
    <ReconnectContent>
      <rdpStream>redirectclipboard:i:0 redirectprinters:i:0 redirectcomports:i:1
redirectsmartcards:i:0 devicestoredirect:s: drivestoredirect:s:* redirectdrives:i:1 session
```



AvA1BR8GgZ6/snLurFl8bX0w0c5om/bQ51E0t6wPgjlitP41zokkwc9xubTgBb81  
jp0+J1SgyszJoD1qfRsteafy/MImLVNVfoSHn35Gos9wmZQIDAQABO4IF1DCCBdAw  
IwYDVR0fBBwwGjAYoBoGeyYpZmlsZTovL3Rlc3QuY3JsgQEAMAwGA1UdEwQFMAMC  
AQAwwCwYDVR0PBAQDAgQCMBMGA1UdJQMMMAoGCCsGAQUFBwMBMGA1UdJQMMMAoG  
CCsGAQUFBwMDMDUGA1UdBwQumCyCK1JEVki5LTEwMTE4NC5yZHZ0ZWFTLnN0YnRl  
c3QubWljcm9zb2Z0LmNvbTA1BgNVHREELjAsGipSRFZCOS0xMDExODQucmR2dGVh  
bS5zdGJ0ZXN0Lm1pY3Jvc29mdC5jb20wggtTBG8rBgEEAYI3E4LfZ4ajUwEEggS+  
MIIEugQIU1NMVGVzdAAEBNzhbG1kAAIBBAIBAQQITgBVAEwATAAEggSUBwIAAACk  
AABSU0EYAAgAAEAQAQ1Jtyzjphf5yGhX9Vui4kwv/xpXstGnloPaDKzoFQnPP2O  
Nb8F4LS5cc9zJInOnF60YjmCD6y3NFHn0PabaM7RMH1tffms7nKyv56BBh8FJfAC  
R9tpworABC5nhlMoHyqj+zeJpy606190LcymOxEUC/DNVBezgmPuxXLaNjbiMUpo  
ELpFlU2Lns3190876y+vh0+1zJgVvvpnlCn69POkq7yptIVJcD4yrTkhhLiVLN5O  
F73ScmIThN+AIv1XwFaWbhaqM3bEOc2ZNZBgg+0y6kDEwM+fRL/i6qnn8OBcBltm  
+ZykuNzpyY9VELiLiLxPn9e3dsyYjBmNlPwqPnOOGe7R0OUsrYkiqVvNWDi+4qbf  
rYkWGAnN3qxUeBnrigL0948NHP6qHJuqiulfz4yU/tbh1DLKJ0u2UziMhI5m66j  
LI2UU2b4x9LopuVcno8cVtWtmw7BCRJZs03/VO751yAtDHc+QLQ39rp846nE50+u  
JvZW6BU6/hY1IZT+gtCnWmT+Ixur1/r++4OOSgMiAtJR9liFdsoEN6LJwGzx+wFy  
Tt7P1OdJeLSiVlr+6CUodaAFs+tfGDtOsjdsuT9wFRm8i83EXTu7xFwhGJZKGSU  
vl6waYIsJZs+QZx/plWtUNGMi3jyEvl6qGeloYpjmseTy0V86grxFyKZIAuIxeul  
EvAm6b1qD/btMOYMFZ8RNk7in8Oj1BfZyO0f5kMvgBASipOvxGMcpnOmBsxKVpb8  
ZBI+K7Ewdkjq+W9Viatq0/6Qj9rVu5I5aWAPUoyxy3IF1E3yRs4pvPmNZzxpEh1/  
dG19wlebHQY3c2lNmD4aMBiJNcgnsdnDm9ZhWUX1sMQKQwqvG7g4YGBWwG+8Zjv  
leZrC7sDvNp128CroKI4G9SM8OSkPikKsrP34BcoGRoTFpeKkBAk5fQOUbqUZit  
sVImrLLeXBeXlI9l84YBkfrLaFWajFK+p1H68qBRfKosvCpUWhBtiqc447qtCYj  
WrwUph6yt+orXmkfKiuKlCdJ1WJfb2t4JxwQf8OJWKXIKfVZy+aOk4BaB57PyC3o  
M/JRdxkCiZLwG49nD4aMBiJNcgnsdnDm9ZhWUX1sMQKQwqvG7g4YGBWwG+8Zjv  
99NT+V3Sw/LUBg7tjsAnPzJYG0Y6prwF749+M2FnBBOZwWdIrACT7izOGKEcPxWT  
LnKFu7PSksomly7cQ5NskYD8bamcmxSIS7jwav/BLuTRGV5EWvGem8eUfDkxQRRi  
OW3IDw0HjD6VYVnJyHs7q+XkNJsSBPRQD9mGgFfTjtyOhwHmLrIDwIjzIr54Xq1T  
8f7Dj4P5vPcUZhtOHC+00ZELmp7tODHX191uotAIPKsa3zH5S0kP93hOwepoZYhnr  
JNDDLpSk0rzyPZeg5F0W4ZmNv3YrLQ47RdoZbOPBu+U5yyD2001bH1rli56NJgr  
NsZMKnwX/Zghl/Yb9mge+jEbgUmxCfGrNTw7gIyXc3L2CCVQLPcjTa5RjoaUobj  
bAzFh6uMUZaTUXKVU48wHwYDVR0jBBgwFoAUKMnouHlh+66LZcePcoKz8gNBge4w  
DQYJKoZIhvcNAQEBBQADggEBAlIBdFJe+7TwikFEdvYJmKBeGigESQU3qIR8KBJC  
+EjuCwa2kEnh2H8MdeK1YAucHPJyFCwIo3RRb72HTEab9/K0G1LuLiHEG6QJPO8U  
8nE7vLncBCKVZ3RsoZnWqZYXq7cGxOIOMeEneB5z6IZUgqhwn1VxxfEz0eM2yw8  
GymBseh5F+PSCd6m8Xwfpv++MLymAFnYAASVLFviH+ZohNKPvpr7LAE6M1B6UFT  
LlSjDg+te1NAJG1PoeQlLlyNIkwImo7fyJyA2QFFcHHW00X+kdZK62LK61UAMYTi  
MOMhs3XonNVUkzMPILVnC/W4WvgChZF14dA9dNknm0WIEp8xggFOMIIBSgIBATAn  
MBMxETAPBgNVBAMTFCNTTCBsb290AhCwk27ipHLCr02ufWa7Sv3pMAkGBSsOAwIa  
BQAwdQYJKoZIhvcNAQEBBQAEggEARg6AoNGE/Fg16ohkHCT+AirvrbLSElTfB62m  
MBkmwGGL4M6Gsm7x/pnhMrEliGMXy91Oc/wdv0hojRhLo43DEdu/sQ0GikzFOFu  
C1gmLu88wUp7L45o71WtrhwOWwsjMVskbj//5XGrQ9dJnFb2s0cFhtCTEKuXMRA  
dSn0YFHs2Uzk6hNMMjQ1+jLEJy5mFAod1jHAJrdwaQcE7Ttwp5jh0zntUbKFE6  
1z26UTmt4V61+Z/eqwtPvcAyibgUwV180TayNSbmUd7fqVDPVa09D+Pn4k1pEzfr  
5dEvdHbLSChbB7zrlYuh7KGSDCftNm7EIJZWXzoBnGwB6RAJsg==

```
</rdpStream>  
<rct>REMOTEDESKTOP</rct>  
</ReconnectContent>  
<ReconnectContent>  
<rdpStream>redirectclipboard:i:0 redirectprinters:i:0 redirectcomports:i:1  
redirectsmartcards:i:0 devicestoredirect:s: drivestoredirect:s:* redirectdrives:i:1 session  
bpp:i:32 prompt for credentials on client:i:1 server port:i:3389 allow font smoothing:i:1  
promptcredentialonce:i:1 authentication level:i:0 gatewayusagemethod:i:2  
gatewayprofileusagemethod:i:0 gatewaycredentialsource:i:0 full address:s:RDVB9-  
101180.rdvteam.stbtest.microsoft.com workspace id:s:RDVB9-  
101180.rdvteam.stbtest.microsoft.com use redirection server name:i:1  
loadbalanceinfo:s:tsv://MS Terminal Services Plugin.1.RDVB9-101180 use multimon:i:0 alternate  
full address:s:RDVB9-101180.rdvteam.stbtest.microsoft.com signscope:s:Full Address,Alternate  
Full Address,Use Redirection Server Name,Server  
Port,GatewayUsageMethod,GatewayProfileUsageMethod,GatewayCredentialsSource,PromptCredentialOn  
ce,Authentication  
Level,RedirectDrives,RedirectPrinters,RedirectCOMPorts,RedirectSmartCards,RedirectClipboard,D  
evicesToRedirect,DrivesToRedirect,LoadBalanceInfo signature:s: Full Address,Alternate Full  
Address,Use Redirection Server Name,Server  
Port,GatewayUsageMethod,GatewayProfileUsageMethod,GatewayCredentialsSource,PromptCredentialOn  
ce,Alternate  
Shell,RemoteApplicationProgram,RemoteApplicationMode,RemoteApplicationName,RemoteApplicationC  
mdLine,Authentication
```



Tt7P10dJeLSiVir+6CUodaAFs+tfGDT0SjsduT9wFRm8i83EXTu7xFwhGJZKgGsU  
v16waYIsJZs+QZx/plWtUNGMi3jyEvl6qGeloYpjmseTy0V86grxFyKZiAuIxeul  
EvAm6b1qD/btM0YMFZ8RNk7in80j1BfZy00f5kMvgBASipOvxGMcpnOmBsxKVpb8  
ZBI+K7EWdkjq+W9Viatq0/6Qj9rVu5I5aWAPUoxy3IF1E3Yrs4pvPmNzxpEh1/  
dG19wlebHQZY3cZ1mN602j2fHZlyRHPCPdNB0GFLm/N2Z4qK50tekuuH1k+xB4qY  
leZrC7sDvNPl28CroKI4G9SM8OSkPikKsrP34BcoGROTFpeKkBAk5fQOUbqUZit  
sVImrLLeXbexlI9l84YBkf8rLaFWajFK+p1H68qBRfK0svCpUWhBtiqc447qtCYj  
WrwUph6yt+orXmzkfIUkLcdJ1WJfb2t4JxwQf80JWKIKfVzy+aOk4BaB57PyC3o  
M/JRdxkCizW7G0W49nD4aMBiJNcgnsdnDm9ZhWUX1sMQKQwqvG7g4YGBWwG+8Zjv  
99NT+V3Sw/LUbG7tjsAnPzJYG0Y6prwF749+M2FnBBOZWwDirACT7izOGKEcPxWT  
LnKFu7PSksomly7cq5NskYD8bamcmxSIS7jwav/BLuTRGV5EWvGeM8eUfDkxQRRi  
OW3IDw0HjD6VYVNjyHs7q+XkNJsSBPRQd9mGgFftjtyOhwHmLrIDwIJzIr54XqlT  
8f7Dj4P5vPcUzhtOHC+00ZEImp7tODHX191uotAipKsa3zh5S0kP93hOwepozYhn  
rJNDLlpSk0rzyPZeg5F1YAcHPJyFCwIo3RRb72HTEAb9/K0G1LuLiHEG6QJPO8U  
NsZMKnwX/Zghl/Yb9mge+jEbgUmxCfGrNTw7gIyXc3lS2CCVQLPcjTa5RjoaUobj  
bAzFh6uMUZaTUXKVU48wHwYDVR0jBBgwFoAUKMnouH1h+66LzcePcoKz8gNBGe4w  
DQYJKoZIhvcNAQEFBQAEGgEBAIBdFJe+7TwikFEdvyJmKBeGigESQU3qIR8KBjC  
+EjuCWA2kEnh2H8MdeK1YAuchPjyFCwIo3RRb72HTEAb9/K0G1LuLiHEG6QJPO8U  
8nE7vLncBCKVZ3RsoZnwgZBYXq7cGxOIOmEeNbB5z6IZUgqhnw1VxxfEz0eM2yw8  
GGymBseh5F+PScD6m8Xwfpv++MLymAFnYAASVLFviH+ZohNKpvpr7LAE6M1B6UFT  
L1sJdg+te1NAJG1PoEQLllyNIkwIMo7fyJyA2QFFcHHW00X+kdZK62LK61UAMYTi  
MOMhs3XonNVUkzMPIlVnC/W4WvgChZF14da9dNknm0WIEp8xggFOMIIBSgIBATAn  
MBMxETAPBgNVBAMTCFNTTCBSb290AhCwk27ipH1Cr02ufWa7Sv3pMAkGBSsOAwIa  
BQAwDQYJKoZIhvcNAQEFBQAEGgEAR6AoNGE/Fg16ohkHCT+AirvrbLSElTfB62m  
M1kMwGGL4M6GsM7x/pnhMrEliGMXy910c/wdv0hojRhLo43DEdu/sQ0GgIkzFOFu  
C1gmLu88wUp7L45o71LWrhwOWwsjMVskbj//5XGrQ9dJnFb2s0cFhtCTEKkUXMRA  
dSPn0YFHS2Uzk6hhNMmJQ1+j1EJy5mFAodljHAJrdwaQcE7Ttwp5jh0zntUbKFE6  
1z26UTmt4V61+z/eqwtPvcAyibgUwV180TayNSbmUd7fqVDPVa09D+Pn4k1pEzfr  
5dEvdHbLschb7zr1yUh7KGsDCftNm7EIJZWXzoBnGwE6RAJSg==  
</rdpStream>  
<rect>REMOTEDESKTOP</rect>  
</ReconnectContent>  
<ReconnectContent>  
<rdpStream>redirectclipboard:i:0 redirectprinters:i:0 redirectcomports:i:1  
redirectsmartcards:i:0 devicestoredirect:s drivestoredirect:s:\* redirectdrives:i:1 session  
bpp:i:32 prompt for credentials on client:i:1 span monitors:i:1 use multimon:i:1  
remoteapplicationmode:i:1 server port:i:3389 allow font smoothing:i:1  
promptcredentialonce:i:1 authentication level:i:0 gatewayusagemethod:i:2  
gatewayprofileusagemethod:i:0 gatewaycredentialsource:i:0 full address:s:RDVB9-  
101180.rdvteam.stbtest.microsoft.com alternate shell:s:|cmd remoteapplicationprogram:s:|cmd  
remoteapplicationname:s:cmd.exe remoteapplicationcmdline:s: workspace id:s:RDVB9-  
101180.rdvteam.stbtest.microsoft.com use redirection server name:i:1  
loadbalanceinfo:s:tsv://MS Terminal Services Plugin.1.RDVB9-101180 alternate full  
address:s:RDVB9-101180.rdvteam.stbtest.microsoft.com signscope:s:Full Address,Alternate Full  
Address,Use Redirection Server Name,Server  
Port,GatewayUsageMethod,GatewayProfileUsageMethod,GatewayCredentialsSource,PromptCredentialOn  
ce,Alternate  
Shell,RemoteApplicationProgram,RemoteApplicationMode,RemoteApplicationName,RemoteApplicationC  
mdLine,Authentication  
Level,RedirectDrives,RedirectPrinters,RedirectCOMPorts,RedirectSmartCards,RedirectClipboard,D  
evicesToRedirect,DrivesToRedirect,LoadBalanceInfo signature:s: Full Address,Alternate Full  
Address,Use Redirection Server Name,Server  
Port,GatewayUsageMethod,GatewayProfileUsageMethod,GatewayCredentialsSource,PromptCredentialOn  
ce,Alternate  
Shell,RemoteApplicationProgram,RemoteApplicationMode,RemoteApplicationName,RemoteApplicationC  
mdLine,Authentication  
Level,RedirectDrives,RedirectPrinters,RedirectCOMPorts,RedirectSmartCards,RedirectClipboard,D  
evicesToRedirect,DrivesToRedirect,LoadBalanceInfo  
signature:s:AQABAAEAAAEEgAAMIISFQYJKoZIhvcNAQcCoIISBjCCEgICAQEXCzAJBgUrDgMCG  
GgUAMAsGCSqGSIB3DQEHAACCEI8wggfFMIIGx6ADAgECAhBfZzkIP2oDi06PGDo+  
oafJMA0GCSqGSIB3DQEBBQUAMBMxETAPBgNVBAMTCFNTTCBSb290MCAxDTkwMDEw  
MTAwMDAwMfoYDzIwOTAxMjMxMDAwMDAwWjATMREwDwYDVQQDEWhTU0wgUm9vdDCC  
ASiWdQYJKoZIhvcNAQEFBQAEGgEPADCCAQoCggEBAKBSnjeWYGMhQa1IGbEkbC  
otl4+TeYARdNALsSIXOrD42ohMtR+owHtFAkY4zeantZWO0vp6erI8osVvSv6jL4  
Wf8WQ6qoNPK9WshB3QbfccXvq+ezRpiVbr+JF90YsC2cuq3ZlW/3FnE7jWcbGon5  
DbXCTe6mHbpDgpnq2oG7PsU3rq+EBW8sIvPREgoFdEns8GM8Dys+eYbCW4o7+EDY  
rtaqRuCnjZx5mdmdH1unlD4kzeVv5dFqoZoU5HMBIPPK+D156+vzrQy6jyKkEqA  
w1zqBhqvHzXWv9+uYyfsX82tr6x3YnVnh5sdH+CMvpLKsr0fhvwe10cq3HCvMC  
AwEAAaOCBSSwggUnMAwGA1UdEwQFMAMBAF8wggTVBg8rBgEAYI3E4LfZ4ajUwEE  
ggTAMIIEvAQIU1NMVGVzdAAECFNTTFJvb3QAAGEBAGECBAhOAFUATABMAASCBJQH



NsZMKnwX/Zgh1/Yb9mge+jEbcUmxCfGrNTw7gIyXc3lS2CCVQLPcjTa5RjOaUobj  
bAzFh6uMUZaTUXKVU48wHwYDVR0jBBgwFoAUKMnouHlh+66LZcePcoKz8gNBGe4w  
DQYJKoZIhvcNAQEFBQADggEBAlIBdFJe+7TwikFEdvyJMkBeGigESQU3qIR8KBjC  
+EjuCwa2kEnh2H8MdEK1YAucHPJyFCwIo3RRb72HTEAb9/K0G1LuLiHEG6QJPO8U  
8nE7vLncBCKVZ3RsoZnwgZBYXq7cGxOIOmEeNbB5z6IZUgqhwn1VxxfEz0eM2yw8  
GGymBseh5F+PSCd6m8Xwfpv++MLymAFnYAASVLFviH+ZohNKVpvr7LAE6M1B6UFT  
LlSjDg+te1NAJG1PoEQlLlYNIkwIMo7fyJyA2QFFcHHW00X+kdZK62LK6lUAMYTi  
MOMhs3XOnNVUkzMPILVnC/W4WvgChZF14dA9dNknm0WIEp8xggFOMIIBSgIBATAn  
MBMxETAPBgNVBAMTCFNTTCBSb290AhCwk27ipHlCr02ufWa7Sv3pMAkGBSsOAwIa  
BQAwDQYJKoZIhvcNAQEBBQAEGgEARg6AoNGE/Fg16ohkHCT+AivrjbLSEltfB62m  
MBkmwGG14M6GsM7x/pnhMrEliGMXy91Oc/wdv0hojRhLo43DEdu/sQ0GgIkzFOFu  
C1gmLu88wUp7L45o7lWtrhwOWwsjMVskbj//5XGrQ9dJnFb2s0cFhtCTEkKuxMRA  
dSPn0YFHS2Uzk6hhNMmjQ1+jlEJy5mFAod1jHAJrdwaQcE7Ttwp5jh0zntUbKFE6  
1z26UTmt4V61+z/eqwtPvcAyibgUwVl80TayNSbmUd7fqVDPVa09D+Pn4k1pEzFf  
5dEvdHbLSCHb7zr1YUh7KGsDCftNm7EIJZWXzoBnGwE6RAJSg==

```
</rdpStream>  
<rect>REMOTEAPPLICATION</rect>  
</ReconnectContent>  
</wksprc>  
</ReconnectContents>
```

## **5 Security**

### **5.1 Security Considerations for Implementers**

There are no known additional security considerations for the Remote Desktop Workspace Runtime Protocol, but server implementers are encouraged to use transport mechanisms that support encryption and integrity verification of the messages.

### **5.2 Index of Security Parameters**

None.



## 6 Appendix A: Full WSDL

```
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"
xmlns:tns="http://schemas.microsoft.com/ts/2010/09/rdweb"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"
targetNamespace="http://schemas.microsoft.com/ts/2010/09/rdweb"
xmlns:wSDL="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types>
    <xsd:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/ts/2010/09/rdweb">
      <xsd:element name="GetRDPFiles" nillable="true">
        <xsd:complexType/>
      </xsd:element>
      <xsd:element name="GetRDPFilesResponse" nillable="true">
        <xsd:complexType>
          <xsd:sequence>
            <xsd:element minOccurs="1" maxOccurs="1" name="GetRDPFilesResult" nillable="true"
type="tns:ReconnectContents"/>
          </xsd:sequence>
        </xsd:complexType>
      </xsd:element>
      <xsd:complexType name="ReconnectContents">
        <xsd:sequence>
          <xsd:element minOccurs="0" maxOccurs="1" name="version" nillable="true"
type="xsd:string"/>
          <xsd:element minOccurs="0" maxOccurs="1" name="wksprc" nillable="true"
type="tns:ArrayOfReconnectContent"/>
        </xsd:sequence>
      </xsd:complexType>
      <xsd:complexType name="ArrayOfReconnectContent">
        <xsd:sequence>
          <xsd:element minOccurs="0" maxOccurs="unbounded" name="ReconnectContent"
nillable="true" type="tns:ReconnectContent"/>
        </xsd:sequence>
      </xsd:complexType>
      <xsd:complexType name="ReconnectContent">
        <xsd:sequence>
          <xsd:element minOccurs="0" maxOccurs="1" name="rdpStream" nillable="true"
type="xsd:string"/>
          <xsd:element minOccurs="1" maxOccurs="1" name="rct"
type="tns:ReconnectContentType"/>
        </xsd:sequence>
      </xsd:complexType>
      <xsd:simpleType name="ReconnectContentType">
        <xsd:restriction base="xsd:string">
          <xsd:enumeration value="REMOTEDESKTOP"/>
          <xsd:enumeration value="VMREMOTEDESKTOP"/>
          <xsd:enumeration value="REMOTEAPPLICATION"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:schema>
  </wsdl:types>
  <wsdl:portType name="RDWebService">
    <wsdl:operation name="GetRDPFiles">
      <wsdl:input wsaw:Action="http://schemas.microsoft.com/ts/2010/09/rdweb/GetRDPFiles"
name="RDWebService_GetRDPFiles_InputMessage"
message="tns:RDWebService_GetRDPFiles_InputMessage"/>
      <wsdl:output wsaw:Action="http://schemas.microsoft.com/ts/2010/09/rdweb/GetRDPFiles"
name="RDWebService_GetRDPFiles_OutputMessage"
message="tns:RDWebService_GetRDPFiles_OutputMessage"/>
    </wsdl:operation>
  </wsdl:portType>
  <wsdl:binding name="RDWebServiceSoap" type="tns:RDWebService">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http"/>
    <wsdl:operation name="GetRDPFiles">
```

```

    <soap:operation soapAction="http://schemas.microsoft.com/ts/2010/09/rdweb/GetRDPFiles"
style="document"/>
    <wsdl:input name="RDWebService_GetRDPFiles_InputMessage">
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="RDWebService_GetRDPFiles_OutputMessage">
      <soap:body use="literal"/>
    </wsdl:output>
  </wsdl:operation>
</wsdl:binding>
<wsdl:binding name="RDWebServiceSoap12" type="tns:RDWebService">
  <soap12:binding transport="http://schemas.xmlsoap.org/soap/http"/>
  <wsdl:operation name="GetRDPFiles">
    <soap12:operation
soapAction="http://schemas.microsoft.com/ts/2010/09/rdweb/GetRDPFiles" style="document"/>
    <wsdl:input name="RDWebService_GetRDPFiles_InputMessage">
      <soap12:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="RDWebService_GetRDPFiles_OutputMessage">
      <soap12:body use="literal"/>
    </wsdl:output>
  </wsdl:operation>
</wsdl:binding>
<wsdl:message name="RDWebService_GetRDPFiles_InputMessage">
  <wsdl:part name="GetRDPFiles" element="tns:GetRDPFiles"/>
</wsdl:message>
<wsdl:message name="RDWebService_GetRDPFiles_OutputMessage">
  <wsdl:part name="GetRDPFilesResponse" element="tns:GetRDPFilesResponse"/>
</wsdl:message>
</wsdl:definitions>

```

## 7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

- Windows 8 operating system
- Windows Server 2012 operating system
- Windows 8.1 operating system
- Windows Server 2012 R2 operating system
- Windows 10 operating system
- Windows Server 2016 Technical Preview operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

## 8 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.

## 9 Index

### A

Abstract data model  
[client](#) 15  
[server](#) 11  
[Applicability](#) 8  
[Attribute groups](#) 10  
[Attributes](#) 9

### C

[Capability negotiation](#) 8  
[Change tracking](#) 28  
Client  
[abstract data model](#) 15  
[initialization](#) 15  
[local events](#) 16  
[message processing](#) 15  
[sequencing rules](#) 15  
[timer events](#) 15  
[timers](#) 15  
[Common data structures](#) 10  
[Complex types](#) 9

### D

Data model - abstract  
[client](#) 15  
[server](#) 11

### E

Events  
[local - client](#) 16  
[local - server](#) 15  
[timer - client](#) 15  
[timer - server](#) 15

### F

[Fields - vendor-extensible](#) 8  
[Full WSDL](#) 25

### G

[Glossary](#) 5  
[Groups](#) 10

### I

[Implementer - security considerations](#) 24  
[Index of security parameters](#) 24  
[Informative references](#) 7  
Initialization  
[client](#) 15  
[server](#) 11  
[Introduction](#) 5

### L

Local events  
[client](#) 16

[server](#) 15

### M

Message processing  
[client](#) 15  
[server](#) 11  
Messages  
[attribute groups](#) 10  
[attributes](#) 9  
[common data structures](#) 10  
[complex types](#) 9  
[elements](#) 9  
[enumerated](#) 9  
[groups](#) 10  
[namespaces](#) 9  
[simple types](#) 9  
[syntax](#) 9  
[transport](#) 9

### N

[Namespaces](#) 9  
[Normative references](#) 6

### O

Operations  
[GetRDPFiles](#) 11  
[Overview \(synopsis\)](#) 7

### P

[Parameters - security index](#) 24  
[Preconditions](#) 7  
[Prerequisites](#) 7  
[Product behavior](#) 27

### R

[References](#) 6  
[informative](#) 7  
[normative](#) 6  
[Relationship to other protocols](#) 7

### S

Security  
[implementer considerations](#) 24  
[parameter index](#) 24  
Sequencing rules  
[client](#) 15  
[server](#) 11  
Server  
[abstract data model](#) 11  
[GetRDPFiles operation](#) 11  
[initialization](#) 11  
[local events](#) 15  
[message processing](#) 11  
[sequencing rules](#) 11  
[timer events](#) 15  
[timers](#) 11

[Simple types](#) 9  
[Standards assignments](#) 8  
Syntax  
  [messages - overview](#) 9

## T

Timer events  
  [client](#) 15  
  [server](#) 15  
Timers  
  [client](#) 15  
  [server](#) 11  
[Tracking changes](#) 28  
[Transport](#) 9  
Types  
  [complex](#) 9  
  [simple](#) 9

## V

[Vendor-extensible fields](#) 8  
[Versioning](#) 8

## W

[WSDL](#) 25