

## [MS-SAMLPR-Diff]:

# Security Assertion Markup Language (SAML) Proxy Request Signing Protocol

---

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation ("this documentation") for protocols, file formats, data portability, computer languages, and standards support. Additionally, overview documents cover inter-protocol relationships and interactions.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you can make copies of it in order to develop implementations of the technologies that are described in this documentation and can distribute portions of it in your implementations that use these technologies or in your documentation as necessary to properly document the implementation. You can also distribute in your implementation, with or without modification, any schemas, IDLs, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications documentation.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that might cover your implementations of the technologies described in the Open Specifications documentation. Neither this notice nor Microsoft's delivery of this documentation grants any licenses under those patents or any other Microsoft patents. However, a given Open Specifications document might be covered by the Microsoft [Open Specifications Promise](#) or the [Microsoft Community Promise](#). If you would prefer a written license, or if the technologies described in this documentation are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **License Programs.** [To see all of the protocols in scope under a specific license program and the associated patents, visit the Patent Map.](#)
- **Trademarks.** The names of companies and products contained in this documentation might be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events that are depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than as specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications documentation does not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications documents are intended for use in conjunction with publicly available standards specifications and network programming art and, as such, assume that the reader either is familiar with the aforementioned material or has immediate access to it.

**Support.** [For questions and support, please contact dochelp@microsoft.com.](#)

## Revision Summary

Date	Revision History	Revision Class	Comments
3/12/2010	1.0	Major	First Release.
4/23/2010	1.0.1	Editorial	Changed language and formatting in the technical content.
6/4/2010	1.0.2	Editorial	Changed language and formatting in the technical content.
7/16/2010	1.0.2	None	No changes to the meaning, language, or formatting of the technical content.
8/27/2010	1.0.2	None	No changes to the meaning, language, or formatting of the technical content.
10/8/2010	1.0.2	None	No changes to the meaning, language, or formatting of the technical content.
11/19/2010	1.0.2	None	No changes to the meaning, language, or formatting of the technical content.
1/7/2011	1.0.2	None	No changes to the meaning, language, or formatting of the technical content.
2/11/2011	1.0.2	None	No changes to the meaning, language, or formatting of the technical content.
3/25/2011	1.0.2	None	No changes to the meaning, language, or formatting of the technical content.
5/6/2011	2.0	Major	Updated and revised the technical content.
6/17/2011	3.0	Major	Updated and revised the technical content.
9/23/2011	3.0	None	No changes to the meaning, language, or formatting of the technical content.
12/16/2011	3.0	None	No changes to the meaning, language, or formatting of the technical content.
3/30/2012	3.0	None	No changes to the meaning, language, or formatting of the technical content.
7/12/2012	3.1	Minor	Clarified the meaning of the technical content.
10/25/2012	3.1	None	No changes to the meaning, language, or formatting of the technical content.
1/31/2013	3.1	None	No changes to the meaning, language, or formatting of the technical content.
8/8/2013	3.1	None	No changes to the meaning, language, or formatting of the technical content.
11/14/2013	3.1	None	No changes to the meaning, language, or formatting of the technical content.
2/13/2014	3.1	None	No changes to the meaning, language, or formatting of the technical content.
5/15/2014	3.1	None	No changes to the meaning, language, or formatting of the technical content.

Date	Revision History	Revision Class	Comments
6/30/2015	3.1	None	No changes to the meaning, language, or formatting of the technical content.
7/14/2016	3.1	None	No changes to the meaning, language, or formatting of the technical content.
<a href="#"><u>6/1/2017</u></a>	<a href="#"><u>3.1</u></a>	<a href="#"><u>None</u></a>	<a href="#"><u>No changes to the meaning, language, or formatting of the technical content.</u></a>

# Table of Contents

<b>1 Introduction .....</b>	<b>7</b>
1.1 Glossary .....	7
1.2 References .....	8
1.2.1 Normative References .....	8
1.2.2 Informative References .....	9
1.3 Overview .....	9
1.4 Relationship to Other Protocols .....	9
1.5 Prerequisites/Preconditions .....	10
1.6 Applicability Statement .....	10
1.7 Versioning and Capability Negotiation .....	10
1.8 Vendor-Extensible Fields .....	11
1.9 Standards Assignments.....	11
<b>2 Messages.....</b>	<b>12</b>
2.1 Transport .....	12
2.2 Common Message Syntax .....	12
2.2.1 Namespaces .....	12
2.2.2 Messages.....	12
2.2.2.1 SignMessageRequest.....	13
2.2.2.2 SignMessageResponse.....	14
2.2.2.3 VerifyMessageRequest.....	14
2.2.2.4 VerifyMessageResponse.....	15
2.2.2.5 IssueRequest.....	15
2.2.2.6 IssueResponse.....	16
2.2.2.7 LogoutRequest.....	16
2.2.2.8 LogoutResponse .....	17
2.2.2.9 CreateErrorMessageRequest.....	17
2.2.2.10 CreateErrorMessageResponse.....	18
2.2.3 Elements .....	19
2.2.4 Complex Types.....	19
2.2.4.1 RequestType .....	19
2.2.4.2 ResponseType .....	19
2.2.4.3 PrincipalType.....	19
2.2.4.4 SamlMessageType.....	20
2.2.4.5 PostBindingType .....	20
2.2.4.6 RedirectBindingType.....	20
2.2.5 Simple Types .....	21
2.2.5.1 LogoutStatusType .....	21
2.2.5.2 PrincipalTypes .....	22
2.2.6 Attributes .....	22
2.2.7 Groups .....	22
2.2.8 Attribute Groups.....	22
<b>3 Protocol Details.....</b>	<b>23</b>
3.1 Common Details .....	23
3.1.1 Abstract Data Model.....	23
3.1.2 Timers .....	23
3.1.3 Initialization.....	23
3.1.4 Message Processing Events and Sequencing Rules .....	23
3.1.4.1 SignMessage .....	24
3.1.4.1.1 Messages .....	24
3.1.4.1.1.1 SignMessageRequest.....	24
3.1.4.1.1.2 SignMessageResponse.....	24
3.1.4.2 VerifyMessage .....	24
3.1.4.2.1 Messages .....	24

3.1.4.2.1.1	VerifyMessageRequest .....	24
3.1.4.2.1.2	VerifyMessageResponse .....	24
3.1.4.3	Issue .....	25
3.1.4.3.1	Messages .....	25
3.1.4.3.1.1	IssueRequest .....	25
3.1.4.3.1.2	IssueResponse .....	25
3.1.4.4	Logout .....	25
3.1.4.4.1	Messages .....	25
3.1.4.4.1.1	LogoutRequest .....	25
3.1.4.4.1.2	LogoutResponse .....	25
3.1.4.5	CreateErrorMessage .....	25
3.1.4.5.1	Messages .....	26
3.1.4.5.1.1	CreateErrorMessageRequest .....	26
3.1.4.5.1.2	CreateErrorMessageResponse .....	26
3.1.4.6	Types Common to Multiple Operations .....	26
3.1.4.6.1	Complex Types .....	26
3.1.4.6.1.1	PrincipalType .....	26
3.1.4.6.1.2	SamlMessageType .....	26
3.1.4.6.1.3	PostBindingType .....	26
3.1.4.6.1.4	RedirectBindingType .....	27
3.1.4.6.2	Simple Types .....	27
3.1.4.6.2.1	LogoutStatusType .....	27
3.1.4.6.2.2	PrincipalTypes .....	27
3.1.4.7	Status Codes for Operations .....	27
3.1.4.7.1	Element <Status> .....	27
3.1.4.7.2	Element <StatusCode> .....	28
3.1.4.7.3	Element <StatusMessage> .....	30
3.1.4.7.4	Element <StatusDetail> .....	30
3.1.5	Timer Events .....	30
3.1.6	Other Local Events .....	30
3.2	Server Details .....	30
3.2.1	Abstract Data Model .....	30
3.2.2	Timers .....	30
3.2.3	Initialization .....	31
3.2.4	Message Processing Events and Sequencing Rules .....	31
3.2.5	Timer Events .....	31
3.2.6	Other Local Events .....	31
3.3	Client Details .....	31
3.3.1	Abstract Data Model .....	31
3.3.2	Timers .....	31
3.3.3	Initialization .....	31
3.3.4	Message Processing Events and Sequencing Rules .....	31
3.3.5	Timer Events .....	31
3.3.6	Other Local Events .....	32
<b>4</b>	<b>Protocol Examples .....</b>	<b>33</b>
4.1	Issue Operation Examples .....	33
4.1.1	IssueRequest Example .....	33
4.1.2	IssueResponse Example .....	34
4.1.3	IssueResponse Example Using Artifact Binding .....	35
4.2	CreateErrorMessage Operation Examples .....	36
4.2.1	CreateErrorMessageRequest Example .....	36
4.2.2	CreateErrorMessageResponse Example .....	37
4.3	SignMessage Operation Examples .....	37
4.3.1	SignMessageRequest Example .....	37
4.3.2	SignMessageResponse Example .....	38
4.4	VerifyMessage Operation Examples .....	39
4.4.1	VerifyMessageRequest Example .....	39

4.4.2	VerifyMessageResponse Example.....	40
4.4.3	VerifyMessageResponse Example Using Redirect Binding .....	40
4.5	Logout Operations Examples .....	41
4.5.1	LogoutRequest Example .....	41
4.5.2	LogoutResponse Example .....	42
4.5.3	LogoutRequest Example - Locally Initiated .....	43
4.5.4	LogoutResponse Example:Final Response to Locally Initiated Request .....	43
4.5.5	LogoutRequest Example with SAMLResponse and RelayState .....	43
4.5.6	LogoutResponse Example with SAMLRequest and RelayState .....	45
<b>5</b>	<b>Security.....</b>	<b>46</b>
5.1	Security Considerations for Implementers .....	46
5.2	Index of Security Parameters .....	46
<b>6</b>	<b>Appendix A: Full WSDL .....</b>	<b>47</b>
<b>7</b>	<b>Appendix B: Product Behavior .....</b>	<b>48</b>
<b>8</b>	<b>Change Tracking.....</b>	<b>49</b>
<b>9</b>	<b>Index.....</b>	<b>50</b>

# 1 Introduction

This document specifies the Security Assertion Markup Language (SAML) Proxy Request Signing Protocol, which allows proxy servers to perform operations that require knowledge of configured keys and other state information about federated sites known by the Security Token Service (STS) server.

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative. All other sections and examples in this specification are informative.

## 1.1 Glossary

This document uses the following terms:

**Active Directory Federation Services (AD FS) Proxy Server:** An AD FS 2.0 service that processes SAML Federation Protocol messages. AD FS proxy servers are clients for the Security Assertion Markup Language (SAML) Proxy Request Signing Protocol (SAMLPR).

**Active Directory Federation Services (AD FS) Security Token Service (STS):** An AD FS 2.0 service that holds configuration information about federated sites. AD FS STS servers are servers for the Security Assertion Markup Language (SAML) Proxy Request Signing Protocol (SAMLPR).

**certificate:** A certificate is a collection of attributes [\(1\)](#) and extensions that can be stored persistently. The set of attributes in a certificate can vary depending on the intended usage of the certificate. A certificate securely binds a public key to the entity that holds the corresponding private key. A certificate is commonly used for authentication [\(2\)](#) and secure exchange of information on open networks, such as the Internet, extranets, and intranets. Certificates are digitally signed by the issuing certification authority (CA) and can be issued for a user, a computer, or a service. The most widely accepted format for certificates is defined by the ITU-T X.509 version 3 international standards. For more information about attributes and extensions, see [RFC3280] and [X509] sections 7 and 8.

**SAML Artifact Binding:** A method of transmitting SAML messages via references in HTTP messages, as specified in [SamlBinding] section 3.6.

**SAML Identity Provider (IdP):** A provider of SAML assertions, as specified in [SAMLCore2] section 2.

**SAML Message:** A SAML protocol message, as specified in [SAMLCore2] and [SamlBinding].

**SAML Post Binding:** A method of transmitting SAML messages via HTTP POST actions, as specified in [SamlBinding] section 3.5.

**SAML Redirect Binding:** A method of transmitting SAML messages via HTTP redirects, as specified in [SamlBinding] section 3.4.

**SAML Service Provider (SP):** A consumer of SAML assertions, as specified in [SAMLCore2] section 2.

**Security Assertion Markup Language (SAML):** The set of specifications that describe security assertions encoded in XML, profiles for attaching assertions to protocols and frameworks, request/response protocols used to obtain assertions, and the protocol bindings to transfer protocols, such as SOAP and HTTP.

**security token service (STS):** A web service that issues security tokens. That is, it makes assertions based on evidence that it trusts; these assertions are for consumption by whoever trusts it.

**SHA-1 hash:** A hashing algorithm as specified in [FIPS180-2] that was developed by the National Institute of Standards and Technology (NIST) and the National Security Agency (NSA).

**SOAP:** A lightweight protocol for exchanging structured information in a decentralized, distributed environment. SOAP uses XML technologies to define an extensible messaging framework, which provides a message construct that can be exchanged over a variety of underlying protocols. The framework has been designed to be independent of any particular programming model and other implementation-specific semantics. SOAP 1.2 supersedes SOAP 1.1. See [SOAP1.2-1/2003].

**SOAP body:** A container for the payload data being delivered by a SOAP message to its recipient. See [SOAP1.2-1/2007] section 5.3 for more information.

**SOAP message:** An XML document consisting of a mandatory SOAP envelope, an optional SOAP header, and a mandatory SOAP body. See [SOAP1.2-1/2007] section 5 for more information.

**Uniform Resource Locator (URL):** A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [RFC1738].

**Web Services Description Language (WSDL):** An XML format for describing network services as a set of endpoints that operate on messages that contain either document-oriented or procedure-oriented information. The operations and messages are described abstractly and are bound to a concrete network protocol and message format in order to define an endpoint. Related concrete endpoints are combined into abstract endpoints, which describe a network service. WSDL is extensible, which allows the description of endpoints and their messages regardless of the message formats or network protocols that are used.

**XML namespace:** A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [RFC3986]. A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [XMLNS-2ED].

**XML Schema (XSD):** A language that defines the elements, attributes, namespaces, and data types for XML documents as defined by [XMLSCHEMA1/2] and [W3C-XSD] standards. An XML schema uses XML syntax for its language.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as defined in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the Errata.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[SamlBinding] Cantor, S., Hirsch, F., Kemp, J., et al., "Bindings for the OASIS Security Assertion Markup Language (SAML) V2.0", March 2005, <http://docs.oasis-open.org/security/saml/v2.0/saml-bindings-2.0-os.pdf>

[SAMLCore2] Cantor, S., Kemp, J., Philpott, R., and Maler, E., Eds., "Assertions and Protocol for the OASIS Security Assertion Markup Language (SAML) V2.0", March 2005, <http://docs.oasis-open.org/security/saml/v2.0/saml-core-2.0-os.pdf>

[SOAP1.2-1/2003] Gudgin, M., Hadley, M., Mendelsohn, N., et al., "SOAP Version 1.2 Part 1: Messaging Framework", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part1-20030624>

[WSAddressing] Box, D., et al., "Web Services Addressing (WS-Addressing)", August 2004, <http://www.w3.org/Submission/ws-addressing/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[WSSC1.3] Lawrence, K., Kaler, C., Nadalin, A., et al., "WS-SecureConversation 1.3", March 2007, <http://docs.oasis-open.org/ws-sx/ws-secureconversation/200512/ws-secureconversation-1.3-os.html>

[WSSU1.0] OASIS Standard, "WS Security Utility 1.0", 2004, <http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd>

[WSTrust] IBM, Microsoft, Nortel, VeriSign, "WS-Trust V1.0", February 2005, <http://specs.xmlsoap.org/ws/2005/02/trust/WS-Trust.pdf>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

## 1.2.2 Informative References

[WS-Trust1.3] Nadalin, A., Goodner, M., Gudgin, M., Barbir, A., Granqvist, H., "WS-Trust 1.3", OASIS Standard 19 March 2007, <http://docs.oasis-open.org/ws-sx/ws-trust/200512/ws-trust-1.3-os.html>


## 1.3 Overview

The Security Assertion Markup Language (SAML) Proxy Request Signing Protocol (SAMLPR) provides the capability for AD FS proxy servers to have the AD FS STS server for an installation perform operations that require knowledge of the configured keys and other state information about federated sites known by the Security Token Service (STS) server. For more information, see [WS-Trust1.3]. In particular, proxy servers use the SAMLPR Protocol to have the STS server in an installation perform SAML (see [SAMLCore2] and [SamlBinding]) signature operations upon messages to be sent. Multiple proxy servers can use a single STS server.

The protocol is stateless, with the parameters of each message being fully self-contained.


## 1.4 Relationship to Other Protocols

The Security Assertion Markup Language (SAML) Proxy Request Signing Protocol (SAMLPR) uses SOAP over TCP for local connections, as shown in the following layering diagram:

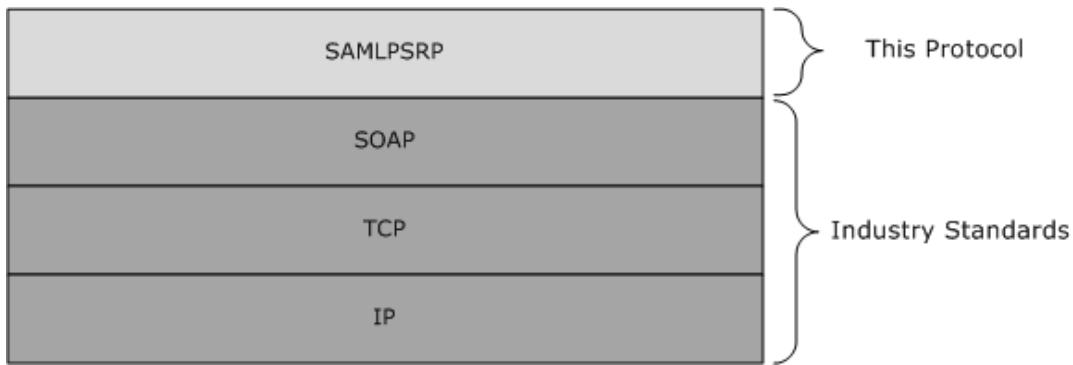

**Figure 1: SAMLPR SOAP over TCP layer diagram**

The Security Assertion Markup Language (SAML) Proxy Request Signing Protocol (SAMLPR) uses SOAP over HTTPS for remote connections, as shown in the following layering diagram:

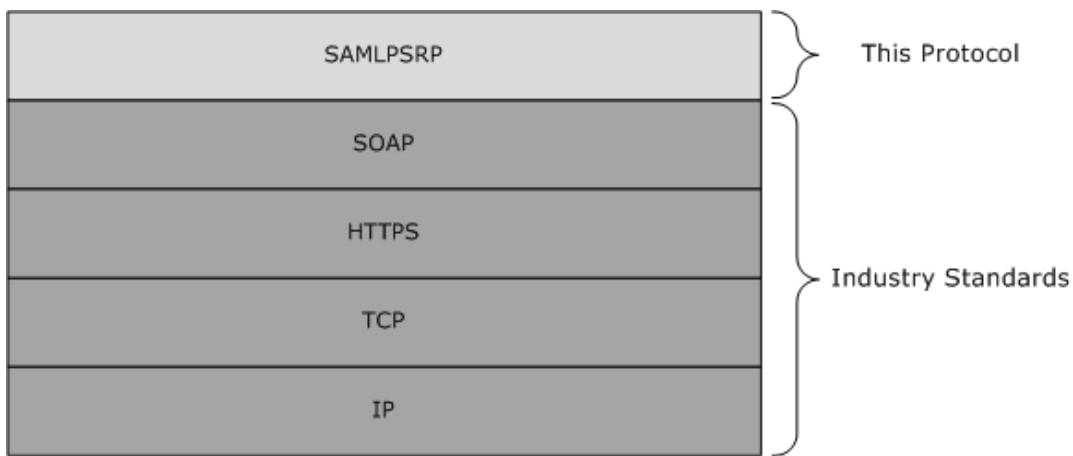

**Figure 2: SAMLPR SOAP over HTTPS layer diagram**

## 1.5 Prerequisites/Preconditions

The client is configured with the Uniform Resource Locator (URL) of the server's SOAP service in order to call the service.

## 1.6 Applicability Statement

The SAMLPR Protocol is used by services that perform SAML signature operations for proxy servers by STS servers in a manner that is compatible with AD FS 2.0.

## 1.7 Versioning and Capability Negotiation

This protocol uses the versioning mechanisms defined in the following specification:

- SOAP 1.2, as specified in [SOAP1.2-1/2003].

This protocol does not perform any capability negotiation.

## **1.8 Vendor-Extensible Fields**

The schema for this protocol provides for extensibility points for additional elements to be added to each SOAP message body. Elements within these extensibility points that are not understood are ignored.

## **1.9 Standards Assignments**

There are no standards assignments for this protocol beyond those defined in the following specification:

- SOAP 1.2, as specified in [SOAP1.2-1/2003].

## 2 Messages

### 2.1 Transport

The Security Assertion Markup Language (SAML) Proxy Request Signing Protocol uses SOAP, as specified in [SOAP1.2-1/2003], over TCP locally or HTTPS remotely, for communication.

### 2.2 Common Message Syntax

This section contains no common definitions used by this protocol.

#### 2.2.1 Namespaces

This specification defines and references various XML namespaces using the mechanisms specified in [XMLNS]. Although this specification associates a specific XML namespace prefix for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
s	http://www.w3.org/2003/05/soap-envelope	[SOAP1.2-1/2003]
xs	http://www.w3.org/2001/XMLSchema	[XMLSCHEMA1] and [XMLSCHEMA2]
a	http://schemas.xmlsoap.org/ws/2004/08/addressing	[WSAddressing] section 1.2
msis	http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol	This document ([MS-SAMLPR])
samlp	urn:oasis:names:tc:SAML:2.0:protocol	[SAMLCore2]
saml	urn:oasis:names:tc:SAML:2.0:assertion	[SAMLCore2]
wst	http://docs.oasis-open.org/ws-sx/ws-trust/200512	[WSTrust]
wssc	http://docs.oasis-open.org/ws-sx/ws-secureconversation/200512	[WSSC1.3]
wssu	http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd	[WSSU1.0]

#### 2.2.2 Messages

Message	Description
SignMessageRequest	A message that requests that a SAML Message signature be applied to a SAML Message, if the configuration for the requested principal specifies that messages are to be signed.
SignMessageResponse	A reply message to SignMessageRequest, containing the resulting SAML Message, which is signed, if the configuration for the requested principal specifies that messages are to be signed.
VerifyMessageRequest	A message that requests verification that a SAML Message is from a known party and signed according to the metadata directives for that party.

Message	Description
VerifyMessageResponse	A reply message to the VerifyMessageRequest message, containing a Boolean result.
IssueRequest	A message requesting issuance of a SAML token.
IssueResponse	A reply message to the IssueRequest message containing a SAML response message.
LogoutRequest	A message requesting that a SAML logout be performed.
LogoutResponse	A reply message to the LogoutRequest message containing updated SessionState and LogoutState values.
CreateErrorMessageRequest	A message that requests creation of a SAML error message, which will be signed, if the configuration for the requested principal specifies that messages are to be signed.
CreateErrorMessageResponse	A reply message to the CreateErrorMessageRequest message containing the created SAML error message.

### 2.2.2.1 SignMessageRequest

The SignMessageRequest message requests that a SAML Message signature be applied to a SAML Message, if the configuration for the requested principal specifies that messages are to be signed. It is used by the following message:

Message type	Action URI
Request	<a href="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest</a>

**body:** The SOAP body MUST contain a single msis:SignMessageRequest element with the following type:

```

<complexType name="SignMessageRequestType">
  <complexContent>
    <extension base="msis:RequestType">
      <sequence>
        <element name="ActivityId" type="string"/>
        <element name="Message" type="msis:SamlMessageType"/>
        <element name="Principal" type="msis:PrincipalType"/>
        <any namespace="#other" processContents="lax" minOccurs="0" maxOccurs="unbounded" />
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

**ActivityId:** An opaque string supplied by the caller to track the activity to which this message pertains.

**Message:** A complex type representing a SAML Protocol message.

**Principal:** A complex type representing a SAML EntityId for a SAML Identity Provider (IdP), a SAML Service Provider (SP), or this STS server.

### 2.2.2.2 SignMessageResponse

A SignMessageResponse message is a reply message to SignMessageRequest, containing the resulting SAML Message, which is signed, if the configuration for the requested principal specifies that messages are to be signed. It is used by the following message:

Message type	Action URI
Response	<a href="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse</a>

**body:** The SOAP body MUST contain a single msis:SignMessageResponse element with the following type:

```
<complexType name="SignMessageResponseType">
  <complexContent>
    <extension base="msis:ResponseType">
      <sequence>
        <element name="Message" type="msis:SamlMessageType"/>
        <any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded" />
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

**Message:** A complex type representing a SAML Protocol message.

### 2.2.2.3 VerifyMessageRequest

The VerifyMessageRequest message requests verification that a SAML Message is from a known party and signed according to the metadata directives for that party. It is used by the following message:

Message type	Action URI
Request	<a href="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest</a>

**body:** The SOAP body MUST contain a single msis:VerifyMessageRequest element with the following type:

```
<complexType name="VerifyMessageRequestType" >
  <complexContent>
    <extension base="msis:RequestType">
      <sequence>
        <element name="ActivityId" type="string"/>
        <element name="Message" type="msis:SamlMessageType"/>
        <any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded" />
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

**ActivityId:** An opaque string supplied by the caller to track the activity to which this message pertains.

**Message:** A complex type representing a SAML Protocol message.

#### 2.2.2.4 VerifyMessageResponse

The VerifyMessageResponse message is a reply to VerifyMessageRequest, containing a Boolean result. It is used by the following message:

Message type	Action URI
Response	<a href="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse</a>

**body:** The SOAP body MUST contain a single msis:VerifyMessageResponse element with the following type:

```
<complexType name="VerifyMessageResponseType" >
  <complexContent>
    <extension base="msis:ResponseType">
      <sequence>
        <element name="IsVerified" type="boolean"/>
        <any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"
      />
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

**IsVerified:** A Boolean result indicating whether a SAML Message is from a known party and signed according to the metadata directives for that party.

#### 2.2.2.5 IssueRequest

The IssueRequest message requests the issuance of a SAML token. It is used by the following message:

Message type	Action URI
Request	<a href="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest</a>

**body:** The SOAP body MUST contain a single msis:IssueRequest element with the following type:

```
<complexType name="IssueRequestType" >
  <complexContent>
    <extension base="msis:RequestType">
      <sequence>
        <element name="ActivityId" type="string"/>
        <element name="Message" type="msis:SamlMessageType"/>
        <element name="OnBehalfOf" type="wst:OnBehalfOfType"/>
        <element name="SessionState" type="string"/>
        <any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"
      />
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

**ActivityId:** An opaque string supplied by the caller to track the activity to which this message pertains.

**Message:** A complex type representing a SAML Protocol message.

**OnBehalfOf:** A complex type representing the party to issue the token for.

**SessionState:** A structured string representing the information required to log out from this session.

### 2.2.2.6 IssueResponse

The IssueResponse message is a reply to IssueRequest, containing a SAML response message. It is used by the following message:

Message type	Action URI
Response	<a href="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse</a>

**body:** The SOAP body MUST contain a single msis:IssueResponse element with the following type:

```
<complexType name="IssueResponseType">
<complexContent>
<extension base="msis:ResponseType">
<sequence>
<element name="Message" minOccurs="0" type="msis:SamlMessageType"/>
<element name="SessionState" type="string"/>
<element name="AuthenticatingProvider" type="string"/>
<any namespace="#other" processContents="lax" minOccurs="0" maxOccurs="unbounded"
/>
</sequence>
</extension>
</complexContent>
</complexType>
```

**Message:** A complex type representing a SAML Protocol message.

**SessionState:** A structured string representing the information required to log out from this session.

**AuthenticatingProvider:** The URI of a claims provider or a local STS identifier, depending upon where the user authenticated.

### 2.2.2.7 LogoutRequest

The LogoutRequest message requests that a SAML logout be performed. It is used by the following message:

Message type	Action URI
Request	<a href="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest</a>

**body:** The SOAP body MUST contain a single msis:LogoutRequest element with the following type:

```
<complexType name="LogoutRequestType" >
<complexContent>
<extension base="msis:RequestType">
<sequence>
<element name="ActivityId" type="string"/>
<element name="Message" minOccurs="0" type="msis:SamlMessageType"/>
<element name="SessionState" type="string"/>
```

```

        <element name="LogoutState" type="string"/>
        <any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"
    />
    </sequence>
    </extension>
</complexContent>
</complexType>
```

**ActivityId:** An opaque string supplied by the caller to track the activity that this message pertains to.

**Message:** A complex type representing a SAML protocol message.

**SessionState:** A structured string representing the information required to log out from this session.

**LogoutState:** A structured string representing additional information required to log out from this session.

### 2.2.2.8 LogoutResponse

The LogoutResponse message is a reply to LogoutRequest, containing updated SessionState and LogoutState values. It is used by the following message:

Message type	Action URI
Response	<a href="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse</a>

**body:** The SOAP body MUST contain a single msis:LogoutResponse element with the following type:

```

<complexType name="LogoutResponseType">
    <complexContent>
        <extension base="msis:ResponseType">
            <sequence>
                <element name="LogoutStatus" type="msis:LogoutStatusType"/>
                <element name="Message" type="msis:SamlMessageType" minOccurs="0"/>
                <element name="SessionState" type="string"/>
                <element name="LogoutState" type="string"/>
                <any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"
            />
            </sequence>
        </extension>
    </complexContent>
</complexType>
```

**LogoutStatus:** A complex type representing the status of the logout process.

**Message:** A complex type representing a SAML Protocol message.

**SessionState:** A structured string representing the information required to log out from this session.

**LogoutState:** A structured string representing additional information required to log out from this session.

### 2.2.2.9 CreateErrorMessageRequest

The CreateErrorMessageRequest message requests the creation of a SAML error message, which will be signed, if the configuration for the requested principal specifies that messages are to be signed. It is used by the following message:

Message type	Action URI
Request	<a href="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest</a>

**body:** The SOAP body MUST contain a single msis:CreateErrorMessage element with the following type:

```

<complexType name="CreateErrorMessageRequestType">
  <complexContent>
    <extension base="msis:RequestType">
      <sequence>
        <element name="ActivityId" type="string"/>
        <element name="Message" type="msis:SamlMessageType"/>
        <element name="Principal" type="msis:PrincipalType"/>
        <any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded" />
      </sequence>
    </extension>
  </complexContent>
</complexType>

```

**ActivityId:** An opaque string supplied by the caller to track the activity to which this message pertains.

**Message:** A complex type representing a SAML Protocol message.

**Principal:** A complex type representing a SAML EntityId for a SAML IdP, a SAML SP, or this STS server.

### 2.2.2.10 CreateErrorMessageResponse

The CreateErrorMessageResponse message is a reply to CreateErrorMessageRequest, containing the created SAML error message. It is used by the following messages:

Message type	Action URI
Response	<a href="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse</a>

**body:** The SOAP body MUST contain a single msis:CreateErrorMessageResponse element with the following type:

```

<complexType name="CreateErrorMessageResponseType">
  <complexContent>
    <extension base="msis:ResponseType">
      <sequence>
        <element name="Message" type="msis:SamlMessageType"/>
        <any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded" />
      </sequence>
    </extension>
  </complexContent>
</complexType>

```

**Message:** A complex type representing a SAML Protocol message.

### 2.2.3 Elements

This specification does not define any common XML Schema element definitions.

### 2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

Complex type	Description
RequestType	An abstract type containing protocol request message parameters.
ResponseType	An abstract type containing protocol response messages parameters.
PrincipalType	A structure containing a PrincipalTypes value and an identifier for the principal.
SamlMessageType	A structure containing a representation of a SAML Protocol message.
PostBindingType	A structure containing SAML binding information for a SAML post binding.
RedirectBindingType	A structure containing SAML binding information for a SAML redirect binding.

#### 2.2.4.1 RequestType

This abstract type contains request message parameters for messages using this protocol. The schema for this type MUST be as follows:

```
<complexType name="RequestType" abstract="true"/>
```

#### 2.2.4.2 ResponseType

This abstract type contains response message parameters for messages using this protocol. The schema for this type MUST be as follows:

```
<complexType name="ResponseType" abstract="true"/>
```

#### 2.2.4.3 PrincipalType

This structure contains a PrincipalTypes value and an identifier for the principal. The schema for this type MUST be as follows:

```
<complexType name="PrincipalType">
  <sequence>
    <element name="Type" type="msis:PrincipalTypes"/>
    <element name="Identifier" type="string"/>
  </sequence>
</complexType>
```

**Type:** A PrincipalTypes enumeration value identifying the type of the SAML principal.

**Identifier:** An identifier for the SAML principal. This is a SAML EntityId.

#### 2.2.4.4 SamlMessageType

This structure contains a representation of a SAML Protocol message. The schema for this type MUST be as follows:

```
<complexType name="SamlMessageType">
  <sequence>
    <element name="BaseUri" type="anyURI"/>
    <choice>
      <element name="SAMLart" type="string"/>
      <element name="SAMLRequest" type="string"/>
      <element name="SAMLResponse" type="string"/>
    </choice>
    <choice>
      <element name="PostBindingInformation" type="msis:PostBindingType"/>
      <element name="RedirectBindingInformation" type="msis:RedirectBindingType"/>
    </choice>
  </sequence>
</complexType>
```

**BaseUri:** The URL to post message to.

**SAMLart:** A SAML artifact identifier, base64-encoded as per [SamlBinding] section 3.6.

**SAMLRequest:** A SAML request message, base64-encoded as per [SamlBinding] sections 3.4 and 3.5.

**SAMLResponse:** A SAML response message, base64-encoded as per [SamlBinding] sections 3.4 and 3.5.

**PostBindingInformation:** Information about the SAML Message using the SAML post binding, as per [SamlBinding] section 3.5.

**RedirectBindingInformation:** Information about the SAML Message using the SAML redirect binding, as per [SamlBinding] section 3.4.

#### 2.2.4.5 PostBindingType

This structure contains SAML binding information for a SAML post binding. The schema for this type MUST be as follows:

```
<complexType name="PostBindingType">
  <sequence>
    <element name="RelayState" minOccurs="0" type="string"/>
  </sequence>
</complexType>
```

**RelayState:** An opaque BLOB that, if present in the request, MUST be returned in the response, as per [SamlBinding] section 3.5.3.

#### 2.2.4.6 RedirectBindingType

This structure contains SAML binding information for a SAML redirect binding. The schema for this type MUST be as follows:

```

<complexType name="RedirectBindingType">
  <sequence>
    <element name="RelayState" minOccurs="0" type="string"/>
    <sequence minOccurs="0">
      <element name="Signature" type="string"/>
      <element name="SigAlg" type="string"/>
      <element name="QueryStringHash" minOccurs="0" type="string"/>
    </sequence>
  </sequence>
</complexType>

```

**RelayState:** An opaque BLOB that, if present in the request, MUST be returned in the response, as per [SamlBinding] section 3.4.3.

**Signature:** The message signature (if present), encoded as per [SamlBinding] section 3.4.4.1.

**SigAlg:** The message signature algorithm (if present), as per [SamlBinding] section 3.4.4.1.

**QueryStringHash:** A base64-encoded SHA-1 hash of the redirect query string (if present), for integrity purposes, as per [SamlBinding] section 3.6.4.

## 2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

Simple type	Description
LogoutStatusType	An enumeration of status values for logout operations.
PrincipalTypes	An enumeration of the types of SAML principals.

### 2.2.5.1 LogoutStatusType

This type enumerates the set of status values for logout operations. The schema for this type MUST be as follows:

```

<simpleType name="LogoutStatusType">
  <restriction base="string">
    <enumeration value="InProgress" />
    <enumeration value="LogoutPartial" />
    <enumeration value="LogoutSuccess" />
  </restriction>
</simpleType>

```

**InProgress:** Indicates that more logout work is required to be performed.

**LogoutPartial:** Indicates that the logout process is complete, but all session participants might not have been logged out.

**LogoutSuccess:** Indicates the logout process is complete, with all session participants logged out.

## 2.2.5.2 PrincipalTypes

This type enumerates the set of types of SAML principals. The schema for this type MUST be as follows:

```
<simpleType name="PrincipalTypes">
  <restriction base="string">
    <enumeration value="Self" />
    <enumeration value="Scope" />
    <enumeration value="Authority" />
  </restriction>
</simpleType>
```

**Self:** Indicates that the principal is this STS server.

**Scope:** Indicates that the principal is a SAML Service Provider, identified by an Entity Identifier, as per [SAMLCore2] section 8.3.6.

**Authority:** Indicates that the principal is a SAML Identity Provider, identified by an Entity Identifier, as per [SAMLCore2] section 8.3.6.

## 2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

## 2.2.7 Groups

This specification does not define any common XML schema group definitions.

## 2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

## 3 Protocol Details

### 3.1 Common Details

This section describes protocol details that are common among multiple port types.

#### 3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

The SAMLPR Protocol enables proxy servers to have STS servers perform operations requiring state held at the STS server. Other than standard SOAP request/response protocol state that is not specific to this protocol, no state about the protocol is maintained at either the protocol client or server.

#### 3.1.2 Timers

There are no protocol-specific timer events that MUST be serviced by an implementation. This protocol does not require timers beyond those that are used by the underlying transport to transmit and receive SOAP messages. The protocol does not include provisions for time-based retry for sending protocol messages.

#### 3.1.3 Initialization

No protocol-specific initialization is required to use this protocol. Standard SOAP bindings MUST be established between the client and server before initiating communication.

For clients running on the local machine, the standard STS server SOAP endpoint address is `net.tcp://localhost/samlprotocol`. For clients running on remote machines connecting to a server, the standard STS server SOAP endpoint address is `https://contoso.com/adfs/services/trust/samlprotocol/proxycertificatetransport`, where contoso.com represents the server domain name. Other port addresses MAY be used by implementations. <1>

#### 3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of operations as defined by this specification:

Operation	Description
SignMessage	This operation causes a SAML Message signature be applied to the supplied SAML Message when the configuration requires signing, with the resulting message being returned as a result.
VerifyMessage	This operation verifies whether a SAML Message is from a known party and signed according to metadata directives for that party, returning the result as a Boolean.
Issue	This operation causes issuance of a SAML token.
Logout	This operation causes a SAML session to be logged out.
CreateErrorMessage	This operation creates a SAML error message, applying a signature, if the configuration for the requested principal specifies that messages are to be signed.

For each operation there is a request and reply message. In all cases, the sequence of operation is that the client sends the request message to the server, which responds with the corresponding reply message. The server MUST accept the request messages and the client MUST accept the corresponding reply messages, when sent in response to a request message. The behavior of any other uses of these messages is undefined.

### **3.1.4.1 SignMessage**

This operation causes a SAML Message signature be applied to the supplied SAML Message when the configuration requires signing, with the resulting message being returned as a result. This operation consists of the client sending a SignMessageRequest message to the server, which replies with a SignMessageResponse message.

#### **3.1.4.1.1 Messages**

The following table summarizes the set of message definitions that are specific to this operation.

<b>Message</b>	<b>Description</b>
SignMessageRequest	Conveys request parameters for SignMessage operation.
SignMessageResponse	Conveys response parameters for SignMessage operation.

#### **3.1.4.1.1.1 SignMessageRequest**

This message conveys request parameters for the SignMessage operation.

#### **3.1.4.1.1.2 SignMessageResponse**

This message conveys response parameters for the SignMessage operation.

### **3.1.4.2 VerifyMessage**

This operation verifies whether a SAML Message is from a known party and signed according to metadata directives for that party, returning the result as a Boolean. This operation consists of the client sending a VerifyMessageRequest message to the server, which replies with a VerifyMessageResponse message.

#### **3.1.4.2.1 Messages**

The following table summarizes the set of message definitions that are specific to this operation.

<b>Message</b>	<b>Description</b>
VerifyMessageRequest	Conveys request parameters for the VerifyMessage operation.
VerifyMessageResponse	Conveys response parameters for the VerifyMessage operation.

#### **3.1.4.2.1.1 VerifyMessageRequest**

This message conveys request parameters for the VerifyMessage operation.

#### **3.1.4.2.1.2 VerifyMessageResponse**

This message conveys response parameters for the VerifyMessage operation.

### **3.1.4.3 Issue**

This operation causes the issuance of a SAML token. This operation consists of the client sending an IssueRequest message to the server, which replies with an IssueResponse message.

#### **3.1.4.3.1 Messages**

The following table summarizes the set of message definitions that are specific to this operation.

Message	Description
IssueRequest	Conveys request parameters for the Issue operation.
IssueResponse	Conveys response parameters for the Issue operation.

#### **3.1.4.3.1.1 IssueRequest**

This message conveys request parameters for the Issue operation.

#### **3.1.4.3.1.2 IssueResponse**

This message conveys response parameters for the Issue operation.

### **3.1.4.4 Logout**

This operation causes a SAML session to be logged out. This operation consists of the client sending a LogoutRequest message to the server, which replies with a LogoutResponse message.

#### **3.1.4.4.1 Messages**

The following table summarizes the set of message definitions that are specific to this operation.

Message	Description
LogoutRequest	Conveys request parameters for the Logout operation.
LogoutResponse	Conveys response parameters for the Logout operation.

#### **3.1.4.4.1.1 LogoutRequest**

This message conveys request parameters for the Logout operation.

#### **3.1.4.4.1.2 LogoutResponse**

This message conveys response parameters for Logout operation.

### **3.1.4.5 CreateErrorMessage**

This operation creates a SAML error message, applying a signature, if the configuration for the requested principal specifies that messages are to be signed. This operation consists of the client

sending a CreateErrorMessageRequest message to the server, which replies with a CreateErrorMessageResponse message.

#### **3.1.4.5.1 Messages**

The following table summarizes the set of message definitions that are specific to this operation.

<b>Message</b>	<b>Description</b>
CreateErrorMessageRequest	Conveys request parameters for the CreateErrorMessage operation.
CreateErrorMessageResponse	Conveys response parameters for the CreateErrorMessage operation.

##### **3.1.4.5.1.1 CreateErrorMessageRequest**

This message conveys request parameters for the CreateErrorMessage operation.

##### **3.1.4.5.1.2 CreateErrorMessageResponse**

This message conveys response parameters for the CreateErrorMessage operation.

#### **3.1.4.6 Types Common to Multiple Operations**

This section describes types that are common to multiple operations.

##### **3.1.4.6.1 Complex Types**

The following table summarizes the XML schema complex type definitions that are common to multiple operations, the schemas for which are defined in section 2.2.4.

<b>Complex type</b>	<b>Description</b>
PrincipalType	Identifies participant in a SAML federation, including its role.
SamlMessageType	Representation of a SAML Protocol message and the binding used to send it.
PostBindingType	Information about a SAML post binding, which consists of its RelayState, if present.
RedirectBindingType	Information about a SAML redirect binding, which consists of its RelayState, if present, and signature information, if present.

##### **3.1.4.6.1.1 PrincipalType**

This complex type identifies participant in a SAML federation, including its role.

##### **3.1.4.6.1.2 SamlMessageType**

This complex type specifies the representation of a SAML Protocol message and the binding used to send it.

##### **3.1.4.6.1.3 PostBindingType**

This complex type specifies information about a SAML post binding, which consists of its RelayState, if present.

### **3.1.4.6.1.4 RedirectBindingType**

This complex type specifies information about a SAML redirect binding, which consists of its RelayState, if present, and signature information, if present.

### **3.1.4.6.2 Simple Types**

The following table summarizes the XML schema simple definitions that are common to multiple operations, the schemas for which are defined in section 2.2.5.

Simple type	Description
LogoutStatusType	Indicates whether logout operation has completed or not, and if completed, whether all session participants were logged out.
PrincipalTypes	Identifies role of participant in SAML federation.

#### **3.1.4.6.2.1 LogoutStatusType**

This simple type indicates whether logout operation has completed or not, and if completed, whether all session participants were logged out.

#### **3.1.4.6.2.2 PrincipalTypes**

This simple type identifies the role of the participant in a SAML federation.

### **3.1.4.7 Status Codes for Operations**

This section describes both the <Status> element and the different status codes as specified in [SAMLCore2], section 3.2.2.

#### **3.1.4.7.1 Element <Status>**

The <Status> element contains the following three elements:

Element	Required/Optional	Description
<StatusCode>	Required	This element MUST contain a code that represents the status of a request that has been received by the server.
<StatusMessage>	Optional	This element MAY contain a message that is to be returned to the operator.
<StatusDetail>	Optional	This element MAY contain additional information concerning an error condition.

The following schema fragment defines both the <Status> element and its corresponding **StatusType** complex type:

```
<element name="Status" type="samlp:StatusType"/>
<complexType name="StatusType">
    <sequence>
        <element ref="samlp:StatusCode"/>
        <element ref="samlp:StatusMessage" minOccurs="0"/>
        <element ref="samlp:StatusDetail" minOccurs="0"/>
    </sequence>
```

```
</complexType>
```

### 3.1.4.7.2 Element <StatusCode>

The <StatusCode> element contains a code or a set of nested codes that represent the status of the request. Every <StatusCode> element has the following attribute:

Attribute	Required/Optional	Description
Value	Required	The status code value. This value MUST contain a URI reference. The Value attribute of the top-level <StatusCode> element MUST be one of the top-level status codes given in this section. Subordinate <StatusCode> elements MAY use second-level status code values given in this section.

The <StatusCode> element MAY contain subordinate second-level <StatusCode> elements that provide additional information on the error condition.

The permissible top-level status codes are:

Status code	Description
urn:oasis:names:tc:SAML:2.0:status:Success	The request succeeded.
urn:oasis:names:tc:SAML:2.0:status:Requester	The request could not be performed due to an error on the part of the requester.
urn:oasis:names:tc:SAML:2.0:status:Responder	The request could not be performed due to an error on the part of the SAML responder or SAML authority.
urn:oasis:names:tc:SAML:2.0:status:VersionMismatch	The SAML responder could not process the request because the version of the request message was incorrect.

The second-level status codes are:

Status code	Description
urn:oasis:names:tc:SAML:2.0:status:AuthnFailed	The responding provider was unable to successfully authenticate the principal.
urn:oasis:names:tc:SAML:2.0:status:InvalidAttrNameOrValue	Unexpected or invalid content was encountered within a <saml:Attribute> or <saml:AttributeValue> element.
urn:oasis:names:tc:SAML:2.0:status:InvalidNameIDPolicy	The responding provider cannot or will not support the requested name identifier policy.
urn:oasis:names:tc:SAML:2.0:status>NoAuthnContext	The specified authentication context requirements cannot be met by the responder.
urn:oasis:names:tc:SAML:2.0:status>NoAvailableIDP	Used by an intermediary to indicate that none of the supported identity provider <Loc> elements in an <IDPList> can be resolved or that none of the supported identity providers are available.
urn:oasis:names:tc:SAML:2.0:status>NoPassive	Indicates that the responding provider cannot authenticate the principal passively, as has been requested.
urn:oasis:names:tc:SAML:2.0:status:NoSupportedIDP	Used by an intermediary to indicate that none

Status code	Description
	of the identity providers in an <IDPList> are supported by the intermediary.
urn:oasis:names:tc:SAML:2.0:status:PartialLogout	Used by a session authority to indicate to a session participant that it was not able to propagate the logout request to all other session participants.
urn:oasis:names:tc:SAML:2.0:status:ProxyCountExceeded	Indicates that a responding provider cannot authenticate the principal directly and is not permitted to proxy the request further.
urn:oasis:names:tc:SAML:2.0:status:RequestDenied	The SAML responder or SAML authority is able to process the request but has chosen not to respond. This status code MAY be used when there is concern about the security context of the request message or the sequence of request messages received from a particular requester.
urn:oasis:names:tc:SAML:2.0:status:RequestUnsupported	The SAML responder or SAML authority does not support the request.
urn:oasis:names:tc:SAML:2.0:status:RequestVersionDeprecated	The SAML responder cannot process any requests with the protocol version specified in the request.
urn:oasis:names:tc:SAML:2.0:status:RequestVersionTooHigh	The SAML responder cannot process the request because the protocol version specified in the request message is a major upgrade from the highest protocol version supported by the responder.
urn:oasis:names:tc:SAML:2.0:status:RequestVersionTooLow	The SAML responder cannot process the request because the protocol version specified in the request message is too low.
urn:oasis:names:tc:SAML:2.0:status:ResourceNotRecognized	The resource value provided in the request message is invalid or unrecognized.
urn:oasis:names:tc:SAML:2.0:status:TooManyResponses	The response message would contain more elements than the SAML responder is able to return.
urn:oasis:names:tc:SAML:2.0:status:UnknownAttrProfile	An entity that has no knowledge of a particular attribute profile has been presented with an attribute drawn from that profile.
urn:oasis:names:tc:SAML:2.0:status:UnknownPrincipal	The responding provider does not recognize the principal specified or implied by the request.
urn:oasis:names:tc:SAML:2.0:status:UnsupportedBinding	The SAML responder cannot properly fulfill the request using the protocol binding specified in the request.

The following schema fragment defines the <StatusCode> element and its corresponding **StatusCodeType** complex type:

```

<element name="StatusCode" type="samlp:StatusCodeType"/>
<complexType name="StatusCodeType">
    <sequence>
```

```

<element ref="samlp:StatusCode" minOccurs="0"/>
</sequence>
<attribute name="Value" type="anyURI" use="required"/>
</complexType>

```

### **3.1.4.7.3 Element <StatusMessage>**

The <StatusMessage> element specifies a message that MAY be returned to an operator. The following schema fragment defines the <StatusMessage> element:

```
<element name="StatusMessage" type="string"/>
```

### **3.1.4.7.4 Element <StatusDetail>**

The <StatusDetail> element MAY be used to specify additional information concerning the status of the request. The additional information consists of zero or more elements from any namespace, with no requirement for a schema to be present or for schema validation of the <StatusDetail> contents.

The following schema fragment defines the <StatusDetail> element and its corresponding **StatusDetailType** complex type:

```

<element name="StatusDetail" type="samlp:StatusDetailType"/>
<complexType name="StatusDetailType">
    <sequence>
        <any namespace="#any" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
    </sequence>
</complexType>

```

## **3.1.5 Timer Events**

This protocol does not require timers beyond those that are used by the underlying transport to transmit and receive SOAP messages. The protocol does not include provisions for time-based retry for sending protocol messages.

## **3.1.6 Other Local Events**

This protocol does not have dependencies on any transport protocols other than HTTP 1.1 and TCP. This protocol relies on these transport mechanisms for the correct and timely delivery of protocol messages. The protocol does not take action in response to any changes or failure in machine state or network communications.

## **3.2 Server Details**

### **3.2.1 Abstract Data Model**

This port type utilizes the common abstract data model described in section 3.1.1.

### **3.2.2 Timers**

This port type utilizes the common timers design described in section 3.1.2.

### **3.2.3 Initialization**

This port type utilizes the common initialization design described in section 3.1.3. In addition, an implementation SHOULD publish a SOAP endpoint at the port `net.tcp://localhost/samlprotocol` to be connected to by local clients. Also, an implementation SHOULD publish a SOAP endpoint at the port `https://contoso.com/adfs/services/trust/samlprotocol/proxycertificatetransport`, where contoso.com represents the server domain name, to be connected to by remote clients. Other port addresses MAY be used by implementations.<2>

### **3.2.4 Message Processing Events and Sequencing Rules**

This port type utilizes the common message processing events and sequencing rules described in section 3.1.4.

### **3.2.5 Timer Events**

This port type utilizes the common timer events design described in section 3.1.5.

### **3.2.6 Other Local Events**

This port type utilizes the common other local events design described in section 3.1.6.

## **3.3 Client Details**

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or implementation are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

### **3.3.1 Abstract Data Model**

This port type utilizes the common abstract data model described in section 3.1.1.

### **3.3.2 Timers**

This port type utilizes the common timers design described in section 3.1.2.

### **3.3.3 Initialization**

This port type utilizes the common initialization design described in section 3.1.3. In addition, an implementation SHOULD connect to a SOAP endpoint at the port `net.tcp://localhost/samlprotocol` for a local connection to the STS or it SHOULD connect to a SOAP endpoint at the port `https://contoso.com/adfs/services/trust/samlprotocol/proxycertificatetransport`, where contoso.com represents the STS domain name for a remote connection. Other port addresses MAY be used by implementations.<3>

### **3.3.4 Message Processing Events and Sequencing Rules**

This port type utilizes the common message processing events and sequencing rules described in section 3.1.4.

### **3.3.5 Timer Events**

This port type utilizes the common timer events design described in section 3.1.5.

### **3.3.6 Other Local Events**

This port type utilizes the common other local events design described in section 3.1.6.

## 4 Protocol Examples

### 4.1 Issue Operation Examples

#### 4.1.1 IssueRequest Example

This is an example of a message requesting issuance of a SAML token.

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProtocolRequest</a:Action>
      <a:MessageID>urn:uuid:cc11441e-1d06-45b5-b0b5-ef73eee87659</a:MessageID>
      <a:ReplyTo>
        <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
      </a:ReplyTo>
      <a:To s:mustUnderstand="1">net.tcp://localhost/samlprotocol</a:To>
    </s:Header>
    <s:Body>
      <msis:IssueRequest
        xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
        <msis:ActivityId>00000000-0000-0000-0000-000000000000</msis:ActivityId>
        <msis:Message>
          <msis:BaseUri>http://localhost</msis:BaseUri>

<msis:SAMLRequest>PD94bWwgdmVyc2lvbj0iMS4wIiB1bmNvZGluZz0idXRmLTE2Ij8+PHNhbwOkF1dGhuUmVxdWV
zdCBJRDiX2QzYWNjZWl3LWV1ZjctNDI5NyliMTgyLWE0NmYxYzQ3NWJjMSigVmVyc2lvbj0iMi4wIiBJc3N1ZU1uc3Rh
bnQ9IjIwMDktMTItMThUMDE6MzE6MDYuNDM0WiIgQ29uc2VudD0idXJu9hC2lZm5hBwOnRjO1NBTUw6Mi4wOmNvb
nNlbnQ6dw5zcGVjaWZpZWQiIHTbG5zOnNhbWxwPSJ1cm46b2FzaXM6bmFtZXM6dGM6U0FNTDoyLjA6cHJvdG9jb2wiPj
xJc3N1ZXiGeG1sbnM9InVybjpvYXNpczpuYW1lczp0YzpTQU1MoJiMuDphc3NlcnRp24iPmh0dHA6Ly9leHRlcm5hbHJ
wl3Njb3B1PC9Jc3N1ZXi+PC9zYW1scDpBdXRoblJ1cXVlc3Q+</msis:SAMLRequest>
          <msis:PostBindingInformation></msis:PostBindingInformation>
        </msis:Message>
        <msis:OnBehalfOf>
          <wssc:SecurityContextToken wssu:Id="_7b5d980c-9309-474e-ace8-23a99bbe261d-
6C82EA4288DB37210E653FCF8E064B57" xmlns:wssc="http://docs.oasis-open.org/ws-sx/ws-
secureconversation/200512" xmlns:wssu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-
wss-wssecurity-utility-1.0.xsd">
            <wssc:Identifier>urn:uuid:24e876b6-1b0e-43e4-95da-7de16ec31f76</wssc:Identifier>
            <wssc:Instance>urn:uuid:a27fafd2-7e20-47c5-a004-3d83bed8e8f4</wssc:Instance>
            <mss:Cookie
              xmlns:mss="http://schemas.microsoft.com/ws/2006/05/security">WFUABeuNCowL9thXJ601uZ9/RNRXopMT
MYRh/PRX3SAAAAAA91yIG1JLwXwgu5vEdh3wsm4zf7cBxsK5Waam5TqQjGD1J7qhggnjpNBwz9J7r/8fqJLdscGzvU7E
ifqfkkoXX01kDf+fUXxXr0oBE/dY4BKrGrK1S07VqOULAR4Xr39+X8Jp/eeMncIaJuZ01DSB4MwlulVpZKhC3grjfPfAo
1wBwAAm0P1IV2HE1h1ppYbFBmaYmYzpqCQoa/Ptr08YCN8YweH1FzEm929H5oEG87TMEjYnuAe1BAmGo8BhqBtVS+o16jd
XCSeLF3J/vabemgbxIfJngh4x5xuYldiRo9FJH78syGjOtGFAVi3KRnpIvnRPg3YKRW0sknIH21DDzjaFGPZW/w1B0Yen
bWFH+sRkfd+jOqhTVk+3++oeYczWWSiAzhWDMZKA/kqv3Rh05Drr0v6JbzS3H+PjxzXL1NeEvD8Nhxh+0tINy+i3PWIHX
C7WFgYeS8T1TpaxBq+zrH5DDEQlv4haozU+411T7pBcy9Nd1jLedSK/Eo5/Fyvsm8g2HKL0jgKbr6jB3XYRffDjAlTIWZ
jq7IZQqqAnaa9xZpcVKxZ4sHysUo1GK6uFYWpdZYUe5sTmW4bdYJw6bNS0KEzheKLrociE8c9Ldv61idHQJuvG0qT6xU
pCkD6KeUrV6ZQxRoKs5fyemG8wsR7+r9tLpbPjqpnpj4SbAjXwOQJA0ksz0KCDn+VbQjQ/YIc+fWd0Jv6/S+rZLDi1UXg
MYPmdGcfIMFZEMICjz81dcVGIXAuKC9AfFJpfqG+A+vQowgqxop6Abi/pKnrDa+ChNOQIkSFQoz5btioPd63j5dKu/Y5
CqR+tHD7eysrTf1zdhw10xYFA0beoETCRSgsmCg02iByWWTxze1rKwPfn5wB0dnzh5ruPAOS9alto8k2dqbyavuPRI
3MqehLnsBxr9Lh5j45gs19+InjbJv/Sel1xsbh5BkbTZp9pghkG4ALivz1aRBcQdUDXe85Tb1hcuyD1AVs1PudCMHD1N8p
DDPAkgAzcIhTiBnElfljHL7uCeC+UKfEu6Hv8N134yw5vRPErgq8VaRb0UBXVs9/p4Adv/HgtJbLU2hL1/rr9DqOru3h
Hlp0R18aLiddHt/n004awqaIconXGILFqlwMRJXP3J8JL9CNcPbp/eszX83o1GILPR+dnsRnAjHQbcGWkSM/5VMTHRVie
g1mXQVcJ90gltdmP1Cxt8luaxruGjezeIzkSwtXHSg5HPEWGw91mtx9Snro4BD9XveIMHkInBYczKV1glR+AxopfNCgq
sKyA+EyGVOcscmDnqLmnR12gsvnY1JZBz2uBfgqCq6BLgI0QYnSkdyEPTfcIn6aupftsh5zmnd/1vXY6b0TCXQ+iNuLM
bxLZh2znB13UNqt4hDIQGEfwqR6TPK1p0dpfd4T5yGetcq0pf12nwbcICsRL1Snp4pBRuULw7cn1x4IzJcU+vplmGs
GpdtsUPJyxu+8XSAh13wBvx8g+X3sZKNxKDAUncwHlg7QHzPaRat2S9i87+GJg6CFrfIbh32exctEY4c5eR/yXi8y2s
RTLqmfx4X2s3+108sDMwcPunHh/ygRwk9NWq8BvuAcPmkN5norSia+9//wyeee19e3Ez3i/iMAWAyVoVYT1uom5jkwhEDR
FlZ0t51RtejC1kPqFBAGdruJ+T402E3qUHeGaRili7XRsY07EQocv07UGVOJ++YgtXb//SRdIFStO+MiOHv5AOIzDlab+
qKSRRhpSWmXK18x4Rja+5qbDE2+gPfj0lp42YC9ZSvxrhHu/yHW/ZdNaaf106WAiaehYjIirfMiTx6yIXL0f6reF9FxPy
```

```

JzOfWEYKLbqFa2wZumAj67Mo453IwWaJPqZ+JcExHeghuj9CMgsUsXyqVbb2HEjVU3VfGOZVShAQX+HT/W8z9365vHlgXn
9X4Yg+Af31vGgiAwznYENKtm5iWJTgINMdMxSt3dkEWZ3mMo7L21FRJLBc2vemz5hkdijTZFFymC2Rp53S700/g6l+b2t
5Nviz1ADXwrjZfpdG3+cBugaq1id162qI6oqKepeo9rwCJwYxnXDZ8060zmSm0N48Hzs6uBETZ7JMKAW/ajaembKaKT4
mQAEv5DBtwhcjXn4sQ9XHQQSxjKn5MzvDdBXB6YzoGq3aGY9TuWYAFaaegDgEyR2aPmlVwJPVCPhJ9SYAq6UglSu6F5Qy
EHM5vz6kC6CMVIRqyjcpSrhRW7ferQLDcZQDfWcBZUnLoxrbiCn8yF7qv6nL26800R2Mjmybf0WKaguG/AlBq36uxnaS1
ds1zcIderyiqQenStNPT4YACHUQiif15Wv8Vnf37LiJYDolqhc5zWTq5ahHImDezmLeNoM4H9eHY1X3+6jDQAQ3YQk6uLZ
wOr6LdyCNns7m0IEoR3dWPqLJMiuNtow5LeN77vVVlraw14ajdQOxlh19kmkumtjYwXI1GuPbCRFLluEu6VVVOYHDxks
Fvx1ndWHHV1338ALnKu7500DtH5bg1ZE1UuLSPDR/B6zhS7QRS4o5j3kwRq845ro+M1LJJzmrKQKaf5szHivqjIIJmQ
j5Meq8CGFF0HdH27zKA02mYzmPPJ3FjQ6HG+ZM+3DtSdyjIj2oPFmklyhzet45wlporNNs+EVVquh+M1EE5PqgtUS3WN
rUREQM4tvGC5Ni5kApHDj1+LeQHAE1z0m=</mss:Cookie>
    </wssc:SecurityContextToken>
</msis:OnBehalfOf>
<msis:SessionState></msis:SessionState>
</msis:IssueRequest>
</s:Body>
</s:Envelope>

```

## 4.1.2 IssueResponse Example

This is an example of a reply to a request to issue a SAML token, which contains the resulting SAML response message.

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse</a:Action>
    <a:RelatesTo>urn:uuid:86127da1-0660-4001-9clf-d79bf1aae52a</a:RelatesTo>
    <a>To s:mustUnderstand="1">http://www.w3.org/2005/08/addressing/anonymous</a:To>
  </s:Header>
  <s:Body>
    <msis:IssueResponse
      xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
      <msis:Message>
        <msis:BaseUri>https://externalrp/rp1</msis:BaseUri>

<msis:SAMLResponse>PHNhbwXwxO1Jlc3BvbN1IE1EPSJfMGQ2MjE0MWMTYTazZC00MGElLWJmZmQtYjJmZDY2NjI5MD
kxIiBWZXJzaW9uPSIyLjAiIE1zc3V1SLW5zdGFudD0iMjAwOS0xMj0xOFQwMT0zMT0xNy41MTJa1iBEZXN0aW5hdGlvbj0
iaHR0cHM6Ly9leHrlcm5hbHJwL3JwMSIgQ29uc2VudD0idXJuOm9hc2lzMh5bwVzOnRj0lNBTUw6Mi4wOmNvbnNlbnQ6
dW5zcGVjaWzpqZWQiIEluUmVzcG9uc2VUbz0ix2QwZDE1NDE1LTY50GMtNDk20S1iM2E5LWRjZmNjMjEzYzE5ZSIgeG1sb
nM6c2FtbHA9InVybjpvYXNpczpuyW1lczp0YzpTQU1MojiuMDpwcm90b2NvbCI+PElzc3VlciB4bWxucz0idXJuOm9hc2
1z0m5hbWVzOnRj0lNBTUw6Mi4w0mFzC2VydG1vb1+aHR0cDovL2xvY2FsaG9zdC88L01zc3V1cj48c2FtbHA6U3RhdHV
zPjxzYw1scDpTdGF0dXNbD2R1FZhzbHv1PSJ1cm46b2FzaXm6bmFtzXm6dGM6U0FNTDoyLjA6c3RhHVz0lN1Y2N1c3Mi
IC8+PC9zYw1scDpTdGF0dXM+PEVuY3J5cHrlZEfzc2VydG1vb1B4bWxucz0idXJuOm9hc2lzMh5bwVzOnRj0lNBTUw6M
i4wOmFzC2VydG1vb1+PHhlbmM6RW5jcn1wdGvkRGf0YSBueXB1PSjodHRwOi8vd3d3Lnczlm9yZy8yMDAxLzA0L3htbG
VuYyNFbGvtzW50iB4bWxucz4Zw5jPSjodHRwOi8vd3d3Lnczlm9yZy8yMDAxLzA0L3htbGVuYyMiPjx4Zw5jOkVuY3J
5cHRpb25NZXR0b2QgQWxnb3JpdGhtPSjodHRwOi8vd3d3Lnczlm9yZy8yMDAxLzA0L3htbGVuYyNhZMyNTYtY2JjIiAv
PjxLZXl1JbmZvIHtB5zPSjodHRwO18vd3d3Lnczlm9yZy8yMDAwLzA5L3htbGRzaWcjiJ48ZTpFbmNyeXB0ZWLRLZxkge
G1sbnM6ZT0iaHR0cDovL3d3d53My5vcmcvMjAwMS8wNC94bWx1bmMjIj48ZTpFbmNyeXB0aW9uTWV0aG9kIEFsZ29yaX
RobT0iaHR0cDovL3d3d53My5vcmcvMjAwMS8wNC94bWx1bmMjcnNhLw9hZAtbWdmMXAiPjxeAwdlc3RNZXRob2QgQWx
nb3JpdGhtPSjodHRwOi8vd3d3Lnczlm9yZy8yMDAwLzA5L3htbGRzaWcjc2hHSigLz48L2U6RW5jcn1wdG1vbk1ldGhv
ZD48S2V5SW5mbz48ZHM6WDUwOURhdGEgEg1sbnM6ZHM9Imh0dHA6Ly93d3cudzMuB3JnLzIwMDAveMDkveG1sZHNpZyMiP
jxkczpYNTA5SXNzdWVYU2VyaWFsPjxkczpYNTA5SXNzdWVYtMftZt5DTj1sb2NhbGhvc3Q8L2RzO1g1MD1Jc3N1ZXJOYW
11PjxkczpYNTA5U2VyaWFsTnVtYmVyPjxkmtQ4MjA1MzcxODg1MzQ1NDQzOTM1NTQ5MTM3MjE2Mz1zNzkyPC9kczpYNTA
5U2VyaWFsTnVtYmVyPjwvZHM6WDUwO1zc3V1clN1cm1hbD48L2RzO1g1MD1EYXrhPjwvS2V5SW5mbz48ZTpDaXboZXJE
YXRhPjx1OkNpcGh1c1ZhbHv1PnBVUTQwMmr3cGduUy9XYWVrK2NvdTAvgOG1DYVQ0cDA4NDBTejNCK3Rxcm1JW1FCZFUO
DFzC83NHpSQXR82NVMkova2JBUHbtRkZCckdJYWE0eGdGc3NHUUFWk44Rkn6N3pzb2VBNXN1QitGa3pXM0U4Skk3zi
s2UGxZXGsrLp13d11Kd1poTDhzWTJQ3ZYV1NrzJMUGoyRhpkdFpOeHVTU9kr08L2U6Q21waGVyVmFsdwU+PC9
1OkNpcGh1cKhdGE+PC91OkVuY3J5cHrlZEtleT48l0tleuluZm8+FHhlbmM6Q21waGVyRgf0Y48eGVuYzpDaXboZXJW
Yw1ZT5CMGQzN3FBUWJWeURIetJac3Joa3ZIw0zcmE1dk0vbjVuUUFhREFNcVdrWFhCdm9DTExdjNWeEYrVDr0WGJ3U
1kv0UpVZEpJNDJwMXVFTGpxd3NxrMxNK1QwU2NjeDQ3ZG8wZ20yuCtFaG40amlXZTzwcGx4dUcwVFFpeWNKZE1OZEKzTT
d4UnNLvEhHWc2dnNi294bnBoWFF4Txd2SVB1WGXzQW10ZE3YXN2RUEyMGg2N3Jws1RPrml1Qu9WVksvTEFvNx2eTZ
MZHp1czRLMEvpWV5NT09sdGREN1pKUT1Sc1pyMHZEOGM2K2EybDBNYUNSL0pIWGJpTmlraGtmc1FCWThqc1FFRHQ2VEoz
ZENXUEjtNGg2c1FxQ051V2NDW1JzclBZYk5Gek1GTHhVsnJVRUVHmkJBOWp5a0x3UkhtSVUxFZ0cmY0a3Vrbk01TkhNb
UMxu2JFQ2tqTDY3emRHOHgzSkcydld2bnhKUWQzTH1YcmzRd2vCRU90c1dT3BCcWVmeStnMXVQLy9Qsk02ZHZBSGU5az

```

```

1vS2JQem5UWQ1SVRiY11ZSXlpVFBKZ0UrNEkralIyT211eWVHemlzY0hZc2s3MG5wRWxGb1RKb2NXZXZYb3BTd28yRnZ
jNPF0V3dicHN4UnBXS3E4OctjcXpuV0xoSo1zMG92Y2ZjNzV1aWFmN2xpK2NRajVESm5GSlpSenpJMzFoSUpaRFJ3OxpM
TmR6eU8zN1J3RmVrRjhESTF6DwdFIxSDJKV3ZNQW1nb2rSwH6ZDFxaEFDSHNNNeS4009nWnZENmh1d1BQYm9vSWNLt
XJYWmpwQkhXV1AxZGlpb3JVZ0hZa3czY0xkUzF4b1c5Rk9Mz21JbWRMcmhSRFFZa0VxeW1Rc1g5M2FBVHTanZvREgzMn
RsNg1Zc2tnY1MvOFJKaGRHMnUxUXJ4dX1sSQ1MmdrbDQvRWpXa1pZRHFxc0NQY1JxYWFXVTNybGJrU10T29sL2JvbU1
oenRFZi81dW16UTFvY1AwV2J0UFVneXNPTnhtY29Hq3VIS0xZcDBuRwKxdXhMdFNSR0RyQTJKeGhORnpHb0hraF16Q1Qy
WWhEM1ZmQ2x5YXRoN1R4OXrVt29qZU3bjYyWmxqMWhIdmNFUmFJRVV3VFhMznoxbmliVldIYURoV1Z1V2Nack14OXdiQ
TNZMgt213RJTE1qd1drL1dUTEm2d1RrcE16NXkzT1cyazNPdUZJTytmRWRCYT1XTTNNb05HSEN0WEs1bEsxTDBmTGdYRG
NrYwx1TXNtNzRhaHE3L2xwZmJyUlF1cGdZy3ZCUnjsTmVBeFhGam15Z0F3MV1RUHNTm9FWkNjt2VEcTJ0a1RqS010eXh
kdEZTNitKbTBjZ2JPb3FueGc3ejJKc1dwYVFocmtDch1LzFxbo11ZVRaMWJmV3cyaXZ4N3hnUjMzXJ1NUFTTG1wdutH
U21LenVFSFA4NHFXr3N1OHA4Y0ExQmhoNzXVMFBMgS0o1Tzd50Vc3VQ2dWY5R1hjcnhxcj1LNzR1WnhJUDBvTEVsZ
lgzMXo5eW9pbW14WHNBZGtW0p4bD1jC0RoEtdOcE1iOXB0zmpKTGFTSEfHjyhQcJ14U0h1NUU0L2ZrcVNxsSk9kT2JcX
JjUFZ4TV1Lb0pvaE9YTU84Yml1NnhvdGZHODZRE1lCwo4Zss5TkVYnjV6Uhg4cTbxVHY1b1JvQUFFV1YyUUvsc3daU2d
uTk1OSkrVvWxZMgd4RKnxaWdu05Kc0Q3WVYyWVZhdhntOVJmV2hGbHd0N0czMwd1V0k05R1Nrd0pEa3BLZVpsUU5tVHdm
WTzjVf5jeX1zT1ovQ3hHZ2IwYmdkl3hNzm42MG14Y1V1dEtYVUhbkjRvaG9nUXViUUpHM21TT1FqS1JORG1EOEt0Rmx3M
GFwd3pCYXYwT0tkU3NCQjAzUGN0YjvGVWzvNm5iNXvpTTNaTW1YbFpwOWsvaVdRbnVQT1Vya2hZaVpLNFR3SDBvdu4rc3
V5YmNkNytdm1wenh1MkxLzjF3YisajNwCxtzN1ByjvzuW430Fpusf1OUfpFYXU4RH1Ya0E0CEY3MHI2SnVRL2tGS31
4WTVUYTA4NnNbHRQekhaN2Zku2dGvFRLTE5109BeT13SnJIVVFEK2RBdmYram5TVA3M1Ba1jZnVmRzRXBETzNudj4
dXRinHpcNktxSvdKbVnZk3ZkNKEqWDFLbE8xv0tXOUFRN0FaSkfzSTJQmzZh0W9PjVwTkpITS9yaGJGK1VZcFmVY3pVW
Ut5NWVvWC9wb2pxellpR0s1Vhg10ExPdjMz2R3Zwp5aGkzNm95NEg3K1NwDjryw1PNGVYTWR1R21S01vd0VgRTFLQV
1COE9hY1NRSER4U2JVLytteUG1aNE9QzK5hMV2RFJCbU43cVd3T1kLSH1Rc0FDaWmWNE9YwU1CeW0zRE1weWx2SUva2Z
RckFkbHbrBnN1za0V3RU0xUi1mk12R1Z4NEFTd1d1wHrsR1NUdW1UWk1udzRmajhXUf1RdFk1SFzhVXd2dW1DTmRRL21a
WmVldUx4ajFBcFVMZUsk01YctNhUmlTYTSYzBYQ2Ixy3pLeVpXVE5FVmP0RytLL2dxWePsbH1Wm1Zpd0JMK0Z5T09Lc
3hwT2JkamhHTHNYaTzq2RWTytMbTRKS0R2eTQreVRwa3FOK3JwTgD5M1VSSFJ3SERUWVNC2NrA04TVAvbmswt1ZLK2
JiN2pRZDd4bXBoNFrVmx2aStpcGZS01FTv03WjVubFgvSkpwOC9DRXk1dTvwMi96ZjvxZjR6eHpmSwExb1p0WkxKVUZ
oMnf0ZJ1LzNEZjMyU1A30V1ub1pDdtZ1Wk5UrvRmFk1UG1PdtBdvHo4CvM0VupCL0tqQW6Q3ZQj012dn1OVndS0W6
Ti9vazdVK2NLUHrsK1M3WFNRZDdpN0didFI5S1c2b1ZPQW1yVG05GRM5dTBibzFuNxPPTXpKYU1UM1dnOEVGOVjSTE0c
nAyQ3NpVdgyQnhFTnRyMxA3L1BtNndCQ1FBbWs5RuS0aTdDcFnzdHruOpwajjGwmNkd0o1REZIRGQzRWZveGRIMkw0Wk
5kdE9pSupaeEQ5bHV1QytSNHczT2V3b3pQWEVnd1NjenBiRXQyUHNpdnR6VzFFVEYwZu5xcEt1R2FSEhoUkRML0x6UGp
KYzd1S1BmUXZ5bHp0TkszTEt1bm9rMkFTUZYcVhCugpWWDDNand0emd0WFdadi9xUC9uellUakpuUdJVFdBMitqNG1R
VWpCSFAxVpzK3EvVDUwcCtsQ215Qys4Rm11T3Y2ROJNTG1X1d13QVFMNHFrV1VuRhu2bnUxSeX1MXZqdXZJcDjwTeTYS
zhamNT1le1CdjFHU1VsYnBa1YbkhJWSHcrchNYRjNbw1RVu1d0TmpFMHPrY2pMUUVuc1hTRHn6S0dzVmh2d1BQqjhxL2
VvnN0d0T1zNnBgE5t0NhzRjB3UHfwL0xtQvnzR1RNuDbkQitYmg1FTytLcWgQzQzbkxWWFVmJjrdCtGcStCbFhhSG1
MTSs0Q1gvNbhU2VSa1LPWkhjRkFsVEYxU5iak1SaXdhbnJDQ1JpcHg4b1ZuVEdobWF2RzFvrnQzcnBucGFCR1pnMnNW
Twpha2kzzkpxUXkbkVxejBLdHBUWFraWURjK3I3U1M2TE02K1dxZitpTTR2Qkx1Ly9tejN0SD1haFpob0s1c0NEdc9uz
GJHSuk4emtYbngvai9aUXdtek9vMndwsFJmbXnys25UmmnrnHP4dU51TzVUVVZTTmN1cko5dmhidTR30Tc2b2R4K0JJK2
1QZWtzL0hxTmxibXhYYmx2c11cTVXWXVmUmhIVjFpd3N1TWNKYThnZGdjY11wn0nsaGrxUitPeVzsVWFtbEpSemFEYtd
SWX1TbUlwzbzA3BjueTdhQWVNaWhn1t4VfhMRVBDZHcQjceDruUmjIRUpQbmJocEpXUFFkc21uWk1jYkzjREF5aFhu
VmDQVXJGyN10VvrlbDFYYVdPcdngus94c1BHWGfvSmZRN0ZRY1ZJNkdoUEFBamVPK1Y1Yw5Wa3NpekpTY0dsNxP50E1GQ
1E1Ef0s1pCSFJSlytNMWtvNzNNUnExSu8yZzhrR0k1N3gyQWcz1hQSzJvRHVtKdwVc5c2JZrmv5VgxCTVBuRmtaTG
dLT1BhczLZGEyUmNWZw02Q0tGeCt3bGU1T1Q5TTQ1d1ZgbzBLVev3Uf16QmdTa24zS2NqN0t5NmRUVGxIaUtzjUQxaCt
Pd2FyM2dDz31wcGcrMdedsg10Z2NOU282cmoxV1V6cmg5STjvQkRQMGJBUC9BS2Mva0MyckriVmRHTGpTbS9FSDducTNw
OulzekhhL1YrOvdFmnrVzklqQ1JNRY8venv2WT0813h1bmM6Q21waGvYVmFsdu+PC94ZW5jOkNpcGhlckRhGE+PC94Z
W5jOkVuY3J5cHR1ZERhdGE+PC9FbmNyeXB0ZWRBc3N1cnRpB24+PC9zyW1scDpSzxNwb25zT4=</msis:SAMLResponse
e>
    <msis:PostBindingInformation></msis:PostBindingInformation>
</msis:Message>
<msis:SessionState></msis:SessionState>
<msis:AuthenticatingProvider>http://localhost/</msis:AuthenticatingProvider>
</msis:IssueResponse>
</s:Body>
</s:Envelope>

```

#### 4.1.3 IssueResponse Example Using Artifact Binding

This is an example of a reply to a request to issue a SAML token, which contains the resulting SAML response message. In this example, the SAML Artifact Binding was employed.

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/Proc
essRequestResponse</a:Action>
    <a:RelatesTo>urn:uuid:0ac7deb2-4d52-4a77-8071-d4bb099e6db9</a:RelatesTo>
    <a:To s:mustUnderstand="1">http://www.w3.org/2005/08/addressing/anonymous</a:To>

```

```

</s:Header>
<s:Body>
    <msis:IssueResponse
        xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
        <msis:Message>
            <msis:BaseUri>https://externalrp/</msis:BaseUri>

<msis:SAMLart>AAQAAPlJen9kBjz+58LcIVeEcgTU2/CTgbpO7ZhNzAgEANlB90ECfpNEVLg=</msis:SAMLart>
            <msis:RedirectBindingInformation></msis:RedirectBindingInformation>
        </msis:Message>
        <msis:SessionState></msis:SessionState>
        <msis:AuthenticatingProvider></msis:AuthenticatingProvider>
    </msis:IssueResponse>
</s:Body>
</s:Envelope>

```

## 4.2 CreateErrorMessage Operation Examples

### 4.2.1 CreateErrorMessageRequest Example

This is an example of a message that requests creation of a SAML error message.

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
    xmlns:a="http://www.w3.org/2005/08/addressing">
    <s:Header>
        <a:Action
            s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest</a:Action>
        <a:MessageID>urn:uuid:678452fe-e24d-439e-8543-e2e72f936930</a:MessageID>
        <a:ReplyTo>
            <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
        </a:ReplyTo>
        <a:To s:mustUnderstand="1">net.tcp://localhost/samlprotocol</a:To>
    </s:Header>
    <s:Body>
        <msis>CreateErrorMessageRequest
            xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
            <msis:ActivityId>00000000-0000-0000-0000-000000000000</msis:ActivityId>
            <msis:Message>
                <msis:BaseUri>http://localhost</msis:BaseUri>

<msis:SAMLRequest>PD94bWwgdmVyc2lvbj0iMS4wIiBlbmNvZGluZz0idXRmLTE2Ij8+PHNhbwXwOkF1dGhuUmVxdWV
zdCBJRDoIxZIwN2U2YTdhLTa1YTgtNGMzOS1iMTE0LTgyYzc5ZTk1Y2NmOCIGVmVyc2lvbj0iMi4wIiBJc3N1ZUluc3Rh
bnQ9IjIwMDktMTItMThUMDE6MzE6MTEuODYzWiIgQ29uc2VudD0idXJuOm9hc21z0m5hbWVzOnRj01NBTUw6Mi4wOmNvb
nN1bnQ6dW5zcGVjaWZpZWQiIFByb3RvY29sQmluZGluZz0idXJuOm9hc21z0m5hbWVzOnRj01NBTUw6Mi4wOmJpbmRpmb
dz0khUVFAtUmVkaXj1Y3QiIHhtbG5zOnNhbWxwPSJ1cm46b2FzaXM6bmFtZXMDGM6U0FNTDoyLjA6cHJvdG9jb2wiPjx
Jc3N1ZXIgeG1sbnM9InVybjpvyXNpczpuYw1lczp0YzpTQU1MOjIuMDphc3N1cnRpb24iPmh0dHA6Ly9leHR1cm5hbHJw
L3Njb3BlPC9Jc3N1ZXI+PC9zYW1scDpBdXRoblJlcXVlc3Q+</msis:SAMLRequest>
            <msis:PostBindingInformation></msis:PostBindingInformation>
        </msis:Message>
        <samlp:Status
            xmlns:samlp="urn:oasis:names:tc:SAML:2.0:protocol">
            <samlp:StatusCode Value="urn:oasis:names:tc:SAML:2.0:status:Responder">
                <samlp:StatusCode
                    Value="urn:oasis:names:tc:SAML:2.0:status>NoAuthnContext"></samlp:StatusCode>
                </samlp:StatusCode>
            </samlp:Status>
        </msis>CreateErrorMessageRequest>
    </s:Body>
</s:Envelope>

```

## 4.2.2 CreateErrorMessageResponse Example

This is an example of a reply to a message requesting creation of a SAML error message, which contains the created SAML error message.

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse</a:Action>
      <a:RelatesTo>urn:uuid:678452fe-e24d-439e-8543-e2e72f936930</a:RelatesTo>
      <a:To s:mustUnderstand="1">http://www.w3.org/2005/08/addressing/anonymous</a:To>
    </s:Header>
    <s:Body>
      <msis:CreateErrorMessageResponse
        xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
        <msis:Message>
          <msis:BaseUri>https://externalrp/</msis:BaseUri>

<msis:SAMLResponse>7b0HYBxJliUmL23Ke39K9UrX4HShCIBgEyTYkEAQ7MGIzeaS7B1pRyMpqqBymVWZV1mFkDM7Z
28995777333nvvvfe6051OJ/f/fz9czmQBbPbOStrUniGAqsgfP358Hz8iHjfZolw9epU3q2rZ5OnZ088++vzILL+/vzO
5tz3Zy/e29/PJ/e1sZ7q7ne8/yPbuP9g9mB3MPkp/Mq+bolp+9tHeeOej9Kxp1vnZsmzzUsf7ew83N7d2949eLoz++je
7qPd3fHDvb2f+ih9mjdtscxafnPetqvm0d27+bs2r5dZWa/ufpSeABEAWdfLR1XWFM2jZbbIm0ft9NHr4y+eP6L+Hk210
aP1sln10+K8yAmjs6UZx5uKhrG38yD/NHuQbe/czw6296f3Hm5Pdnf3tw/2pg8e5g/vT6fnBx+l7xb1snEZNjc5aqu2m
pa1R8dPebB1vLq5peyps1rDPajIwyWxlpW06ycV0179/FdgXOkk/C6zdp1E/51Us3y9Cezcplv7qfh1jqPs7z+6IPAvKi
O1+18STPR0tR8lN49eny3C67zkf3TTMHR/wM=</msis:SAMLResponse>
        <msis:RedirectBindingInformation>
```

```
<msis:Signature>R1FtupsaiiTbNa5wL4+mOnuFpRBYS5kq/ni5ycqNprqp010c5+RUOA5/8RKmRY787oB817FFJOYw
3FkI1hWaYPqc1b1HFp7AcuJFPmWVT2bGXbdRV6sCFV0g5X01PsYG+a/9EZdiYuaMCRUvOds0s5SdtmL95FCQpLxkg5PEk
w=</msis:Signature>
        <msis:SigAlg>http://www.w3.org/2001/04/xmldsig-more#rsa-sha256</msis:SigAlg>
        </msis:RedirectBindingInformation>
      </msis:Message>
    </msis:CreateErrorMessageResponse>
  </s:Body>
</s:Envelope>
```

## 4.3 SignMessage Operation Examples

### 4.3.1 SignMessageRequest Example

This is an example of a message that requests that a SAML Message signature be applied to a SAML Message.

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest</a:Action>
      <a:MessageID>urn:uuid:5654c3f9-691f-4f9e-aa51-d5d37060dc88</a:MessageID>
      <a:ReplyTo>
        <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
      </a:ReplyTo>
      <a:To s:mustUnderstand="1">net.tcp://localhost/samlprotocol</a:To>
    </s:Header>
    <s:Body>
      <msis:SignMessageRequest
        xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
        <msis:ActivityId>00000000-0000-0000-0000-000000000000</msis:ActivityId>
```

```

<msis:Message>
  <msis:BaseUri>http://contoso.com/</msis:BaseUri>

<msis:SAMLRequest>PHNhbWxOkF1dGhuUmVxdWVzdCBJRD0ixza4MTZjZjJiLTg2YzUtNDU2Ny04MGV1LTfkZjVmYjV
jZmYzYiIgVmVyc2lvbj0iMi4wiBjc3N1ZU1uc3RhbnQ9IjIwMDktMTItMThUMDE6MzE6MTMuNTEzWiIgRGVzdGluYXRp
b249Imh0dHbzOi8vbG9jYWxob3N0ojoQzNDMvbnVuaXQvRmVkZXJhdGlvblBhc3NpdmUviBDb25zZW50PSJ1cm46b2Fza
XM6bmFtZXM6dGM6U0FNtDoyLjA6Y29uc2VudDp1bnNwZWNPzml1ZCigeG1sbnM6c2FtbHA9InVybjpVYXNpczpuYw1lcz
p0YzpTQU1MOjIuMDpwcm90b2NvbCIgLz4=</msis:SAMLRequest>
  <msis:PostBindingInformation></msis:PostBindingInformation>
</msis:Message>
<msis:Principal>
  <msis:Type>Scope</msis:Type>
  <msis:Identifier>http://externalrp/rp1</msis:Identifier>
</msis:Principal>
</msis:SignMessageRequest>
</s:Body>
</s:Envelope>

```

### 4.3.2 SignMessageResponse Example

This is an example of a reply to a request to create a signed SAML Message, which contains the resulting SAML Message.

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/Proc
      essRequestResponse</a:Action>
    <a:RelatesTo>urn:uuid:5654c3f9-691f-4f9e-aa51-d5d37060dc88</a:RelatesTo>
    <a:To s:mustUnderstand="1">http://www.w3.org/2005/08/addressing/anonymous</a:To>
  </s:Header>
  <s:Body>
    <msis:SignMessageResponse
      xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
      <msis:Message>
        <msis:BaseUri>http://contoso.com/</msis:BaseUri>

<msis:SAMLRequest>PHNhbWxOkF1dGhuUmVxdWVzdCBJRD0ixza4MTZjZjJiLTg2YzUtNDU2Ny04MGV1LTfkZjVmYjV
jZmYzYiIgVmVyc2lvbj0iMi4wiBjc3N1ZU1uc3RhbnQ9IjIwMDktMTItMThUMDE6MzE6MTMuNTEzWiIgRGVzdGluYXRp
b249Imh0dHbzOi8vbG9jYWxob3N0ojoQzNDMvbnVuaXQvRmVkZXJhdGlvblBhc3NpdmUviBDb25zZW50PSJ1cm46b2Fza
XM6bmFtZXM6dGM6U0FNtDoyLjA6Y29uc2VudDp1bnNwZWNPzml1ZCigeG1sbnM6c2FtbHA9InVybjpVYXNpczpuYw1lcz
p0YzpTQU1MOjIuMDpwcm90b2NvbCI+PElzc3VlciB4bWxzc0idXJuOm9hc21z0m5hbWvzOnRj01NBTUw6Mi4wOmFzc2V
ydlvbib1+aHR0cDovL2xv2FsaG9zdC88L01zc3Vlcj48ZHM6U21nbmF0dXJ1IHhtbG5z0mRzPSJodHRwOi8vd3dLncz
lm9yZy8yMDAwLzA5L3htbGRzaWcjIj48ZHM6U21nbmVksW5mbz48ZHM6Q2Fub25pY2FsaXphdG1vbk1ldGhvZCBBbGdvc
ml0aG09Imh0dHA6Ly93d3cudzMub3JnLzIwMDEvMTAvEg1sLWV4Yy1jMTRuIyIgLz48ZHM6U21nbmF0dXJ1TW0aG9kIE
FsZ29yaXRobT0iaHR0cDovL3d3dy53My5vcmcvMjAwMS8wNC94bwXkc21nLw1vcmUjcnNhLXNoYTI1NiIgLz48ZHM6UmV
mZXJ1bmN1IFVSST0i118wODE2Y2Yy104NmM1LTQ1NjctODBlzs0xZGY1ZmI1Y2ZmM2IiPjxkczpUcmFuc2Zvcm1zPjxk
czpUcmFuc2Zvcm0gQWxnb3JpdGhtPSJodHRwOi8vd3d3Lnczlm9yZy8yMDAwLzA5L3htbGRzaWcjZw52ZWxvcGvkLXNpZ
25hdHVyZSIgLz48ZHM6VHJhbNmB3Jtcz48ZHM6RGlzXN0Tw0aG9kIEFsZ29yaXRobT0iaHR0cDovL3d3dy53My5vcmcvMjAwMS8xMC94bWtZxhjLW
MxNG4jIiAVPjwvZHM6VHJhbNmB3Jtcz48ZHM6RGlzXN0Tw0aG9kIEFsZ29yaXRobT0iaHR0cDovL3d3dy53My5vcmcvMjAwMS8wNC94bWx1bmMj2chhMjU2IiAvPjxkczpEwdlc3RWYwX1ZT5FMUtyd25i0NYV2dKY1ZmTDEwM2JaUk5jWD1G
ZwZodFVCYmJJVTM3QTbJPTwvZHM6RGlzXN0VmFsdWU+PC9kczpSzwz1cmVuY2U+PC9kczpTaWduZWRJbmZvPjxkczpTa
WduYXR1cmVWYwX1ZT5Kb2wvUdh4b1zjZTNdm1QbdVzTEg0TmZuZu5nENwZHZWM1RmdGpTQXVqUW9PrZFPVU5KYnEvK3
FIbWFpSup4Q1VLSGEvK0xqWXRVUF1JRnYyc3RRQnV1VnlMbjf1Q1FQSW54S2YZH1scndLz0tFZDF2VnNLT3pHa1JNYW5
oVHPaaGFENjJGVVRvUzFZSVN1M3ZwSEZmWUpLamZuYzYump5Ti9tZk1NRmc9PC9kczpTaWduYXR1cmVWYwX1ZT48S2V5
SW5mbyB4bwxucz0iaHR0cDovL3d3dy53My5vcmcvMjAwMC8wos94bwXkc21nIy1+PGRzOlg1MD1EYXRhPjxkczpYNTA5Q
2VydGlmawNhdGU+TU1JQj1q0NBVitnQXdkQfKnSvFSSktCzk1oeFnHaENCQkJxaGwvQTBEqu5Cz2txaGtpRz13MEJBUV
FGQURBVU1SSxdFQV1EV1FRREV3bHNiMk5oYkdodmMzUxdiaGNOTRz01UQTFNakkwTkRFMFdoY05Nemt4TWpNeE1qTTF
PVFU1V2pBVU1SSxdFQV1EV1FRREV3bHNiMk5oYkdodmMzUxdnWjh3RFFZSktrwklodmNOQVFFQkJRQRnWTBTT1HSkFv
R0JBTGpJUnpQV0hsvW1vSTVqZ3F2Q1BuWnRDeW5ERFA1OWxtY2k5bzDDeCsraVRZcTBPOE1CVzRmNWNLdFIvZ2hXYmVab
1VVRC5yV1JZeFpRTWdyZmJzbmwc3Zqd0pcQjBRUzVjU0VvSzdpVw03eG1GcnZE1Zee1lyeEJ3ZVR6N1JHU01mWEIzcF
Nna0J1cUp0K1BuMGF3UHBENU11RXNMU1JuclpVWHYiUml6QWdNQkFBRp2pTVEyJITUVVR0ExVWRBUVERtUR5QUVLa216aHQ
4TEY2TG1ta3d1d31Xd1RxaEZqQVNVNUk13RUFZRFZRUURFd2xzYjJOaGJHaHzjM1NDRUVTU2dYekljVW1vUWdRUVZvWmZ3
TkF3RFFZSktrwklodmNOQVFFRURQURnWUVBUFQ1eEE0dzhQdE5ibC9ma2gvWDNWT3dGVk1ZQVBisk1WZ0NsNX1Mz1Ext
E42Z2t6Ti94VU9weFv1RjV5cXRPOU91dFZFdUv3ZnNqV3hweXF1VUJPT114VUZ0MFFKWW9Wc3J4MDgyV0ROS21uSGJVeV

```

```

h2RUovOURvYit0K21TUGp1N2VtUkphVEtubnZtaEdQeXRadTVzazlyVDdPMTBIS1NCQkZISTJGZmRBPTwvZHM6WDUwOUN
1cnRpZmljYXR1PjwvZHM6WDUwOURhdGE+PC9LZXlJbmZvPjwvZHM6U2lnbmF0dXJ1Pjwvc2FtbHA6QXV0aG5SZXf1ZXN0
Pg==</msis:SAMLRequest>
    <msis:PostBindingInformation></msis:PostBindingInformation>
</msis:Message>
</msis:SignMessageResponse>
</s:Body>
</s:Envelope>

```

## 4.4 VerifyMessage Operation Examples

### 4.4.1 VerifyMessageRequest Example

This is an example of a message that requests verification that a SAML Message is from a known party and signed according to the configuration for that party.

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
xmlns:a="http://www.w3.org/2005/08/addressing">
    <s:Header>
        <a:Action
s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/Proc
essRequest</a:Action>
        <a:MessageID>urn:uuid:05fbb0db-e105-448b-b127-1bf689738d75</a:MessageID>
        <a:ReplyTo>
            <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
        </a:ReplyTo>
        <a:To s:mustUnderstand="1">net.tcp://localhost/samlprotocol</a:To>
    </s:Header>
    <s:Body>
        <msis:VerifyMessageRequest
xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
            <msis:ActivityId>00000000-0000-0000-0000-000000000000</msis:ActivityId>
            <msis:Message>
                <msis:BaseUri>http://contoso.com/</msis:BaseUri>
<msis:SAMLRequest>PHNhbwXwOkF1dGhuUmVxdWzdCBJRD0iXza4MTZjZjJiLTg2YzUtNDU2Ny04MGV1LTfKjVmYjV
jZmYzYiIgVmYc21vbj0iMi4wiIBjc3N1Z1uc3RhbNQ9iJiWMDktMTiTmThUMDE6MzE6MTMuNTcyWiIgRGVzdGluYXRp
b249Imh0dHbzOi8vbG9jYWxob3N0oJQzNDMvbnVuaxQvRmVkJhdG1vblBhc3NpdmUvIiBDb25zZW50PSJ1cm46b2Fz
XM6bmFtZXM6dGM6U0FNTdoyLjA6Y29uc2VudDp1bnNwZWNpZml1ZC1geG1sbnM6c2FtbHA9InVybjpvyXNpczpuYW1lc
p0YzpTQU1MOjIuMdPwcm90b2NvbCI+PElzc3VlciB4bWxucz0idXJuOm9hc21z0m5hbWVzOnRj01NBTUw6Mi4wOmFzc2V
ydGlvbiI+aHR0cDovL2xvY2FsaG9zdC88L01zc3V1cj48ZHM6U21nbmF0dXJ1IHhtbG5zOmRzPSJodHRwOi8vd3d3Lncz
Lm9yZy8yMDAwLzA5L3htbGRzaWcjIj48ZHM6U21nbmVksW5mbz48ZHM6Q2Fub25pY2FsaXphdGlvbk1ldGhvZCEBbGdvc
m10aG91Imh0dHa6L6Y93d3cudzMu3JnLzIwMDEvMTAvEg1sLWVYy1jMTRuIyIgIz48ZHM6U21nbmF0dXJ1TWV0aG9kIE
FsZ29yaXRobT0iaHR0cDovL3d3dy53My5vcmcvMjAwMs8wNc94bWxkc2lnLW1vcmUjcnNhLXNoYT1NiIgIz48ZHM6UmV
mZXJlbnm1IFVSST0iI18wODE2Yy1i04NmM1LTQ1njctODB1ZS0zGYZ1ZmI1Y2zmM2IiPjxkczpUcmFuc2Zvcm1zPjxk
czpUcmFuc2Zvcm0gQWxnb3JpdGhtPSJodHRwOi8vd3d3LnczLm9yZy8yMDAwLzA5L3htbGRzaWcjZw52ZWxvcGVkLXnpZ
25hdHVyZSIgIz48ZHM6VHJhbnNm3jtIEFSz29yaXRobT0iaHR0cDovL3d3dy53My5vcmcvMjAwMs8wXMC94bWwtXhjLW
MxNG4jIiAvPjwvZHM6VHJhbnNm3Jtcz48ZHM6RGlzZN0TWW0aG9kIEFsZ29yaXRobT0iaHR0cDovL3d3dy53My5vcmc
vMjAwMS8wNC94bWx1bmMjC2hbmjU2IiAvPjxkczpBaWdlc3RWYwxz1ZT5FMUtyd25Ia0NYV2dKY1ZmTDEwM2JaUk5jWD1G
ZWZodFVCYmJVTM3QTbJPTwvZHM6RGlzZN0VmFsdwU+PC9kczpS2Zw1cmVuY2U+PC9kczpTaWduZWRJbmZvPjxkczpTa
WduYXR1cmVWYwx1ZT5Kb2wvUDh4b1zJZT2ndm1QbdVzTeG0TmZuZu5nENwZHZWm1RMdGpTQXVqUW9PRzFPVU5KYnEvK3
F1bWFpSpUp4Q1VLSEgvK0xqWXRVUF1JRnYyc3RRQnVLvnLmbjF1Q1FQSW54S2JYZH1scndlZ0tFZDF2VnNLT3pHa1JNYW5
oVhpaaGFENjJGVVRvUzFZSVN1M3ZwSEZmWUpLamZuYzZyUmp5Ti9tZk1NRmc9PC9kczpTaWduYXR1cmVWYwx1ZT48S2V5
SW5mbyB4bWxucz0iaHR0cDovL3d3dy53My5vcmcvMjAwMc8wOS94bWxkc2lnIiYi+PGRzOlg1MD1EYXRhPjxkczpYNTA5Q
2VydG1maWNhdGU+TU1Qj1lqQ0NBVitnQXdjQkFnSVFSSktCZk1oeFNhaENCQkJXaGwvQTBEqu5C2txaGtpRz13MEJBUV
FGQURBV1SSXdfQV1EV1FREV3bHN1Mk5oYkdodmMzUxdiagNOTURz01UQTFNaakkwTkRFMFdoY05Nemt4TWpNe1qTTF
PVFU1V2pBU1SSXdfQV1EV1FREV3bHN1Mk5oYkdodmMzUxdnWjh3RFFZSktrWk1odmNOQVFQkjRQRnWTBBT1HSkFv
R0JBTGpJpUnp0hsvWlvsTVqz2FQ1BuWnRdeW5ERFA1OWxt2k5bzdCsraVRzCtBPOE1CVzRmNWNLdFIvZ2hXYmVab
1VVRG5yV1JZeFpRTWdyzJzbmwc3Zqd0pcQjBRUzVjU0VvSzdpVw3eG1GcnZEU1ZEellyeEJ3ZVR6N1JHU01mWEIzcf
Nna0J1cUp0K1BuMGF3UHBENU11RNXMU1JyclpVWH1yUml6QwdNQkFBR2pTVEJITUVVR0ExVWRBUVERTUR5QUVla216aHQ
4TEY2TG1ta3d1d31X1d1RxaEZqQVNUk13RUFZRFZRUURFd2xzYjJoaGJHaHzjM1NDRUVTU2dYek1jVW1vUWdRUVZvWmZ3
TkF3RFFZSktrWk1odmNOQVFQkjRQRnWUVBUFQ1eEE0dzhQdE5IbC9ma2gvWDNWT3dGvk1zQVBiSk1WZ0NsNX1M2ExT
E42Z2t6T194VU9weFV1RjV5cXRPOU91dFZFdUV3ZnNgv3hweXF1VUJPT114VUZ0MFKKWW9Wc3J4MDgyV0ROS21uSGJVeV
h2RUovOURvYit0K21TUGp1N2VtUkphVEtubnZtaEdQeXRadTVzazlyVDdPMTBIS1NCQkZISTJGZmRBPTwvZHM6WDUwOUN

```

```

lcnRpZmljYXrlPjwvZHM6WDUwOURhdGE+PC9LZXlJbmZvPjwvZHM6U2lnbmF0dXJ1Pjwvc2FtbHA6QXV0aG5SXF1ZXN0
Pg==</msis:SAMLRequest>
    <msis:PostBindingInformation></msis:PostBindingInformation>
    </msis:Message>
    </msis:VerifyMessageRequest>
</s:Body>
</s:Envelope>

```

#### 4.4.2 VerifyMessageResponse Example

This is an example of a reply to a request to verify that a SAML Message is from a known party and signed according to the configuration for that party, containing the verification response.

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
xmlns:a="http://www.w3.org/2005/08/addressing">
    <s:Header>
        <a:Action
s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse</a:Action>
        <a:RelatesTo>urn:uuid:05fbb0db-e105-448b-b127-1bf689738d75</a:RelatesTo>
        <a:To s:mustUnderstand="1">http://www.w3.org/2005/08/addressing/anonymous</a:To>
    </s:Header>
    <s:Body>
        <msis:VerifyMessageResponse
xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
            <msis:IsVerified>true</msis:IsVerified>
        </msis:VerifyMessageResponse>
    </s:Body>
</s:Envelope>

```

#### 4.4.3 VerifyMessageResponse Example Using Redirect Binding

This is an example of a reply to a request to verify that a SAML Message is from a known party and signed according to the configuration for that party, containing the verification response. In this example, the SAML redirect binding was employed.

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
xmlns:a="http://www.w3.org/2005/08/addressing">
    <s:Header>
        <a:Action
s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest</a:Action>
        <a:MessageID>urn:uuid:9525a87c-7b8b-474b-9840-eb3f202ab467</a:MessageID>
        <a:ReplyTo>
            <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
        </a:ReplyTo>
        <a:To s:mustUnderstand="1">net.tcp://localhost/samlprotocol</a:To>
    </s:Header>
    <s:Body>
        <msis:VerifyMessageRequest
xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
            <msis:ActivityId>00000000-0000-0000-0000-000000000000</msis:ActivityId>
            <msis:Message>
                <msis:BaseUri>http://contoso.com/</msis:BaseUri>
            <msis:SAMLRequest>7b0HYBxJliUmL23Ke39K9UrX4HShCIBgEyTYkEAQ7MGIZeaS7B1pRyMpqyqBymVWZV1mFkDM7Z2
8995777333nvvvfe60510J/ff/z9cZmQBbPbOStrJniGAqsgfP358Hz8iHjfZolw901638+Wr/Bet86ZNz55+9tHvv3Ow
++n0fG+yffDp9P72/v1PH2wf7OT59u/s/P755P70/Pze5KP0J/O6Kar1Zx/tjXc+Ss+aZp2fLZs2W7b00c70w+3dve3dg
zc7u4/u7T7avTd+sLv7Ux+1T6mXYpm1/Oa8bVfNo7t3y2qalfOqaR/t39u/d3e5Xhb73Wf5LK+54cusaYrL/O5H6Um1bH
J0sK6Xj6qsKZpHy2yRN4/a6aPxx188f0S4Pjpk0frZbPKp8V5kc8+St8tymXziEe8+e1VxbXVtCo/OnrMY6r11c0vEYJ
5DVQ/OsKY/CHdfXxX4Bw9vtsn+NH/Aw==</msis:SAMLRequest>

```

```

<msis:RedirectBindingInformation>

<msis:Signature>Gd1KRh71Ko9hiCis2UoDj4fSCp1eCB0Zu5GGDYlie1lmaMc3zX/EwaIHd+fOZ+NchzJn5rhrEjznI
5KmV3jdtBDgocf2z3C/U/3HeKvde5eqC7NPchGOHhmotd1Ik2KzxmMgOW9st8m4fpLqqrxx39oViInL9rIfMs3x9IFg3CoC
k=</msis:Signature>
    <msis:SigAlg>http://www.w3.org/2001/04/xmldsig-more#rsa-sha256</msis:SigAlg>

<msis:QueryStringHash>ci5RuRIGSZR2Tz4smxkIL1TU1zqAzYP4Pz798X2ZOcc=</msis:QueryStringHash>
    </msis:RedirectBindingInformation>
    </msis:Message>
    </msis:VerifyMessageRequest>
</s:Body>
</s:Envelope>

```

## 4.5 Logout Operations Examples

### 4.5.1 LogoutRequest Example

This is an example of a message requesting that a SAML logout be performed.

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
xmlns:a="http://www.w3.org/2005/08/addressing">
    <s:Header>
        <a:Action
s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/Proc
essRequest</a:Action>
        <a:MessageID>urn:uuid:17817720-c31e-48e8-8904-067aac199c8d</a:MessageID>
        <a:ReplyTo>
            <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
        </a:ReplyTo>
        <a:To s:mustUnderstand="1">net.tcp://localhost/samlprotocol</a:To>
    </s:Header>
    <s:Body>
        <msis:LogoutRequest
xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
            <msis:ActivityId>00000000-0000-0000-000000000000</msis:ActivityId>
            <msis:Message>
                <msis:BaseUri>https://localhost:4343/nunit/FederationPassive</msis:BaseUri>

<msis:SAMLRequest>PHNhbwXwOkxvZ291dFJlcXVlc3QgSUQ9I184N2YyMmUyNi1mMTcwLTQ4ZDQtODEwMS11N2RhODY
xNwJ1OWUi1FZ1cnNb2491jIuMCiGSXNzdWVJbnN0YW50PSIyMDA5LTEyLTE4VDAxOjMxOjIyLjc0NVoiIERlc3RpbmF0
aW9uPSJodHRwczovL2xvY2Fs9zD0oMzQzL251bm10L0Z1ZGVyYXRpb25QYXNzaXZ1IbdB25zZW50PSJ1cm46b2Fza
XM6bmFtZXM6dGM6U0FNtDoyLjA6Y29uc2VudDp1bnNwZWPnZml1ZC1gTm90T25PckFmdGVyPSIyMDA5LTEyLTE4VDAxOj
M2OjIyLjc0NVoiIHhtbG5zOnNhbWxwPSJ1cm46b2FzaxM6bmFtZXM6dGM6U0FNtDoyLjA6cHJvdG9jb2wiPjxJc3N1ZXI
geG1sbnM9InVybjpVYXNpczpuY1lczp0YzpTQU1MojIuMDphc3N1cnRpb24iPmh0dHA6Ly9sb2NhbGhvc3QvPC9Jc3N1
ZXI+PGRzO1NpZ25hdHVyZSB4bWxuczpkczoiaHR0cDovL3d3dy53My5vcmcvMjAwMC8wOS94bWxkc2lnIyI+PGRzO1NpZ
251ZEluZm8+PGRzOkNhb9uaWhbG16YXRpb25NZXRob2QgQWxb3JpdGhtPSJodHRwOi8vd3d3LnczLm9yZy8yMDAxLz
EwL3htbc1leGmtYzE0biMiIC8+PGRzO1NpZ25hdHVyZU11dGhvZCBBbGdvcm10aG09Imh0dHA6Ly93d3cudzMub3JnLzI
wMDEvMDQveG1sZHPnzb3J1J3JzYS1zaGeNTYi1C8+PGRzO1J1zmVyzW5jZSBVUkk91iNFODdmMjJ1MjYtZjE3MC00
OGQ0LTgxMDEtZTdkYTg2MTVizT11j48ZHM6VHJhbNm3Jtcz48ZHM6VHJhbNm3Jtcz48ZHM6VHJhbNm3Jtcz48ZHM6VHJhb
Hv1PjwvZHM6UmVmZxJ1bmN1PjwvZHM6U21nbmVksW5mbz48ZHM6U21nbmF0dxJ1VmFsdWU+bEt5ME9QKzc0Ke1bG1RdE
VBOSSxUzRSMjJ3dG9HYW5wN1g4bGhDQULxeStUbTz0REIrldC9pQULmdi9hM3c2dUR3eXYV11iemV0TW5qUmJFQVdZemF
GZXRwZ3NwSFByAktFWVUxbDjia01WeKzivEVVQjEwRmFNTkdTVjdqRGtsZwtLb1reGR5Q3FuSFmxCG8rcjEye1RDv3Hm
TONJK3pZbk1pMUp6WxkOPTTwvZHM6U21nbmF0dxJ1VmFsdWU+PETleUluzm8geG1sbnM9Imh0dHA6Ly93d3cudzMub3JnL
zIwMDAvMDkveG1sZHNpZyMiPjxkczpYNTA5RGF0YT48ZHM6WDUwOUNlcnRpZmljYXRLP1kJSUI5akNDQVYrZ0F3SUJBZ0
1RukpLQmZNaHhTYWhDQkjCV2hsL0EwREFOQmdrcWhraUc5dzBCQVFRRkFEQVNUk13RUFZRFZRUURFd2xzYjJOaGJHaHZ
jm1F3SGhjTk1EWXdNVEExTwPjME5ERTBXAGNOTXpreE1qTxhNa0k0xt1RVNVdqQVNVNuk13RUFZRFZRUURFd2xzYjJOaGJH
aHZjM1F3Z1o4d0RRUplb1pJaHzjTkFRUJCUEZ1kwQU1JR0pBb0dCQUXqSVJ6UFdiU1Vpb0k1amdxdkJQb1p0Q3luR
ERQNT1sbWNp0W83Q3grK21UWXewTzhNQlc0zjVjs3RSL2doV2J1Wm9VVURuciZSWXhaUU1ncmZic25sNnN2andKQkIwUV
M1Y1Nfb0s3T1VqN3hpRnJ2RFNWRHpZchnCd2VUejZSR1NNZ1hCM3BTZ2tCSHFkDctQbjBhd1BwRDVNdUVzTFJSbnJaVVh
yM1JpekFnTUJBQUdqU1RCSE1FVUdBMVVkQVFRK01EeUFFS2tpemh00ExGNkxtbWt3Zxd5v3dUcWhGakFVTVJJd0BVWURW

```

```

UVFERXdsc2IyTmhiR2h2YzNTQ0VFU1NnWHPJY1Vtb1FnUVFWb1pmd05Bd0RRWUpLb1pJaHZjTkFRRUVCUUFEZ11FQVBUN
XhBNHc4UHROSGwvZmt0L1gzV93R1zNWUFQYkpNVmdDbDV5TGZRMUxONmdrek4veFVPcHhVZUYleXF0Tz1PdXRWRXVfd2
Zzald4cHlxZVVCT09ZeFVGdDBRS11vNyeDA4M1dETktpbkhiVxLYdkVKLz1Eb2IrdCtpU1BqdTdlbVJKYVRlbm52bWh
HUH10WnU1c2s5clQ3TzEwSEpTQkJGSEkyRmZkQT08L2RzOlg1MD1DZXJ0aWzpY2F0ZT48L2RzOlg1MD1EYXRhPjwvS2V5
SW5mbz48L2RzO1Npz25hdHVyZT48TmFtzU1EIhtbG5zPSJ1cm46b2FzaXM6bmFtZXM6dGM6U0FNTDoyLjA6YXNzZXJ0a
W9uIj5iYX18L05hbWVJRD48c2FtbHA6U2Vzc21vbkluzGV4PjAwMDwvc2FtbHA6U2Vzc21vbkluzGV4Pjwvc2FtbHA6TG
9nb3V0UmVxdWVzdD4=</msis:SAMLRequest>
<msis:PostBindingInformation></msis:PostBindingInformation>
</msis:Message>
<msis:SessionState>http%3a%2f%2flocalhost%2f&True&aaa&&&&111</msis:SessionState>

<msis:LogoutState>http%3a%2f%2fexternalrp%2fscope?_ID??http%3a%2f%2fexternalrp%2fscope&False&
foo&&&&?ID?</msis:LogoutState>
</msis:LogoutRequest>
</s:Body>
</s:Envelope>

```

#### 4.5.2 LogoutResponse Example

This is an example of a reply to a request that a SAML logout be performed, which contains the updated SessionState and LogoutState values.

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/Proc
      essRequestResponse</a:Action>
    <a:RelatesTo>urn:uuid:17817720-c31e-48e8-8904-067aac199c8d</a:RelatesTo>
    <a:To s:mustUnderstand="1">http://www.w3.org/2005/08/addressing/anonymous</a:To>
  </s:Header>
  <s:Body>
    <msis:LogoutResponse
      xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
      <msis:LogoutStatus>InProgress</msis:LogoutStatus>
      <msis:Message>
        <msis:BaseUri>https://localhost:4343/SLO/RedirectResponse</msis:BaseUri>
      </msis:Message>
    </msis:LogoutResponse>
    <msis:SAMLResponse>7b0HYBxJliUmL23Ke39K9UrX4HShCIBgEyTYkEAQ7MGIzeaS7B1pRyMpqyqBymVWZV1mFkDM7Z
    28995777333nvvfe60510J/f/f/z9cZmQBbPb0StrJniGAqsgfP358Hz8iHjfZolw9e15dV0v2Vd6sqmWTp2dPP/v0958
    9zD69n+/vbM8e7j3Y3t+/v7N9cJDvbO/s3N+f3D+/n+2cTz5KfzKvm6JafvbR3njno/Ssadb52bJps2VLH+3sPNze3dve
    PXizs/v03u6jvb3xg4cfuqj9GnetMuYa/nNeduumkd375bVNCvnVdM+2r+3f+/u6+df3n2Vz4o6n1rMPkpP8APA1/XyU
    ZU1RfNomS3y51E7fT6+IvnjwiPR1Np9Gi9bFb5tDgv8hnhtjRQ31Q0vIMH53t7+d6n2+e7D3a29w9m+9sHuzu72/mDWX
    bw6e79Sf6Qunu3KfNIybS5i5XddVW06r860gxE6GWVze/lDVNx0MIhx2BCD4N7j6+K3C0DiPet1m7bsK/TqpZnv5kvq7
    zzf003PrRq/wXrYnwef1Revfo8d0Qrv4ZcsLR/wM=</msis:SAMLResponse>
    <msis:RedirectBindingInformation>
      <msis:Signature>AIN+zc9QDY7YZ65zRXz0ob4RMuE1AGEPuok37NCdWvubEJ4E3awvi8Ieu+v+LsDhBd+zXzmjb7NDU
      XUcoTzql0FN0Whlbq34OrMitR4FbGDQMpwBy1Vlmy2MXN7nZvAD+2en+Pd+bkk4P0KMH7PPCQsboj63CyzRfGnV+R81Mf
      Y=</msis:Signature>
      <msis:SigAlg>http://www.w3.org/2001/04/xmldsig-more#rsa-sha256</msis:SigAlg>
    </msis:RedirectBindingInformation>
  </msis:Message>
  <msis:SessionState>http%3a%2f%2flocalhost%2f&True&aaa&&&&111</msis:SessionState>

  <msis:LogoutState>http%3a%2f%2fexternalrp%2fscope?_ID??http%3a%2f%2fexternalrp%2fscope&False&
  foo&&&&?ID?</msis:LogoutState>
  </msis:LogoutResponse>
</s:Body>
</s:Envelope>

```

### 4.5.3 LogoutRequest Example - Locally Initiated

This is an example of a message requesting that a SAML logout be performed. In this example, the request is being sent to the endpoint on the local host.

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest</a:Action>
      <a:MessageID>urn:uuid:1fec3465-1008-490d-aeb2-da9b4df4a3d2</a:MessageID>
      <a:ReplyTo>
        <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
      </a:ReplyTo>
      <a:To s:mustUnderstand="1">net.tcp://localhost/samlprotocol</a:To>
    </s:Header>
    <s:Body>
      <msis:LogoutRequest
        xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
        <msis:ActivityId>00000000-0000-0000-0000-000000000000</msis:ActivityId>
        <msis:SessionState></msis:SessionState>
        <msis:LogoutState></msis:LogoutState>
      </msis:LogoutRequest>
    </s:Body>
  </s:Envelope>
```

### 4.5.4 LogoutResponse Example:Final Response to Locally Initiated Request

This is an example of a reply to a request that a SAML logout be performed, which contains the updated SessionState and LogoutState values. In this example, the final response to a locally initiated logout request is shown.

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse</a:Action>
      <a:RelatesTo>urn:uuid:1fec3465-1008-490d-aeb2-da9b4df4a3d2</a:RelatesTo>
      <a:To s:mustUnderstand="1">http://www.w3.org/2005/08/addressing/anonymous</a:To>
    </s:Header>
    <s:Body>
      <msis:LogoutResponse
        xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
        <msis:LogoutStatus>LogoutSuccess</msis:LogoutStatus>
        <msis:SessionState></msis:SessionState>
        <msis:LogoutState></msis:LogoutState>
      </msis:LogoutResponse>
    </s:Body>
  </s:Envelope>
```

### 4.5.5 LogoutRequest Example with SAMLResponse and RelayState

This is an example of a message requesting that a SAML logout be performed. In this example, the request contains both a SAMLResponse and RelayState.

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
```

```

<s:Header>
  <a:Action
    s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequest</a:Action>
    <a:MessageID>urn:uuid:9aaa9e19-93b7-46e5-afb8-24804341d435</a:MessageID>
    <a:ReplyTo>
      <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
    </a:ReplyTo>
    <a:To s:mustUnderstand="1">net.tcp://localhost/samlprotocol</a:To>
  </s:Header>
  <s:Body>
    <msis:LogoutRequest
      xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
      <msis:ActivityId>00000000-0000-0000-000000000000</msis:ActivityId>
      <msis:Message>
        <msis:BaseUri>https://localhost:4343/nunit/FederationPassive</msis:BaseUri>

      <msis:SAMLResponse>PHNhbwXwOkxvZ291dFJlc3BvbN1IE1EPSJfNTNiMzFkNzEtODUxNS00NjZmLTh1ZTAtMTY1NT11YjBjMj11iBWZXJzaW9uPSIyLjAiElzc3V1SW5zdGfUdD0iMjAwOS0xMi0xOFQwMTozMToyMy4yNzZaIiBEZXN0aW5hdGlvbj0iaHR0cHM6Ly9sb2NbhbGhvc3Q6NDM0My9udW5pdC9GZWRlcmF0aW9uUGFzc212ZSIgQ29uc2VudD0idXJuOm9hc21z0m5hbWVzOnRj01NBTUw6Mi4wOmNvbnN1bnQ6dW5zcGVjaWpzWQoIEluUmVzcG9uc2VUbz0iQ3VycmVudE1EIb4bWxuczpzyW1scD0idXJuOm9hc21z0m5hbWVzOnRj01NBTUw6Mi4wOnByb3RvY29sIj48SXNzdWVYIHtbG5zPSJ1cm46b2FzaXM6bmFtZXMD6GMU0FNTDoyLjA6YXNzZXJ0aW9uIj5odHRwO18vbG9jYWxb3N0LzwvSXNzdWVYpjxkczpTaWduYXR1cmUgeGlsbnM6ZHM9Imh0dHA6Ly93d3cudzMuB3JnLzIwMDAvMDKveG1sZHNpZyMipjxkczpTaWduZWRJbmZvbjxkczpDYW5vbmlj1AvPjxkczpTaWduYXR1cmvNzXRob2QgQWxn3JpdGhtPSJodHRwO18vd3d3LnczLm9yZy8yMDAxLzA0L3htbGRzaWctbW9yZSNyc2Etc2hhMjU2IiAvPjxkczpSZWz1cmVuy2UgVVJJPSIjXzUzYjMxDcxLTg1MTUtNDY2Zi04ZWUwLTE2NTU5ZWIwYzI5ZSI+PGRzO1RyYW5zZm9ybXM+PGRzO1RyYW5zZm9ybSBBbGdvcm10aG09Imh0dHA6Ly93d3cudzMuB3JnLzIwMDAvMDKveG1sZHNpZyN1bnZ1bg9wZWQtc21nbmF0dXJ1IiAvPjxkczpUcmFuc2Zvcm0gQWxn3JpdGhtPSJodHRwO18vd3d3LnczLm9yZy8yMDAxLzEwL3htbC1leGmtYzE0biMiIC8+PC9kczpUcmFuc2Zvcm1zPjxkczpEaWdlc3RNZXRob2QgQWxnb3JpdGhtPSJodHRwO18vd3d3LnczLm9yZy8yMDAxLzA0L3htbGVuYyNzaGEyNTYiIC8+PGRzOkRpZ2VzdFzhbHV1PkNWQ0doaktMajdYaUoxdzBzYThHT1ZDem1EVwo0MFByb2R3ajvRRnYrOUU9PC9kczpEaWdlc3RWYw1zT48L2Rz01J1ZmVyZw5jZT48L2Rz01NpZ251ZE1uZm8+PGRzO1NpZ25hdHvYzVzhbHV1PktFQmZDdh5YwxDQ3cyVvDcRzFmdUdIW1ErYlp4T11HSTRiaFyw3lWMX1CY3FZVUDrek5Ja01pV3JjanJ6bDVZNHhyVndySksY01Ka2hHENzcl1CTDR0U2o1ZHBMU9hd2VRMSS5QnMxSm91bHAyC2dhL1oZrZFYRz1BN0V5d2JGSSswRnZzWUNqUGxIWWFRdUNIeitRUjB0RWppSGJwYldFY2dvbkpSND08L2Rz01NpZ25hdHvYzVzhbHV1PjxLZx1JbmZvIhbtG5zPSJodHRwO18vd3d3LnczLm9yZy8yMDAwLzA5L3htbGRzaWCjIj48ZHM6WDUwOURhdGE+PGRzO1g1MD1DZXJ0aWpzY2F0ZT5NSU1COWpDQ0FWK2dBd01CQWdJUVJKS0JmTWh4U2FoQ0JCQ1d0bc9BMRBTKJna3Foa21HOxwQkFRUUZBREFTVJJd0VBwURWUVFERXds2IyTmhiR2h2YzNRd0hoY05NRF13TVRBmu1qSTBOREUwV2hjTk16a3hNaK14TwpNMU9UVTvXakFVTvJJd0VBwURWUVFERXds2IyTmhiR2h2YzNRd2daOhdEUV1KS29aSwH2Y05BUUVCQ1FBRGdZMEEFNSUdKQw9HQkFmak1Se1BSxFJw9JNwPncXZCUG5adEN5bkREDU5bG1jaT1vN0N4KytpVF1xME84TUJXNGY1Y0t0Ui9naFdizVpvVVVEbnJWU114W1FN23JmYnNuBdZzdump3SkJCMFTNWTRW9LN09Vajd4aUZYdkRTVKR6WXJ4Qnd1Vh02UkdTTWZYQjNwU2drQkhxSnQrUG4wYxdQcEQ1TXVFc0xSuM5yW1VYcjjSAxpbZ01CQUFH1NUQkhNRVHVQTFVZEFRUSTNR1BRUltraXpodDhMRjZmbW1rd2V3eVd3VHFoRmpBVU1SSxdFQV1EV1FREV3bHN1Mk5oYkdodmMzU0NFRVNTZ1h6SWNVbW9Rz1FRVm9aZndQXeEUv1KS29aSh2Y05BUUVCQ1FBRGdZRUFQVDV4QTR30FB0Tkhsl2ZraC9YM1ZPd0zWTV1BUGJKTvZnQ2w1eUxmUTFMTjZna3pol3hvt3B4VWVGNx1xdE85T3V0Vkv1RXdmC2pXeHB5cWVvQk9PWXhVRnQwUUpZb1ZzcnwQDJXRE5LaW51Y1V5WHZFS185RG9iK3QraVNQanU3Zw1SSmFUS25udm1oR1B5dFp1XNnRoXJUN08xMEhKU0JCRkhJMKzMzEE9PC9kczpYNTA5Q2VydG1maWNhdGU+PC9kczpYNTA5RGF0YT48L0t1eUluZm8+PC9kczpTaWduYXR1cmU+PHNhbWxwO1N0YXR1cz48c2FtbHA6U3RhdHVzQ29kZSBWYw1ZT0idXJuOm9hc21z0m5hbWVzOnRj01NBTUw6Mi4wOnN0YXR1czpTdWNjZXNzIiAvPjwvc2FtbHA6U3RhdHVzPjwvc2FtbHA6TG9nb3V0UmVzcG9uc2U+</msis:SAMLResponse>
    <msis:PostBindingInformation>
      <msis:RelayState>RelayState</msis:RelayState>
    </msis:PostBindingInformation>
  </msis:Message>

  <msis:SessionState>http%3a%2f%2fexternalrp%2fscope&False&&&&&000</msis:SessionState>

  <msis:LogoutState>http%3a%2f%2fexternalrp%2fscope?ID??http%3a%2f%2flocalhost%2f&True&foo&&&&?CurrentId?urn%3aoasis%3anames%3atc%3aSAML%3a2.0%3astatus%3aSuccess</msis:LogoutState>
    </msis:LogoutRequest>
  </s:Body>
</s:Envelope>

```

#### 4.5.6 LogoutResponse Example with SAMLRequest and RelayState

This is an example of a reply to a request that a SAML logout be performed, which contains the updated SessionState and LogoutState values. In this example, the response is to a request where the request contains both a SAMLResponse and RelayState.

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
  xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
      s:mustUnderstand="1">http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/ProcessRequestResponse</a:Action>
    <a:RelatesTo>urn:uuid:9aaa9e19-93b7-46e5-afb8-24804341d435</a:RelatesTo>
    <a:To s:mustUnderstand="1">http://www.w3.org/2005/08/addressing/anonymous</a:To>
  </s:Header>
  <s:Body>
    <msis:LogoutResponse
      xmlns:msis="http://schemas.microsoft.com/ws/2009/12/identityserver/samlprotocol/">
      <msis:LogoutStatus>InProgress</msis:LogoutStatus>
      <msis:Message>
        <msis:BaseUri>https://externalrp:4343/SLO/RedirectRequest</msis:BaseUri>

      <msis:SAMLRequest>7b0HYBxJliUmL23Ke39K9UrX4HShCIBgEyTYkEAQ7MGIzeaS7B1pRyMpqyqBymVWZV1mFkDM7Z2
8995777333nvvvfe60510J/ff/z9cZmQBbPbOStrJniGaqsgfP358Hz8iHjfZolw9e15dV0v2Vf6L1nnTpmdPP/v0988f
5vd39/J8e+fBwWx7//7+dPvhvXyyPdmdZg/vH0weTrL7H6U/mddNUS0/+2hvvPNRetY06/xs2bTzsqWPdnYebu/ube8ev
NnZfXRv99HevfG9vYOf+ih9Sr0Uy6z1N+dtu2oe3b2bv2vzepmV9erR/r39e3dfP//y7qt8Vt51GD2UXpSLZscwNf181
GVNUXzaJkt8uZRO330+viL548Ij0dTafRovWxW+bQ4L/LZR+mLqv1y+WV9fE699HD71OH2b1Eum0dM1s29r0qgraZV+dH
RYx53La9ufilrmrzGuD86wrhp2GU1zcp51bR3H98VOEePX9B7Z0/fE955VT2+K28e6bS+zhvMztlyl872tnZeXw38rn5
MOCBo/8H</msis:SAMLRequest>
      <msis:RedirectBindingInformation>
        <msis:RelayState>RelayState</msis:RelayState>

    <msis:Signature>TgTFsKkfCEEtmiu18kZzRzx0OqCxAqelkobQaaS6vV8iXeqmIAdyBvZeTykQaif3KYp5herI6evSMXA1P7KwX/GG/8o5e6QbNiBZTn48Cti+YJF7yqCZ5HX/gRg9e9CL8LvMvy8hBa8rDnDOH3eRZFwQNSzJzdVSqs+TNAx+4=</msis:Signature>
      <msis:SigAlg>http://www.w3.org/2001/04/xmldsig-more#rsa-sha256</msis:SigAlg>
      </msis:RedirectBindingInformation>
    </msis:Message>
    <msis:SessionState></msis:SessionState>

  <msis:LogoutState>http%3a%2f%2fexternalrp%2fscope?ID??http%3a%2f%2fexternalrp%2fscope&False&foo&&&&000?_e9e512ee-078d-454c-93eb-b1ca958b9ba5?urn%3aoasis%3anames%3atc%3aSAML%3a2.0%3astatus%3aSuccess</msis:LogoutState>
  </msis:LogoutResponse>
</s:Body>
</s:Envelope>
```

## 5 Security

### 5.1 Security Considerations for Implementers

Implementers have to ensure that SSL is used to authenticate between clients and servers on different machines, and that the server is the intended server referred to by the server endpoint. Implementers also have to ensure that the remote client role authenticates to the server role such that the server can trust the client to perform SSL client certificate authentication where appropriate. Otherwise there are no specific security considerations beyond those specified in normative references.

### 5.2 Index of Security Parameters

None.

## 6 Appendix A: Full WSDL

For ease of implementation, the following example provides the full Web Services Description Language (WSDL) ([WSDL]).

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:wsa10="http://www.w3.org/2005/08/addressing"
  xmlns:wsx="http://schemas.xmlsoap.org/ws/2004/09/mex"
  xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/" xmlns:wsu="http://docs.oasis-
  open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"
  xmlns:wspp="http://schemas.xmlsoap.org/ws/2004/09/policy"
  xmlns:wsap="http://schemas.xmlsoap.org/ws/2004/08/addressing/policy"
  xmlns:msc="http://schemas.microsoft.com/ws/2005/12/wsdl/contract"
  xmlns:wsa="http://schemas.xmlsoap.org/ws/2004/08/addressing"
  xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
  xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl" xmlns:tns="http://tempuri.org/"
  xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
  targetNamespace="http://tempuri.org/" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types />
  <wsdl:portType name="ISamlProtocolContract" />
  <wsdl:portType name="IAnyActionContract" />
  <wsdl:binding name="DefaultBinding_ISamlProtocolContract" type="tns:ISamlProtocolContract">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http" />
  </wsdl:binding>
  <wsdl:binding name="DefaultBinding_IAnyActionContract" type="tns:IAnyActionContract">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http" />
  </wsdl:binding>
</wsdl:definitions>
```

## 7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

- Windows Server 2003 R2 operating system
- Windows Server 2008 operating system
- Windows Server 2008 R2 operating system
- Active Directory Federation Services (AD FS) 2.0
- Windows Server 2012 operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms "SHOULD" or "SHOULD NOT" implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term "MAY" implies that the product does not follow the prescription.

<1> Section 3.1.3: AD FS 2.0 does use the SOAP endpoint address `net.tcp://localhost/samlprotocol` to establish local connections and the SOAP endpoint address

`https://contoso.com/adfs/services/trust/samlprotocol/proxycertificatetransport`, where contoso.com represents the STS server domain name, to establish remote connections.

<2> Section 3.2.3: AD FS 2.0 does use the SOAP endpoint address `net.tcp://localhost/samlprotocol` to establish local connections and the SOAP endpoint address

`https://contoso.com/adfs/services/trust/samlprotocol/proxycertificatetransport`, where contoso.com represents the STS server domain name, to establish remote connections.

<3> Section 3.3.3: AD FS 2.0 does use the SOAP endpoint address `net.tcp://localhost/samlprotocol` to establish local connections and the SOAP endpoint address

`https://contoso.com/adfs/services/trust/samlprotocol/proxycertificatetransport`, where contoso.com represents the STS server domain name, to establish remote connections.

## 8 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.

## 9 Index

### A

Abstract data model  
  client (section 3.1.1 23, section 3.3.1 31)  
  server (section 3.1.1 23, section 3.2.1 30)  
Applicability 10  
Attribute groups 22  
Attributes 22

### C

Capability negotiation 10  
Change tracking 49  
Client  
  abstract data model (section 3.1.1 23, section 3.3.1 31)  
  CreateErrorMessage operation 25  
  initialization (section 3.1.3 23, section 3.3.3 31)  
  Issue operation 25  
  local events (section 3.1.6 30, section 3.3.6 32)  
  Logout operation 25  
  message processing (section 3.1.4 23, section 3.3.4 31)  
  multiple operations 26  
  overview (section 3.1 23, section 3.3 31)  
  sequencing rules (section 3.1.4 23, section 3.3.4 31)  
  SignMessage operation 24  
  timer events (section 3.1.5 30, section 3.3.5 31)  
  timers (section 3.1.2 23, section 3.3.2 31)  
  VerifyMessage operation 24  
Complex types 19  
  overview 19  
PostBindingType 20  
PrincipalType 19  
RedirectBindingType 20  
RequestType 19  
ResponseType 19  
SamlMessageType 20  
CreateErrorMessage operation 25  
CreateErrorMessageRequest example 36  
CreateErrorMessageRequest message 17  
CreateErrorMessageResponse example 37  
CreateErrorMessageResponse message 18

### D

Data model - abstract  
  client (section 3.1.1 23, section 3.3.1 31)  
  server (section 3.1.1 23, section 3.2.1 30)

### E

Events  
  local  
    client (section 3.1.6 30, section 3.3.6 32)  
    server (section 3.1.6 30, section 3.2.6 31)  
  local - client 32  
  local - server 31  
  timer  
    client (section 3.1.5 30, section 3.3.5 31)  
    server (section 3.1.5 30, section 3.2.5 31)  
  timer - client 31  
  timer - server 31  
Examples

CreateErrorMessageRequest 36  
CreateErrorMessageResponse 37  
IssueRequest 33  
IssueResponse 34  
IssueResponse example using artifact binding 35  
LogoutRequest 41  
LogoutRequest example - locally initiated 43  
LogoutRequest example with SAMLResponse and RelayState 43  
LogoutResponse 42  
LogoutResponse example - final response to locally initiated request 43  
LogoutResponse example with SAMLRequest and RelayState 45  
SignMessageRequest 37  
SignMessageResponse 38  
VerifyMessageRequest 39  
VerifyMessageResponse 40  
VerifyMessageResponse example using redirect binding 40

## F

Fields - vendor-extensible 11  
Full WSDL 47

## G

Glossary 7  
Groups 22

## I

Implementer - security considerations 46  
Index of security parameters 46  
Informative references 9  
Initialization  
    client (section 3.1.3 23, section 3.3.3 31)  
    server (section 3.1.3 23, section 3.2.3 31)  
Introduction 7  
Issue operation 25  
IssueRequest example 33  
IssueRequest message 15  
IssueResponse example 34  
IssueResponse example using artifact binding 35  
IssueResponse message 16

## L

Local events  
    client (section 3.1.6 30, section 3.3.6 32)  
    server (section 3.1.6 30, section 3.2.6 31)  
Logout operation 25  
LogoutRequest example 41  
LogoutRequest example - locally initiated 43  
LogoutRequest example with SAMLResponse and RelayState 43  
LogoutRequest message 16  
LogoutResponse example 42  
LogoutResponse example - final response to locally initiated request 43  
LogoutResponse example with SAMLRequest and RelayState 45  
LogoutResponse message 17  
LogoutStatusType simple type 21

## M

Message processing  
    client (section 3.1.4 23, section 3.3.4 31)  
    server (section 3.1.4 23, section 3.2.4 31)

Messages  
attribute groups 22  
attributes 22  
complex types 19  
CreateErrorMessageRequest 17  
CreateErrorMessageRequest message 17  
CreateErrorMessageResponse 18  
CreateErrorMessageResponse message 18  
elements 19  
enumerated (section 2.2.2 12, section 2.2.2.1 13)  
groups 22  
IssueRequest 15  
IssueRequest message 15  
IssueResponse 16  
IssueResponse message 16  
LogoutRequest 16  
LogoutRequest message 16  
LogoutResponse 17  
LogoutResponse message 17  
LogoutStatusType simple type 21  
namespaces 12  
PostBindingType complex type 20  
PrincipalType complex type 19  
PrincipalTypes simple type 22  
RedirectBindingType complex type 20  
RequestType complex type 19  
ResponseType complex type 19  
SamlMessageType complex type 20  
SignMessageRequest 13  
SignMessageRequest message 13  
SignMessageResponse 14  
SignMessageResponse message 14  
simple types 21  
syntax 12  
transport 12  
VerifyMessageRequest 14  
VerifyMessageRequest message 14  
VerifyMessageResponse 15  
VerifyMessageResponse message 15  
Multiple operations 26

## N

Namespaces 12  
Normative references 8

## O

Operations  
CreateErrorMessage 25  
Issue 25  
Logout 25  
multiple operations 26  
SignMessage 24  
VerifyMessage 24  
Overview (synopsis) 9

## P

Parameters - security index 46  
PostBindingType complex type 20  
Preconditions 10  
Prerequisites 10  
PrincipalType complex type 19  
PrincipalTypes simple type 22

Product behavior 48

## R

RedirectBindingType complex type 20

References 8

    informative 9

    normative 8

Relationship to other protocols 9

RequestType complex type 19

ResponseType complex type 19

## S

SamlMessageType complex type 20

Security

    implementer considerations 46

    parameter index 46

Sequencing rules

    client (section 3.1.4 23, section 3.3.4 31)

    server (section 3.1.4 23, section 3.2.4 31)

Server

    abstract data model (section 3.1.1 23, section 3.2.1 30)

    CreateErrorMessage operation 25

    initialization (section 3.1.3 23, section 3.2.3 31)

    Issue operation 25

    local events (section 3.1.6 30, section 3.2.6 31)

    Logout operation 25

    message processing (section 3.1.4 23, section 3.2.4 31)

    multiple operations 26

    overview 23

    sequencing rules (section 3.1.4 23, section 3.2.4 31)

    SignMessage operation 24

    timer events (section 3.1.5 30, section 3.2.5 31)

    timers (section 3.1.2 23, section 3.2.2 30)

    VerifyMessage operation 24

SignMessage operation 24

SignMessageRequest example 37

SignMessageRequest message 13

SignMessageResponse example 38

SignMessageResponse message 14

Simple types 21

    LogoutStatusType 21

    overview 21

    PrincipalTypes 22

Standards assignments 11

Syntax

    messages - overview 12

Syntax - messages - overview 12

## T

Timer events

    client (section 3.1.5 30, section 3.3.5 31)

    server (section 3.1.5 30, section 3.2.5 31)

Timers

    client (section 3.1.2 23, section 3.3.2 31)

    server (section 3.1.2 23, section 3.2.2 30)

Tracking changes 49

Transport 12

Types

    complex 19

    simple 21

## V

Vendor-extensible fields 11  
VerifyMessage operation 24  
VerifyMessageRequest example 39  
VerifyMessageRequest message 14  
VerifyMessageResponse example 40  
VerifyMessageResponse example using redirect binding 40  
VerifyMessageResponse message 15  
Versioning 10

## **W**

WSDL 47