[MS-LSAD]:

Local Security Authority (Domain Policy) Remote Protocol

Intellectual Property Rights Notice for Open Specifications Documentation

- Technical Documentation. Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights**. This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets**. Microsoft does not claim any trade secret rights in this documentation.
- Patents. Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft Open Specification Promise or the Community Promise. If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting ipla@microsoft.com.
- Trademarks. The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- Fictitious Names. The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments	
2/22/2007	0.01		Version 0.01 release	
6/1/2007	1.0	Major	Updated and revised the technical content.	
7/3/2007	2.0	Major	Updated and revised the technical content.	
7/20/2007	3.0	Major	Added new content.	
8/10/2007	4.0	Major	New content added.	
9/28/2007	5.0	Major	Updated and revised the technical content.	
10/23/2007	5.1	Minor	Clarified the meaning of the technical content.	
11/30/2007	5.1.1	Editorial	Changed language and formatting in the technical content.	
1/25/2008	6.0	Major	Updated and revised the technical content.	
3/14/2008	7.0	Major	Updated and revised the technical content.	
5/16/2008	8.0	Major	Updated and revised the technical content.	
6/20/2008	9.0	Major	Updated and revised the technical content.	
7/25/2008	9.0.1	Editorial	Changed language and formatting in the technical content.	
8/29/2008	10.0	Major	Updated and revised the technical content.	
10/24/2008	11.0	Major	Updated and revised the technical content.	
12/5/2008	12.0	Major	Updated and revised the technical content.	
1/16/2009	13.0	Major	Updated and revised the technical content.	
2/27/2009	14.0	Major	Updated and revised the technical content.	
4/10/2009	15.0	Major	Updated and revised the technical content.	
5/22/2009	16.0	Major	Updated and revised the technical content.	
7/2/2009	17.0	Major	Updated and revised the technical content.	
8/14/2009	18.0	Major	Updated and revised the technical content.	
9/25/2009	19.0	Major	Updated and revised the technical content.	
11/6/2009	20.0	Major	Updated and revised the technical content.	
12/18/2009	21.0	Major	Updated and revised the technical content.	
1/29/2010	22.0	Major	Updated and revised the technical content.	
3/12/2010	23.0	Major	Updated and revised the technical content.	
4/23/2010	23.1	Minor	Clarified the meaning of the technical content.	
6/4/2010	24.0	Major	Updated and revised the technical content.	
7/16/2010	25.0	Major	Updated and revised the technical content.	

Date	Revision History	Revision Class	Comments
8/27/2010	26.0	Major	Updated and revised the technical content.
10/8/2010	27.0	Major	Updated and revised the technical content.
11/19/2010	28.0	Major	Updated and revised the technical content.
1/7/2011	29.0	Major	Updated and revised the technical content.
2/11/2011	30.0	Major	Updated and revised the technical content.
3/25/2011	31.0	Major	Updated and revised the technical content.
5/6/2011	32.0	Major	Updated and revised the technical content.
6/17/2011	33.0	Major	Updated and revised the technical content.
9/23/2011	33.0	None	No changes to the meaning, language, or formatting of the technical content.
12/16/2011	34.0	Major	Updated and revised the technical content.
3/30/2012	35.0	Major	Updated and revised the technical content.
7/12/2012	35.0	None	No changes to the meaning, language, or formatting of the technical content.
10/25/2012	36.0	Major	Updated and revised the technical content.
1/31/2013	36.0	None	No changes to the meaning, language, or formatting of the technical content.
8/8/2013	37.0	Major	Updated and revised the technical content.
11/14/2013	37.0	None	No changes to the meaning, language, or formatting of the technical content.
2/13/2014	37.0	None	No changes to the meaning, language, or formatting of the technical content.
5/15/2014	37.0	None	No changes to the meaning, language, or formatting of the technical content.
6/30/2015	38.0	Major	Significantly changed the technical content.
10/16/2015	38.0	No Change	No changes to the meaning, language, or formatting of the technical content.

Table of Contents

1				
	1.2		es 1	
	1.2.1		ative References 1	
	1.2.2		native References 1	
			1	
			hip to Other Protocols 1	
			ites/Preconditions	
			ity Statement 2	
			g and Capability Negotiation2	
			xtensible Fields2	
	1.9	Standards	s Assignments2	1
2	Mess	anes	2:	3
_			<u> </u>	
			Data Types	
	2.2.1		ant Value Definitions	
			CCESS MASK	
		2.1.1.1	ACCESS_MASK for All Objects2	
		2.1.1.2	ACCESS_MASK for Policy Objects	
		2.1.1.3	ACCESS_MASK for Account Objects	
		2.1.1.4	ACCESS_MASK for Secret Objects	
		2.1.1.5	ACCESS_MASK for Trusted Domain Objects	
	2.2.		OLICY_SYSTEM_ACCESS_MODE	
	2.2.		ECURITY_INFORMATION	
	2.2.2		Data Types	
	2.2.		SAPR HANDLE	
	2.2.		LSAPR_HANDLE	
	2.2.		SA_UNICODE_STRING 3	
	2.2.		SAPR_OBJECT_ATTRIBUTES 3	
	2.2.		SAPR_SR_SECURITY_DESCRIPTOR	
	2.2.3		Types Referenced by Basic Data Types	
	2.2.		TRING	
	2.2.		SAPR_ACL	
	2.2.		ECURITY_DESCRIPTOR_CONTROL	
	2.2.		SAPR_SECURITY_DESCRIPTOR	
	2.2.		ECURITY_IMPERSONATION_LEVEL 3	
	2.2.		ECURITY_CONTEXT_TRACKING_MODE	
	2.2.		ECURITY_QUALITY_OF_SERVICE3	
	2.2.4		Query/Set Data Types	
	2.2.		OLICY INFORMATION CLASS	
	2.2.		SAPR_POLICY_INFORMATION 3	
	2.2.		OLICY_AUDIT_LOG_INFO3	
	2.2.	4.4 LS	SAPR_POLICY_AUDIT_EVENTS_INFO4	0
	2.2.		SAPR_POLICY_PRIMARY_DOM_INFO4	
	2.2.		SAPR_POLICY_ACCOUNT_DOM_INFO4	
	2.2.		SAPR POLICY PD ACCOUNT INFO 4	
	2.2.	4.8 P	OLICY_LSA_SERVER_ROLE4	1
	2.2.		OLICY_LSA_SERVER_ROLE_INFO 4	
			SAPR_POLICY_REPLICA_SRCE_INFO4	
			OLICY_MODIFICATION_INFO4	
			OLICY_AUDIT_FULL_SET_INFO4	
			OLICY AUDIT FULL QUERY INFO	
			SAPR_POLICY_DNS_DOMAIN_INFO 4	
	2.2.		OLICY_DOMAIN_INFORMATION_CLASS 4	

2.2.4.16	LSAPR_POLICY_DOMAIN_INFORMATION	
2.2.4.17	POLICY_DOMAIN_QUALITY_OF_SERVICE_INFO	
2.2.4.18	LSAPR_POLICY_DOMAIN_EFS_INFO	44
2.2.4.19	POLICY_DOMAIN_KERBEROS_TICKET_INFO	
2.2.4.20	POLICY_AUDIT_EVENT_TYPE	
2.2.5 Acc	ount Query/Set Data Types	46
2.2.5.1	LSAPR_ACCOUNT_INFORMATION	
2.2.5.2	LSAPR_ACCOUNT_ENUM_BUFFER	46
2.2.5.3	LSAPR_USER_RIGHT_SET	
2.2.5.4	LSAPR_LUID_AND_ATTRIBUTES	47
2.2.5.5	LSAPR_PRIVILEGE_SET	47
2.2.6 Sec	ret Query/Set Data Types	
2.2.6.1	LSAPR_CR_CIPHER_VALUE	48
2.2.7 Tru	sted Domain Query/Set Data Types	48
2.2.7.1	LSAPR_TRUST_INFORMATION	48
2.2.7.2	TRUSTED_INFORMATION_CLASS	49
2.2.7.3	LSAPR_TRUSTED_DOMAIN_INFO	50
2.2.7.4	LSAPR_TRUSTED_DOMAIN_NAME_INFO	
2.2.7.5	LSAPR_TRUSTED_CONTROLLERS_INFO	
2.2.7.6	TRUSTED_POSIX_OFFSET_INFO	52
2.2.7.7	LSAPR TRUSTED PASSWORD INFO	
2.2.7.8	LSAPR TRUSTED DOMAIN INFORMATION BASIC	
2.2.7.9	LSAPR TRUSTED DOMAIN INFORMATION EX	
2.2.7.10	LSAPR_TRUSTED_DOMAIN_INFORMATION_EX2	
2.2.7.11	LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION	
2.2.7.12	LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION_INTERNAL	56
2.2.7.13	LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION	
2.2.7.14	LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION_INTERNAL	
2.2.7.15	LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION2	
2.2.7.16	LSAPR_TRUSTED_DOMAIN_AUTH_BLOB	
2.2.7.17	LSAPR_AUTH_INFORMATION	
2.2.7.18	TRUSTED_DOMAIN_SUPPORTED_ENCRYPTION_TYPES	
2.2.7.19	LSAPR_TRUSTED_ENUM_BUFFER	
2.2.7.20	LSAPR_TRUSTED_ENUM_BUFFER_EX	
2.2.7.21	LSA_FOREST_TRUST_RECORD	
2.2.7.22	LSA_FOREST_TRUST_RECORD_TYPE	
2.2.7.23	LSA_FOREST_TRUST_BINARY_DATA	
2.2.7.24	LSA FOREST TRUST DOMAIN INFO	
2.2.7.25	LSA_FOREST_TRUST_INFORMATION	
2.2.7.26	LSA_FOREST_TRUST_COLLISION_RECORD_TYPE	64
2.2.7.27	LSA_FOREST_TRUST_COLLISION_RECORD	64
2.2.7.28	LSA_FOREST_TRUST_COLLISION_INFORMATION	6.5
	rilege Data Types	65
2.2.8.1	LSAPR_POLICY_PRIVILEGE_DEF	65
2.2.8.2	LSAPR PRIVILEGE ENUM BUFFER	
_	ry Service Schema Elements	
	tails	
	Details	
	tract Data Model	
3.1.1.1	Policy Object Data Model	
3.1.1.2	Accounts Rights Data Model	
3.1.1.2.1	Privilege Data Model	
3.1.1.2.2		
3.1.1.3	Account Object Data Model	
3.1.1.4	Secret Object Data Model	
3.1.1.5	Trusted Domain Object Data Model	
3.1.1.6	Configuration Settings	76

3

3.1.1.6.1	Block Anonymous Access to Objects	76
	ContextHandle Data Model	
	ribute Listingect Class Listing	
	ess for Public Abstract Data Model Elements	
3.1.1.10 Acc	Example Patterns for Direct Access of Policy Object ADM Elements	
3.1.1.10.1		
3.1.1.10.1.		
	2 Set rate in for rolley object / Driving	
	ation	
	e Processing Events and Sequencing Rules	
	aining Handles	
3.1.4.2 Acc	ess Rights and Access Checks	84
3.1.4.2.1	Access Checks Applied on Handle Open	
3.1.4.2.2	Access Checks Applied for Object Operations	87
3.1.4.2.3	Determining If Requestors Are Anonymous	
	sing Handles	
	cy Object Methods	
3.1.4.4.1	LsarOpenPolicy2 (Opnum 44)	
3.1.4.4.2	LsarOpenPolicy (Opnum 6)	89
3.1.4.4.3	LsarQueryInformationPolicy2 (Opnum 46)	
3.1.4.4.4	LsarQueryInformationPolicy (Opnum 7)	
3.1.4.4.5	LsarSetInformationPolicy2 (Opnum 47)	
3.1.4.4.6 3.1.4.4.7	LsarSetInformationPolicy (Opnum 8)	
3.1.4.4.7	LsarQueryDomainInformationPolicy (Opnum 53)	95 70
	ount Object Methods	79 م
3.1.4.5.1	LsarCreateAccount (Opnum 10)	
3.1.4.5.2	LsarEnumerateAccounts (Opnum 11)	
3.1.4.5.3	LsarOpenAccount (Opnum 17)	
3.1.4.5.4	LsarEnumeratePrivilegesAccount (Opnum 18)	103
3.1.4.5.5	LsarAddPrivilegesToAccount (Opnum 19)	
3.1.4.5.6	LsarRemovePrivilegesFromAccount (Opnum 20)	104
3.1.4.5.7	LsarGetSystemAccessAccount (Opnum 23)	
3.1.4.5.8	LsarSetSystemAccessAccount (Opnum 24)	
3.1.4.5.9	LsarEnumerateAccountsWithUserRight (Opnum 35)	
3.1.4.5.10	LsarEnumerateAccountRights (Opnum 36)	
3.1.4.5.11	LsarAddAccountRights (Opnum 37)	
3.1.4.5.12	LsarRemoveAccountRights (Opnum 38)	
	ret Object Methods	
3.1.4.6.1	LsarCreateSecret (Opnum 16)	
3.1.4.6.2	LsarOpenSecret (Opnum 28)	
3.1.4.6.3	LsarSetSecret (Opnum 29)	
3.1.4.6.4	LsarQuerySecret (Opnum 30)	
3.1.4.6.5 3.1.4.6.6	LsarStorePrivateData (Opnum 42)	
	sted Domain Object Methods	
3.1.4.7.1	LsarOpenTrustedDomain (Opnum 25)	119
3.1.4.7.2	LsarQueryTrustedDomainInfo (Opnum 39)	
3.1.4.7.3	LsarSetTrustedDomainInfo (Opnum 40)	
3.1.4.7.4	LsarDeleteTrustedDomain (Opnum 41)	
3.1.4.7.5	LsarQueryTrustedDomainInfoByName (Opnum 48)	
3.1.4.7.6	LsarSetTrustedDomainInfoByName (Opnum 49)	
3.1.4.7.7	LsarEnumerateTrustedDomainsEx (Opnum 50)	
3.1.4.7.8	LsarEnumerateTrustedDomains (Opnum 13)	
3.1.4.7.9	LsarOpenTrustedDomainByName (Opnum 55)	
3.1.4.7.10	LsarCreateTrustedDomainEx2 (Opnum 59)	131
3.1.4.7.11	LsarCreateTrustedDomainEx (Opnum 51)	134

	3.1.4.7.12 LsarCreateTrustedDomain (Opnum 12)	135
	3.1.4.7.13 LsarQueryInfoTrustedDomain (Opnum 26)	
	3.1.4.7.14 LsarSetInformationTrustedDomain (Opnum 27)	
	3.1.4.7.15 LsarQueryForestTrustInformation (Opnum 73)	
	3.1.4.7.16 LsarSetForestTrustInformation (Opnum 74)	
	3.1.4.7.16.1 Forest Trust Collision Generation	
	3.1.4.8 Privilege Methods	146
	3.1.4.8.1 LsarEnumeratePrivileges (Opnum 2)	
	3.1.4.8.2 LsarLookupPrivilegeValue (Opnum 31)	
	3.1.4.8.3 LsarLookupPrivilegeName (Opnum 32)	
	3.1.4.8.4 LsarLookupPrivilegeDisplayName (Opnum 33)	
	3.1.4.9 Common Object Methods	
	3.1.4.9.1 LsarQuerySecurityObject (Opnum 3)	
	3.1.4.9.2 LsarSetSecurityObject (Opnum 4)	
	3.1.4.9.3 LsarDeleteObject (Opnum 34)	
	3.1.4.10 Data Validation	
	3.1.5 Timer Events	
	3.1.6 Other Local Events	
	3.1.6.1 LSAPR HANDLE rundown	
	5111011 25/11/2[17/11522].411461111	
	Posts and Francisco	
	Protocol Examples	
	4.1 Manipulating Account Objects	161
	4.1 Manipulating Account Objects4.2 Manipulating Secret Objects	161 164
	 4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 	161 164 167
	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB.	161 164 167
5	4.1 Manipulating Account Objects	161 164 169 1 173
5	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Security 5.1 Security Considerations for Implementers	161164167169173
5	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Security 5.1 Security Considerations for Implementers 5.1.1 RC4 Cipher Usage	161 164 169 173 173
5	 4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB 5.1 Security 5.1 Security Considerations for Implementers 5.1.1 RC4 Cipher Usage 5.1.2 Secret Encryption and Decryption 	
5	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. 5.1 Security 5.1 Security Considerations for Implementers 5.1.1 RC4 Cipher Usage 5.1.2 Secret Encryption and Decryption 5.1.3 DES-ECB-LM Cipher Definition	
5	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Security 5.1 Security Considerations for Implementers 5.1.1 RC4 Cipher Usage 5.1.2 Secret Encryption and Decryption 5.1.3 DES-ECB-LM Cipher Definition 5.1.4 Encryption and Decryption Examples	
5	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Security 5.1 Security Considerations for Implementers 5.1.1 RC4 Cipher Usage 5.1.2 Secret Encryption and Decryption 5.1.3 DES-ECB-LM Cipher Definition 5.1.4 Encryption and Decryption Examples 5.1.4.1 Encryption Example	
5	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Security 5.1 Security Considerations for Implementers 5.1.1 RC4 Cipher Usage 5.1.2 Secret Encryption and Decryption 5.1.3 DES-ECB-LM Cipher Definition 5.1.4 Encryption and Decryption Examples 5.1.4.1 Encryption Example 5.1.4.2 Decryption Example	
5	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Security 5.1 Security Considerations for Implementers 5.1.1 RC4 Cipher Usage 5.1.2 Secret Encryption and Decryption 5.1.3 DES-ECB-LM Cipher Definition 5.1.4 Encryption and Decryption Examples 5.1.4.1 Encryption Example 5.1.4.2 Decryption Example 5.1.4.2 Index of Security Parameters	
5	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Security	
5	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Security 5.1 Security Considerations for Implementers 5.1.1 RC4 Cipher Usage 5.1.2 Secret Encryption and Decryption 5.1.3 DES-ECB-LM Cipher Definition 5.1.4 Encryption and Decryption Examples 5.1.4.1 Encryption Example 5.1.4.2 Decryption Example 5.1.4.2 Decryption Example 5.1 Index of Security Parameters Appendix A: Full IDL	
5 6 7	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Security	161169173173175176176177
5	4.1 Manipulating Account Objects 4.2 Manipulating Secret Objects 4.3 Manipulating Trusted Domain Objects 4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Security 5.1 Security Considerations for Implementers 5.1.1 RC4 Cipher Usage 5.1.2 Secret Encryption and Decryption 5.1.3 DES-ECB-LM Cipher Definition 5.1.4 Encryption and Decryption Examples 5.1.4.1 Encryption Example 5.1.4.2 Decryption Example 5.1.4.2 Decryption Example 5.1 Index of Security Parameters Appendix A: Full IDL Appendix B: Product Behavior	161169173173175176176177

1 Introduction

The Local Security Authority (Domain Policy) Remote Protocol is used to manage various machine and **domain** security policies. All versions of Windows NT operating system–based products, in all configurations, implement and listen on the server side of this protocol. However, not all operations are meaningful in all configurations.

This protocol, with minor exceptions, enables remote policy-management scenarios. Therefore, the majority of this interface does not need to be implemented to achieve Windows client-to-server (**domain controller** configuration and otherwise) interoperability, as defined by the ability for Windows clients to retrieve policy settings from servers.

Policy settings controlled by this protocol relate to the following:

- Account objects: The rights and privileges that security principals have on the server.
- **Secret objects**: Mechanisms that securely store data on the server.
- Trusted domain objects: Mechanisms that the Windows operating system uses for describing trust relationships between domains and forests.
- Other miscellaneous settings, such as lifetimes of Kerberos tickets, states of domain controller (backup or primary), and other unrelated pieces of policy.

All of these types of policy are addressed in sections of this document that specify the server data model.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [RFC2119]. Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are specific to this document:

- **access control list (ACL)**: A list of access control entries (ACEs) that collectively describe the security rules for authorizing access to some resource; for example, an object or set of objects.
- account domain: A domain, identified by a security identifier (SID), that is the SID namespace for which a given machine is authoritative. The account domain is the same as the primary domain for a domain controller (DC) and is its default domain. For a Windows machine that is joined to a domain, the account domain is the SID namespace defined by the local Security Accounts Manager [MS-SAMR].
- account object: An element of a Local Security Authority (LSA) policy database that describes the rights and privileges granted by the server to a security principal. The security identifier (SID) of the security principal matches that of the account object.
- **ACID**: A term that refers to the four properties that any database system must achieve in order to be considered transactional: Atomicity, Consistency, Isolation, and Durability [GRAY].
- **Active Directory**: A general-purpose network directory service. **Active Directory** also refers to the Windows implementation of a directory service. **Active Directory** stores information about a variety of objects in the network. Importantly, user accounts, computer accounts, groups, and all related credential information used by the Windows implementation of Kerberos are stored in **Active Directory**. **Active Directory** is either deployed as Active Directory Domain Services (AD DS) or Active Directory Lightweight Directory Services (AD LDS). [MS-ADTS] describes both

- forms. For more information, see [MS-AUTHSOD] section 1.1.1.5.2, Lightweight Directory Access Protocol (LDAP) versions 2 and 3, Kerberos, and DNS.
- backup domain controller (BDC): A domain controller (DC) that receives a copy of the domain directory database from the primary domain controller (PDC). This copy is synchronized periodically and automatically with the primary domain controller (PDC). BDCs also authenticate user logons and can be promoted to function as the PDC. There is only one PDC or PDC emulator in a domain, and the rest are backup domain controllers.
- **Coordinated Universal Time (UTC)**: A high-precision atomic time standard that approximately tracks Universal Time (UT). It is the basis for legal, civil time all over the Earth. Time zones around the world are expressed as positive and negative offsets from UTC. In this role, it is also referred to as Zulu time (Z) and Greenwich Mean Time (GMT). In these specifications, all references to UTC refer to the time at UTC-0 (or GMT).
- **discretionary access control list (DACL)**: An **access control list (ACL)** that is controlled by the owner of an object and that specifies the access particular users or groups can have to the object.
- DNS name: A fully qualified domain name (FQDN).
- domain: A set of users and computers sharing a common namespace and management infrastructure. At least one computer member of the set must act as a domain controller (DC) and host a member list that identifies all members of the domain, as well as optionally hosting the Active Directory service. The domain controller provides authentication (2) of members, creating a unit of trust for its members. Each domain has an identifier that is shared among its members. For more information, see [MS-AUTHSOD] section 1.1.1.5 and [MS-ADTS].
- domain controller (DC): The service, running on a server, that implements Active Directory, or the server hosting this service. The service hosts the data store for objects and interoperates with other DCs to ensure that a local change to an object replicates correctly across all DCs. When Active Directory is operating as Active Directory Domain Services (AD DS), the DC contains full NC replicas of the configuration naming context (config NC), schema naming context (schema NC), and one of the domain NCs in its forest. If the AD DS DC is a global catalog server (GC server), it contains partial NC replicas of the remaining domain NCs in its forest. For more information, see [MS-AUTHSOD] section 1.1.1.5.2 and [MS-ADTS]. When Active Directory is operating as Active Directory Lightweight Directory Services (AD LDS), several AD LDS DCs can run on one server. When Active Directory is operating as AD DS, only one AD DS DC can run on one server. However, several AD LDS DCs can coexist with one AD DS DC on one server. The AD LDS DC contains full NC replicas of the config NC and the schema NC in its forest. The domain controller is the server side of Authentication Protocol Domain Support [MS-APDS].
- **domain member (member machine)**: A machine that is joined to a domain by sharing a secret between the machine and the domain.
- domain naming context (domain NC): A specific type of naming context (NC), or an instance of that type, that represents a domain. A domain NC can contain security principal objects; no other type of NC can contain security principal objects. Domain NCs appear in the global catalog (GC). A domain NC is hosted by one or more domain controllers (DCs) operating as AD DS. In AD DS, a forest has one or more domain NCs. A domain NC cannot exist in AD LDS. The root of a domain NC is an object of class domainDNS; for directory replication [MS-DRSR], see domainDNS.
- endpoint: A network-specific address of a remote procedure call (RPC) server process for remote procedure calls. The actual name and type of the endpoint depends on the RPC protocol sequence that is being used. For example, for RPC over TCP (RPC Protocol Sequence ncacn_ip_tcp), an endpoint might be TCP port 1025. For RPC over Server Message Block (RPC

- Protocol Sequence ncacn_np), an endpoint might be the name of a named pipe. For more information, see [C706].
- **forest**: One or more **domains** that share a common schema and trust each other transitively. An organization can have multiple **forests**. A **forest** establishes the security and administrative boundary for all the objects that reside within the **domains** that belong to the **forest**. In contrast, a **domain** establishes the administrative boundary for managing objects, such as users, groups, and computers. In addition, each **domain** has individual security policies and trust relationships with other **domains**.
- **forest functional level**: A specification of functionality available in a **forest**. It must be less than or equal to the **domain controller (DC)** functional level of every **DC** in the **forest**. See [MS-ADTS] section 6.1.4.4 for information on how the **forest functional level** is determined.
- **forest trust**: A type of **trust** where the trusted party is a **forest**, which means that all **domains** in that **forest** are trusted.
- **forest trust information**: Information about namespaces, domain names, and **security identifiers (SIDs)** owned by a trusted **forest**.
- **global catalog server (GC server)**: A **domain controller (DC)** that contains a naming context (NC) replica (one full, the rest partial) for each **domain naming context** in the **forest**.
- **globally unique identifier (GUID)**: A term used interchangeably with **universally unique identifier (UUID)** in Microsoft protocol technical documents (TDs). Interchanging the usage of these terms does not imply or require a specific algorithm or mechanism to generate the value. Specifically, the use of this term does not imply or require that the algorithms described in [RFC4122] or [C706] must be used for generating the **GUID**. See also **universally unique identifier (UUID)**.
- **interdomain trust account**: An account that stores information associated with a **domain trust** in the **domain controllers (DCs)** of the **domain** that is trusted to perform authentication.
- **local account domain**: A **domain**, identified by a **security identifier (SID)**, that is a **SID** namespace for which a given machine is authoritative. The **local account domain** is the same as the **account domain** for any non-**domain controller (DC)**. On a **DC**, the **local account domain** is an **account domain** local to the **DC**.
- **locally unique identifier (LUID)**: A 64-bit value guaranteed to be unique within the scope of a single machine.
- NDR64: See 64-bit Network Data Representation (NDR64).
- **Network Data Representation (NDR)**: A specification that defines a mapping from Interface Definition Language (IDL) data types onto octet streams. **NDR** also refers to the runtime environment that implements the mapping facilities (for example, data provided to **NDR**). For more information, see [MS-RPCE] and [C706] section 14.
- **OEM code page**: See original equipment manufacturer (OEM) code page.
- **opnum**: An operation number or numeric identifier that is used to identify a specific **remote procedure call (RPC)** method or a method in an interface. For more information, see [C706] section 12.5.2.12 or [MS-RPCE].
- **primary domain**: A **domain** (identified by a **security identifier (SID)**) that the server is joined to. For a **domain controller (DC)**, the **primary domain** is that of the **domain** itself.
- **primary domain controller (PDC)**: A **domain controller (DC)** designated to track changes made to the accounts of all computers on a **domain**. It is the only computer to receive these

- changes directly, and is specialized so as to ensure consistency and to eliminate the potential for conflicting entries in the **Active Directory** database. A **domain** has only one **PDC**.
- **primary domain controller (PDC) role owner**: The **domain controller (DC)** that hosts the **primary domain controller** emulator FSMO role for a given domain naming context (NC).
- **privilege**: The capability of a security principal to perform a type of operation on a computer system regardless of restrictions placed by discretionary access control.
- **RC4**: A variable key-length symmetric encryption algorithm. For more information, see [SCHNEIER] section 17.1.
- **read-only domain controller (RODC)**: A **domain controller (DC)** that does not accept originating updates. Additionally, an **RODC** does not perform outbound replication. An RODC cannot be the primary domain controller (PDC) for its domain.
- **remote procedure call (RPC)**: A context-dependent term commonly overloaded with three meanings. Note that much of the industry literature concerning RPC technologies uses this term interchangeably for any of the three meanings. Following are the three definitions: (*) The runtime environment providing remote procedure call facilities. The preferred usage for this meaning is "RPC runtime". (*) The pattern of request and response message exchange between two parties (typically, a client and a server). The preferred usage for this meaning is "RPC exchange". (*) A single message from an exchange as defined in the previous definition. The preferred usage for this term is "RPC message". For more information about RPC, see [C706].
- root domain: The unique domain naming contexts (domain NCs) of an Active Directory forest that is the parent of the forest's config NC. The config NC's relative distinguished name (RDN) is "cn=Configuration" relative to the root object of the root domain. The root domain is the domain that is created first in a forest.
- **RPC client**: A computer on the network that sends messages using remote procedure call (RPC) as its transport, waits for responses, and is the initiator in an RPC exchange.
- **RPC protocol sequence**: A character string that represents a valid combination of a **remote procedure call (RPC)** protocol, a network layer protocol, and a transport layer protocol, as described in [C706] and [MS-RPCE].
- **RPC server**: A computer on the network that waits for messages, processes them when they arrive, and sends responses using RPC as its transport acts as the responder during a remote procedure call (RPC) exchange.
- **RPC transport**: The underlying network services used by the remote procedure call (RPC) runtime for communications between network nodes. For more information, see [C706] section 2.
- **secret object**: An element of the Local Security Authority (LSA) Policy Database, which contains a value that is secret in that access to it is strictly controlled through cryptographic protections and restrictive access control mechanisms.
- security descriptor: A data structure containing the security information associated with a securable object. A security descriptor identifies an object's owner by its security identifier (SID). If access control is configured for the object, its security descriptor contains a discretionary access control list (DACL) with SIDs for the security principals who are allowed or denied access. Applications use this structure to set and query an object's security status. The security descriptor is used to guard access to an object as well as to control which type of auditing takes place when the object is accessed. The security descriptor format is specified in [MS-DTYP] section 2.4.6; a string representation of security descriptors, called SDDL, is specified in [MS-DTYP] section 2.5.1.
- **security identifier (SID)**: An identifier for **security principals** in Windows that is used to identify an account or a group. Conceptually, the **SID** is composed of an account authority

- portion (typically a **domain**) and a smaller integer representing an identity relative to the account authority, termed the relative identifier (RID). The **SID** format is specified in [MS-DTYP] section 2.4.2; a string representation of **SIDs** is specified in [MS-DTYP] section 2.4.2 and [MS-AZOD] section 1.1.1.2.
- **security principal**: An identity that can be used to regulate access to resources, as specified in [MS-AUTHSOD] section 1.1.1.1. A **security principal** can be a user, a computer, or a group that represents a set of users.
- **Server Message Block (SMB)**: A protocol that is used to request file and print services from server systems over a network. The SMB protocol extends the CIFS protocol with additional security, file, and disk management support. For more information, see [CIFS] and [MS-SMB].
- **server role**: The state of a **domain controller (DC)**, which can be one of two values--primary DC or backup DC.
- **service**: A process or agent that is available on the network, offering resources or services for clients. Examples of services include file servers, web servers, and so on.
- **system access control list (SACL)**: An **access control list (ACL)** that controls the generation of audit messages for attempts to access a securable object. The ability to get or set an object's **SACL** is controlled by a privilege typically held only by system administrators.
- trust: To accept another authority's statements for the purposes of authentication and authorization, especially in the case of a relationship between two domains. If domain A trusts domain B, domain A accepts domain B's authentication and authorization statements for principals represented by security principal objects in domain B; for example, the list of groups to which a particular user belongs. As a noun, a trust is the relationship between two domains described in the previous sentence.
- **trust attributes**: A collection of attributes that define different characteristics of a trust within a domain or a forest.
- **trusted domain**: A domain that is trusted to make authentication decisions for security principals in that domain.
- **trusted domain object (TDO)**: A collection of properties that define a trust relationship with another domain, such as direction (outbound, inbound, or both), trust attributes, name, and security identifier of the other domain. For more information, see [MS-ADTS].
- **trusted forest**: A forest that is trusted to make authentication statements for security principals in that forest. Assuming forest A trusts forest B, all domains belonging to forest A will trust all domains in forest B, subject to policy configuration.
- universally unique identifier (UUID): A 128-bit value. UUIDs can be used for multiple purposes, from tagging objects with an extremely short lifetime, to reliably identifying very persistent objects in cross-process communication such as client and server interfaces, manager entry-point vectors, and RPC objects. UUIDs are highly likely to be unique. UUIDs are also known as globally unique identifiers (GUIDs) and these terms are used interchangeably in the Microsoft protocol technical documents (TDs). Interchanging the usage of these terms does not imply or require a specific algorithm or mechanism to generate the UUID. Specifically, the use of this term does not imply or require that the algorithms described in [RFC4122] or [C706] must be used for generating the UUID.
- **MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as defined in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the Errata.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[C706] The Open Group, "DCE 1.1: Remote Procedure Call", C706, August 1997, https://www2.opengroup.org/ogsys/catalog/c706

[FIPS81] FIPS PUBS, "DES Modes of Operation", December 1980, http://csrc.nist.gov/publications/fips/fips81/fips81.htm

[GRAY] Gray, J. and Reuter, A., "Transaction Processing: Concepts and Techniques", San Mateo, CA: Morgan Kaufmann Publishers, 1993, ISBN: 1558601902.

[MS-ADA1] Microsoft Corporation, "Active Directory Schema Attributes A-L".

[MS-ADA2] Microsoft Corporation, "Active Directory Schema Attributes M".

[MS-ADA3] Microsoft Corporation, "Active Directory Schema Attributes N-Z".

[MS-ADSC] Microsoft Corporation, "Active Directory Schema Classes".

[MS-ADTS] Microsoft Corporation, "Active Directory Technical Specification".

[MS-DTYP] Microsoft Corporation, "Windows Data Types".

[MS-ERREF] Microsoft Corporation, "Windows Error Codes".

[MS-GPEF] Microsoft Corporation, "Group Policy: Encrypting File System Extension".

[MS-GPSB] Microsoft Corporation, "Group Policy: Security Protocol Extension".

[MS-KILE] Microsoft Corporation, "Kerberos Protocol Extensions".

[MS-LSAT] Microsoft Corporation, "Local Security Authority (Translation Methods) Remote Protocol".

[MS-NRPC] Microsoft Corporation, "Netlogon Remote Protocol".

[MS-RPCE] Microsoft Corporation, "Remote Procedure Call Protocol Extensions".

[MS-SAMR] Microsoft Corporation, "Security Account Manager (SAM) Remote Protocol (Client-to-Server)".

[MS-SMB2] Microsoft Corporation, "Server Message Block (SMB) Protocol Versions 2 and 3".

[MS-SMB] Microsoft Corporation, "Server Message Block (SMB) Protocol".

[MS-WKST] Microsoft Corporation, "Workstation Service Remote Protocol".

[RFC1088] McLaughlin III, L., "A Standard for the Transmission of IP Datagrams over NetBIOS Networks", RFC 1088, February 1989, http://www.ietf.org/rfc/1088.txt

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, http://www.rfc-editor.org/rfc/rfc2119.txt

[RFC3961] Raeburn, K., "Encryption and Checksum Specifications for Kerberos 5", RFC 3961, February 2005, http://www.ietf.org/rfc/rfc3961.txt

[RFC4120] Neuman, C., Yu, T., Hartman, S., and Raeburn, K., "The Kerberos Network Authentication Service (V5)", RFC 4120, July 2005, http://www.rfc-editor.org/rfc/rfc4120.txt

[RFC4757] Jaganathan, K., Zhu, L., and Brezak, J., "The RC4-HMAC Kerberos Encryption Types Used by Microsoft Windows", RFC 4757, December 2006, http://www.ietf.org/rfc/rfc4757.txt

1.2.2 Informative References

[MS-DRSR] Microsoft Corporation, "Directory Replication Service (DRS) Remote Protocol".

[MSFT-LSA-IDL] Microsoft Corporation, "Local Security Authority Merged IDL File", April 2009, http://www.microsoft.com/downloads/details.aspx?displaylang=en&familyID=7700ad04-866b-447a-9e08-21dbda94460f

1.3 Overview

The Local Security Authority (Domain Policy) Remote Protocol provides a **remote procedure call** (RPC) interface used for providing remote management for policy settings related to **account objects**, **secret objects**, **trusted domain objects** (TDOs), and other miscellaneous security-related policy settings. The client end of the Local Security Authority (Domain Policy) Remote Protocol is an application that issues method calls on the RPC interface. The server end of the Local Security Authority (Domain Policy) Remote Protocol is a **service** that implements support for this RPC interface.

The following represent primary use cases for remote management:

- Creating, deleting, enumerating, and modifying trusts, account objects, and secret objects.
- Querying and modifying policy settings unrelated to TDOs, account objects or secret objects, such as lifetimes of Kerberos tickets.

This protocol is used by Windows clients for the "domain join" operation (as specified in [MS-ADTS] section 6.4) as an implementation choice to achieve the end state, as specified in [MS-ADTS]. The specific profile of the Local Security Authority (Domain Policy) Remote Protocol for the "domain join" scenario is specified in section $\underline{1.6}$ as "Retrieval of policy settings by clients".

The server end of the Local Security Authority (Domain Policy) Remote Protocol can be implemented on a domain controller (DC), including **primary domain controllers (PDCs)**, **backup domain controllers (BDCs)**, **global catalog servers (GC servers)**, and **read-only domain controllers (RODCs)**, or on a non-domain controller. In the case of a DC, including PDCs, BDCs, GC servers, and RODCs, the server end of this protocol can be in one of the **forest functional levels**. The behavior of the server end of the Local Security Authority (Domain Policy) Remote Protocol is the same in these cases, except when noted in the message processing descriptions for the methods of this protocol. See sections 3.1.4.4.1, 3.1.4.4.3, 3.1.4.4.5, 3.1.4.7, 3.1.4.7.3, 3.1.4.7.4, 3.1.4.7.10, 3.1.4.7.14, and 3.1.4.7.16 for details.

This protocol is a simple request/response-based RPC protocol. Typically, there are no long-lived sessions, although clients can cache the RPC connection and reuse it over time. A sample sequence of requests and responses is specified in section $\underline{4}$.

It is helpful to consider two perspectives when understanding and implementing this protocol: an object-based perspective and a method-based perspective.

The object-based perspective shows that the protocol exposes four main object abstractions: a policy object, an account object, a secret object, and a trusted domain object. A requester obtains a "handle" (an RPC context handle) to one of these objects and then performs one or more actions on the object. The following is a brief listing of methods that operate on each of the respective object types.

Policy object:

- LsarOpenPolicy2
- LsarQueryInformationPolicy2
- LsarSetInformationPolicy2
- LsarClose
- LsarQueryDomainInformationPolicy
- LsarEnumeratePrivileges
- LsarLookupPrivilegeName
- LsarLookupPrivilegeValue
- LsarLookupPrivilegeDisplayName
- LsarSetDomainInformationPolicy
- LsarQuerySecurityObject
- LsarSetSecurityObject

Account object:

- LsarCreateAccount
- LsarOpenAccount
- LsarEnumerateAccounts
- LsarClose
- LsarDeleteObject
- LsarSetSystemAccessAccount
- LsarQuerySecurityObject
- LsarAddAccountRights
- LsarRemoveAccountRights
- LsarAddPrivilegesToAccount
- LsarRemovePrivilegesFromAccount
- LsarEnumerateAccountsWithUserRight
- LsarGetSystemAccessAccount
- LsarSetSecurityObject
- LsarEnumeratePrivilegesAccount

LsarEnumerateAccountRights

Secret object:

- LsarCreateSecret
- LsarOpenSecret
- LsarClose
- LsarDeleteObject
- LsarRetrievePrivateData
- LsarStorePrivateData
- LsarSetSecret
- LsarQuerySecret
- LsarQuerySecurityObject
- LsarSetSecurityObject

Trusted domain object:

- LsarCreateTrustedDomainEx2
- LsarOpenTrustedDomain
- LsarClose
- LsarDeleteObject
- LsarOpenTrustedDomainByName
- LsarDeleteTrustedDomain
- LsarEnumerateTrustedDomainsEx
- LsarQueryInfoTrustedDomain
- LsarSetInformationTrustedDomain
- LsarQueryForestTrustInformation
- LsarSetForestTrustInformation
- LsarQueryTrustedDomainInfo
- LsarSetTrustedDomainInfo
- LsarQueryTrustedDomainInfoByName
- LsarSetTrustedDomainInfoByName

For example, to set a policy that controls the lifetime of Kerberos tickets, a requester opens a handle to the Policy object and updates the maximum service ticket age policy setting via a parameter called <code>MaxServiceTicketAge</code>. The call sequence from the requester appears as follows (with the parameter information removed for brevity):

1. Send LsarOpenPolicy2 request; receive LsarOpenPolicy2 reply.

- Send LsarQueryDomainInformationPolicy request; receive LsarQueryDomainInformationPolicy reply.
- 3. Send LsarSetDomainInformationPolicy request; receive LsarSetDomainInformationPolicy reply.
- 4. Send LsarClose request; receive LsarClose reply.

The following is a brief explanation of the call sequence:

- 1. Using the network address of a responder that implements this protocol, a requester makes an LsarOpenPolicy2 request to obtain a handle to the policy object. This handle is necessary to examine and manipulate domain policy information.
- 2. Using the handle returned from LsarOpenPolicy2, the requester makes an LsarQueryDomainInformationPolicy request to retrieve the current policy settings that affect Kerberos tickets.
- 3. After modifying the portions of the Kerberos ticket policy information to suit the requester, the requester makes the LsarSetDomainInformationPolicy request to set the policy to the new values.
- 4. The requester closes the policy handle returned from LsarOpenPolicy2. This releases responder resources associated with the handle.

In the method-based perspective, there is a common set of operations for each object type. The operations fall into patterns. The following is a list of the patterns and associated methods, along with a description of the pattern.

• Open pattern: This pattern returns an RPC context handle that references a specific object type. A requester uses this pattern by specifying a specific access for the handle in the request and using the returned handle to call other methods that require the returned handle and the associated access. For example, calling the LsarSetSecret method requires a secret object handle that has been opened with SECRET WRITE access.

LsarOpenPolicy2 is distinguished from the other methods in this pattern in two ways. First, the requestor must call this method before calling any other handle-based methods. Second, a network address, rather than a context handle, is required to indicate the responder.

The following are the methods that follow the open pattern:

- LsarOpenPolicy2
- LsarOpenPolicy
- LsarOpenAccount
- LsarOpenSecret
- LsarOpenTrustedDomain
- LsarOpenTrustedDomainByName
- Enumerate pattern: This pattern enables a requester to obtain a complete listing of all objects of
 a certain type (account or trusted domain) or to get all values of a certain type out of an object
 (for example, privileges known to the server).

The following are the methods that follow the enumerate pattern:

- LsarEnumerateTrustedDomainsEx
- LsarEnumerateAccounts
- LsarEnumeratePrivileges

- LsarEnumeratePrivilegesAccount
- LsarEnumerateAccountRights
- LsarEnumerateAccountsWithUserRight
- **Create pattern**: Methods in this pattern enable specified objects to be created. A handle to the newly created object is also returned.

The following are the methods that follow the create pattern:

- LsarCreateAccount
- LsarCreateSecret
- LsarCreateTrustedDomainEx2
- **Query pattern**: This pattern enables specified attributes of an object to be returned. The requester indicates which attributes to return by specifying an "information class". This is an enumeration that the responder understands and translates to a specific structure to return (the structure contains the attributes indicated by the information class).

For example, to retrieve the name of a trusted domain, a requester would specify the information level "TrustedDomainNameInformation" to the LsarQueryTrustedDomainInfo method.

The following are the methods that follow the query pattern:

- LsarQueryDomainInformationPolicy
- LsarQueryForestTrustInformation
- LsarQueryInformationPolicy2
- LsarQuerySecret
- LsarQueryTrustedDomainInfo
- LsarQueryTrustedDomainInfoByName
- LsarQueryInfoTrustedDomain
- **Set pattern**: This pattern enables specified object attributes to be set. The requester makes a request for which attributes to update by specifying an "information class". Similar to the Query pattern, this information level allows the caller to specify to the responder which attributes are being sent in the request.

The following are the methods that follow the set pattern:

- LsarSetDomainInformationPolicy
- LsarSetForestTrustInformation
- LsarSetInformationPolicy2
- LsarSetSecret
- LsarAddPrivilegesToAccount
- LsarRemovePrivilegesFromAccount
- LsarAddAccountRights
- LsarRemoveAccountRights

• **Delete pattern**: This pattern enables a requester to delete a specified object.

The following are the methods that follow the delete pattern:

- LsarDeleteObject
- LsarDeleteTrustedDomain
- **Lookup pattern**: This pattern enables a caller to translate between different representations of an entity (in the case of this protocol, names and identifiers of privileges).

The following are the methods that follow the lookup pattern:

- LsarLookupPrivilegeName
- LsarLookupPrivilegeValue
- LsarLookupPrivilegeDisplayName
- Security pattern: This pattern enables a caller to specify or query the access control at the level
 of individual objects.

The following are the methods that follow the security pattern:

- LsarSetSecurityObject
- LsarQuerySecurityObject
- **Miscellaneous**: The following method does not fall into a general pattern. A brief description is given here. See the message processing section for details.

LsarClose: This method releases responder resources associated with the RPC context handle that is passed as a parameter.

1.4 Relationship to Other Protocols

The Local Security Authority (Domain Policy) Remote Protocol is composed of a subset of **opnums** in an interface that also includes the Local Security Authority (Translation Methods) Remote Protocol [MS-LSAT].

The Local Security Authority (Domain Policy) Remote Protocol is dependent on RPC, which is used for communication between **domain members** and domain controllers.

This protocol shares the **Domain Name** field of the abstract data Account Domain Information, as specified in section 3.1.1.1 of this specification, with the Workstation Service Remote Protocol [MS-WKST].

This protocol depends on Server Message Block (SMB) protocols for sending messages on the wire.

Authentication protocols like the Kerberos Protocol Extensions [MS-KILE] and translation protocols like the Directory Replication Service (DRS) Remote Protocol [MS-DRSR] and Local Security Authority (Translation Methods) Remote Protocol [MS-LSAT] depend on the abstract data model introduced by this protocol in section 3.1.1. These protocols use the information in the Local Security Authority (Domain Policy) Remote Protocol to locate a domain that can process further requirements on that protocol.

The Active Directory Technical Specification [MS-ADTS] discusses **Active Directory**, which is used by this protocol when running on a domain controller.

The server-side protocol relationships for non-domain controller and domain controller configurations are illustrated in the following diagrams.

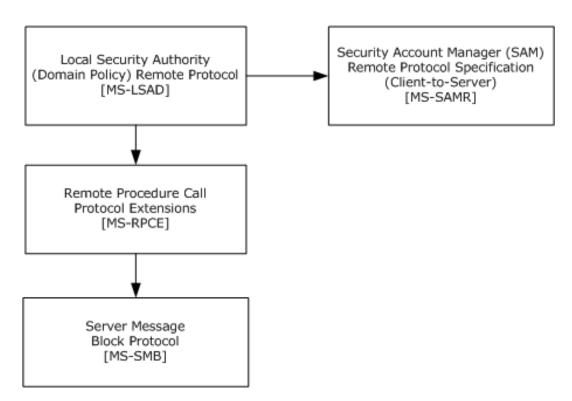


Figure 1: Server-side protocol relationships for a non-domain controller configuration

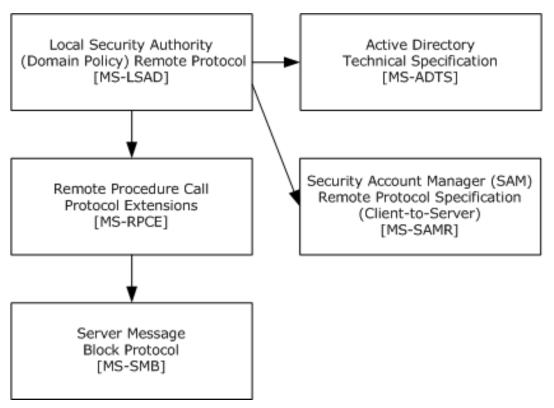


Figure 2: Server-side protocol relationships for a domain controller configuration

1.5 Prerequisites/Preconditions

This protocol has the prerequisites specified in [MS-RPCE] as being common to protocols that depend on RPC.

1.6 Applicability Statement

This protocol is applicable to the following two high-level scenarios:

- 1. Remote management of trusted domains, account objects or secret objects, or other miscellaneous machine and domain policy settings controlled by the protocol.
- 2. Retrieval of policy settings by clients.

To achieve the first scenario, this entire specification must be implemented.

To achieve the second scenario, only RPC methods <u>LsarOpenPolicy2</u> (section 3.1.4.4.1), <u>LsarOpenPolicy</u> (section 3.1.4.4.2), <u>LsarQueryInformationPolicy2</u> (section 3.1.4.4.3), <u>LsarQueryInformationPolicy</u> (section 3.1.4.4.4), and <u>LsarClose</u> (section 3.1.4.9.4) (and associated data structures specified in these method definitions) must be implemented by a listener of this protocol.

Although significant protocol functionality is not dependent on server configuration, some functionality might depend on server configuration. Certain aspects of this protocol might depend on the server being a DC, including PDCs, BDCs, GC servers, and RODCs, or on being a non-DC, and also on the server reaching a certain forest functional level. These requirements are explained in their respective message processing sections.

1.7 Versioning and Capability Negotiation

- Supported transports: The protocol runs over RPC-named pipes and TCP/IP, as specified in section 2.1.
- **Protocol version**: This protocol's RPC interface has a single version number, but the interface has been extended by placing additional methods at the end. The use of these methods is specified in section 3.1.
- **Structure version**: <u>LSAPR ACL (section 2.2.3.2)</u> structures are versioned using the first field in the structure. Only one version of those structures is used in this protocol.
- **Localization**: This protocol uses text strings in various functions. Localization considerations for such strings are specified in section 3.1.1.2.1.

1.8 Vendor-Extensible Fields

This protocol uses NTSTATUS values as specified in [MS-ERREF] section 2.3. Vendors are free to choose their own values for this field, provided that the C bit (0x20000000) is set, which indicates that it is a customer code.

1.9 Standards Assignments

This protocol has no standards assignments. It uses private allocations for the RPC interface **universally unique identifier (UUID)** and the RPC **endpoint**.

Parameter	Value	Reference
Isarpc Interface UUID	{12345778-1234-ABCD-EF00-0123456789AB}	[C706] section A.2.5.

Parameter	Value	Reference
RPC endpoint	\PIPE\lsarpc	section 2.1

2 Messages

This section describes the supported transports and details of the messages defined for this protocol.

2.1 Transport

This protocol MUST use Server Message Block (SMB) RPC protocol sequences.

This protocol MUST use "\PIPE\lsarpc" as the RPC endpoint when using RPC over SMB. <1>

For authentication and authorization services, both the requester and responder of this protocol MUST use the SMB transport to communicate the identity of the requester, as specified in [MS-SMB] section 3.2.4.2.3.

For confidentiality and tamper resistance services, the requester and responder MAY use the functionality provided by the SMB transport, as specified in [MS-SMB] sections 2.2.3.1 and 2.2.4.5.2.1 and [MS-SMB2] sections 2.2.3 and 2.2.4.<2>

The requester MUST NOT use the RPC-provided security-support-provider mechanisms (for authentication, authorization, confidentiality, or tamper-resistance services).<3>

The responder MAY use the RPC-provided security-support-provider mechanisms as specified in [MS-RPCE] section 3.2.1.4.1.1.<4>

Cryptographic operations (as specified in section 5.1) MUST utilize a session key obtained from the SMB session on the client or server.

This protocol MUST use the UUID and version number as follows:

- UUID: See Standards Assignments in section 1.9.
- Version number: 0.0.

The security settings used in this protocol vary depending on the role of the **RPC client** and **RPC server**, the function being used, and the specific parameters being used. Security settings are therefore specified in message processing sections for each message.

This protocol MUST configure RPC to enforce Maximum Server Input Data Size as specified in [MS-RPCE] section 3.3.3.5.4.<5> This configuration introduces additional restrictions on the upper limits for the sizes of data types defined under section 2.2 when those data types are used in RPC messages.

2.2 Common Data Types

This protocol MUST indicate to the RPC runtime that it is to support both the **NDR** and **NDR64** transfer syntaxes and provide a negotiation mechanism for determining which transfer syntax will be used, as specified in [C706] section 12 and in [MS-RPCE] section 3.3.1.5.6.

This protocol contains messages with parameters that do not have any effect on message processing in any environment; however, the parameters remain for backward compatibility of the interfaces. These will be called out as ignored in sections on data type definition, message definition, and message processing. These values MUST be ignored on receipt and SHOULD be set to zero when sent, unless specified otherwise.

In addition to RPC base types and definitions specified in [C706] and [MS-DTYP], other data types are defined in this specification. <6>

The following lists summarize the types defined in this specification.

Note LUID, NTSTATUS, RPC_SID, and RPC_UNICODE_STRING are specified in [MS-DTYP] sections 2.3.7, 2.2.38, 2.4. 2.4.2.3, and 2.3.10, respectively.

Note The LARGE INTEGER structure, when it represents time in this protocol, is used as a 64-bit value that represents the number of 100-nanosecond intervals since January 1, 1601, **Coordinated Universal Time (UTC)**.

Constant value definitions:

- ACCESS MASK (section 2.2.1.1)
- POLICY SYSTEM ACCESS MODE (section 2.2.1.2)
- SECURITY INFORMATION (section 2.2.1.3)

Basic data types:

- LSAPR HANDLE (section 2.2.2.1)
- PLSAPR HANDLE (section 2.2.2.2)
- LSA UNICODE STRING (section 2.2.2.3)
- LSAPR OBJECT ATTRIBUTES (section 2.2.2.4)
- LSAPR SR SECURITY DESCRIPTOR (section 2.2.2.5)

Data types referenced by basic data types:

- STRING (section 2.2.3.1)
- LSAPR ACL (section 2.2.3.2)
- SECURITY DESCRIPTOR CONTROL (section 2.2.3.3)
- LSAPR SECURITY DESCRIPTOR (section 2.2.3.4)
- SECURITY IMPERSONATION LEVEL (section 2.2.3.5)
- SECURITY CONTEXT TRACKING MODE (section 2.2.3.6)
- SECURITY QUALITY OF SERVICE (section 2.2.3.7)

Policy query/set data types:

- POLICY INFORMATION CLASS (section 2.2.4.1)
- LSAPR POLICY INFORMATION (section 2.2.4.2)
- POLICY AUDIT LOG INFO (section 2.2.4.3)
- LSAPR POLICY AUDIT EVENTS INFO (section 2.2.4.4)
- LSAPR POLICY PRIMARY DOM INFO (section 2.2.4.5)
- LSAPR POLICY ACCOUNT DOM INFO (section 2.2.4.6)
- LSAPR POLICY PD ACCOUNT INFO (section 2.2.4.7)
- POLICY LSA SERVER ROLE (section 2.2.4.8)
- POLICY LSA SERVER ROLE INFO (section 2.2.4.9)

- LSAPR POLICY REPLICA SRCE INFO (section 2.2.4.10)
- POLICY MODIFICATION INFO (section 2.2.4.11)
- POLICY AUDIT FULL SET INFO (section 2.2.4.12)
- POLICY AUDIT FULL QUERY INFO (section 2.2.4.13)
- LSAPR POLICY DNS DOMAIN INFO (section 2.2.4.14)
- POLICY DOMAIN INFORMATION CLASS (section 2.2.4.15)
- LSAPR POLICY DOMAIN INFORMATION (section 2.2.4.16)
- POLICY DOMAIN QUALITY OF SERVICE INFO (section 2.2.4.17)
- LSAPR POLICY DOMAIN EFS INFO (section 2.2.4.18)
- LSAPR DOMAIN KERBEROS TICKET INFO (section 2.2.4.19)

Account query/set data types:

- LSAPR ACCOUNT INFORMATION (section 2.2.5.1)
- LSAPR ACCOUNT ENUM BUFFER (section 2.2.5.2)
- LSAPR USER RIGHT SET (section 2.2.5.3)
- LSAPR LUID AND ATTRIBUTES (section 2.2.5.4)
- LSAPR PRIVILEGE SET (section 2.2.5.5)

Secret query/set data types:

LSAPR CR CIPHER VALUE (section 2.2.6.1)

Trusted domain query/set data types:

- LSAPR TRUST INFORMATION (section 2.2.7.1)
- TRUSTED INFORMATION CLASS (section 2.2.7.2)
- LSAPR TRUSTED DOMAIN INFO (section 2.2.7.3)
- LSAPR TRUSTED DOMAIN NAME INFO (section 2.2.7.4)
- LSAPR TRUSTED CONTROLLERS INFO (section 2.2.7.5)
- TRUSTED POSIX OFFSET INFO (section 2.2.7.6)
- LSAPR TRUSTED PASSWORD INFO (section 2.2.7.7)
- LSAPR TRUSTED DOMAIN INFORMATION BASIC (section 2.2.7.8)
- LSAPR TRUSTED DOMAIN INFORMATION EX (section 2.2.7.9)
- LSAPR TRUSTED DOMAIN INFORMATION EX2 (section 2.2.7.10)
- LSAPR TRUSTED DOMAIN AUTH INFORMATION (section 2.2.7.11)
- LSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL (section 2.2.7.12)
- LSAPR TRUSTED DOMAIN FULL INFORMATION (section 2.2.7.13)

- LSAPR TRUSTED DOMAIN FULL INFORMATION INTERNAL (section 2.2.7.14)
- LSAPR TRUSTED DOMAIN FULL INFORMATION2 (section 2.2.7.15)
- LSAPR TRUSTED DOMAIN AUTH BLOB (section 2.2.7.16)
- LSAPR AUTH INFORMATION (section 2.2.7.17)
- TRUSTED DOMAIN SUPPORTED ENCRYPTION TYPES (section 2.2.7.18)
- LSAPR TRUSTED ENUM BUFFER (section 2.2.7.19)
- LSAPR TRUSTED ENUM BUFFER EX (section 2.2.7.20)
- LSA FOREST TRUST RECORD (section 2.2.7.21)
- LSA FOREST TRUST RECORD TYPE (section 2.2.7.22)
- LSA FOREST TRUST BINARY DATA (section 2.2.7.23)
- LSA FOREST TRUST DOMAIN INFO (section 2.2.7.24)
- LSA FOREST TRUST INFORMATION (section 2.2.7.25)
- LSA FOREST TRUST COLLISION RECORD TYPE (section 2.2.7.26)
- LSA FOREST TRUST COLLISION RECORD (section 2.2.7.27)
- LSA FOREST TRUST COLLISION INFORMATION (section 2.2.7.28)

Privilege data types:

- LSAPR POLICY PRIVILEGE DEF (section 2.2.8.1)
- LSAPR PRIVILEGE ENUM BUFFER (section 2.2.8.2)

The following citation contains a timeline of when each structure, data type, or enumeration was introduced. <7>

2.2.1 Constant Value Definitions

2.2.1.1 ACCESS_MASK

The ACCESS_MASK data type is a bitmask that defines the user rights that an object is to be granted. Access types are reconciled with the **discretionary access control list (DACL)** of the object to determine whether the access requested is assigned or denied.

The ACCESS_MASK data type is defined in [MS-DTYP] section 2.4.3. The following declaration is an alternative definition.

This type is declared as follows:

typedef unsigned long ACCESS MASK;

2.2.1.1.1 ACCESS_MASK for All Objects

Certain <u>ACCESS MASK</u> flags apply equally to all types of objects. These flags are described in the following table.

Value	Meaning
DELETE 0x00010000	Delete object.
READ_CONTROL 0x00020000	The read value of a DACL and owner in a security descriptor .
WRITE_DAC 0x00040000	The write value of a DACL in a security descriptor.
WRITE_OWNER 0x00080000	The write value of the owner in a security descriptor.
MAXIMUM_ALLOWED 0x02000000	Used in requesting access; get as much access as the server will allow.

The four high-order bits in ACCESS_MASK values are translated by the responder into specific ACCESS_MASK values using the following tables, depending on the type of the object that the operation is performed on. For numeric values of the symbolic names used in these tables, refer to section 2.2.1.1.2 for policy objects, section 2.2.1.1.3 for account objects, section 2.2.1.1.4 for secret objects, and section 2.2.1.1.5 for trusted domain objects. In the following tables, the symbol '|' is used to indicate that the value represented by the symbol is to be logically combined by using the bitwise OR operation with the other operant.

ACCESS_MASK value to be translated	Translated to when used with policy object
0x80000000	POLICY_VIEW_AUDIT_INFORMATION POLICY_GET_PRIVATE_INFORMATION READ_CONTROL 0x00020006
0x40000000	POLICY_TRUST_ADMIN POLICY_CREATE_ACCOUNT POLICY_CREATE_SECRET POLICY_CREATE_PRIVILEGE POLICY_SET_DEFAULT_QUOTA_LIMITS POLICY_SET_AUDIT_REQUIREMENTS POLICY_AUDIT_LOG_ADMIN POLICY_SERVER_ADMIN READ_CONTROL 0x000207F8
0x20000000	POLICY_VIEW_LOCAL_INFORMATION POLICY_LOOKUP_NAMES READ_CONTROL 0x00020801
0x10000000	POLICY_VIEW_LOCAL_INFORMATION POLICY_VIEW_AUDIT_INFORMATION POLICY_GET_PRIVATE_INFORMATION POLICY_TRUST_ADMIN POLICY_CREATE_ACCOUNT POLICY_CREATE_SECRET POLICY_CREATE_PRIVILEGE POLICY_SET_DEFAULT_QUOTA_LIMITS POLICY_SET_AUDIT_REQUIREMENTS POLICY_AUDIT_LOG_ADMIN POLICY_SERVER_ADMIN POLICY_LOOKUP_NAMES DELETE READ_CONTROL WRITE_DAC WRITE_OWNER 0x000F0FFF

ACCESS_MASK value to be translated	Translated to when used with account object
0x80000000	ACCOUNT_VIEW READ_CONTROL 0x00020001
0x40000000	ACCOUNT_ADJUST_PRIVILEGES ACCOUNT_ADJUST_QUOTAS

ACCESS_MASK value to be translated	Translated to when used with account object
	ACCOUNT_ADJUST_SYSTEM_ACCESS READ_CONTROL 0x0002000E
0x20000000	READ_CONTROL 0x00020000
0x10000000	ACCOUNT_VIEW ACCOUNT_ADJUST_PRIVILEGES ACCOUNT_ADJUST_QUOTAS ACCOUNT_ADJUST_SYSTEM_ACCESS DELETE READ_CONTROL WRITE_DAC WRITE_OWNER 0x000F000F

ACCESS_MASK value to be translated	Translated to when used with secret object
0×80000000	SECRET_QUERY_VALUE READ_CONTROL 0x00020002
0x40000000	SECRET_SET_VALUE READ_CONTROL 0x00020001
0x20000000	READ_CONTROL 0x00020000
0x10000000	SECRET_QUERY_VALUE SECRET_SET_VALUE DELETE READ_CONTROL WRITE_DAC WRITE_OWNER 0x000F0003

ACCESS_MASK value to be translated	Translated to when used with trusted domain object
0x80000000	TRUSTED_QUERY_DOMAIN_NAME READ_CONTROL 0x00020001
0x40000000	TRUSTED_SET_CONTROLLERS TRUSTED_SET_POSIX READ_CONTROL 0x00020014
0x20000000	TRUSTED_QUERY_CONTROLLERS TRUSTED_QUERY_POSIX READ_CONTROL 0x0002000A
0x10000000	TRUSTED_QUERY_DOMAIN_NAME TRUSTED_QUERY_CONTROLLERS TRUSTED_SET_CONTROLLERS TRUSTED_QUERY_POSIX TRUSTED_SET_POSIX TRUSTED_SET_AUTH TRUSTED_QUERY_AUTH DELETE READ_CONTROL WRITE_DAC WRITE_OWNER 0x000F007F

2.2.1.1.2 ACCESS_MASK for Policy Objects

The following ACCESS MASK flags apply to policy objects.

Value	Meaning	
0x00000000	No access.	
POLICY_VIEW_LOCAL_INFORMATION 0x00000001	Access to view local information.	
POLICY_VIEW_AUDIT_INFORMATION 0x00000002	Access to view audit information.	
POLICY_GET_PRIVATE_INFORMATION 0x00000004	Access to view private information.	
POLICY_TRUST_ADMIN 0x00000008	Access to administer trust relationships.	
POLICY_CREATE_ACCOUNT 0x00000010	Access to create account objects.	
POLICY_CREATE_SECRET 0x00000020	Access to create secret objects.	
POLICY_CREATE_PRIVILEGE 0x00000040	Access to create privileges. Note New privilege creation is not currently a part of the protocol, so this flag is not actively used.	
POLICY_SET_DEFAULT_QUOTA_LIMITS 0x00000080	Access to set default quota limits. Note Quota limits are not currently a part of the protocol, so this flag is not actively used.	
POLICY_SET_AUDIT_REQUIREMENTS 0x00000100	Access to set audit requirements.	
POLICY_AUDIT_LOG_ADMIN 0x00000200	Access to administer the audit log.	
POLICY_SERVER_ADMIN 0x00000400	Access to administer policy on the server.	
POLICY_LOOKUP_NAMES 0x00000800	Access to translate names and security identifiers (SIDs) .	
POLICY_NOTIFICATION 0x00001000	Access to be notified of policy changes.<8>	

2.2.1.1.3 ACCESS_MASK for Account Objects

The following ACCESS MASK flags apply to account objects.

Value	Meaning
ACCOUNT_VIEW 0x00000001	View account information.
ACCOUNT_ADJUST_PRIVILEGES 0x00000002	Change privileges on an account.

Value	Meaning
ACCOUNT_ADJUST_QUOTAS 0x00000004	Change quotas on an account.
ACCOUNT_ADJUST_SYSTEM_ACCESS 0x00000008	Change system access.

2.2.1.1.4 ACCESS_MASK for Secret Objects

The following ACCESS MASK flags apply to secret objects.

Value	Meaning
SECRET_SET_VALUE 0x00000001	Set secret value.
SECRET_QUERY_VALUE 0x00000002	Query secret value.

2.2.1.1.5 ACCESS_MASK for Trusted Domain Objects

The following ACCESS MASK flags apply to trusted domain objects.<9>

Value	Meaning
TRUSTED_QUERY_DOMAIN_NAME 0x00000001	View domain name information.
TRUSTED_QUERY_CONTROLLERS 0x00000002	View "Domain Controllers" information.
TRUSTED_SET_CONTROLLERS 0x000000004	Change "Domain Controllers" information.
TRUSTED_QUERY_POSIX 0x000000008	View POSIX information.
TRUSTED_SET_POSIX 0x00000010	Change POSIX information.
TRUSTED_SET_AUTH 0x00000020	Change authentication information.
TRUSTED_QUERY_AUTH 0x00000040	View authentication information.

2.2.1.2 POLICY_SYSTEM_ACCESS_MODE

The POLICY_SYSTEM_ACCESS_MODE data type determines the way in which a user (member of a group or alias) is allowed to access the system. All values can be combined in any way by using bitwise OR operations.

Value	Meaning
0x00000000	No access The user is not granted any access to the system.
POLICY_MODE_INTERACTIVE 0x00000001	The user can logon locally to the system.
POLICY_MODE_NETWORK 0x00000002	The user can logon to the system over the network.
POLICY_MODE_BATCH 0x00000004	The user can logon to the system as a batch job.
0x00000008	Reserved
POLICY_MODE_SERVICE 0x00000010	The user can logon to the system as a service.
0x00000020	Reserved
POLICY_MODE_DENY_INTERACTIVE 0x00000040	The user is denied the right to interactively logon to the system. This setting supersedes POLICY_MODE_INTERACTIVE.
POLICY_MODE_DENY_NETWORK 0x00000080	The user is denied the right to logon to the system from the network. This setting supersedes POLICY_MODE_NETWORK.
POLICY_MODE_DENY_BATCH 0x00000100	The user is denied the right to logon to the system as a batch job. This setting supersedes POLICY_MODE_BATCH.
POLICY_MODE_DENY_SERVICE 0x00000200	The user is denied the right to logon to the system as a service. This setting supersedes POLICY_MODE_SERVICE.
POLICY_MODE_REMOTE_INTERACTIVE 0x00000400	The user can logon to the system as a Remote Desktop client.
POLICY_MODE_DENY_REMOTE_INTERACTIVE 0x00000800	The user is denied the right to logon to the system as a Remote Desktop client.
POLICY_MODE_ALL 0x00000FF7	This flag indicates all allowed bits.<10>
POLICY_MODE_ALL_NT4 0x00000037	This flag indicates all allowed bits.<11>

The following citation contains a timeline of when each mode was introduced. <12>

2.2.1.3 SECURITY_INFORMATION

The SECURITY_INFORMATION type is used to specify which portions of a security descriptor the caller would like to retrieve or set on an object.

The SECURITY_INFORMATION data type is defined in [MS-DTYP] section 2.4.7. The following declaration is an alternative definition.

This type is declared as follows:

typedef unsigned long SECURITY INFORMATION;

The following table defines the bits that are relevant to the Local Security Authority (Domain Policy) Remote Protocol.

Value	Meaning
OWNER_SECURITY_INFORMATION 0x00000001	Return the Owner portion of the security descriptor.
GROUP_SECURITY_INFORMATION 0x000000002	Return the Group portion of the security descriptor.
DACL_SECURITY_INFORMATION 0x00000004	Return the DACL portion of the security descriptor.
SACL_SECURITY_INFORMATION 0x000000008	Return the SACL portion of the security descriptor.

Other values SHOULD NOT be set.

The server honors the request to set or retrieve security information only if the caller has the appropriate rights to the object.

The following table lists the SECURITY_INFORMATION bits and the corresponding user rights required of the caller requesting to query information.

Security information access requested	Rights required of caller on server	Privileges required of caller on server
OWNER_SECURITY_INFORMATION	READ_CONTROL	Does not apply.
GROUP_SECURITY_INFORMATION	READ_CONTROL	Does not apply.
DACL_SECURITY_INFORMATION	READ_CONTROL	Does not apply.
SACL_SECURITY_INFORMATION	Does not apply.	Security privilege.

The following table lists the SECURITY_INFORMATION bits and the corresponding user rights required of the caller requesting to set information.

Security information access requested	Rights required of caller on server	Privileges required of caller on server
OWNER_SECURITY_INFORMATION	WRITE_OWNER	Take ownership privilege. Note Either the access bit or the privilege is sufficient; the caller does not need both.
GROUP_SECURITY_INFORMATION	WRITE_OWNER	Take-ownership privilege.
DACL_SECURITY_INFORMATION	WRITE_DAC	Does not apply.
SACL_SECURITY_INFORMATION	Does not apply.	Security privilege.

2.2.2 Basic Data Types

2.2.2.1 LSAPR_HANDLE

The LSAPR_HANDLE type defines a context handle (as specified in <a>[C706] section 6) to the target server.

This type is declared as follows:

```
typedef [context handle] void* LSAPR HANDLE;
```

Note For information about the relevance of the context_handle attribute in this data type, see section 3.1.1.7.

2.2.2.2 PLSAPR_HANDLE

The PLSAPR HANDLE type defines a pointer to a context handle (as specified in [C706] section 6).

This type is declared as follows:

```
typedef LSAPR HANDLE* PLSAPR HANDLE;
```

2.2.2.3 LSA_UNICODE_STRING

The LSA_UNICODE_STRING type is identical to RPC_UNICODE_STRING, as specified in [MS-DTYP] section 2.3.10.

This type is declared as follows:

```
typedef RPC UNICODE STRING LSA UNICODE STRING, *PLSA UNICODE STRING;
```

2.2.2.4 LSAPR_OBJECT_ATTRIBUTES

The LSAPR_OBJECT_ATTRIBUTES structure specifies an object and its properties. This structure MUST be ignored except for the **RootDirectory** field, which MUST be NULL. $\leq 13 \geq 100$

```
typedef struct _LSAPR_OBJECT_ATTRIBUTES {
  unsigned long Length;
  unsigned char* RootDirectory;
  PSTRING ObjectName;
  unsigned long Attributes;
  PLSAPR_SECURITY_DESCRIPTOR SecurityDescriptor;
  PSECURITY_QUALITY_OF_SERVICE SecurityQualityOfService;
} LSAPR_OBJECT_ATTRIBUTES;
*PLSAPR_OBJECT_ATTRIBUTES;
```

Length: The length of the structure, in bytes. This field is not used and MUST be ignored.

RootDirectory: This field is not used and MUST be NULL.

ObjectName: A pointer to a STRING structure that contains the object name. This field MUST be ignored. The content is unspecified and no requirements are placed on its value because it is never used.

Attributes: This field MUST be ignored. The content is unspecified and no requirements are placed on its value because it is never used.

SecurityDescriptor: This field contains the security attributes of the object. This field MUST be ignored. The content is unspecified and no requirements are placed on its value because it is never used.

SecurityQualityOfService: This field MUST be ignored. The content is unspecified and no requirements are placed on its value because it is never used.

2.2.2.5 LSAPR_SR_SECURITY_DESCRIPTOR

The LSAPR_SR_SECURITY_DESCRIPTOR structure is used to communicate a self-relative security descriptor, as specified in [MS-DTYP] section 2.4.6.

```
typedef struct _LSAPR_SR_SECURITY_DESCRIPTOR {
  [range(0, 262144)] unsigned long Length;
  [size is(Length)] unsigned char* SecurityDescriptor;
} LSAPR SR SECURITY DESCRIPTOR,
  *PLSAPR SR SECURITY DESCRIPTOR;
```

Length: The count of bytes in SecurityDescriptor.<a><14>

SecurityDescriptor: The contiguous buffer containing the self-relative security descriptor. This field MUST contain the **Length** number of bytes. If the **Length** field has a value other than 0, this field MUST NOT be NULL.

2.2.3 Data Types Referenced by Basic Data Types

2.2.3.1 STRING

The STRING structure holds a counted string encoded in the **OEM code page**.

This structure has no effect on message processing in any environment.

```
typedef struct _STRING {
  unsigned short Length;
  unsigned short MaximumLength;
  [size_is(MaximumLength), length_is(Length)]
    char* Buffer;
} STRING,
*PSTRING;
```

Length: The length, in bytes, of the string pointed to by the **Buffer** member, not including the terminating null character (if any).

MaximumLength: This field contains the total number of bytes in the Buffer field.

Buffer: A pointer to the actual string. If **Length** is greater than 0, this field MUST contain a non-NULL value. If **Length** is 0, this field MUST be ignored.

2.2.3.2 LSAPR_ACL

The LSAPR_ACL structure defines the header of an **access control list (ACL)** that specifies a list of security protections applied to an object.

This structure has no effect on message processing in any environment.

```
typedef struct _LSAPR_ACL {
  unsigned char AclRevision;
  unsigned char Sbz1;
  unsigned short AclSize;
  [size_is(AclSize - 4)] unsigned char Dummy1[*];
} LSAPR ACL,
*PLSAPR ACL;
```

AcIRevision: The revision level of the LSAPR_ACL structure. This field MUST be ignored. The content is unspecified, and no requirements are placed on its value because it is never used.

Sbz1: This field is used for alignment. This field MUST be ignored. The content is unspecified, and no requirements are placed on its value because it is never used.

AclSize: The size of this structure in bytes, including the size of the variable sized **Dummy1** field.

Dummy1: This field MUST be ignored. The content is unspecified, and no requirements are placed on its value because it is never used.

The ACL structure is specified in [MS-DTYP] section 2.4.5.

2.2.3.3 SECURITY_DESCRIPTOR_CONTROL

The SECURITY_DESCRIPTOR_CONTROL type contains a set of bit flags that qualify the meaning of a security descriptor or its components.

This type has no effect on message processing in any environment.

This type is declared as follows:

```
typedef unsigned short SECURITY_DESCRIPTOR_CONTROL, *PSECURITY_DESCRIPTOR_CONTROL;
```

The flags that are used with this type are as specified in [MS-DTYP] section 2.4.6, under the **Control** member of the SECURITY_DESCRIPTOR structure.

2.2.3.4 LSAPR_SECURITY_DESCRIPTOR

The LSAPR SECURITY DESCRIPTOR structure defines an object's security descriptor.

This structure has no effect on message processing in any environment.

```
typedef struct _LSAPR_SECURITY_DESCRIPTOR {
  unsigned char Revision;
  unsigned char Sbz1;
  SECURITY_DESCRIPTOR_CONTROL Control;
  PRPC SID Owner;
  PRPC_SID Group;
  PLSAPR_ACL Sacl;
  PLSAPR_ACL Dacl;
} LSAPR SECURITY DESCRIPTOR,
  *PLSAPR SECURITY DESCRIPTOR;
```

Revision: The security descriptor revision level. This field MUST be ignored. The content is unspecified, and no requirements are placed on its value because it is never used.

Sbz1: This field is used for alignment. This field MUST be ignored. The content is unspecified, and no requirements are placed on its value because it is never used.

Control: A set of flags (as specified in section <u>2.2.3.3</u>) that qualify the meaning of the security descriptor or its individual fields.

Owner: A pointer to the RPC_SID structure that represents an object's owner as a SID.

Group: A pointer to the RPC_SID structure that represents an object's primary group as a SID.

Sacl: A pointer to an ACL structure (as specified in <a>2.2.3.2) that contains a system access control list (SACL).

Dacl: A pointer to an ACL structure that contains a discretionary access control list (DACL).

The SECURITY_DESCRIPTOR structure is specified in [MS-DTYP] section 2.4.6.

2.2.3.5 SECURITY_IMPERSONATION_LEVEL

The SECURITY_IMPERSONATION_LEVEL enumeration defines a set of values that specifies security impersonation levels. These levels govern the degree to which a server process can act on behalf of a client process.

This enumeration has no effect on message processing in any environment.

```
typedef enum _SECURITY_IMPERSONATION_LEVEL
{
   SecurityAnonymous = 0,
   SecurityIdentification = 1,
   SecurityImpersonation = 2,
   SecurityDelegation = 3
} SECURITY IMPERSONATION LEVEL,
   *PSECURITY IMPERSONATION LEVEL;
```

SecurityAnonymous: The server cannot obtain information about the client and cannot impersonate the client.

SecurityIdentification: The server can obtain information such as security identifiers and privileges, but the server cannot impersonate the client.

SecurityImpersonation: The server can impersonate the client's security context on its local system, but cannot impersonate the client when communicating with services on remote systems.

SecurityDelegation: The server can impersonate the client's security context when communicating with services on remote systems.

2.2.3.6 SECURITY_CONTEXT_TRACKING_MODE

The SECURITY_CONTEXT_TRACKING_MODE type specifies whether the server is to be given a snapshot of the client's security context (called "static tracking") or is to be continually updated to track changes to the client's security context (called "dynamic tracking").

This structure has no effect on message processing in any environment and SHOULD be ignored.

This type is declared as follows:

The following values are possible.

Value	Meaning
0x00	The server is given a snapshot of the client's security context.
0x01	The server is continually updated with changes.

All other values SHOULD be ignored.

2.2.3.7 SECURITY_QUALITY_OF_SERVICE

The SECURITY_QUALITY_OF_SERVICE structure defines information used to support client impersonation.

This structure has no effect on message processing in any environment.

```
typedef struct _SECURITY_QUALITY_OF_SERVICE {
  unsigned long Length;
  SECURITY IMPERSONATION LEVEL ImpersonationLevel;
  SECURITY_CONTEXT_TRACKING_MODE ContextTrackingMode;
  unsigned char EffectiveOnly;
} SECURITY_QUALITY_OF_SERVICE,
  *PSECURITY_QUALITY_OF_SERVICE;
```

Length: This value MUST be ignored. No requirements are placed on its value because it is never used.

ImpersonationLevel: This field contains information (as specified in section 2.2.3.5) given to the server about the client that describes how the server can represent, or impersonate, the client.

ContextTrackingMode: This field specifies how the server tracks changes to the client's security context (as specified in section 2.2.3.6).

EffectiveOnly: This field specifies whether the server can enable or disable privileges and groups that the client's security context might include. This value MUST be TRUE (nonzero) if the server has this right; otherwise, it MUST be FALSE (0).

2.2.4 Policy Query/Set Data Types

2.2.4.1 POLICY_INFORMATION_CLASS

The POLICY_INFORMATION_CLASS enumeration type contains values that specify the type of policy being queried or set by the client.

```
typedef enum POLICY INFORMATION CLASS
{
   PolicyAuditLogInformation = 1,
   PolicyAuditEventsInformation,
   PolicyPrimaryDomainInformation,
   PolicyPdAccountInformation,
   PolicyAccountDomainInformation,
   PolicyLsaServerRoleInformation,
   PolicyReplicaSourceInformation,
   PolicyInformationNotUsedOnWire,
```

```
PolicyModificationInformation,
PolicyAuditFullSetInformation,
PolicyAuditFullQueryInformation,
PolicyDnsDomainInformation,
PolicyDnsDomainInformationInt,
PolicyLocalAccountDomainInformation,
PolicyLastEntry
POLICY_INFORMATION_CLASS,
*PPOLICY_INFORMATION_CLASS;
```

PolicyAuditLogInformation: Information about audit log.

PolicyAuditEventsInformation: Auditing options.

PolicyPrimaryDomainInformation: Primary domain information.

PolicyPdAccountInformation: Obsolete information class.

PolicyAccountDomainInformation: Account domain information.

PolicyLsaServerRoleInformation: Server role information.

PolicyReplicaSourceInformation: Replica source information.

PolicyInformationNotUsedOnWire: This enumeration value does not appear on the wire.

PolicyModificationInformation: Obsolete information class. **PolicyAuditFullSetInformation:** Obsolete information class.

PolicyAuditFullQueryInformation: Audit log state.

PolicyDnsDomainInformation: DNS domain information.

PolicyDnsDomainInformationInt: DNS domain information.

PolicyLocalAccountDomainInformation: Local account domain information.

PolicyLastEntry: Not used in this protocol. Present to mark the end of the enumeration.

The following citation contains a timeline of when each enumeration value was introduced. <15>

The values in this enumeration are used to define the contents of the <u>LSAPR POLICY INFORMATION</u> (section 2.2.4.2) union, where the structure associated with each enumeration value is specified. The structure associated with each enumeration value defines the meaning of that value to this protocol.

2.2.4.2 LSAPR_POLICY_INFORMATION

The LSAPR_POLICY_INFORMATION union is defined as follows, where the structure depends on the <u>POLICY_INFORMATION_CLASS</u> specified in this message.

```
typedef
[switch_type(POLICY_INFORMATION_CLASS)]
union    LSAPR POLICY INFORMATION {
    [case(PolicyAuditLogInformation)]
        POLICY_AUDIT_LOG_INFO PolicyAuditLogInfo;
    [case(PolicyAuditEventsInformation)]
        LSAPR_POLICY_AUDIT_EVENTS_INFO PolicyAuditEventsInfo;
    [case(PolicyPrimaryDomainInformation)]
        LSAPR_POLICY_PRIMARY_DOM_INFO PolicyPrimaryDomainInfo;
    [case(PolicyAccountDomainInformation)]
```

```
LSAPR POLICY ACCOUNT DOM INFO PolicyAccountDomainInfo;
 [case(PolicyPdAccountInformation)]
   LSAPR POLICY PD ACCOUNT INFO PolicyPdAccountInfo;
 [case(PolicyLsaServerRoleInformation)]
   POLICY LSA SERVER ROLE_INFO PolicyServerRoleInfo;
 [case(PolicyReplicaSourceInformation)]
   LSAPR POLICY REPLICA SRCE INFO PolicyReplicaSourceInfo;
 [case(PolicyModificationInformation)]
   POLICY MODIFICATION INFO PolicyModificationInfo;
 [case(PolicyAuditFullSetInformation)]
   POLICY AUDIT FULL SET INFO PolicyAuditFullSetInfo;
 [case(PolicyAuditFullQueryInformation)]
   POLICY AUDIT FULL QUERY_INFO PolicyAuditFullQueryInfo;
 [case(PolicyDnsDomainInformation)]
   LSAPR POLICY DNS DOMAIN INFO PolicyDnsDomainInfo;
 [case(PolicyDnsDomainInformationInt)]
   LSAPR POLICY DNS DOMAIN INFO PolicyDnsDomainInfoInt;
 [case(PolicyLocalAccountDomainInformation)]
   LSAPR POLICY ACCOUNT DOM INFO PolicyLocalAccountDomainInfo;
} LSAPR POLICY INFORMATION,
*PLSAPR POLICY INFORMATION;
```

2.2.4.3 POLICY_AUDIT_LOG_INFO

The POLICY_AUDIT_LOG_INFO structure contains information about the state of the audit log. The following structure corresponds to the PolicyAuditLogInformation information class.

```
typedef struct _POLICY_AUDIT_LOG_INFO {
  unsigned long AuditLogPercentFull;
  unsigned long MaximumLogSize;
  LARGE INTEGER AuditRetentionPeriod;
  unsigned char AuditLogFullShutdownInProgress;
  LARGE INTEGER TimeToShutdown;
  unsigned long NextAuditRecordId;
} POLICY_AUDIT_LOG_INFO,
  *PPOLICY_AUDIT_LOG_INFO;
```

AuditLogPercentFull: A measure of how full the audit log is, as a percentage.

MaximumLogSize: The maximum size of the auditing log, in kilobytes (KB).

AuditRetentionPeriod: The auditing log retention period (64-bit signed integer), a 64-bit value that represents the number of 100-nanosecond intervals since January 1, 1601, UTC. An audit record can be discarded if its time stamp predates the current time minus the retention period.

AuditLogFullShutdownInProgress: A Boolean flag; indicates whether or not a system shutdown is being initiated due to the security audit log becoming full. This condition occurs only if the system is configured to shut down when the log becomes full.

After a shutdown has been initiated, this flag MUST be set to TRUE (nonzero). If an administrator can correct the situation before the shutdown becomes irreversible, this flag MUST be reset to FALSE (0).

This field MUST be ignored for set operations.

TimeToShutdown: A 64-bit value that represents the number of 100-nanosecond intervals since January 1, 1601, UTC. If the AuditLogFullShutdownInProgress flag is set, this field MUST contain the time left before the shutdown becomes irreversible.

NextAuditRecordId: Not in use. This field SHOULD be set to zero when sent, and MUST be ignored on receipt.

2.2.4.4 LSAPR_POLICY_AUDIT_EVENTS_INFO

The LSAPR_POLICY_AUDIT_EVENTS_INFO structure contains auditing options on the server.

```
typedef struct _LSAPR_POLICY_AUDIT_EVENTS_INFO {
  unsigned char AuditingMode;
  [size is(MaximumAuditEventCount)]
   unsigned long* EventAuditingOptions;
  [range(0,1000)] unsigned long MaximumAuditEventCount;
} LSAPR_POLICY_AUDIT_EVENTS_INFO,
*PLSAPR_POLICY_AUDIT_EVENTS_INFO;
```

Auditing Mode: 0 indicates that auditing is disabled. All other values indicate that auditing is enabled.

EventAuditingOptions: An array of values specifying the auditing options for a particular audit type. The auditing type of an element is represented by its index in the array, which is identified by the POLICY AUDIT EVENT TYPE enumeration (see section 2.2.4.20). Each element MUST contain one or more of the values in the table below.

If the **MaximumAuditingEventCount** field has a value other than 0, this field MUST NOT be NULL.

Value	Meaning
POLICY_AUDIT_EVENT_UNCHANGED 0x00000000	Leave existing auditing options unchanged for events of this type; used only for set operations. This value cannot be combined with values in this table.
POLICY_AUDIT_EVENT_NONE 0x00000004	Upon updates, this value causes the existing auditing options for events of this type to be deleted and replaced with any other new values specified. If specified by itself, this value cancels all auditing options for events of this type. This value is used only for set operations.
POLICY_AUDIT_EVENT_SUCCESS 0x00000001	When auditing is enabled, audit all successful occurrences of events of the given type.
POLICY_AUDIT_EVENT_FAILURE 0x000000002	When auditing is enabled, audit all unsuccessful occurrences of events of the given type.

MaximumAuditEventCount: The number of entries in the EventAuditingOptions array.<a href="mailto:self-bulk-red)

2.2.4.5 LSAPR_POLICY_PRIMARY_DOM_INFO

The LSAPR_POLICY_PRIMARY_DOM_INFO structure defines the server's **primary domain**.

The following structure corresponds to the PolicyPrimaryDomainInformation information class.

```
typedef struct _LSAPR_POLICY_PRIMARY_DOM_INFO {
   RPC_UNICODE_STRING Name;
   PRPC SID Sid;
} LSAPR_POLICY_PRIMARY_DOM_INFO,
   *PLSAPR_POLICY_PRIMARY_DOM_INFO;
```

Name: This field contains a name for the primary domain that is subject to the restrictions of a NetBIOS name, as specified in [RFC1088]. The value SHOULD be used (by implementations external to this protocol) to identify the domain via the NetBIOS API, as specified in [RFC1088].

Sid: The SID of the primary domain.

2.2.4.6 LSAPR_POLICY_ACCOUNT_DOM_INFO

The LSAPR_POLICY_ACCOUNT_DOM_INFO structure contains information about the server's **account domain**. The following structure corresponds to the PolicyAccountDomainInformation and PolicyLocalAccountDomainInformation information classes.

```
typedef struct LSAPR POLICY ACCOUNT DOM INFO {
   RPC_UNICODE_STRING DomainName;
   PRPC_SID DomainSid;
} LSAPR_POLICY_ACCOUNT_DOM_INFO,
   *PLSAPR_POLICY_ACCOUNT_DOM_INFO;
```

DomainName: This field contains a name for the account domain that is subjected to the restrictions of a NetBIOS name, as specified in [RFC1088]. This value SHOULD be used (by implementations external to this protocol) to identify the domain via the NetBIOS API, as specified in [RFC1088].

DomainSid: The SID of the account domain. This field MUST NOT be NULL.

2.2.4.7 LSAPR_POLICY_PD_ACCOUNT_INFO

The LSAPR_POLICY_PD_ACCOUNT_INFO structure is obsolete and exists for backward compatibility purposes only.

Name: Represents the name of an account in the domain that should be used for authentication and name/ID lookup requests.

```
typedef struct LSAPR POLICY PD ACCOUNT INFO {
   RPC_UNICODE_STRING Name;
} LSAPR_POLICY_PD_ACCOUNT_INFO,
   *PLSAPR_POLICY_PD_ACCOUNT_INFO;
```

2.2.4.8 POLICY_LSA_SERVER_ROLE

The POLICY_LSA_SERVER_ROLE enumeration takes one of two possible values, depending on which capacity the account domain database is in: primary or backup. Certain operations of the protocol are allowed only against a primary account database. On non-domain controller machines, the account domain database is in primary state. On domain controllers, if the machine is the **primary domain controller (PDC) role owner**, then the account domain database is in primary state; otherwise, it is in backup state.

```
typedef enum POLICY LSA SERVER ROLE
{
   PolicyServerRoleBackup = 2,
   PolicyServerRolePrimary
} POLICY LSA SERVER ROLE,
   *PPOLICY_LSA_SERVER_ROLE;
```

PolicyServerRoleBackup: A backup account database.

PolicyServerRolePrimary: A primary account database.

2.2.4.9 POLICY_LSA_SERVER_ROLE_INFO

The POLICY_LSA_SERVER_ROLE_INFO structure is used to allow callers to query and set whether the account domain database acts as the primary copy or backup copy. The following structure corresponds to the PolicyLsaServerRoleInformation information class.

```
typedef struct _POLICY_LSA_SERVER_ROLE_INFO {
  POLICY_LSA_SERVER_ROLE LSaServerRole;
} POLICY_LSA_SERVER_ROLE_INFO,
  *PPOLICY_LSA_SERVER_ROLE_INFO;
```

LsaServerRole: One of the values of the <u>POLICY LSA SERVER ROLE</u> enumeration on return.

2.2.4.10 LSAPR_POLICY_REPLICA_SRCE_INFO

The LSAPR_POLICY_REPLICA_SRCE_INFO structure corresponds to the PolicyReplicaSourceInformation information class.

```
typedef struct _LSAPR_POLICY_REPLICA_SRCE_INFO {
   RPC_UNICODE_STRING ReplicaSource;
   RPC_UNICODE_STRING ReplicaAccountName;
} LSAPR POLICY REPLICA SRCE INFO,
   *PLSAPR POLICY REPLICA SRCE INFO;
```

ReplicaSource: A string.

ReplicaAccountName: A string.

2.2.4.11 POLICY_MODIFICATION_INFO

The POLICY_MODIFICATION_INFO structure is obsolete and exists for backward compatibility purposes only. Callers of this protocol MUST NOT be able to set or retrieve this structure.

```
typedef struct _POLICY_MODIFICATION_INFO {
   LARGE_INTEGER ModifiedId;
   LARGE_INTEGER DatabaseCreationTime;
} POLICY_MODIFICATION_INFO,
   *PPOLICY_MODIFICATION_INFO;
```

ModifiedId: A 64-bit unsigned integer that is incremented each time anything in the Local Security Authority (LSA) database is modified.

DatabaseCreationTime: The date and time when the LSA database was created. It is a 64-bit value that represents the number of 100-nanosecond intervals since January 1, 1601, UTC.

2.2.4.12 POLICY_AUDIT_FULL_SET_INFO

The POLICY_AUDIT_FULL_SET_INFO structure contains information to set on the server that is controlling audit log behavior. The following structure corresponds to the PolicyAuditFullSetInformation information class. This information class is not supported.

```
typedef struct _POLICY_AUDIT_FULL_SET_INFO {
  unsigned char ShutDownOnFull;
} POLICY_AUDIT_FULL_SET_INFO,
  *PPOLICY_AUDIT_FULL_SET_INFO;
```

ShutDownOnFull: A nonzero value means that the system MUST shut down when the event log is full, while zero means that the system MUST NOT shut down when the event log is full.

2.2.4.13 POLICY_AUDIT_FULL_QUERY_INFO

The POLICY_AUDIT_FULL_QUERY_INFO structure is used to query information about the state of the audit log on the server. The following structure corresponds to the PolicyAuditFullQueryInformation information class.

This information class is obsolete and exists for backward compatibility purposes only.

```
typedef struct _POLICY_AUDIT_FULL_QUERY_INFO {
  unsigned char ShutDownOnFull;
  unsigned char LogIsFull;
} POLICY_AUDIT_FULL_QUERY_INFO,
  *PPOLICY_AUDIT_FULL_QUERY_INFO;
```

ShutDownOnFull: This field indicates whether the system MUST shut down when the event log is full.

LogIsFull: This field indicates whether the event log is full or not.

2.2.4.14 LSAPR_POLICY_DNS_DOMAIN_INFO

The LSAPR_POLICY_DNS_DOMAIN_INFO structure is used to allow callers to query and set the server's primary domain.<17>

The following structure corresponds to the PolicyDnsDomainInformation and PolicyDnsDomainInformationInt information classes.

```
typedef struct _LSAPR_POLICY_DNS_DOMAIN_INFO {
   RPC_UNICODE_STRING Name;
   RPC_UNICODE_STRING DnsDomainName;
   RPC UNICODE STRING DnsForestName;
   GUID DomainGuid;
   PRPC_SID Sid;
} LSAPR_POLICY_DNS_DOMAIN_INFO,
   *PLSAPR_POLICY_DNS_DOMAIN_INFO;
```

Name: This field contains a name for the domain that is subject to the restrictions of a NetBIOS name, as specified in [RFC1088]. This value SHOULD be used (by implementations external to this protocol) to identify the domain via the NetBIOS API, as specified in [RFC1088].

DnsDomainName: The fully qualified **DNS name** of the domain.

DnsForestName: The fully qualified DNS name of the forest containing this domain.

DomainGuid: The **globally unique identifier (GUID)**, as specified in [MS-DTYP] section 2.3.4.1, of the domain.

Sid: The SID of the domain.

2.2.4.15 POLICY_DOMAIN_INFORMATION_CLASS

The POLICY_DOMAIN_INFORMATION_CLASS enumeration type contains values that specify the type of policy being queried or set by the client.

```
typedef enum _POLICY_DOMAIN_INFORMATION_CLASS
{
   PolicyDomainQualityOfServiceInformation = 1,
   PolicyDomainEfsInformation = 2,
   PolicyDomainKerberosTicketInformation = 3
} POLICY DOMAIN INFORMATION CLASS,
   *PPOLICY DOMAIN INFORMATION CLASS;
```

The values in this enumeration are used in defining the contents of the LSAPR POLICY DOMAIN INFORMATION union.

2.2.4.16 LSAPR_POLICY_DOMAIN_INFORMATION

The LSAPR_POLICY_DOMAIN_INFORMATION union is defined as follows, where the structure depends on the <u>POLICY_DOMAIN_INFORMATION_CLASS</u> that is specified in the message.

```
typedef
[switch_type(POLICY_DOMAIN_INFORMATION_CLASS)]
union _LSAPR_POLICY_DOMAIN_INFORMATION {
    [case(PolicyDomainQualityOfServiceInformation)]
        POLICY_DOMAIN_QUALITY_OF_SERVICE_INFO PolicyDomainQualityOfServiceInfo;
    [case(PolicyDomainEfsInformation)]
        LSAPR_POLICY_DOMAIN_EFS_INFO PolicyDomainEfsInfo;
    [case(PolicyDomainKerberosTicketInformation)]
        POLICY_DOMAIN_KERBEROS_TICKET_INFO PolicyDomainKerbTicketInfo;
} LSAPR_POLICY_DOMAIN_INFORMATION,
*PLSAPR_POLICY_DOMAIN_INFORMATION;
```

PolicyDomainQualityOfServiceInfo: The complete description is as specified in section 2.2.4.17.<18>

PolicyDomainEfsInfo: The complete description is as specified in section 2.2.4.18.

PolicyDomainKerbTicketInfo: The complete description is as specified in section 2.2.4.19.

2.2.4.17 POLICY_DOMAIN_QUALITY_OF_SERVICE_INFO

The POLICY_DOMAIN_QUALITY_OF_SERVICE_INFO structure is obsolete and exists for backward compatibility purposes only.

```
typedef struct _POLICY_DOMAIN_QUALITY_OF_SERVICE_INFO {
  unsigned long QualityOfService;
} POLICY_DOMAIN_QUALITY_OF_SERVICE_INFO,
  *PPOLICY_DOMAIN_QUALITY_OF_SERVICE_INFO;
```

QualityOfService: Quality of service of the responder. MUST be set to zero when sent and MUST be ignored on receipt.

2.2.4.18 LSAPR_POLICY_DOMAIN_EFS_INFO

The LSAPR_POLICY_DOMAIN_EFS_INFO structure communicates a counted binary byte array.

```
typedef struct _LSAPR_POLICY_DOMAIN_EFS_INFO {
  unsigned long InfoLength;
  [size is(InfoLength)] unsigned char* EfsBlob;
} LSAPR_POLICY_DOMAIN_EFS_INFO,
```

InfoLength: The count of bytes in the **EfsBlob**.

EfsBlob: An array of bytes, of size **InfoLength** bytes. If the value of **InfoLength** is other than 0, this field MUST NOT be NULL. The syntax of this blob SHOULD<19> conform to the layout specified in [MS-GPEF] section 2.2.1.2.1.

2.2.4.19 POLICY_DOMAIN_KERBEROS_TICKET_INFO

The POLICY_DOMAIN_KERBEROS_TICKET_INFO structure communicates policy information about the Kerberos security provider.

```
typedef struct _POLICY_DOMAIN_KERBEROS_TICKET_INFO {
  unsigned long AuthenticationOptions;
  LARGE_INTEGER MaxServiceTicketAge;
  LARGE INTEGER MaxTicketAge;
  LARGE_INTEGER MaxRenewAge;
  LARGE_INTEGER MaxClockSkew;
  LARGE_INTEGER Reserved;
} POLICY_DOMAIN_KERBEROS_TICKET_INFO,
  *PPOLICY_DOMAIN_KERBEROS_TICKET_INFO;
```

AuthenticationOptions: Optional flags that affect validations performed during authentication.

0	1	2	3	4	5	6	7	8	9	1 0	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	> ر	0	0	0	0	0	0	0

Where the bits are defined as:

Value	Description
VC POLICY_KERBEROS_VALIDATE_CLIENT (0x00000080)	This is the only flag that is currently defined. When this bit is set, the AuthenticationOptions flag of the Key Distribution Center (KDC) configuration setting will be set to POLICY_KERBEROS_VALIDATE_CLIENT (as described in [MS-KILE] section 3.3.1). All other bits SHOULD be set to 0 and ignored upon receipt.

MaxServiceTicketAge: This is in units of 10^(-7) seconds. It corresponds to Maximum ticket lifetime (as specified in [RFC4120] section 8.2) for service tickets only. The default value of this setting is 10 hours.

MaxTicketAge: This is in units of 10^(-7) seconds. It corresponds to the Maximum ticket lifetime (as specified in [RFC4120] section 8.2) for ticket-granting ticket (TGT) only. The default value of this setting is 10 hours.

MaxRenewAge: This is in units of 10^(-7) seconds. It corresponds to the Maximum renewable lifetime, as specified in [RFC4120] section 8.2. The default value of this setting is one week.

MaxClockSkew: This is in units of 10^(-7) seconds. It corresponds to the Acceptable clock skew, as specified in [RFC4120] section 8.2. The default value of this setting is five minutes.

Reserved: The value of this field SHOULD be set to zero when sent or on receipt.

2.2.4.20 POLICY_AUDIT_EVENT_TYPE

```
typedef enum _POLICY_AUDIT_EVENT_TYPE
{
   AuditCategorySystem = 0,
   AuditCategoryLogon,
   AuditCategoryDetaCccss,
   AuditCategoryPrivilegeUse,
   AuditCategoryDetailedTracking,
   AuditCategoryPolicyChange,
   AuditCategoryAccountManagement,
   AuditCategoryDirectoryServiceAccess,
   AuditCategoryAccountLogon
} POLICY_AUDIT_EVENT_TYPE,
   *PPOLICY_AUDIT_EVENT_TYPE;
```

AuditCategorySystem: Manages auditing of system-related events

AuditCategoryLogon: Manages auditing of account logon events

AuditCategoryObjectAccess: Manages auditing of object access events

AuditCategoryPrivilegeUse: Manages auditing of privilege use events

AuditCategoryDetailedTracking: Manages detailed auditing

AuditCategoryPolicyChange: Manages auditing of policy change events

AuditCategoryAccountManagement: Manages auditing of account management events

AuditCategoryDirectoryServiceAccess: Manages auditing of Active Directory access events

AuditCategoryAccountLogon: Manages auditing of account logon events

The values in this enumeration are used as indices into the **EventAuditingOptions** field of the <u>LSAPR POLICY AUDIT EVENTS INFO</u> structure (see section 2.2.4.4).

2.2.5 Account Query/Set Data Types

2.2.5.1 LSAPR_ACCOUNT_INFORMATION

The LSAPR ACCOUNT INFORMATION structure specifies a security principal security identifier (SID).

```
typedef struct _LSAPR_ACCOUNT_INFORMATION {
   PRPC SID Sid;
} LSAPR_ACCOUNT_INFORMATION,
   *PLSAPR ACCOUNT_INFORMATION;
```

Sid: This field contains the SID of the security principal. This field MUST NOT be NULL.

2.2.5.2 LSAPR_ACCOUNT_ENUM_BUFFER

The LSAPR_ACCOUNT_ENUM_BUFFER structure specifies a collection of security principal SIDs represented in an array of structures of type LSAPR_ACCOUNT_INFORMATION.

```
typedef struct _LSAPR_ACCOUNT_ENUM_BUFFER {
  unsigned long EntriesRead;
  [size is(EntriesRead)] PLSAPR ACCOUNT INFORMATION Information;
} LSAPR ACCOUNT ENUM BUFFER,
```

```
*PLSAPR_ACCOUNT_ENUM_BUFFER;
```

EntriesRead: This field contains the number of security principals.

Information: This field contains a set of structures that define the security principal SID, as specified in section 2.2.5.1. If the EntriesRead field has a value other than 0, this field MUST NOT be NULL.

2.2.5.3 LSAPR_USER_RIGHT_SET

The LSAPR_USER_RIGHT_SET structure specifies a collection of user rights.

```
typedef struct _LSAPR_USER_RIGHT_SET {
   [range(0,256)] unsigned long Entries;
   [size_is(Entries)] PRPC_UNICODE_STRING UserRights;
} LSAPR_USER_RIGHT_SET,
   *PLSAPR_USER_RIGHT_SET;
```

Entries: This field contains the number of rights. <20>

UserRights: An array of strings specifying the rights. These can be string names corresponding to either privilege names or system access names, as specified in section 3.1.1.2. If the **Entries** field has a value other than 0, this field MUST NOT be NULL.

2.2.5.4 LSAPR_LUID_AND_ATTRIBUTES

The LSAPR_LUID_AND_ATTRIBUTES structure is a tuple defining a locally unique identifier (LUID) and a field defining the attributes of the LUID.

```
typedef struct _LSAPR_LUID_AND_ATTRIBUTES {
  LUID Luid;
  unsigned long Attributes;
} LSAPR LUID AND ATTRIBUTES,
  *PLSAPR LUID AND ATTRIBUTES;
```

Luid: The locally unique identifier.

Attributes: This field contains bitmapped values that define the properties of the privilege set. One or more of the following flags can be set.

0	1	2	3	4	5	6	7	8	9	1	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Е	D

D: The privilege is enabled by default.

E: The privilege is enabled.

All other bits SHOULD be 0 and ignored upon receipt.

2.2.5.5 LSAPR_PRIVILEGE_SET

The LSAPR_PRIVILEGE_SET structure defines a set of privileges that belong to an account.

```
typedef struct _LSAPR_PRIVILEGE_SET {
```

```
[range(0,1000)] unsigned long PrivilegeCount;
unsigned long Control;
[size_is(PrivilegeCount)] LSAPR_LUID_AND_ATTRIBUTES Privilege[*];
} LSAPR_PRIVILEGE_SET,
*PLSAPR_PRIVILEGE_SET;
```

PrivilegeCount: This field contains the number of privileges. <21>

Control: This field contains bitmapped values that define the properties of the privilege set.

	0	1	2	3	4	5	6	7	8	9	1	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	О

O: Valid for a set operation indicating that all specified privileges that are not already assigned should be assigned.

All other bits SHOULD be set to zero when sent, and ignored on receipt.

Privilege: An array of <u>LSAPR LUID AND ATTRIBUTES</u> structures. If the **PrivilegeCount** field has a value different than 0, this field MUST NOT be NULL.

2.2.6 Secret Query/Set Data Types

2.2.6.1 LSAPR_CR_CIPHER_VALUE

The LSAPR_CR_CIPHER_VALUE structure is a counted buffer of bytes containing a secret object.

```
typedef struct _LSAPR_CR_CIPHER_VALUE {
   [range(0,131088)] unsigned long Length;
   [range(0,131088)] unsigned long MaximumLength;
   [size_is(MaximumLength), length_is(Length)]
    unsigned char* Buffer;
} LSAPR CR CIPHER VALUE,
   *PLSAPR CR CIPHER VALUE;
```

Length: This field contains the number of valid bytes in the **Buffer** field.<a>

MaximumLength: This field contains the number of allocated bytes in the Buffer field. <23>

Buffer: This field contains the actual secret data. If the value of the **MaximumLength** field is greater than 0, this field MUST contain a non-NULL value. This field is always encrypted using algorithms as specified in section <u>5.1.2</u>.

2.2.7 Trusted Domain Query/Set Data Types

2.2.7.1 LSAPR_TRUST_INFORMATION

The LSAPR_TRUST_INFORMATION structure identifies a domain.

```
typedef struct _LSAPR_TRUST_INFORMATION {
   RPC_UNICODE_STRING Name;
   PRPC SID Sid;
} LSAPR TRUST INFORMATION,
```

Name: This field contains a name for the domain that is subject to the restrictions of a NetBIOS name, as specified in [RFC1088]. This value SHOULD be used (by implementations external to this protocol) to identify the domain via the NetBIOS, as specified in [RFC1088].

Sid: The SID of the domain. This field MUST NOT be NULL.

2.2.7.2 TRUSTED_INFORMATION_CLASS

The TRUSTED_INFORMATION_CLASS enumeration type contains values that specify the type of trusted domain information queried or set by the client.

```
typedef enum _TRUSTED INFORMATION CLASS
  TrustedDomainNameInformation = 1,
 TrustedControllersInformation.
 TrustedPosixOffsetInformation,
 TrustedPasswordInformation.
 TrustedDomainInformationBasic,
 TrustedDomainInformationEx,
 TrustedDomainAuthInformation,
 TrustedDomainFullInformation,
 TrustedDomainAuthInformationInternal,
  TrustedDomainFullInformationInternal,
 TrustedDomainInformationEx2Internal,
 TrustedDomainFullInformation2Internal,
 TrustedDomainSupportedEncryptionTypes
} TRUSTED INFORMATION CLASS,
 *PTRUSTED INFORMATION CLASS;
```

- **TrustedDomainNameInformation:** The trusted domain information contains the LSAPR TRUSTED DOMAIN NAME INFO structure specified in section 2.2.7.4.
- **TrustedControllersInformation:** The trusted domain information contains the LSAPR_TRUSTED_CONTROLLERS_INFO structure specified in section 2.2.7.5.
- **TrustedPosixOffsetInformation:** The trusted domain information contains the TRUSTED POSIX OFFSET INFO structure specified in section 2.2.7.6.
- **TrustedPasswordInformation:** The trusted domain information contains the LSAPR TRUSTED PASSWORD INFO structure specified in section 2.2.7.7.
- **TrustedDomainInformationBasic:** The trusted domain information contains the LSAPR_TRUSTED_DOMAIN_INFORMATION_BASIC structure specified in section <u>2.2.7.8</u>.
- **TrustedDomainInformationEx:** The trusted domain information contains the LSAPR_TRUSTED_DOMAIN_INFORMATION_EX structure specified in section <u>2.2.7.9</u>.
- **TrustedDomainAuthInformation:** The trusted domain information contains the LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION structure specified in section <u>2.2.7.11</u>.
- **TrustedDomainFullInformation:** The trusted domain information contains the LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION structure specified in section 2.2.7.13.
- **TrustedDomainAuthInformationInternal:** The trusted domain information contains the LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION_INTERNAL structure specified in section <u>2.2.7.12</u>.

- **TrustedDomainFullInformationInternal:** The trusted domain information contains the LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION_INTERNAL structure specified in section 2.2.7.14.
- **TrustedDomainInformationEx2Internal:** The trusted domain information contains the LSAPR_TRUSTED_DOMAIN_INFORMATION_EX2 structure specified in section <u>2.2.7.10</u>.
- **TrustedDomainFullInformation2Internal:** The trusted domain information contains the LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION2 structure specified in section <u>2.2.7.15</u>.
- **TrustedDomainSupportedEncryptionTypes:** The trusted domain information contains the TRUSTED DOMAIN SUPPORTED ENCRYPTION TYPES structure specified in section 2.2.7.18.

The following citation contains a timeline of when each enumeration value was introduced. <24>

The values in this enumeration are used in defining the contents of the LSAPR TRUSTED DOMAIN INFO union.

2.2.7.3 LSAPR_TRUSTED_DOMAIN_INFO

The LSAPR_TRUSTED_DOMAIN_INFO union is defined as follows, where the structure depends on the <u>TRUSTED_INFORMATION_CLASS</u> that is specified in the message.

```
typedef
[switch type(TRUSTED INFORMATION CLASS)]
union LSAPR TRUSTED DOMAIN INFO {
  [case(TrustedDomainNameInformation)]
   LSAPR TRUSTED DOMAIN NAME INFO TrustedDomainNameInfo;
  [case(TrustedControllersInformation)]
    LSAPR TRUSTED CONTROLLERS INFO TrustedControllersInfo;
  [case(TrustedPosixOffsetInformation)]
    TRUSTED POSIX OFFSET INFO TrustedPosixOffsetInfo;
  [case(TrustedPasswordInformation)]
    LSAPR TRUSTED PASSWORD INFO TrustedPasswordInfo;
  [case(TrustedDomainInformationBasic)]
    LSAPR_TRUSTED_DOMAIN_INFORMATION_BASIC TrustedDomainInfoBasic;
  [case(TrustedDomainInformationEx)]
    LSAPR TRUSTED DOMAIN INFORMATION EX TrustedDomainInfoEx;
  [case(TrustedDomainAuthInformation)]
    LSAPR TRUSTED DOMAIN AUTH INFORMATION TrustedAuthInfo;
  [case(TrustedDomainFullInformation)]
    LSAPR TRUSTED DOMAIN FULL INFORMATION TrustedFullInfo;
  [case(TrustedDomainAuthInformationInternal)]
    LSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL TrustedAuthInfoInternal;
  [case(TrustedDomainFullInformationInternal)]
    LSAPR TRUSTED DOMAIN FULL INFORMATION INTERNAL TrustedFullInfoInternal;
  [case(TrustedDomainInformationEx2Internal)]
    LSAPR TRUSTED DOMAIN INFORMATION EX2 TrustedDomainInfoEx2;
  [case(TrustedDomainFullInformation2Internal)]
    LSAPR TRUSTED DOMAIN FULL INFORMATION2 TrustedFullInfo2;
  [case(TrustedDomainSupportedEncryptionTypes)]
    TRUSTED DOMAIN SUPPORTED ENCRYPTION TYPES TrustedDomainSETs;
} LSAPR TRUSTED DOMAIN INFO,
 *PLSAPR TRUSTED DOMAIN INFO;
```

- **TrustedDomainNameInfo:** An instance of the LSAPR_TRUSTED_DOMAIN_NAME_INFO structure specified in section <u>2.2.7.4</u>.
- **TrustedControllersInfo:** An instance of the LSAPR_TRUSTED_CONTROLLERS_INFO structure specified in section <u>2.2.7.5</u>.
- **TrustedPosixOffsetInfo:** An instance of the TRUSTED_POSIX_OFFSET_INFO structure specified in section <u>2.2.7.6</u>.

- **TrustedPasswordInfo:** An instance of the LSAPR_TRUSTED_PASSWORD_INFO structure specified in section 2.2.7.7.
- **TrustedDomainInfoBasic:** An instance of the LSAPR_TRUSTED_DOMAIN_INFORMATION_BASIC structure specified in section 2.2.7.8.
- **TrustedDomainInfoEx:** An instance of the LSAPR_TRUSTED_DOMAIN_INFORMATION_EX structure specified in section <u>2.2.7.9</u>.
- **TrustedAuthInfo:** An instance of the LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION structure specified in section 2.2.7.11.
- **TrustedFullInfo:** An instance of the LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION structure specified in section 2.2.7.13.
- **TrustedAuthInfoInternal:** An instance of the LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION_INTERNAL structure specified in section 2.2.7.12.
- **TrustedFullInfoInternal:** An instance of the LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION_INTERNAL structure specified in section 2.2.7.14.
- **TrustedDomainInfoEx2:** An instance of the LSAPR_TRUSTED_DOMAIN_INFORMATION_EX2 structure specified in section <u>2.2.7.10</u>.
- **TrustedFullInfo2:** An instance of the LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION2 structure specified in section 2.2.7.15.
- **TrustedDomainSETs:** An instance of the TRUSTED_DOMAIN_SUPPORTED_ENCRYPTION_TYPES structure specified in section 2.2.7.18.

2.2.7.4 LSAPR_TRUSTED_DOMAIN_NAME_INFO

The LSAPR_TRUSTED_DOMAIN_NAME_INFO structure is used to communicate the name of a trusted domain. The following structure corresponds to the TrustedDomainNameInformation information class.

```
typedef struct _LSAPR_TRUSTED_DOMAIN_NAME_INFO {
   RPC_UNICODE_STRING Name;
} LSAPR TRUSTED DOMAIN NAME INFO,
   *PLSAPR_TRUSTED_DOMAIN_NAME_INFO;
```

Name: This field contains a name for the domain that is subject to the restrictions of a NetBIOS name, as specified in [RFC1088]. This field SHOULD be used (by implementations external to this protocol) to identify the domain via the NetBIOS API, as specified in [RFC1088].

2.2.7.5 LSAPR_TRUSTED_CONTROLLERS_INFO

The LSAPR_TRUSTED_CONTROLLERS_INFO structure is used to communicate a set of names of domain controllers (DCs) in a trusted domain. The following structure corresponds to the TrustedControllersInformation information class.

```
typedef struct _LSAPR_TRUSTED_CONTROLLERS_INFO {
  [range(0,5)] unsigned long Entries;
  [size_is(Entries)] PRPC_UNICODE_STRING Names;
} LSAPR_TRUSTED_CONTROLLERS_INFO,
  *PLSAPR_TRUSTED_CONTROLLERS_INFO;
```

Entries: The count of names. <25>

Names: This field contains an array of DC names that are subject to the restrictions of a NetBIOS name, as specified in [RFC1088]. This field SHOULD be used (by implementations external to this protocol) to identify the DCs via the NetBIOS API, as specified in [RFC1088]. If the **Entries** field has a value other than 0, this field MUST NOT be NULL.

2.2.7.6 TRUSTED_POSIX_OFFSET_INFO

The TRUSTED_POSIX_OFFSET_INFO structure communicates any offset necessary for POSIX compliance. The following structure corresponds to the TrustedPosixOffsetInformation information class.

```
typedef struct _TRUSTED_POSIX_OFFSET_INFO {
  unsigned long Offset;
} TRUSTED POSIX OFFSET INFO,
  *PTRUSTED_POSIX_OFFSET_INFO;
```

Offset: The offset to use for the generation of POSIX IDs for users and groups, as specified in "trustPosixOffset" in [MS-ADTS] section 6.1.6.7.14.

2.2.7.7 LSAPR_TRUSTED_PASSWORD_INFO

The LSAPR_TRUSTED_PASSWORD_INFO structure is used to communicate trust-authentication material. The following structure corresponds to the TrustedPasswordInformation information class.

```
typedef struct _LSAPR_TRUSTED_PASSWORD_INFO {
  PLSAPR CR CIPHER VALUE Password;
  PLSAPR_CR_CIPHER_VALUE OldPassword;
} LSAPR_TRUSTED_PASSWORD_INFO,
  *PLSAPR_TRUSTED_PASSWORD_INFO;
```

Password: The current authentication material. See section 2.2.6.1.

OldPassword: The version prior to the current version of the authentication material. See section 2.2.6.1.

2.2.7.8 LSAPR TRUSTED DOMAIN INFORMATION BASIC

The LSAPR_TRUSTED_DOMAIN_INFORMATION_BASIC type is identical to the LSAPR_TRUST_INFORMATION structure. This type corresponds to the TrustedDomainInformationBasic information class.

This type is declared as follows:

```
typedef LSAPR_TRUST_INFORMATION LSAPR_TRUSTED_DOMAIN_INFORMATION_BASIC;
```

2.2.7.9 LSAPR_TRUSTED_DOMAIN_INFORMATION_EX

Note: Some of the information in this section is subject to change because it applies to a preliminary product version, and thus may differ from the final version of the software when released. All behavior notes that pertain to the preliminary product version contain specific references to it in the Product Behavior appendix.

The LSAPR_TRUSTED_DOMAIN_INFORMATION_EX structure communicates properties of a trusted domain. The following structure corresponds to the TrustedDomainInformationEx information class. Domain trusts are specified in [MS-ADTS] section 6.1.6.


```
typedef struct _LSAPR_TRUSTED_DOMAIN_INFORMATION_EX {
   RPC_UNICODE_STRING Name;
   RPC UNICODE STRING FlatName;
   PRPC_SID Sid;
   unsigned long TrustDirection;
   unsigned long TrustType;
   unsigned long TrustAttributes;
} LSAPR_TRUSTED_DOMAIN_INFORMATION_EX,
   *PLSAPR_TRUSTED_DOMAIN_INFORMATION_EX;
```

Name: The DNS name of the domain. Maps to the Name field, as specified in section 3.1.1.5.

FlatName: The NetBIOS name of the trusted domain, as specified in [RFC1088]. Maps to the **Flat Name** field, as specified in section 3.1.1.5.

Sid: The domain SID. Maps to the Security Identifier field, as specified in section 3.1.1.5.

TrustDirection: This field contains bitmapped values that define the properties of the direction of trust between the local domain and the named domain. One or more of the valid flags can be set. If all bits are 0, the trust is said to be disabled.



I: The trust is inbound.

O: The trust is outbound.

All other bits SHOULD be 0 and ignored upon receipt.

Maps to the **Trust Direction** field, as specified in section 3.1.1.5.

TrustType: This field specifies the type of trust between the local domain and the named domain.

Value	Meaning
0x00000001	Trust with a Windows domain that is not running Active Directory.
0x00000002	Trust with a Windows domain that is running Active Directory.
0x00000003	Trust with a non-Windows-compliant Kerberos distribution, as specified in [RFC4120] .
0x00000004	Trust with a distributed computing environment (DCE) realm. This is a historical reference and is not used.

Note Other values SHOULD NOT be set.

Maps to the **Trust Type** field, as specified in section 3.1.1.5.

TrustAttributes: This field contains bitmapped values that define the attributes of the trust. <26>

0	1	2	3	4	5	6	7	8	9	1 0	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3 0	1
R	R	R	R	R	R	R	R	О	0	R	R	R	R	R	R	R	R	R	R	R	T A P T		R	Α	A T	A W	A C	A F	A Q	A U	

TrustAttribute values are described in section 3.1.1.5. The following table shows how these values map to the Trust Attributes field in section 3.1.1.5.

Value	Mapping
TANT (TRUST_ATTRIBUTE_NON_TRANSITIVE)	Trust Attributes: Non-transitive
TAUO (TRUST_ATTRIBUTE_UPLEVEL_ONLY)	Trust Attributes: Uplevel only
TAQD (TRUST_ATTRIBUTE_QUARANTINED_DOMAIN)	Trust Attributes: Quarantined
TAFT (TRUST_ATTRIBUTE_FOREST_TRANSITIVE)	Trust Attributes: Forest trust
TACO (TRUST_ATTRIBUTE_CROSS_ORGANIZATION)	Trust Attributes: Cross organization
TAWF (TRUST_ATTRIBUTE_WITHIN_FOREST)	Trust Attributes: Within forest
TATE (TRUST_ATTRIBUTE_TREAT_AS_EXTERNAL)	Trust Attributes: Treat as external
TARC (TRUST_ATTRIBUTE_USES_RC4_ENCRYPTION)	Trust Attributes: Use RC4 Encryption
TANC (TRUST_ATTRIBUTE_CROSS_ORGANIZATION_NO_TGT_DELEGATION)	Trust Attributes: Tokens must not be trusted for delegation.
TAPT (TRUST_ATTRIBUTE_PIM_TRUST)	Trust Attributes: PrivilegedIdentityManagement (PIM) trust.
0	Obsolete. SHOULD be set to 0.
R	Reserved for future use. SHOULD be set to zero.

2.2.7.10 LSAPR_TRUSTED_DOMAIN_INFORMATION_EX2

The LSAPR_TRUSTED_DOMAIN_INFORMATION_EX2 structure communicates properties of a trusted domain. The following structure corresponds to the TrustedDomainInformationEx2Internal information class. Domain trusts are specified in [MS-ADTS] section 6.1.6.

```
typedef struct _LSAPR_TRUSTED_DOMAIN_INFORMATION_EX2 {
   RPC_UNICODE_STRING Name;
   RPC UNICODE STRING FlatName;
   PRPC_SID Sid;
   unsigned long TrustDirection;
   unsigned long TrustType;
   unsigned long TrustAttributes;
   unsigned long ForestTrustLength;
   [size is(ForestTrustLength)] unsigned char* ForestTrustInfo;
} LSAPR TRUSTED DOMAIN INFORMATION EX2,
```

Name: The DNS name of the domain. Maps to the Name field, as specified in section 3.1.1.5.

FlatName: The NetBIOS name of the trusted domain, as specified in [RFC1088]. Maps to the **Flat Name** field, as specified in section 3.1.1.5.

Sid: The domain SID. Maps to the Security Identifier field, as specified in section 3.1.1.5.

TrustDirection: This field contains bitmapped values that define the properties of the direction of trust between the local domain and the named domain. See section <u>2.2.7.9</u> for valid values and a description of each flag. Maps to the Trusted Direction field, as specified in section 3.1.1.5.

TrustType: This field specifies the type of trust between the local domain and the named domain. See section 2.2.7.9 for valid values and a description of each value. Maps to the Trusted Type field, as specified in section 3.1.1.5.

TrustAttributes: This field contains bitmapped values that define the attributes of the trust. See section 2.2.7.9 for valid values and a description of each flag. Maps to the Trusted Attributes field, as specified in section 3.1.1.5.

ForestTrustLength: The count of bytes in ForestTrustInfo.

ForestTrustInfo: Binary data for the **forest trust**. For more information, see "Trust Objects" in [MS-ADTS] section 6.1.6. Maps to the Forest Trust Information field, as specified in section 3.1.1.5. Conversion from this binary format to the <u>LSA FOREST TRUST INFORMATION</u> format is specified in [MS-ADTS] section 6.1.6.9.3. If the **ForestTrustLength** field has a value other than 0, this field MUST NOT be NULL.

2.2.7.11 LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION

The LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION structure communicates authentication material. The following structure corresponds to the TrustedDomainAuthInformation information class. Domain trust authentication is specified in [MS-ADTS] section 6.1.6.9.1. This structure maps to the Incoming and Outgoing Trust Password fields, as specified in section 3.1.1.5.

```
typedef struct _LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION {
   [range(0,1)] unsigned long IncomingAuthInfos;
   PLSAPR AUTH INFORMATION IncomingAuthenticationInformation;
   PLSAPR AUTH INFORMATION IncomingPreviousAuthenticationInformation;
   [range(0,1)] unsigned long OutgoingAuthInfos;
   PLSAPR_AUTH_INFORMATION OutgoingAuthenticationInformation;
   PLSAPR_AUTH_INFORMATION OutgoingPreviousAuthenticationInformation;
} LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION,
*PLSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION;
```

IncomingAuthInfos: The count of <u>LSAPR AUTH INFORMATION</u> entries (section 2.2.7.17) in the **IncomingAuthenticationInformation** field.<27>

IncomingAuthenticationInformation: An array of LSAPR_AUTH_INFORMATION structures. The values are used to compute keys used in inbound trust validation, as specified in [MS-ADTS] section 6.1.6.9.1.

IncomingPreviousAuthenticationInformation: Same as **IncomingAuthenticationInformation**, but the data is the previous version of the authentication information.

OutgoingAuthInfos: The count of LSAPR_AUTH_INFORMATION entries in the OutgoingAuthenticationInformation field. <28>

OutgoingAuthenticationInformation: An array of LSAPR_AUTH_INFORMATION structures. The values are used to compute keys used in outbound trust validation, as specified in [MS-ADTS] section 6.1.6.9.1.

OutgoingPreviousAuthenticationInformation: Same as **OutgoingAuthenticationInformation**, but the data is the previous version of the authentication information.

2.2.7.12 LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION_INTERNAL

The LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION_INTERNAL structure communicates authentication material. The following structure corresponds to the TrustedDomainAuthInformationInternal information class. For more information about domain trust authentication material, see [MS-ADTS] section 6.1.6.9.1.

```
typedef struct _LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION_INTERNAL {
   LSAPR TRUSTED DOMAIN AUTH BLOB AuthBlob;
} LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION_INTERNAL,
   *PLSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION_INTERNAL;
```

AuthBlob: An LSAPR TRUSTED DOMAIN AUTH BLOB.

2.2.7.13 LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION

The LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION structure communicates identification, POSIX compatibility, and authentication information for a trusted domain. The following structure corresponds to the TrustedDomainFullInformation information class.

```
typedef struct _LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION {
   LSAPR_TRUSTED_DOMAIN_INFORMATION_EX Information;
   TRUSTED_POSIX_OFFSET_INFO PosixOffset;
   LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION AuthInformation;
} LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION,
   *PLSAPR_TRUSTED_DOMAIN_FULL_INFORMATION;
```

Information: A structure containing name, SID, and **trust attributes**, as specified in section 2.2.7.9.

PosixOffset: Any offset required for POSIX compliance, as specified in section 2.2.7.6.

AuthInformation: Authentication material, as specified in section 2.2.7.11.

2.2.7.14 LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION_INTERNAL

The LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION_INTERNAL structure communicates identification and authentication information for a trusted domain. The following structure corresponds to the TrustedDomainFullInformationInternal information class.

```
typedef struct _LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION_INTERNAL {
   LSAPR TRUSTED DOMAIN INFORMATION EX Information;
   TRUSTED_POSIX_OFFSET_INFO POSIXOffset;
   LSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL AuthInformation;
} LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION_INTERNAL,
   *PLSAPR_TRUSTED_DOMAIN_FULL_INFORMATION_INTERNAL;
```

Information: A structure containing name, SID, and trust attributes, as specified in section 2.2.7.9.

PosixOffset: Any offset required for POSIX compliance, as specified in section 2.2.7.6.

AuthInformation: Authentication material, as specified in section 2.2.7.12.

2.2.7.15 LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION2

The LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION2 structure is used to communicate identification, POSIX compatibility, and authentication information for a trusted domain. The following structure corresponds to the TrustedDomainFullInformation2Internal information class.

```
typedef struct LSAPR TRUSTED DOMAIN FULL INFORMATION2 {
   LSAPR TRUSTED_DOMAIN_INFORMATION_EX2 Information;
   TRUSTED_POSIX_OFFSET_INFO PosixOffset;
   LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION AuthInformation;
} LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION2,
   *PLSAPR_TRUSTED_DOMAIN_FULL_INFORMATION2;
```

Information: A structure containing name, SID, and trust attributes, as specified in section 2.2.7.10.

PosixOffset: Any offset required for POSIX compliance, as specified in section 2.2.7.6.

AuthInformation: Authentication material, as specified in section 2.2.7.11.

2.2.7.16 LSAPR_TRUSTED_DOMAIN_AUTH_BLOB


The LSAPR_TRUSTED_DOMAIN_AUTH_BLOB structure contains a counted buffer of authentication material. Domain trust authentication is specified in [MS-ADTS] section 6.1.6.9.1.

```
typedef struct _LSAPR_TRUSTED_DOMAIN_AUTH_BLOB {
   [range(0,65536)] unsigned long AuthSize;
   [size_is(AuthSize)] unsigned char* AuthBlob;
} LSAPR_TRUSTED_DOMAIN_AUTH_BLOB,
   *PLSAPR_TRUSTED_DOMAIN_AUTH_BLOB;
```

AuthSize: The count of bytes in **AuthBlob**.<a><29>

AuthBlob: An array of bytes containing the authentication material. If the **AuthSize** field has a value other than 0, this field MUST NOT be NULL. Always encrypted using algorithms, as specified in section <u>5.1.1</u>. The plaintext layout is in the following format.

The incoming and outgoing authentication information buffer size included at the end of the LSAPR_TRUSTED_DOMAIN_AUTH_BLOB can be used to extract the incoming and outgoing authentication information buffers from the LSAPR_TRUSTED_DOMAIN_AUTH_BLOB. Each of these buffers contains the byte offset to both the current and the previous authentication information. This information can be used to extract current and (if any) previous authentication information.

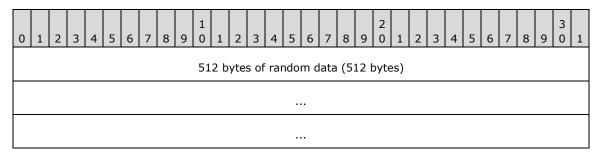

CountOutgoingAuthInfos
ByteOffsetCurrentOutgoingAuthInfo
ByteOffsetPreviousOutgoingAuthInfo
CurrentOutgoingAuthInfos (variable)
PreviousOutgoingAuthInfos (variable)
CountIncomingAuthInfos
ByteOffsetCurrentIncomingAuthInfo
ByteOffsetPreviousIncomingAuthInfo
CurrentIncomingAuthInfos (variable)
PreviousIncomingAuthInfos (variable)
•••
Outgoing AuthInfoSizo
OutgoingAuthInfoSize
IncomingAuthInfoSize

CountOutgoingAuthInfos (4 bytes): Specifies the count of entries present in the CurrentOutgoingAuthInfos field. If optional field PreviousOutgoingAuthInfos is present, the number of entries in PreviousOutgoingAuthInfos is also equal to CountOutgoingAuthInfos.

ByteOffsetCurrentOutgoingAuthInfo (4 bytes): Specifies the byte offset from the beginning of CountOutgoingAuthInfos to the start of the CurrentOutgoingAuthInfos field. If CountOutgoingAuthInfos is 0, this field MUST be ignored.

ByteOffsetPreviousOutgoingAuthInfo (4 bytes): Specifies the byte offset from the beginning of CountOutgoingAuthInfos to the start of the PreviousOutgoingAuthInfos field. If the difference

between ByteOffsetPreviousOutgoingAuthInfo and OutgoingAuthInfoSize is 0, the PreviousOutgoingAuthInfos field has zero entries.

CurrentOutgoingAuthInfos: Contains an array of CountOutgoingAuthInfos of LSAPR AUTH INFORMATION (section 2.2.7.17) entries in self-relative format. Each LSAPR_AUTH_INFORMATION entry in the array MUST be 4-byte aligned. When it is necessary to insert unused padding bytes into a buffer for data alignment, such bytes MUST be set to 0.

PreviousOutgoingAuthInfos: Contains an array of **CountOutgoingAuthInfos**LSAPR_AUTH_INFORMATION entries in self-relative format. See the comments for the **ByteOffsetPreviousOutgoingAuthInfo** field to determine when this field is present. Each
LSAPR_AUTH_INFORMATION entry in the array MUST be 4-byte aligned. When it is necessary to insert unused padding bytes into a buffer for data alignment, such bytes MUST be set to 0.

CountIncomingAuthInfos (4 bytes): Specifies the count of entries present in the **CurrentIncomingAuthInfos** field. If optional field **PreviousIncomingAuthInfos** is present, the number of entries in **PreviousIncomingAuthInfos** is also equal to **CountIncomingAuthInfos**.

ByteOffsetCurrentIncomingAuthInfo (4 bytes): Specifies the byte offset from the beginning of **CountIncomingAuthInfos** to the start of the **CurrentIncomingAuthInfos** field. If **CountIncomingAuthInfos** is 0, this field MUST be ignored.

ByteOffsetPreviousIncomingAuthInfo (4 bytes): Specifies the byte offset from the beginning of **CountIncomingAuthInfos** to the start of the **PreviousIncomingAuthInfos** field. If the difference between **ByteOffsetPreviousIncomingAuthInfo** and **IncomingAuthInfoSize** is 0, the **PreviousIncomingAuthInfos** field has zero entries.

CurrentIncomingAuthInfos: Contains an array of **CountIncomingAuthInfos**LSAPR_AUTH_INFORMATION entries in self-relative format. Each LSAPR_AUTH_INFORMATION entry in the array MUST be 4-byte aligned. When it is necessary to insert unused padding bytes into a buffer for data alignment, such bytes MUST be set to 0.

PreviousIncomingAuthInfos: Contains an array of **CountIncomingAuthInfos**LSAPR_AUTH_INFORMATION entries in self-relative format. See the comments for the **ByteOffsetPreviousIncomingAuthInfo** field to determine when this field is present. Each
LSAPR_AUTH_INFORMATION entry in the array MUST be 4-byte aligned. When it is necessary to insert unused padding bytes into a buffer for data alignment, such bytes MUST be set to 0.

OutgoingAuthInfoSize (4 bytes): Specifies the size, in bytes, of the subportion of the structure from the beginning of the **CountOutgoingAuthInfos** field through the end of the **PreviousOutgoingAuthInfos** field.

IncomingAuthInfoSize (4 bytes): Specifies the size, in bytes, of the sub-portion of the structure from the beginning of the **CountIncomingAuthInfos** field through the end of the **PreviousIncomingAuthInfos** field.

2.2.7.17 LSAPR AUTH INFORMATION

The LSAPR_AUTH_INFORMATION structure communicates information about authentication between trusted domains. Domain trust authentication is specified in [MS-ADTS] section 6.1.6.9.1.

```
typedef struct _LSAPR_AUTH_INFORMATION {
   LARGE_INTEGER LastUpdateTime;
   unsigned long AuthType;
   [range(0,65536)] unsigned long AuthInfoLength;
   [size_is(AuthInfoLength)] unsigned char* AuthInfo;
} LSAPR_AUTH_INFORMATION,
*PLSAPR_AUTH_INFORMATION;
```

LastUpdateTime: The date and time when this authentication information was last updated. It is a 64-bit value that represents the number of 100-nanosecond intervals since January 1, 1601, UTC.


AuthType: A type for the AuthInfo, as specified in the following table.

Value	Meaning
0x00000000	This type MUST be ignored.
0x0000001	Derived RC4HMAC key. For more information, see [RFC4757].
0x00000002	A plaintext password. Indicates that the information stored in the attribute is a Unicode plaintext password. If this AuthType is present, Kerberos can then use this password to derive additional key types that are needed to encrypt and decrypt cross-realm TGTs.
0x0000003	A plaintext password version number that is a single, unsigned long integer consisting of 32 bits.

AuthInfoLength: The count of bytes in AuthInfo buffer.<a><30>

AuthInfo: Authentication data that depends on the AuthType.

The self-relative form of the LSAPR_AUTH_INFORMATION structure is used in LSAPR_TRUSTED_DOMAIN_AUTH_BLOB; in that case, the structure memory layout looks like the following.

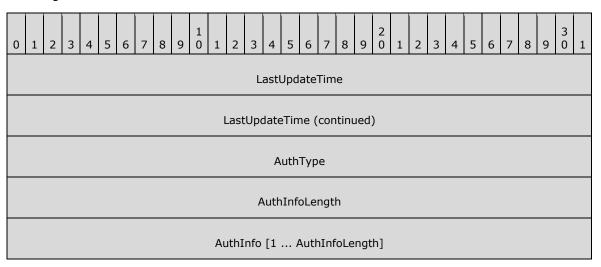

2.2.7.18 TRUSTED_DOMAIN_SUPPORTED_ENCRYPTION_TYPES

The TRUSTED_DOMAIN_SUPPORTED_ENCRYPTION_TYPES structure is used to present the encryption types that are allowed through a trust.

```
typedef struct _TRUSTED_DOMAIN_SUPPORTED_ENCRYPTION_TYPES {
  unsigned long SupportedEncryptionTypes;
} TRUSTED_DOMAIN_SUPPORTED_ENCRYPTION_TYPES,
  *PTRUSTED_DOMAIN_SUPPORTED_ENCRYPTION_TYPES;
```

SupportedEncryptionTypes: This field contains bitmapped values that define the encryption types supported by this trust relationship. The flags can be set in any combination.

0	1	2	3	4	5	6	7	8	9	1	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	S	Α	R	М	С

C: Supports CRC32, as specified in [RFC3961] page 31.

M: Supports RSA-MD5, as specified in [RFC3961] page 31.

R: Supports RC4-HMAC-MD5, as specified in [RFC4757].

A: Supports HMAC-SHA1-96-AES128, as specified in [RFC3961] page 31.

S: Supports HMAC-SHA1-96-AES256, as specified in [RFC3961] page 31.

All other bits SHOULD be 0 and ignored upon receipt.

2.2.7.19 LSAPR_TRUSTED_ENUM_BUFFER

The LSAPR_TRUSTED_ENUM_BUFFER structure specifies a collection of trust information structures of type <u>LSAPR_TRUST_INFORMATION</u>.

```
typedef struct LSAPR TRUSTED ENUM BUFFER {
  unsigned long EntriesRead;
  [size_is(EntriesRead)] PLSAPR_TRUST_INFORMATION Information;
} LSAPR TRUSTED ENUM BUFFER,
  *PLSAPR_TRUSTED_ENUM_BUFFER;
```

EntriesRead: This field contains the number of trust information structures.

Information: This field contains a set of structures that define the trust information, as specified in section 2.2.7.1. If the **EntriesRead** field has a value other than 0, this field MUST NOT be NULL.

2.2.7.20 LSAPR_TRUSTED_ENUM_BUFFER_EX

The LSAPR_TRUSTED_ENUM_BUFFER_EX structure specifies a collection of trust information structures of type <u>LSAPR_TRUSTED_DOMAIN_INFORMATION_EX</u>.

```
typedef struct LSAPR TRUSTED ENUM BUFFER EX {
  unsigned long EntriesRead;
  [size_is(EntriesRead)] PLSAPR_TRUSTED_DOMAIN_INFORMATION_EX EnumerationBuffer;
} LSAPR_TRUSTED_ENUM_BUFFER_EX,
  *PLSAPR_TRUSTED_ENUM_BUFFER_EX;
```

EntriesRead: This field contains the number of trust information structures.

EnumerationBuffer: This field contains a set of structures that define the trust information, as specified in section 2.2.7.9. If the **EntriesRead** field has a value other than 0, this field MUST NOT be NULL.

2.2.7.21 LSA_FOREST_TRUST_RECORD

The LSA_FOREST_TRUST_RECORD structure is used to communicate the type, creation time, and data for a forest trust record. The data is determined by the trust type as follows in the definition of the contained union.

```
typedef struct _LSA_FOREST_TRUST_RECORD {
  unsigned long Flags;
  LSA_FOREST_TRUST_RECORD_TYPE ForestTrustType;
  LARGE_INTEGER Time;
  [switch_type(LSA_FOREST_TRUST_RECORD_TYPE), switch_is(ForestTrustType)]
  union {
    [case(ForestTrustTopLevelName, ForestTrustTopLevelNameEx)]
      LSA_UNICODE_STRING TopLevelName;
    [case(ForestTrustDomainInfo)]
      LSA_FOREST_TRUST_DOMAIN_INFO DomainInfo;
    [default] LSA_FOREST_TRUST_BINARY_DATA_Data;
} ForestTrustData;
} LSA_FOREST_TRUST_RECORD,
*PLSA_FOREST_TRUST_RECORD;
```

Flags: The following table specifies the possible flags.

Note Some flag values are reused for different forest record types. See the Meaning column for more information.

Value	Meaning
LSA_TLN_DISABLED_NEW 0x00000001	The top-level name trust record is disabled during initial creation. Note This flag MUST be used only with forest trust record types of ForestTrustTopLevelName and ForestTrustTopLevelNameEx.
LSA_TLN_DISABLED_ADMIN 0x00000002	The top-level name trust record is disabled by the domain administrator. Note This flag MUST be used only with forest trust record types of ForestTrustTopLevelName and ForestTrustTopLevelNameEx.
LSA_TLN_DISABLED_CONFLICT 0x00000004	The top-level name trust record is disabled due to a conflict. Note This flag MUST be used only with forest trust record types of ForestTrustTopLevelName and ForestTrustTopLevelNameEx.
LSA_SID_DISABLED_ADMIN 0x00000001	The domain information trust record is disabled by the domain administrator. Note This flag MUST be used only with a forest trust record type of ForestTrustDomainInfo.
LSA_SID_DISABLED_CONFLICT 0x00000002	The domain information trust record is disabled due to a conflict. Note This flag MUST be used only with a forest trust record type of ForestTrustDomainInfo.
LSA_NB_DISABLED_ADMIN 0x00000004	The domain information trust record is disabled by the domain administrator. Note This flag MUST be used only with a forest trust record type of ForestTrustDomainInfo.
LSA_NB_DISABLED_CONFLICT 0x00000008	The domain information trust record is disabled due to a conflict. Note This flag MUST be used only with a forest trust record type of ForestTrustDomainInfo.
LSA_FTRECORD_DISABLED_REASONS 0x0000FFFF	The domain information trust record is disabled. Note This set of flags is reserved; for current and future reasons, the trust is disabled.

ForestTrustType: This value is one of <u>LSA_FOREST_TRUST_RECORD_TYPE</u>.

Time: The date and time when this entry was created. It is a 64-bit value that represents the number of 100-nanosecond intervals since January 1, 1601, UTC.

ForestTrustData: An <u>LSA UNICODE STRING</u> or <u>LSA FOREST TRUST DOMAIN INFO</u> structure, depending on the value ForestTrustType as specified in the structure definition for LSA FOREST TRUST RECORD.

2.2.7.22 LSA_FOREST_TRUST_RECORD_TYPE

The LSA_FOREST_TRUST_RECORD_TYPE enumeration specifies a type of forest trust record.

```
typedef enum LSA FOREST TRUST RECORD TYPE
{
   ForestTrustTopLevelName = 0,
   ForestTrustTopLevelNameEx = 1,
   ForestTrustDomainInfo = 2
} LSA FOREST TRUST RECORD TYPE;
```

ForestTrustTopLevelName: The DNS name of the **trusted forest**. The structure used for this record type is equivalent to <u>LSA UNICODE STRING</u> (section 2.2.2.3).

ForestTrustTopLevelNameEx: The DNS name of the trusted forest. This is the same as **ForestTrustTopLevelName**. The structure used for this record type is equivalent to LSA UNICODE STRING.

ForestTrustDomainInfo: This field specifies a record containing identification and name information.

2.2.7.23 LSA_FOREST_TRUST_BINARY_DATA

The LSA_FOREST_TRUST_BINARY_DATA structure is used to communicate a forest trust record. This structure is not used in the current version of the protocol.

```
typedef struct _LSA_FOREST_TRUST_BINARY_DATA {
   [range(0,131072)] unsigned long Length;
   [size is(Length)] unsigned char* Buffer;
} LSA_FOREST_TRUST_BINARY_DATA,
   *PLSA_FOREST_TRUST_BINARY_DATA;
```

Length: The count of bytes in **Buffer**.<a><31>

Buffer: The trust record. If the Length field has a value other than 0, this field MUST NOT be NULL.

2.2.7.24 LSA_FOREST_TRUST_DOMAIN_INFO

The LSA_FOREST_TRUST_DOMAIN_INFO structure is used to communicate a forest trust record corresponding to the LSA_FOREST_TRUST_DOMAIN_INFO value of ForestTrustDomainInfo.

```
typedef struct LSA_FOREST_TRUST_DOMAIN_INFO {
   PRPC_SID Sid;
   LSA_UNICODE_STRING DnsName;
   LSA_UNICODE_STRING NetbiosName;
} LSA_FOREST_TRUST_DOMAIN_INFO,
   *PLSA_FOREST_TRUST_DOMAIN_INFO;
```

Sid: Domain SID for the trusted domain.

DnsName: The DNS name of the trusted domain.

NetbiosName: The NetBIOS name of the trusted domain, as specified in [RFC1088].

2.2.7.25 LSA_FOREST_TRUST_INFORMATION

The LSA_FOREST_TRUST_INFORMATION structure is a collection of LSA_FOREST_TRUST_RECORD (section 2.2.7.21) structures.

```
typedef struct _LSA_FOREST_TRUST_INFORMATION {
   [range(0,4000)] unsigned long RecordCount;
   [size_is(RecordCount)] PLSA_FOREST_TRUST_RECORD* Entries;
} LSA_FOREST_TRUST_INFORMATION,
*PLSA_FOREST_TRUST_INFORMATION;
```

RecordCount: A count of elements in the Entries array. <32>

Entries: An array of LSA_FOREST_TRUST_RECORD structures. If the **RecordCount** field has a value other than 0, this field MUST NOT be NULL.

2.2.7.26 LSA_FOREST_TRUST_COLLISION_RECORD_TYPE

The LSA_FOREST_TRUST_COLLISION_RECORD_TYPE type specifies the type of a collision record in the message.

```
typedef enum _LSA_FOREST_TRUST_COLLISION_RECORD_TYPE
{
   CollisionTdo = 0,
   CollisionXref,
   CollisionOther
} LSA FOREST TRUST COLLISION RECORD TYPE;
```

CollisionTdo: A forest trust record that a caller attempted to set on a trusted domain object has suffered a collision with another trusted domain object in Active Directory, as specified in [MS-ADTS], section 6.1.6.

CollisionXref: A forest trust record that a caller attempted to set on a trusted domain object has suffered a collision with a cross-reference object belonging to the forest to which the server belongs, as specified in [MS-ADTS], section 6.1.6.

CollisionOther: A forest trust record that a caller attempted to set on a trusted domain object has suffered a collision for an unknown reason.

2.2.7.27 LSA_FOREST_TRUST_COLLISION_RECORD

The LSA_FOREST_TRUST_COLLISION_RECORD structure is used to communicate forest trust collision information. For more information about trusted domain objects, see [MS-ADTS] section 6.1.6.

```
typedef struct _LSA_FOREST_TRUST_COLLISION_RECORD {
  unsigned long Index;
  LSA FOREST TRUST COLLISION RECORD TYPE Type;
  unsigned long Flags;
  LSA UNICODE STRING Name;
} LSA_FOREST_TRUST_COLLISION_RECORD,
  *PLSA_FOREST_TRUST_COLLISION_RECORD;
```

Index: An ordinal number of a forest trust record in the **forest trust information** supplied by the caller that suffered a collision. For rules about collisions, see sections 3.1.4.7.16 and 3.1.4.7.16.1.

Type: The type of collision record, as specified in section 2.2.7.26.

Flags: A set of bits specifying the nature of the collision. These flags and the rules for generating them are specified in sections 3.1.4.7.16 and 3.1.4.7.16.1.

Name: The name of the existing entity (a top-level name entry, a domain information entry, or a top-level name exclusion entry) that caused the collision.

2.2.7.28 LSA_FOREST_TRUST_COLLISION_INFORMATION

The LSA_FOREST_TRUST_COLLISION_INFORMATION structure is used to communicate a set of LSA_FOREST_TRUST_COLLISION_RECORD structures.

```
typedef struct _LSA_FOREST_TRUST_COLLISION_INFORMATION {
  unsigned long RecordCount;
  [size_is(RecordCount)] PLSA_FOREST_TRUST_COLLISION_RECORD* Entries;
} LSA FOREST TRUST COLLISION INFORMATION,
  *PLSA FOREST TRUST COLLISION INFORMATION;
```

RecordCount: The count of elements in the Entries array.

Entries: An array of LSA_FOREST_TRUST_COLLISION_RECORD (section 2.2.7.27) structures. If the **RecordCount** field has a value other than zero, this field MUST NOT be NULL.

2.2.8 Privilege Data Types

2.2.8.1 LSAPR_POLICY_PRIVILEGE_DEF

The LSAPR_POLICY_PRIVILEGE_DEF structure specifies a privilege definition, which consists of a pairing of a human-readable name with a locally unique identifier (LUID).

```
typedef struct _LSAPR_POLICY_PRIVILEGE_DEF {
   RPC_UNICODE_STRING Name;
   LUID LocalValue;
} LSAPR POLICY PRIVILEGE DEF,
   *PLSAPR POLICY PRIVILEGE DEF;
```

Name: An RPC_UNICODE_STRING that contains the privilege name.

LocalValue: This field contains the LUID value assigned locally for efficient representation of the privilege. This value is meaningful only on the system where it was assigned.

2.2.8.2 LSAPR_PRIVILEGE_ENUM_BUFFER

The LSAPR_PRIVILEGE_ENUM_BUFFER structure specifies a collection of privilege definitions of type LSAPR_POLICY_PRIVILEGE_DEF.

```
typedef struct _LSAPR_PRIVILEGE_ENUM_BUFFER {
  unsigned long Entries;
  [size_is(Entries)] PLSAPR_POLICY_PRIVILEGE_DEF Privileges;
} LSAPR_PRIVILEGE_ENUM_BUFFER,
  *PLSAPR_PRIVILEGE_ENUM_BUFFER;
```

Entries: This field contains the number of privileges in the structure.

Privileges: This field contains a set of structures that define the privileges, as specified in section 2.2.8.1. If the **Entries** field has a value other than 0, this field MUST NOT be NULL.

2.3 Directory Service Schema Elements

This protocol is part of the Active Directory core family of protocols. In order to be fully compliant with Active Directory, an implementation of this protocol must be used in conjunction with the full Active Directory schema, containing all the schema attributes and classes specified in [MS-ADA1], [MS-ADA2], [MS-ADA3], and [MS-ADSC].

3 Protocol Details

The client side of this protocol is a pass-through; that is, the client side requires no additional timers or other state. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

3.1 Server Details

The Local Security Authority (Domain Policy) Remote Protocol server handles client requests for any of the messages described in section 3.1.4, and operates on the security policy settings stored on the server. For each message, the behavior of the server while processing messages is described in section 3.1.4.

3.1.1 Abstract Data Model

The Local Security Authority (Domain Policy) Remote Protocol defines an abstract data model that contains information about three types of objects: account objects, secret objects, and trusted domain objects. In addition, this abstract data model contains the policy object that holds miscellaneous policy settings that are unrelated to any of these three types of objects, but apply to the operation of the host of the server implementation of the protocol. Each object contains a few fields; operations on these fields MUST satisfy the **ACID** properties [GRAY]. Thus, if fields are defined by structures, it is expected that the entire structure be operated on as a unit.

This data model MUST consist of variables whose values are maintained across system restarts and RPC method invocations and that store those values for retrieval and update, unless otherwise specified.

Note The abstract notation (Public) indicates that this Abstract Data Model element can be directly accessed from outside this protocol, for the purpose of documentary convenience. Such direct access MUST NOT be construed as a relaxation of the security constraints specified within this document; rather, the same authorization decisions that are applied when clients access such data elements using protocol primitives MUST also be applied during direct access of the elements. See section 3.1.1.10 for more details.

3.1.1.1 Policy Object Data Model

The policy object contains miscellaneous policy settings. There is one object of this type on the server. This object cannot be deleted, and a new object of this type cannot be created. Its fields, however, can be changed when they adhere to the rules in the specification. The data model is presented here as a collection of structures defined in section 2.2 to ensure that syntax and other consistency rules are met in the data model.<33>

Name	Туре
Auditing Log Information	POLICY_AUDIT_LOG_INFO
Audit Full Information	POLICY_AUDIT_FULL_QUERY_INFO
Event Auditing Options	LSAPR_POLICY_AUDIT_EVENTS_INFO
Primary Domain Information	LSAPR_POLICY_PRIMARY_DOM_INFO
DNS Domain Information (Public)<34>	LSAPR_POLICY_DNS_DOMAIN_INFO
Account Domain Information	LSAPR_POLICY_ACCOUNT_DOM_INFO

Name	Туре
Server Role Information	POLICY_LSA_SERVER_ROLE_INFO
Replica Source Information	LSAPR_POLICY_REPLICA_SRCE_INFO
* Kerberos Policy Information<35>	POLICY_DOMAIN_KERBEROS_TICKET_INFO
Encrypting File System (EFS) Policy Information<36>	LSAPR_POLICY_DOMAIN_EFS_INFO
Quality of Service Information<37>	POLICY_DOMAIN_QUALITY_OF_SERVICE_INFO
Security Descriptor	LSAPR_SR_SECURITY_DESCRIPTOR

^{*} The Kerberos Policy Information abstract data contains the following public ADM elements (whose meaning is described in section 2.2.4.19):

- **AuthenticationOptions** (Public): Optional flags that affect validations.
- MaxServiceTicketAge (Public): The maximum ticket lifetime for a service ticket.
- MaxTicketAge (Public): The maximum ticket lifetime for a ticket-granting ticket.
- MaxRenewAge (Public): The maximum renewable lifetime.
- MaxClockSkew (Public): The acceptable clock skew.
- Reserved: Reserved for future use.

The server MUST notify the Kerberos protocol [MS-KILE] when any field of the Kerberos Policy Information ADM element is changed; see section 3.1.4.4.8 for more details.

The following element also pertains to the Policy Object data model:

• **ComputerNetBIOSName**: This ADM element represents the NetBIOS name of the computer. It is shared with the **ComputerName.NetBIOS** element from [MS-WKST] section 3.2.1.2.

Auditing Log Information is constant information about the state of the auditing system. The server MUST store the following constant information.

- MaximumLogSize = 8192 for non-domain controllers (DCs)
- MaximumLogSize = 20480 for domain controllers
- AuditLogPercentFull = 0
- AuditRetentionPeriod = 8533315
- AuditLogFullShutdownInProgress = FALSE
- TimeToShutdown = 288342
- NextAuditRecordId = 0

Account Domain Information stores information about the local account domain of the machine. Note that Primary Domain Information is returned to clients who issue <u>LsarQueryInformationPolicy2</u> messages (section 3.1.4.4.3) with PolicyAccountDomainInformation to a domain controller.

For domain-joined machines, Primary Domain Information and DNS Domain Information store information about the domain to which the machine is joined. If the machine is not joined to a domain, these abstract data elements store information about the workgroup the machine is in.

The value of the Server Role Information ADM element is determined by the following series of calls to the local SAM Remote Protocol implementation:

- 1. Invoke **SamrConnect** ([MS-SAMR] section 3.1.5.1.4), specifying SAM_SERVER_CONNECT for the *DesiredAccess* parameter.
- 2. Invoke **SamrLookupDomainInSamServer** ([MS-SAMR] section 3.1.5.11.1), specifying the **Name** field of the Primary Domain Information ADM element for the *Name* parameter
- 3. Invoke **SamrOpenDomain** ([MS-SAMR] section 3.1.5.1.5), specifying the *ServerHandle* that was obtained in step 1, DOMAIN_ALL_ACCESS for the *DesiredAccess* parameter, and the *DomainId* that was obtained in step 2.
- 4. Invoke **SamrQueryInformationDomain2** ([MS-SAMR] section 3.1.5.5.1), specifying the *DomainHandle* that was obtained in step 3, and DomainServerRoleInformation for the *DomainInformationClass* parameter.
- 5. The value obtained in step 4 is then used for the Server Role Information ADM element. If DomainServerRolePrimary is returned, then PolicyServerRolePrimary is used; if DomainServerRoleBackup is returned, PolicyServerRoleBackup is used.
- 6. Call SamrCloseHandle ([MS-SAMR] section 3.1.5.13.1) on the handle from step 3.
- 7. Call **SamrCloseHandle** on the handle from step 1.

Replica Source Information and Encrypting File System (EFS) Policy Information are obsolete abstract data in this version of the protocol. However, an implementation SHOULD support this data for compatibility with previous versions of this protocol.

Audit Full Information and Quality of Service Information are obsolete abstract data in this version of the protocol. An implementation SHOULD choose not to implement this abstract data model.

A security descriptor is used during handle open for access check. The content of this security descriptor is implementation-specific, but a server MUST assign a default security descriptor. <38>

If the responder for this protocol is a domain controller, the values of the implementation-specific instantiation of Event Auditing Options and Kerberos Policy Information abstract data MUST converge between the domain controllers in the same domain. <39> There is no requirement on the length of time to reach convergence.

3.1.1.2 Accounts Rights Data Model

Account Rights is composed of two submodels, Privilege and System Access Rights. When used with account objects, they can be used separately in messages, as in <u>LsarEnumeratePrivileges</u> and <u>LsarGetSystemAccessAccount</u>, or together, as in <u>LsarAddAccountRights</u>. The **Name** fields in the following data models are used to identify the privilege or system access right uniquely.

3.1.1.2.1 Privilege Data Model

The server MUST maintain a list of privileges that it recognizes. A privilege is defined by a language-independent human-readable name, a locally unique identifier (LUID), and a language-dependent description of the privilege. Two different privileges MUST have different names as well as different LUIDs. The list of privileges known by the server SHOULD NOT change unless a major event, such as an operating system upgrade, takes place. The set of names identifying privileges and their LUIDs MUST be the same across all servers running the same revision of the operating system.

Name	Туре
Name	RPC_UNICODE_STRING

Name	Туре
Locally Unique Identifier	LUID
Privilege descriptions in different languages	An array of RPC_UNICODE_STRINGs

The Name and Locally Unique Identifier pair are communicated by the Local Security Authority (Domain Policy) Remote Protocol via the <u>LSAPR PRIVILEGE ENUM BUFFER</u> structure.

Privilege Description is communicated by the Local Security Authority (Domain Policy) Remote Protocol via the <u>LsarLookupPrivilegeDisplayName</u> method.

The data model in this version of the protocol defines the privileges described in the table below. The descriptions that are provided are in English. $\leq 40 >$

Name	LUID	Privilege description
SE_ASSIGNPRIMARYTOKEN_NAME "SeAssignPrimaryTokenPrivilege"	{0,3}	Replace a process-level token.
SE_AUDIT_NAME "SeAuditPrivilege"	{0,21}	Generate security audits.
SE_BACKUP_NAME "SeBackupPrivilege"	{0,17}	Back up files and directories.
SE_CHANGE_NOTIFY_NAME "SeChangeNotifyPrivilege"	{0,23}	Bypass traverse checking.
SE_CREATE_GLOBAL_NAME "SeCreateGlobalPrivilege"	{0,30}	Create global objects.
SE_CREATE_PAGEFILE_NAME "SeCreatePagefilePrivilege"	{0,15}	Create a page file.
SE_CREATE_PERMANENT_NAME "SeCreatePermanentPrivilege"	{0,16}	Create permanent shared objects.
SE_CREATE_TOKEN_NAME "SeCreateTokenPrivilege"	{0,2}	Create a token object.
SE_DEBUG_NAME "SeDebugPrivilege"	{0,20}	Debug programs.
SE_ENABLE_DELEGATION_NAME "SeEnableDelegationPrivilege"	{0,27}	Enable computer and user accounts to be trusted for delegation.
SE_IMPERSONATE_NAME "SeImpersonatePrivilege"	{0,29}	Impersonate a client after authentication.
SE_INC_BASE_PRIORITY_NAME "SeIncreaseBasePriorityPrivilege"	{0,14}	Increase scheduling priority.
SE_INCREASE_QUOTA_NAME "SeIncreaseQuotaPrivilege"	{0,5}	Adjust memory quotas for a process.
SE_LOAD_DRIVER_NAME "SeLoadDriverPrivilege"	{0,10}	Load and unload device drivers.

Name	LUID	Privilege description
SE_LOCK_MEMORY_NAME "SeLockMemoryPrivilege"	{0,4}	Lock pages in memory.
SE_MACHINE_ACCOUNT_NAME "SeMachineAccountPrivilege"	{0,6}	Add workstations to domain.
SE_MANAGE_VOLUME_NAME "SeManageVolumePrivilege"	{0,28}	Manage the files on a volume.
SE_PROF_SINGLE_PROCESS_NAME "SeProfileSingleProcessPrivilege"	{0,13}	Profile single process.
SE_REMOTE_SHUTDOWN_NAME "SeRemoteShutdownPrivilege"	{0,24}	Force shutdown from a remote system.
SE_RESTORE_NAME "SeRestorePrivilege"	{0,18}	Restore files and directories.
SE_SECURITY_NAME "SeSecurityPrivilege"	{0,8}	Manage auditing and security log.
SE_SHUTDOWN_NAME "SeShutdownPrivilege"	{0,19}	Shut down the system.
SE_SYNC_AGENT_NAME "SeSyncAgentPrivilege"	{0,26}	Synchronize directory service data.
SE_SYSTEM_ENVIRONMENT_NAME "SeSystemEnvironment"	{0,22}	Modify firmware environment values.
SE_SYSTEM_PROFILE_NAME "SeSystemProfilePrivilege"	{0,11}	Profile system performance.
SE_SYSTEMTIME_NAME "SeSystemtimePrivilege"	{0,12}	Change system time.
SE_TAKE_OWNERSHIP_NAME "SeTakeOwnershipPrivilege"	{0,9}	Take ownership of files or other objects.
SE_TCB_NAME "SeTcbPrivilege"	{0,7}	Act as part of the operating system.
SE_UNDOCK_NAME "SeUndockPrivilege"	{0,25}	Remove computer from docking station.
SE_CREATE_SYMBOLIC_LINK_NAME "SeCreateSymbolicLinkPrivilege"	{0,35}	Create symbolic links.
SE_INC_WORKING_SET_NAME "SeIncreaseWorkingSetPrivilege"	{0,33}	Increase a process working set.
SE_RELABEL_NAME "SeRelabelPrivilege"	{0,32}	Modify an object label.
SE_TIME_ZONE_NAME "SeTimeZonePrivilege"	{0,34}	Change time zone.

Name	LUID	Privilege description
SE_TRUSTED_CREDMAN_ACCESS_NAME "SeTrustedCredManAccessPrivilege"	{0,31}	Access Credential Manager as a trusted caller.

3.1.1.2.2 System Access Rights Data Model

The server MUST maintain a list of system access rights that it recognizes. A system access right is identified by a bit flag and a name. The name is a human-readable form of a system access right. The flag is a representation of the same system access right for data representation.

Fields:

- Name
- Flag

Two different system accesses MUST have different names and different bit flags.

The list of system access rights that MUST be supported are specified in section 2.2.1.2.<41>

The following table contains the string name that is associated with each system access right. The string name is used in methods that associate a system access with a particular account and that also specify the system access not by a POLICY_SYSTEM_ACCESS_MODE, but by the string specified in this table.

Name	Flag
SeInteractiveLogonRight	POLICY_MODE_INTERACTIVE 0x00000001
SeNetworkLogonRight	POLICY_MODE_NETWORK 0x00000002
SeBatchLogonRight	POLICY_MODE_BATCH 0x00000004
SeServiceLogonRight	POLICY_MODE_SERVICE 0x00000010
SeDenyInteractiveLogonRight	POLICY_MODE_DENY_INTERACTIVE 0x00000040
SeDenyNetworkLogonRight	POLICY_MODE_DENY_NETWORK 0x00000080
SeDenyBatchLogonRight	POLICY_MODE_DENY_BATCH 0x00000100
SeDenyServiceLogonRight	POLICY_MODE_DENY_SERVICE 0x00000200
SeRemoteInteractiveLogonRight	POLICY_MODE_REMOTE_INTERACTIVE 0x00000400
SeDenyRemoteInteractiveLogonRight	POLICY_MODE_DENY_REMOTE_INTERACTIVE 0x00000800

3.1.1.3 Account Object Data Model

Inside the Local Security Authority (Domain Policy) Remote Protocol database, the account object MUST be represented by four pieces of data as follows.

Name	Туре
Security Identifier (Public)	RPC_SID
Security Descriptor	LSAPR_SR_SECURITY_DESCRIPTOR
Privileges (Public)	LSAPR_PRIVILEGE_SET
System Access Rights	unsigned int with combination of POLICY_SYSTEM_ACCESS_MODE flags

The **Security Identifier** field identifies the account object and MUST be present. Two different account objects MUST NOT have the same security identifier (SID). The **Security Identifier** field MUST be read-only. Any valid SID can be used to identify an account object.

The **Security Descriptor** field controls access to the account object. Every account object in the Local Security Authority (Domain Policy) Remote Protocol database MUST have a valid security descriptor. The security descriptor can be queried by calling the <u>LsarQuerySecurityObject</u> method and changed by calling the <u>LsarSetSecurityObject</u> method. The server MUST assign a default security descriptor to every newly created account object, even if the client did not specify a default value.<42>

The **Privileges** field is a potentially empty set of "global" rights granted to the account by the server. Every "right" in the set is a pair of a LUIDs and a bitmask of attributes. The right can be controlled by calling the <u>LsarAddAccountRights</u>, <u>LsarAddPrivilegesToAccount</u>, <u>LsarRemoveAccountRights</u>, and <u>LsarRemovePrivilegesFromAccount</u> methods. Because there are no "negative" rights, the order of rights in the set is not relevant and the server MUST NOT associate any special semantics with the order of rights.

The **System Access Rights** field is a bitmask of flags indicating the system access of the account.

This field can be set to 0.

If the responder for this protocol is a domain controller, the values of the implementation-specific instantiation of this abstract data model MUST converge between the domain controller in the same domain.<43> There is no requirement on the length of time to reach convergence.

3.1.1.4 Secret Object Data Model

Inside the Local Security Authority (Domain Policy) Remote Protocol database, a secret object is represented by the following pieces of data.

Name	Туре	Attribute name
Name	RPC_UNICODE_STRING	IdapDisplayName ([MS-ADA1] section 2.356)
Security Descriptor	LSAPR_SR_SECURITY_DESCRIPTOR	securityIdentifier ([MS-ADA3] section 2.237)
Old Set Time	LARGE_INTEGER	priorSetTime ([MS-ADA3] section 2.159)
Old Value	binary data	priorValue ([MS-ADA3] section 2.160)
New Set Time	LARGE_INTEGER	lastSetTime ([MS-ADA1] section 2.353)

Name	Туре	Attribute name
New Value	binary data	currentValue ([MS-ADA1] section 2.139)

The **Name** field uniquely identifies the secret by using a Unicode string. Two different secrets MUST have different names (the comparison is case-sensitive). The **Name** field MUST be read-only. To be considered valid, the length of the name in bytes MUST be even; it MUST be greater than 0 and less than 0x101. The secret name MUST NOT contain the "\" character. Special values of the **Name** field indicate secret types. The different secret types are as follows:

- Global
- Local
- Trusted Domain
- System

The following rules govern secret type assignments.

The term "starts with" literally means "must have a nonzero number of characters following the prefix". Names consisting of only a reserved prefix are invalid.

The following table indicates the secret name pattern and the associated secret type.

Secret name or name pattern	Type of secret
Starts with "G\$\$"	Trusted domain
Starts with "G\$"	Global
Starts with "L\$"	Local
Starts with "M\$"	System
Starts with "_sc_"	System
Starts with "NL\$"	System
Starts with "RasDialParams"	Local
Starts with "RasCredentials"	Local
Equal to "\$MACHINE.ACC"	System
Equal to "SAC"	Local
Equal to "SAI"	Local
Equal to "SANSC"	Local

The type of a secret defines the access and availability boundary for a given secret object.

System Secret: Cannot be accessed by any clients.

Local Secret: Can be accessed only by a client that is on the same machine as the server.

Global Secret: Replicates between domain controllers in the same domain, allowing each domain controller to be able to respond to secret requests of this type.

Trusted Domain Secret: Used with trusted domain objects to store trust passwords. Trusted domain secrets also replicate between domain controllers in the same domain. <44>

The security descriptor field controls access to the secret object. Every secret object in the Local Security Authority (Domain Policy) Remote Protocol database that has Local Secret type MUST have a valid security descriptor. The security descriptor of Local Secret objects can be queried by calling the LsarQuerySecurityObject (section 3.1.4.9.1) method and changed by calling the LsarSetSecurityObject (section 3.1.4.9.2) method. The server MUST assign a default security descriptor to every newly created secret object, even if the client did not specify a default value. 45>

The value of a secret is a byte BLOB. Depending on the caller's choices, the server stores 0, 1, or 2 values for the secret, the 2 values being "current" and "previous" and 1 value being either "current" or "previous". Both versions of the secret's value are accompanied by a 64-bit time stamp in Coordinated Universal Time (UTC), sometimes referred to as Greenwich Mean Time, in units of 100 nanoseconds since January 1, 1601.

3.1.1.5 Trusted Domain Object Data Model

An implementer must read [MS-ADTS] section 6.1.6 to understand the role of trusts in Active Directory and to understand the data model in this specification.

Inside the Local Security Authority (Domain Policy) Remote Protocol database, a trusted domain object (TDO) is represented by the following table. Each abstract data field listed in the Name column of the table contains a link to the appropriate section in [MS-ADTS] section 6.1.6.7. See these sections for detailed information, including how each abstract data field is mapped to an Active Directory attribute. The Type column lists the data type for its corresponding abstract data field. The Attribute Name column lists the IdapDisplayName and a link to the appropriate section in [MS-ADA1], [MS-ADA2], or [MS-ADA3] for the corresponding abstract data field stored in Active Directory.

Name	Туре	Attribute name
Name ([MS-ADTS] section 6.1.6.7.13)	RPC_UNICODE_STRING	trustPartner ([MS-ADA3] section 2.325)
Flat Name ([MS-ADTS] section 6.1.6.7.1)	RPC_UNICODE_STRING	flatName ([MS-ADA1] section 2.232)
Security Identifier ([MS-ADTS] section 6.1.6.7.8)	RPC_SID	securityIdentifier ([MS-ADA3] section 2.237)
Trust Type ([MS-ADTS] section 6.1.6.7.15)	unsigned int (as specified in section 2.2.7.9 TrustType)	trustType ([MS-ADA3] section 2.327)
Trust Direction ([MS-ADTS] section 6.1.6.7.12)	unsigned int (as specified in section 2.2.7.9 TrustDirection)	trustDirection ([MS-ADA3] section 2.323)
Trust Attributes ([MS-ADTS] section 6.1.6.7.9)	unsigned int (as specified in section 2.2.7.9 TrustAttributes)	trustAttributes ([MS-ADA3] section 2.320)
Posix Offset ([MS-ADTS] section 6.1.6.7.14)	TRUSTED POSIX OFFSET INFO	trustPosixOffset ([MS-ADA3] section 2.326)
Trust Incoming Passwords ([MS- ADTS] section 6.1.6.7.10)	Array of LSAPR AUTH INFORMATION	trustAuthIncoming ([MS-ADA3] section 2.321)
Trust Outgoing Passwords ([MS-	Array of LSAPR_AUTH_INFORMATION	trustAuthOutgoing ([MS-ADA3]

Name	Туре	Attribute name
ADTS] section 6.1.6.7.11)		section 2.322)
Supported Encryption Types ([MS-ADTS] section 6.1.6.7.3)	TRUSTED DOMAIN SUPPORTED ENCRYPTION TYPES	msDS- SupportedEncryptionTypes ([MS-ADA2] section 2.458)
Forest Trust Information ([MS-ADTS] section 6.1.6.7.4)	LSA FOREST TRUST INFORMATION	msDS-TrustForestTrustInfo ([MS-ADA2] section 2.470)
Security Descriptor ([MS-ADTS] section 6.1.6.7.5)	LSAPR SR SECURITY DESCRIPTOR	nTSecurityDescriptor ([MS-ADA3] section 2.37)

The following citation contains a timeline of when each information value was introduced. <46>

3.1.1.6 Configuration Settings

3.1.1.6.1 Block Anonymous Access to Objects

Name	Туре
LsaRestrictAnonymous	Boolean

The LsaRestrictAnonymous setting is used to restrict the ability of anonymous requestors to query or modify security-sensitive data. <47> See sections 3.1.4.4.1, 3.1.4.5.1, 3.1.4.5.2, 3.1.4.5.2, 3.1.4.5.3, 3.1.4.5.10, 3.1.4.5.12, 3.1.4.6.1, 3.1.4.6.1, and 3.1.4.6.1 for information on how message processing is affected with this setting. The server message-processing behavior MUST always reflect the current value of this setting.

This setting MUST be persisted across protocol and system restarts.

3.1.1.7 LsaContextHandle Data Model

This protocol is based largely on the use of RPC context handles to maintain session state between the client and the server. The basic context-handle programming model is described in [C706] section 6.1.6. Also see sections 3.2.3.1.9 and 3.3.1.4.1 in [MS-RPCE].

The server MUST maintain the following data elements for each context handle that is returned to a client.

Name	Туре	
GrantedAccess	ACCESS_MASK	
HandleType	HandleType MUST be one of the following:	
	■ Policy	
	■ Account	
	■ Secret	
	Trusted Domain	

Name	Туре
Object	A reference to an object in the database that has the type specified in HandleType.

3.1.1.8 Attribute Listing

The following attributes are referenced by this protocol (listed by IdapDisplayName). For a normative description of the syntax, see [MS-ADA1], [MS-ADA2], and [MS-ADA3].

- currentValue
- flatName
- lastSetTime
- IdapDisplayName
- msDS-AllUsersTrustQuota
- msDS-PerUserTrustQuota
- msDS-PerUserTrustTombstonesQuota
- msDS-SupportedEncryptionTypes
- msDS-TrustForestTrustInfo
- priorSetTime
- priorValue
- securityIdentifier
- trustAuthIncoming
- trustAuthOutgoing
- trustDirection
- trustPartner
- trustPosixOffset
- trustType
- unicodePwd

3.1.1.9 Object Class Listing

The following classes are referenced by this protocol (listed by IdapDisplayName). For a normative description of these classes, see [MS-ADSC].

- secret
- trustedDomain

3.1.1.10 Access for Public Abstract Data Model Elements

As described in section 3.1.1, direct access (query or set) of data elements tagged as "(Public)" MUST use the same authorization policies, enforced as if the elements were being accessed via the RPC-based protocol methods in this document. The calling patterns described in section 1.3 provide an overview for understanding the basic flow of the query and set patterns. Section 3.1.1.10.1 provides detailed examples for the Policy Object Data Model (section 3.1.1.1); the other object types use similar patterns.

The following table describes the level of access that MUST be enforced during direct access of the described public ADM elements.

Object type	DesiredAccess required for Query pattern	DesiredAccess required for Set pattern
Policy (section 3.1.1.1)	POLICY_VIEW_AUDIT_INFORMATION POLICY_GET_PRIVATE_INFORMATION POLICY_VIEW_LOCAL_INFORMATION READ_CONTROL	POLICY_TRUST_ADMIN POLICY_CREATE_ACCOUNT POLICY_CREATE_SECRET POLICY_CREATE_PRIVILEGE POLICY_SET_DEFAULT_QUOTA_LIMITS POLICY_SET_AUDIT_REQUIREMENTS POLICY_AUDIT_LOG_ADMIN POLICY_SERVER_ADMIN READ_CONTROL
Account (section 3.1.1.3)	ACCOUNT_VIEW READ_CONTROL	ACCOUNT_ADJUST_PRIVILEGES ACCOUNT_ADJUST_QUOTAS ACCOUNT_ADJUST_SYSTEM_ACCESS READ_CONTROL
Secret (section 3.1.1.4)	SECRET_QUERY_VALUE READ_CONTROL	SECRET_SET_VALUE READ_CONTROL
TrustedDomain (section 3.1.1.5)	TRUSTED_QUERY_DOMAIN_NAME READ_CONTROL	TRUSTED_SET_CONTROLLERS TRUSTED_SET_POSIX READ_CONTROL

3.1.1.10.1 Example Patterns for Direct Access of Policy Object ADM Elements

3.1.1.10.1.1 Query Pattern for Policy Object ADM

Direct querying of any of the (Public) ADM elements listed in section 3.1.1 MUST be performed as follows:

- 1. The client MUST invoke <u>LsarOpenPolicy2</u> (<u>section 3.1.4.4.1</u>), specifying NULL for the *SystemName* parameter and POLICY_VIEW_AUDIT_INFORMATION | POLICY_VIEW_LOCAL_INFORMATION | POLICY_GET_PRIVATE_INFORMATION | READ_CONTROL for the *DesiredAccess* parameter.
- 2. The client MUST invoke <u>LsarQueryInformationPolicy2</u> (section 3.1.4.4.3), specifying the policy handle obtained in step 1 for the *PolicyHandle* parameter and PolicyDnsDomainInformation for the *InformationClass* parameter.
- 3. The client MUST invoke <u>LsarClose (section 3.1.4.9.4)</u>, specifying the policy handle obtained in step 1 for the *ObjectHandle* parameter.
- The ADM elements of interest are then read from the LSAPR_POLICY_INFORMATION.PolicyDnsDomainInfo structure (section <u>2.2.4.14</u>) that was returned in step 2.

3.1.1.10.1.2 Set Pattern for Policy Object ADM

Direct setting of any of the (Public) ADM elements listed in section 3.1.1 MUST be performed as follows:

- The client MUST invoke <u>LsarOpenPolicy2</u> (section 3.1.4.4.1), specifying NULL for the *SystemName* parameter and POLICY_TRUST_ADMIN | POLICY_CREATE_ACCOUNT | POLICY_CREATE_SECRET | POLICY_CREATE_PRIVILEGE | POLICY_SET_DEFAULT_QUOTA_LIMITS | POLICY_SET_AUDIT_REQUIREMENTS | POLICY_AUDIT_LOG_ADMIN | POLICY_SERVER_ADMIN | READ_CONTROL for the *DesiredAccess* parameter.
- 2. The client MUST invoke <u>LsarQueryInformationPolicy2</u> (section 3.1.4.4.3), specifying the policy handle obtained in step 1 for the *PolicyHandle* parameter and PolicyDnsDomainInformation for the *InformationClass* parameter.
- 3. The client MUST set the ADM elements of interest in the **LSAPR_POLICY_INFORMATION.PolicyDnsDomainInfo** structure (section <u>2.2.4.14</u>) that was returned in step 2 to the desired new values, leaving the remaining elements unmodified.
- 4. The client MUST invoke <u>LsarSetInformationPolicy2</u> (section 3.1.4.4.5), specifying the policy handle obtained in step 1 for the *PolicyHandle* parameter.
- 5. The client MUST invoke <u>LsarClose (section 3.1.4.9.4)</u>, specifying the policy handle obtained in step 1 for the *ObjectHandle* parameter.

3.1.2 Timers

No protocol timers are required other than those internal ones used in RPC to implement resiliency to network outages, as specified in [MS-RPCE].

3.1.3 Initialization

The server MUST start listening on the well-known named pipe for the RPC interface, as specified in section 2.1.

The **ComputerNetBIOSName** element (specified in section 3.1.1.1) MUST be copied into the **DomainName** field in Account Domain Information (also specified in section 3.1.1.1).

3.1.4 Message Processing Events and Sequencing Rules

This section contains detailed information about each protocol message and the steps taken by the server to process caller requests. <48><49><50>

Methods in RPC Opnum Order

Method	Description	
LsarClose	This method closes an open handle. Opnum: 0	
Opnum1NotUsedOnWire	Opnum: 1	
<u>LsarEnumeratePrivileges</u>	This method is invoked to enumerate all privileges known to the system. Opnum: 2	
<u>LsarQuerySecurityObject</u>	This method is invoked to query security information that is assigned to a database object. It returns the security descriptor of the object. Opnum: 3	

Method	Description
<u>LsarSetSecurityObject</u>	This method is invoked to set a security descriptor on an object. Opnum: 4
Opnum5NotUsedOnWire	Opnum: 5
<u>LsarOpenPolicy</u>	This method is exactly the same as LsarOpenPolicy2 , except that the SystemName parameter in this function, because of its syntactic definition, contains only one character instead of a full string. Opnum: 6
LsarQueryInformationPolicy	This method is invoked to query values representing the server's information policy. Opnum: 7
LsarSetInformationPolicy	This method is invoked to set some policy on the server. Opnum: 8
Opnum9NotUsedOnWire	Opnum: 9
LsarCreateAccount	This method is invoked to create a new account object in the server's database. Opnum: 10
LsarEnumerateAccounts	This method is invoked to request a list of account objects in the server's database. Opnum: 11
<u>LsarCreateTrustedDomain</u>	This method is invoked to create an object of type trusted domain in the server's database. Opnum: 12
LsarEnumerateTrustedDomains	This method is invoked to request a list of TDOs in the server's database. Opnum: 13
Lsar_LSA_TM_14	Opnum: 14
Lsar_LSA_TM_15	Opnum: 15
LsarCreateSecret	This method is invoked to create a new secret object in the server's database. Opnum: 16
LsarOpenAccount	This method is invoked to obtain a handle to an account object. Opnum: 17
<u>LsarEnumeratePrivilegesAccount</u>	This method is invoked to retrieve a list of privileges granted to an account on the server. Opnum: 18
LsarAddPrivilegesToAccount	This method is invoked to add new privileges to an existing account object. Opnum: 19
LsarRemovePrivilegesFromAccount	This method is invoked to remove privileges from an account object. Opnum: 20
Opnum21NotUsedOnWire	Opnum: 21

Method	Description
Opnum22NotUsedOnWire	Opnum: 22
LsarGetSystemAccessAccount	This method is invoked to retrieve system access account flags for an account object. Opnum: 23
LsarSetSystemAccessAccount	This method is invoked to set system access account flags for an account object. Opnum: 24
<u>LsarOpenTrustedDomain</u>	This method is invoked to obtain a handle to a TDO. Opnum: 25
LsarQueryInfoTrustedDomain	This method is invoked to retrieve information on a TDO. Opnum: 26
LsarSetInformationTrustedDomain	This method is invoked to set information on a TDO. Opnum: 27
LsarOpenSecret	This method is invoked to obtain a handle to an existing secret object. Opnum: 28
<u>LsarSetSecret</u>	This method is invoked to set the current and old values of the secret object. Opnum: 29
<u>LsarQuerySecret</u>	This method is invoked to retrieve the current and old (or previous) value of the secret object. Opnum: 30
LsarLookupPrivilegeValue	This method is invoked to map the name of a privilege into the LUID by which the privilege is known on the server. Opnum: 31
<u>LsarLookupPrivilegeName</u>	This method is invoked to map the LUID of a privilege into the string name by which the privilege is known on the server. Opnum: 32
<u>LsarLookupPrivilegeDisplayName</u>	This method is invoked to map the name of a privilege into a display text string in the caller's language. Opnum: 33
<u>LsarDeleteObject</u>	This method is invoked to delete an open account, secret, or TDO. Opnum: 34
LsarEnumerateAccountsWithUserRight	This method is invoked to return a list of account objects that have the user right equal to the passed-in value. Opnum: 35
<u>LsarEnumerateAccountRights</u>	This method is invoked to retrieve a list of rights that are associated with an existing account. Opnum: 36
<u>LsarAddAccountRights</u>	This method is invoked to add new rights to an account object. Opnum: 37
<u>LsarRemoveAccountRights</u>	This method is invoked to remove rights from an account object. Opnum: 38

Method	Description
<u>LsarQueryTrustedDomainInfo</u>	This method is invoked to retrieve information on a TDO. Opnum: 39
<u>LsarSetTrustedDomainInfo</u>	This method is invoked to set information on a TDO. Opnum: 40
<u>LsarDeleteTrustedDomain</u>	This method is invoked to delete a TDO. Opnum: 41
<u>LsarStorePrivateData</u>	This method is invoked to store a secret value. Opnum: 42
LsarRetrievePrivateData	This method is invoked to retrieve a secret value. Opnum: 43
LsarOpenPolicy2	This method opens a context handle to the RPC server. Opnum: 44
Lsar_LSA_TM_45	Opnum: 45
LsarQueryInformationPolicy2	This method is identical to LsarQueryInformationPolicy. Opnum: 46
<u>LsarSetInformationPolicy2</u>	This method is identical to LsarSetInformationPolicy. Opnum: 47
LsarQueryTrustedDomainInfoByName	This method is invoked to retrieve information on a TDO by its string name. Opnum: 48
<u>LsarSetTrustedDomainInfoByName</u>	This method is invoked to set information on a TDO by its string name. Opnum: 49
<u>LsarEnumerateTrustedDomainsEx</u>	This method is invoked to enumerate TDOs in the server's database. Opnum: 50
<u>LsarCreateTrustedDomainEx</u>	This method is invoked to create a new TDO. Opnum: 51
Opnum52NotUsedOnWire	Opnum: 52
LsarQueryDomainInformationPolicy	This method is invoked to retrieve policy settings pertaining to the current domain. Opnum: 53
LsarSetDomainInformationPolicy	This method is invoked to change policy settings pertaining to the current domain. Opnum: 54
<u>LsarOpenTrustedDomainByName</u>	This method is invoked to open a TDO handle by supplying the name of the trusted domain. Opnum: 55
Opnum56NotUsedOnWire	Opnum: 56
Lsar_LSA_TM_57	Opnum: 57
Lsar_LSA_TM_58	Opnum: 58

Method	Description
<u>LsarCreateTrustedDomainEx2</u>	This method is invoked to create a new TDO. Opnum: 59
Opnum60NotUsedOnWire	Opnum: 60
Opnum61NotUsedOnWire	Opnum: 61
Opnum62NotUsedOnWire	Opnum: 62
Opnum63NotUsedOnWire	Opnum: 63
Opnum64NotUsedOnWire	Opnum: 64
Opnum65NotUsedOnWire	Opnum: 65
Opnum66NotUsedOnWire	Opnum: 66
Opnum67NotUsedOnWire	Opnum: 67
Lsar_LSA_TM_68	Opnum: 68
Opnum69NotUsedOnWire	Opnum: 69
Opnum70NotUsedOnWire	Opnum: 70
Opnum71NotUsedOnWire	Opnum: 71
Opnum72NotUsedOnWire	Opnum: 72
LsarQueryForestTrustInformation	This method is invoked to retrieve information on a trust relationship with another forest. Opnum: 73
LsarSetForestTrustInformation	This method is invoked to establish a trust relationship with another forest by attaching a set of records called the forest trust information to the TDO. Opnum: 74

The following citation contains a timeline of when each method value was introduced. <51>

Note Gaps in the opnum numbering sequence represent opnums of methods that are specified in [MS-LSAT], or opnums that MUST NOT be used over the wire.<52>

Note Exceptions MUST NOT be thrown beyond those thrown by the underlying RPC protocol (as specified in [MS-RPCE]), unless otherwise specified.

The return values of all methods MUST conform to the specification of NTSTATUS, as specified in [MS-ERREF] section 2.3. Specific return values for normative processing conditions are specified in this document in the subsections of this section.

Unless otherwise specified, all negative values returned by an implementation are treated equivalently by the client as a message processing error. Unless otherwise specified, all non-negative values returned by an implementation are treated equivalently by the client as a success (of message processing).

Return values for implementation-specific conditions are left to the implementer's discretion, subject to the constraints specified in [MS-ERREF]. For example, an implementation may re-use an existing value in [MS-ERREF], such as 0xC0000017 (no memory).

All methods in this protocol MUST perform data validation (as specified in section 3.1.4.10) for all parameters that are specified as input parameters. If data validation fails for some reason, processing MUST end, and the server MUST respond back with a failure.

In the following sections, the first general idea behind the common operations is explained in sections 3.1.4.1, 3.1.4.2, and 3.1.4.3. The methods are grouped by functionality: policies, accounts, secrets, trusted domains, privileges, and common object methods. Section 3.1.4.10 explains the data validation rules.

3.1.4.1 Obtaining Handles

The Local Security Authority (Domain Policy) Remote Protocol recognizes four types of handles: Policy, Account, Secret, and Trusted Domain. A handle of each type can be obtained only by calling one of a well-defined set of methods. These handles are listed in the following table.

Handle type	Methods that return this type of handle
Policy	<u>LsarOpenPolicy</u> <u>LsarOpenPolicy2</u>
Account	<u>LsarCreateAccount</u> <u>LsarOpenAccount</u>
Secret	<u>LsarCreateSecret</u> <u>LsarOpenSecret</u>
Trusted Domain	LsarCreateTrustedDomain LsarOpenTrustedDomain LsarCreateTrustedDomainEx LsarOpenTrustedDomainByName LsarCreateTrustedDomainEx2

The server MUST keep track of all handles of each type that every caller opens, from the moment of creation until the handle has been closed (by calling <u>LsarClose</u> or <u>LsarDeleteObject</u>) or until the client disconnects.

Upon receipt of a handle parameter, the server MUST check to see that the handle is one of the valid handles of a type relevant for that operation; if the handle is not valid, the server MUST fail the request by returning STATUS_INVALID_HANDLE.

The RPC protocol provides a mechanism to clean up any resources related to a context handle if a client that is holding the context handle exits, dies, disconnects, or reboots. See section 3.1.6.1 for this protocol's context handle rundown specification.

3.1.4.2 Access Rights and Access Checks

Methods in this protocol perform one or more of the access checks that are specified in the following sections.

Access check (section)	Methods that use it
3.1.4.2.1	LsarOpenPolicy LsarOpenPolicy2 LsarCreateAccount LsarOpenAccount LsarCreateSecret

Access check (section)	Methods that use it
Access and a (Section)	LsarOpenSecret
	LsarCreateTrustedDomain
	LsarOpenTrustedDomain
	LsarCreateTrustedDomainEx
	LsarOpenTrustedDomainByName
	LsarCreateTrustedDomainEx2
3.1.4.2.2	LsarQueryInformationPolicy2
	LsarQueryInformationPolicy
	LsarSetInformationPolicy2
	LsarSetInformationPolicy
	LsarQueryDomainInformationPolicy
	LsarSetDomainInformationPolicy
	LsarCreateAccount
	LsarEnumerateAccounts
	LsarEnmeratePrivilegesAccount
	LsarAddPrivilegesToAccount
	LsarRemovePrivilegesFromAccount
	LsarGetSystemAccessAccount
	LsarSetSystemAccessAcount
	LsarEnumerateAccountsWithUserRight
	LsarEnumerateAccountRights
	LsarAddAccountRights
	_
	LsarRemoveAccountRights
	LsarCreateSecret
	LsarSetSecret
	LsarQuerySecret
	LsarStorePrivateData
	LsarRetrievePrivateData
	LsarQueryTrustedDomainInfo
	LsarDeleteTrustedDomain
	LsarQueryTrustedDomainInfoByName
	LsarEnumerateTrustedDomainsEx
	LsarEnumerateTrustedDomains
	LsarQueryInfoTrustedDomain
	LsarSetInformationTrustedDomain
	LsarEnumeratePrivileges
	LsarLookupPrivilegeValue
	LsarLookupPrivilegeName
	LsarLookupPrivilegeDisplayName
	LsarQuerySecurityObject
	LsarSetSecurityObject
	LsarDeleteObject
3.1.4.2.3	LsarOpenPolicy2
	LsarOpenPolicy
	LsarCreateAccount
	LsarEnumerateAccounts
	LsarOpenAccount
	LSarOpenAccount

Access check (section)	Methods that use it
	LsarEnumerateAccountRights
	LsarRemoveAccountRights
	LsarCreateSecret
	LsarOpenSecret
	LsarRetrievePrivateData

3.1.4.2.1 Access Checks Applied on Handle Open

When opening a handle, the server MUST associate with it a set of ACCESS_MASK bits, as defined in section 2.2.1.1. These access bits control which type of subsequent operations the caller can perform with this handle.

All methods that open handles (as specified in section 3.1.4.1) allow the caller to specify a "desired access" bitmask. The meaning of the bits within this bitmask depends on the type of object. The bits are documented in sections 2.2.1.1.1, 2.2.1.1.2, 2.2.1.1.3, 2.2.1.1.4, and 2.2.1.1.5. All methods that open handles (as specified in section 3.1.4.1) perform an access check based on the desired access mask, whose general form is:

```
IF (method specific check fails) THEN
Return STATUS_ACCESS_DENIED
END IF
IF (security descriptor check fails) THEN
Return STATUS ACCESS DENIED
END IF
```

The method-specific checks are detailed in the sections for individual methods that open handles. The security-descriptor check is performed by using the Access Check Algorithm Pseudocode ([MS-DTYP] section 2.5.3.2). For this protocol, the input parameters of that algorithm are mapped as follows:

- SecurityDescriptor: The security descriptor of the object to which the handle is being opened, as specified in section 3.1.1.
- *Token*: This MUST be the token ([MS-DTYP] section 2.5.2) of the client, obtained by invoking GetRpcImpersonationAccessToken(NULL). The **GetRpcImpersonationAccessToken** interface is specified in [MS-RPCE] section 3.3.3.4.3.1.
- Access Request mask: The DesiredAccess parameter of the method being invoked, or the DesiredAccess value specified in the method description.
- Object Tree: This parameter MUST be NULL.
- PrincipalSelfSubst SID: This parameter MUST be NULL.
- *GrantedAccess*: The value returned by this parameter MUST be stored in a local variable *LocalGrantedAccess* (of type ACCESS_MASK).

In the case that the access check is successful, the server MUST NOT grant more access bits than the caller has asked for, but MUST grant only those access bits that the client has explicitly requested. The caller is permitted to request the maximum access permitted by the server by specifying the special constant MAXIMUM_ALLOWED, as specified in section 2.2.1.1.1.

If DesiredAccess contains the MAXIMUM_ALLOWED bit, the server MUST create and return an LsaContextHandle (section 3.1.1.7) via the method's LSAPR_HANDLE* output parameter, with its fields initialized as follows:

- LsaContextHandle.HandleType = "Policy", "Account", "Secret", or "Trusted Domain", depending on the type of the database object
- LsaContextHandle.Object = the database object
- LsaContextHandle.GrantedAccess = LocalGrantedAccess

If *DesiredAccess* does not contain the MAXIMUM_ALLOWED bit, the following constraint MUST be satisfied:

- If DesiredAccess contains bits that are not in GrantedAccess, the server MUST return STATUS_ACCESS_DENIED. Otherwise, the server MUST create and return an LsaContextHandle (section 3.1.1.7) via the method's LSAPR_HANDLE* output parameter, with its fields initialized as follows:
 - LsaContextHandle.HandleType = "Policy", "Account", "Secret", or "Trusted Domain", depending on the type of the database object
 - LsaContextHandle.Object = the database object
 - LsaContextHandle.GrantedAccess = DesiredAccess

The server MUST NOT allow the caller to add more access bits to the handle in a subsequent operation. In order to obtain more access, a new handle must be obtained.

3.1.4.2.2 Access Checks Applied for Object Operations

Each method that consumes a handle requires that certain access bits be set on the handle, which is defined as *RequiredAccess* for the purposes of this specification, and returns STATUS_ACCESS_DENIED according to the pseudocode shown below, if necessary. The required bits vary on a per-method basis and might depend on method arguments. Therefore, the value of RequiredAccess is specified on a per-method basis in sections 3.1.4.4, 3.1.4.5, 3.1.4.6, 3.1.4.7, 3.1.4.8, and 3.1.4.9.

```
IF (any bit set in RequiredAccess is not set in LsaContextHandle.GrantedAccess) THEN
    Return STATUS_ACCESS_DENIED
END IF
```

For example, if a method-processing rule specifies a required access bit of POLICY_VIEW_LOCAL_INFORMATION, the server MUST check that this bit is set in the granted access field on the context handle. If the check is unsuccessful, the server MUST return STATUS_ACCESS_DENIED.

3.1.4.2.3 Determining If Requestors Are Anonymous

```
procedure IsRequestorAnonymous() : boolean
```

The IsRequestorAnonymous procedure returns TRUE if the requestor is anonymous. On entrance:

- AnonymousSid: This MUST be the ANONYMOUS SID as specified in [MS-DTYP] section 2.4.2.4.
- RpcImpersonationAccessToken: This MUST be the token ([MS-DTYP] section 2.5.2) of the client, obtained by invoking the **GetRpcImpersonationAccessToken** interface as specified in [MS-RPCE] section 3.3.3.4.3.1, specifying NULL for *Input Parameter*.

 $\label{lem:reconstruction} Recturn \ RpcImpersonation AccessToken. UserIndex] \ equals \ Anonymous Sid$

3.1.4.3 Closing Handles

A handle of any type can be closed by calling <u>LsarClose</u>. Successful calls to <u>LsarDeleteObject</u>, which deletes an object to which the caller has an open handle, MUST also close the handle. The fact that a handle is closed is communicated to the **RPC transport** by returning a NULL value in the handle parameter, as specified in <u>[C706]</u> section 5.1.6.

Closing one handle MUST NOT affect any other handle on the server; that is, handles obtained using a policy handle MUST continue to be valid after that policy handle is closed.

3.1.4.4 Policy Object Methods

The message processing of methods in this section MUST use the abstract data model defined in section 3.1.1.1.

Method (opnum)	Summary
LsarOpenPolicy2 (opnum 44)	Opens a context handle to the RPC server.
LsarOpenPolicy (opnum 6)	Superseded by <u>LsarOpenPolicy2</u> .
LsarQueryInformationPolicy2 (opnum 46)	Obtains information from the policy object.
LsarQueryInformationPolicy (opnum 7)	Obtains information from the policy object.
LsarSetInformationPolicy2 (opnum 47)	Sets information on the policy object.
LsarSetInformationPolicy (opnum 8)	Sets information on the policy object.
LsarQueryDomainInformationPolicy (opnum 53)	Obtains information from the policy object pertaining to the domain.
LsarSetDomainInformationPolicy (opnum 54)	Sets information on the policy object pertaining to the domain.

3.1.4.4.1 LsarOpenPolicy2 (Opnum 44)

The LsarOpenPolicy2 method opens a context handle to the RPC server. This is the first function that MUST be called to contact the Local Security Authority (Domain Policy) Remote Protocol database.

```
NTSTATUS LsarOpenPolicy2(
   [in, unique, string] wchar_t* SystemName,
   [in] PLSAPR OBJECT ATTRIBUTES ObjectAttributes,
   [in] ACCESS_MASK DesiredAccess,
   [out] LSAPR HANDLE* PolicyHandle
);
```

SystemName: This parameter does not have any effect on message processing in any environment. It MUST be ignored on receipt.

ObjectAttributes: This parameter does not have any effect on message processing in any environment. All fields MUST<53> be ignored except **RootDirectory** which MUST be NULL.

DesiredAccess: An <u>ACCESS MASK</u> value that specifies the requested access rights that MUST be granted on the returned PolicyHandle if the request is successful.

PolicyHandle: An RPC context handle (as specified in section <u>2.2.2.1</u>) that represents a reference to the abstract data model of a policy object, as specified in section <u>3.1.1.1</u>.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing below.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied parameters is incorrect. For example, this can happen when <i>ObjectAttributes</i> is NULL or <i>DesiredAccess</i> is zero.

Processing:

DesiredAccess: A bitmask specifying the access that the caller attempts to obtain on the policy object, which is access-checked according to section 3.1.4.2.1. The method-specific portion of the check is the following:

```
LET serverInfo be a SERVER_INFO_101 structure

CALL ServerGetInfo(101, &serverInfo)

LET isDomainController be a boolean initialized to FALSE

IF (serverInfo.sv101_version_type & (SV_TYPE_DOMAIN_CTRL | SV_TYPE_DOMAIN_BAKCTRL)) THEN

Set isDomainController equal to TRUE

END IF

IF ((isDomainController equals FALSE) and (IsRequestorAnonymous() and LsaRestrictAnonymous is
set to TRUE)) THEN

Return STATUS ACCESS DENIED

END IF
```

SERVER_INFO_101, SV_TYPE_DOMAIN_CTRL, and SV_TYPE_DOMAIN_BACKCTRL are specified in [MS-DTYP] section 2.3.12. The ServerGetInfo procedure is specified in [MS-DTYP] section 2.6. The valid account-rights bits are specified in section 2.2.1.1.2, and the security descriptor is specified in section 3.1.1.1. The IsRequestorAnonymous procedure is specified in section 3.1.4.2.3.

PolicyHandle: If the request is successful, the server MUST create and return a context handle (section 3.1.1.7) via *PolicyHandle*, with its fields initialized as follows:

- LsaContextHandle.HandleType = "Policy"
- LsaContextHandle.Object = the policy object
- LsaContextHandle.GrantedAccess = as specified in section 3.1.4.2.1

The return value MUST be set to STATUS_SUCCESS in this case.

3.1.4.4.2 LsarOpenPolicy (Opnum 6)

The LsarOpenPolicy method is exactly the same as <u>LsarOpenPolicy2</u>, except that the *SystemName* parameter in this function, because of its syntactic definition, contains only one character instead of a full string. This *SystemName* parameter does not have any effect on message processing in any environment. It MUST be ignored.

```
NTSTATUS LsarOpenPolicy(
   [in, unique] wchar_t* SystemName,
   [in] PLSAPR_OBJECT_ATTRIBUTES ObjectAttributes,
   [in] ACCESS MASK DesiredAccess,
   [out] LSAPR HANDLE* PolicyHandle
```

SystemName: This parameter does not have any effect on message processing in any environment. It MUST be ignored on receipt.

ObjectAttributes: This parameter does not have any effect on message processing in any environment. All fields MUST<54> be ignored except **RootDirectory**, which MUST be NULL.

DesiredAccess: An ACCESS MASK value that specifies the requested access rights that MUST be granted on the returned PolicyHandle, if the request is successful.

PolicyHandle: An RPC context handle (as specified in section 2.2.2.1) that represents a reference to the abstract data model of a policy object, as specified in section 3.1.1.1.

Processing:

The processing is the same as for LsarOpenPolicy2. LsarOpenPolicy2 supersedes this message and MUST be used when possible.

3.1.4.4.3 LsarQueryInformationPolicy2 (Opnum 46)

The LsarQueryInformationPolicy2 method is invoked to query values that represent the server's security policy.

```
NTSTATUS LsarQueryInformationPolicy2(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] POLICY_INFORMATION_CLASS InformationClass,
   [out, switch_is(InformationClass)]
    PLSAPR_POLICY_INFORMATION* PolicyInformation
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

InformationClass: A parameter that specifies what type of information the caller is requesting.

PolicyInformation: A parameter that references policy information structure on return.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing below.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC000009A STATUS_INSUFFICIENT_RESOURCES	There are insufficient resources to complete the request.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform the operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the parameters is incorrect. For instance, this can happen if <i>InformationClass</i> is out of range or if <i>PolicyInformation</i> is NULL.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

PolicyHandle MUST be a handle to an open policy object, and *PolicyHandle*.HandleType MUST equal "Policy"; otherwise, STATUS_INVALID_HANDLE MUST be returned.

The server MUST verify that *PolicyHandle* grants access as specified in section <u>3.1.4.2.2</u>. The following table specifies the RequiredAccess value to use in this access check for each *InformationClass* value or indicates if no processing is supported, regardless of access granted.

InformationClass value	RequiredAccess value
PolicyAuditLogInformation	POLICY_VIEW_AUDIT_INFORMATION
PolicyAuditEventsInformation	POLICY_VIEW_AUDIT_INFORMATION
PolicyPrimaryDomainInformation	POLICY_VIEW_LOCAL_INFORMATION
PolicyPdAccountInformation	POLICY_GET_PRIVATE_INFORMATION
PolicyAccountDomainInformation	POLICY_VIEW_LOCAL_INFORMATION
PolicyLsaServerRoleInformation	POLICY_VIEW_LOCAL_INFORMATION
PolicyReplicaSourceInformation	POLICY_VIEW_LOCAL_INFORMATION
PolicyModificationInformation	Not applicable: This information class cannot be queried. The request MUST fail with STATUS_INVALID_PARAMETER.
PolicyAuditFullSetInformation	Not applicable: This information class cannot be queried. The request MUST fail with STATUS_INVALID_PARAMETER.
PolicyAuditFullQueryInformation	POLICY_VIEW_AUDIT_INFORMATION
PolicyDnsDomainInformation	POLICY_VIEW_LOCAL_INFORMATION
PolicyDnsDomainInformationInt	POLICY_VIEW_LOCAL_INFORMATION
PolicyLocalAccountDomainInformation	POLICY_VIEW_LOCAL_INFORMATION

The *InformationClass* parameter can take on any value in the POLICY_INFORMATION_CLASS enumeration range. For all values outside this range, the server MUST return a STATUS_INVALID_PARAMETER error code.

PolicyInformation is an output parameter. The server MUST fill it in with the information requested by the client, based on the value of the *InformationClass* parameter and the abstract data model specified in section <u>3.1.1.1</u>, as follows.

Value of InformationClass parameter	Information returned to caller from abstract data model
PolicyAuditLogInformation	Auditing Log Information
PolicyAuditEventsInformation	Event Auditing Options
PolicyPrimaryDomainInformation	Primary Domain Information
PolicyPdAccountInformation	MUST return an LSAPR POLICY PD ACCOUNT INFO information structure, its Name member being an RPC_UNICODE_STRING with Length set to 0 and Buffer initialized to NULL.
PolicyAccountDomainInformation	On non-domain controllers: Account Domain On domain controller: Primary Domain Information
PolicyLsaServerRoleInformation	Server Role Information

Value of InformationClass parameter	Information returned to caller from abstract data model
PolicyReplicaSourceInformation	Replica Source Information
PolicyModificationInformation	MUST return STATUS_INVALID_PARAMETER
PolicyAuditFullSetInformation	MUST return STATUS_INVALID_PARAMETER
PolicyAuditFullQueryInformation	Audit Full Information<55>
PolicyDnsDomainInformation	DNS Domain Information<56>
PolicyDnsDomainInformationInt	DNS Domain Information
PolicyLocalAccountDomainInformation	AccountDomainInformation

3.1.4.4.4 LsarQueryInformationPolicy (Opnum 7)

The LsarQueryInformationPolicy method is invoked to query values that represent the server's information policy.

```
NTSTATUS LsarQueryInformationPolicy(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] POLICY_INFORMATION_CLASS InformationClass,
   [out, switch is(InformationClass)]
    PLSAPR_POLICY_INFORMATION* PolicyInformation
):
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

InformationClass: A parameter that specifies what type of information the caller is requesting.

PolicyInformation: A parameter that references policy information structure on return.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing below.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC000009A STATUS_INSUFFICIENT_RESOURCES	There are insufficient resources to complete the request.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform the operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the parameters is incorrect. For instance, this can happen if <i>InformationClass</i> is out of range or if <i>PolicyInformation</i> is NULL.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message MUST be processed in an identical manner to <u>LsarQueryInformationPolicy2</u>.

3.1.4.4.5 LsarSetInformationPolicy2 (Opnum 47)

The LsarSetInformationPolicy2 method is invoked to set a policy on the server.

```
NTSTATUS LsarSetInformationPolicy2(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] POLICY INFORMATION CLASS InformationClass,
   [in, switch_is(InformationClass)]
    PLSAPR_POLICY_INFORMATION PolicyInformation
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

InformationClass: A parameter that specifies what type of information the caller is setting.

PolicyInformation: Data that represents policy being set.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the parameters is incorrect. For instance, this can happen if InformationClass is not supported or some of the supplied policy data is invalid.
0xC0000002 STATUS_NOT_IMPLEMENTED	This information class cannot be set.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

PolicyHandle MUST reference a context that was granted an access commensurate with the InformationClass value requested. If PolicyHandle is not a valid context handle or PolicyHandle.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. If the context does not have sufficient access, the server MUST return STATUS_ACCESS_DENIED.

The server MUST verify that *PolicyHandle* grants access as specified in section <u>3.1.4.2.2</u>. The following table specifies the RequiredAccess value to use in this access check for each *InformationClass* value or indicates if no processing is supported, regardless of access granted.

InformationClass value	RequiredAccess value
PolicyAuditLogInformation	POLICY_AUDIT_LOG_ADMIN
PolicyAuditEventsInformation	POLICY_SET_AUDIT_REQUIREMENTS
PolicyPrimaryDomainInformation	POLICY_TRUST_ADMIN

InformationClass value	RequiredAccess value
PolicyPdAccountInformation	Not applicable: This information class cannot be set; the request MUST fail with STATUS_INVALID_PARAMETER.
PolicyAccountDomainInformation	Not applicable: This information class cannot be set; the request MUST fail with STATUS_INVALID_PARAMETER.
PolicyLsaServerRoleInformation	POLICY_SERVER_ADMIN
PolicyReplicaSourceInformation	POLICY_SERVER_ADMIN
PolicyModificationInformation	Not applicable: This information class cannot be set; the request MUST fail with STATUS_INVALID_PARAMETER.
PolicyAuditFullSetInformation	Not applicable: This information class cannot be set; the request MUST fail with STATUS_INVALID_PARAMETER.
PolicyAuditFullQueryInformation	Not applicable: This information class cannot be set; the request MUST fail with STATUS_INVALID_PARAMETER.
PolicyDnsDomainInformation	POLICY_TRUST_ADMIN
PolicyDnsDomainInformationInt	POLICY_TRUST_ADMIN
PolicyLocalAccountDomainInformation	POLICY_TRUST_ADMIN

The *InformationClass* parameter can take on any value in the POLICY_INFORMATION_CLASS enumeration range. For all values outside this range, the server MUST return the STATUS_INVALID_PARAMETER error code.

The *PolicyInformation* parameter contains the data that the caller wishes to set, based on the value of the *InformationClass* parameter. The server MUST update its abstract data model, specified in section 3.1.1.1, as follows.

Value of InformationClass parameter	Information updated in abstract data model
PolicyAuditLogInformation	Server MUST return the STATUS_NOT_IMPLEMENTED error code because this is not a policy element that can be set.
PolicyAuditEventsInformation	Event Auditing Options.
PolicyPrimaryDomainInformation	Primary Domain Information.
PolicyPdAccountInformation	Server MUST return STATUS_INVALID_PARAMETER because this is not a policy element that can be set.
PolicyAccountDomainInformation	On a domain controller, the server MUST fail this request with the STATUS_INVALID_PARAMETER. On non-domain controllers: Account Domain Information.
PolicyLsaServerRoleInformation	Server Role Information.
PolicyReplicaSourceInformation	Replica Source Information.
PolicyModificationInformation	Server MUST return STATUS_INVALID_PARAMETER because this is not a policy element that can be set.
PolicyAuditFullSetInformation	ShutDownOnFull field of Audit Full Information. <57>
PolicyAuditFullQueryInformation	Server MUST record STATUS_INVALID_PARAMETER because this is not a policy element that can be set.

Value of InformationClass parameter	Information updated in abstract data model
PolicyDnsDomainInformation	DNS Domain Information. <58>
PolicyDnsDomainInformationInt	DNS Domain Information.
PolicyLocalAccountDomainInformation	Account Domain Information.

3.1.4.4.6 LsarSetInformationPolicy (Opnum 8)

The LsarSetInformationPolicy method is invoked to set a policy on the server.

```
NTSTATUS LsarSetInformationPolicy(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] POLICY_INFORMATION_CLASS InformationClass,
   [in, switch_is(InformationClass)]
   PLSAPR POLICY INFORMATION PolicyInformation
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

InformationClass: A parameter that specifies what type of information the caller is setting.

PolicyInformation: Data that represents the policy being set.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the parameters is incorrect. For instance, this can happen if InformationClass is not supported or some of the supplied policy data is invalid.
0xC0000002 STATUS_NOT_IMPLEMENTED	This information class cannot be set.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message MUST be processed in an identical manner to <u>LsarSetInformationPolicy2</u>.

3.1.4.4.7 LsarQueryDomainInformationPolicy (Opnum 53)

The LsarQueryDomainInformationPolicy method is invoked to retrieve policy settings in addition to those exposed through <u>LsarQueryInformationPolicy</u> and <u>LsarSetInformationPolicy2</u>. Despite the term "Domain" in the name of the method, processing of this message occurs with local data, and

furthermore, there is no requirement that this data have any relationship with the LSA information in the domain to which the machine is joined.

```
NTSTATUS LsarQueryDomainInformationPolicy(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] POLICY DOMAIN INFORMATION CLASS InformationClass,
   [out, switch_is(InformationClass)]
    PLSAPR_POLICY_DOMAIN_INFORMATION* PolicyDomainInformation
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

InformationClass: A parameter that specifies what type of information the caller is requesting.

PolicyDomainInformation: A parameter that references policy information structure on return.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied arguments was invalid.
0xC0000034 STATUS_OBJECT_NAME_NOT_FOUND	No value has been set for this policy.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

If the *InformationClass* parameter is PolicyDomainEfsInformation, and the responder does not support Encrypting File System (EFS) Policy Information as specified in section 3.1.1.1, the request MUST fail with STATUS_OBJECT_NAME_NOT_FOUND.

If the *InformationClass* parameter is PolicyDomainQualityOfServiceInformation, and the responder implementation does not support Quality Of Service Information as specified in section 3.1.1.1, the request MUST fail with STATUS_INVALID_PARAMETER.

If *PolicyHandle* is not a valid context handle or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE.

The server MUST verify that *PolicyHandle* grants access as specified in section <u>3.1.4.2.2</u>. The following table specifies the RequiredAccess value to use in this access check for each *InformationClass* value.

InformationClass value	RequiredAccess value
PolicyDomainQualityOfServiceInformation	POLICY_VIEW_AUDIT_INFORMATION
PolicyDomainEfsInformation	POLICY_VIEW_LOCAL_INFORMATION
PolicyDomainKerberosTicketInformation	POLICY_VIEW_LOCAL_INFORMATION

The *InformationClass* parameter can take on any value in the POLICY_DOMAIN_INFORMATION_CLASS enumeration range. For all values outside this range, the server MUST return the STATUS INVALID PARAMETER error code.

PolicyDomainInformation is an output parameter. The server MUST fill it with the information requested by the client, based on the value of the *InformationClass* parameter and the abstract data model specified in section 3.1.1.1. If the information has not been set before, the request MUST fail with STATUS_OBJECT_NAME_NOT_FOUND.

Value of InformationClass parameter	Information returned to caller from abstract data model
PolicyDomainQualityOfServiceInformation	Quality Of Service Information
PolicyDomainEfsInformation	EFS Policy Information
PolicyDomainKerberosTicketInformation	Kerberos Policy Information

3.1.4.4.8 LsarSetDomainInformationPolicy (Opnum 54)

The LsarSetDomainInformationPolicy method is invoked to change policy settings in addition to those exposed through LsarQueryInformationPolicy and LsarSetInformationPolicy2. Despite the term "Domain" in the name of the method, processing of this message occurs with local data. Also, there is no requirement that this data have any relationship with the LSA information in the domain in which the machine is joined.

```
NTSTATUS LsarSetDomainInformationPolicy(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] POLICY_DOMAIN_INFORMATION_CLASS InformationClass,
   [in, unique, switch is(InformationClass)]
   PLSAPR POLICY DOMAIN INFORMATION PolicyDomainInformation
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

InformationClass: A parameter that specifies what type of information the caller is setting.

PolicyDomainInformation: Data representing policy being set.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the following message processing.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied arguments was invalid.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

If the *InformationClass* parameter is PolicyDomainEfsInformation, and the responder implementation does not support Encrypting File System (EFS) Policy Information as specified in section 3.1.1.1, the request MUST fail with STATUS INVALID PARAMETER.

If the *InformationClass* parameter is PolicyDomainQualityOfServiceInformation, and the responder implementation does not support Quality Of Service Information as specified in section 3.1.1.1, the request MUST fail with an RPC exception RPC_S_INVALID_TAG.

If *PolicyHandle* is not a valid context handle or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE.

The server MUST verify that *PolicyHandle* grants access as specified in section <u>3.1.4.2.2</u>. The following table specifies the RequiredAccess value to use in this access check for each *InformationClass* value.

InformationClass value	RequiredAccess value
PolicyDomainQualityOfServiceInformation	POLICY_SERVER_ADMIN
PolicyDomainEfsInformation	POLICY_SERVER_ADMIN
PolicyDomainKerberosTicketInformation	POLICY_SERVER_ADMIN

The *InformationClass* parameter can take on any value in the POLICY_DOMAIN_INFORMATION_CLASS enumeration range. For all values outside this range, the server MUST return the STATUS_INVALID_PARAMETER error code.

The *PolicyDomainInformation* parameter contains the data that the caller needs to set, based on the value of the *InformationClass* parameter. The server MUST update its abstract data model, specified in section 3.1.1.1, as follows.

Value of InformationClass parameter	Information returned to caller from abstract data model
PolicyDomainQualityOfServiceInformation	Quality Of Service Information
PolicyDomainEfsInformation	EFS Policy Information
PolicyDomainKerberosTicketInformation	Kerberos Policy Information

If the abstract data model update succeeds and the *InformationClass* parameter is PolicyDomainKerberosTicketInformation, the server MUST invoke the KDC ConfigurationChange event (see [MS-KILE] section 3.3.4.1) and MUST ignore any errors that are returned.

3.1.4.5 Account Object Methods

The message processing of methods in this section MUST use the abstract data model, as specified in section 3.1.1.3.

Method (opnum)	Summary
LsarCreateAccount (opnum 10)	Creates a new account object in the policy database.
LsarEnumerateAccounts (opnum 11)	Enumerates all account objects in the policy database.
LsarOpenAccount (opnum 17)	Opens a handle to an existing account object.
LsarEnumeratePrivilegesAccount (opnum 18)	Enumerates all rights and privileges of an account.
LsarAddPrivilegesToAccount (opnum 19)	Adds new privileges to an existing account object.
LsarRemovePrivilegesFromAccount (opnum	Removes privileges from an existing account object.

Method (opnum)	Summary
20)	
LsarGetSystemAccessAccount (opnum 23)	Retrieves system access flags from the account object.
LsarSetSystemAccessAccount (opnum 24)	Sets system access flags on the account object.
LsarEnumerateAccountsWithUserRight (opnum 35)	Enumerates all account objects in the server's policy database that match a given user right.
LsarEnumerateAccountRights (opnum 36)	Enumerates all rights of an account object in the server's policy database.
LsarAddAccountRights (opnum 37)	Adds new rights to an account object in the server's policy database.
LsarRemoveAccountRights (opnum 38)	Removes rights from an account object in the server's policy database.

3.1.4.5.1 LsarCreateAccount (Opnum 10)

The LsarCreateAccount method is invoked to create a new account object in the server's database.

```
NTSTATUS LsarCreateAccount(
[in] LSAPR_HANDLE PolicyHandle,
[in] PRPC_SID AccountSid,
[in] ACCESS_MASK DesiredAccess,
[out] LSAPR_HANDLE* AccountHandle
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

AccountSid: The security identifier (SID) of the account to be created.

DesiredAccess: A bitmask specifying accesses to be granted to the newly created and opened account at this time.

AccountHandle: Used to return a handle to the newly created account object.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC0000035 STATUS_OBJECT_NAME_COLLISION	An account with this SID already exists.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC00000D	Some of the parameters supplied were invalid.

Return value/code	Description
STATUS_INVALID_PARAMETER	

Processing:

This message takes four arguments:

PolicyHandle: A handle to an open policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY CREATE ACCOUNT.

AccountSid: The SID of the account to be created. The server MUST validate that AccountSid represents a valid SID and fail the request with STATUS_INVALID_PARAMETER if it is not.<59>

DesiredAccess: A set of access bits that the caller attempts to receive from the account object after it has been created, which is access-checked according to section 3.1.4.2.2. The method-specific portion of the check is the following.

```
IF (IsRequestorAnonymous() and LsaRestrictAnonymous is set to TRUE) THEN
    Return STATUS_OBJECT_NAME_NOT_FOUND
END IF
```

The valid account-rights bits are specified in section 2.2.1.1.3, and the security descriptor is specified in section 3.1.1.3. The IsRequestorAnonymous procedure is specified in section 3.1.4.2.3.

AccountHandle: If the request is successful, the server MUST create and return a context handle (section 3.1.1.7) via AccountHandle, with its fields initialized as follows:

- LsaContextHandle.HandleType = "Account"
- LsaContextHandle.Object = the account object
- LsaContextHandle.GrantedAccess = as specified in section 3.1.4.2.1

This mechanism allows the caller to skip the additional step of opening the account object after creating it.

The server MUST check whether another account object already exists in its policy database with the same SID, and fail the request with STATUS_OBJECT_NAME_COLLISION if it does.

The server MUST associate a security descriptor with a newly created account object. See section 3.1.1.3 for the data model of this object type.

3.1.4.5.2 LsarEnumerateAccounts (Opnum 11)

The LsarEnumerateAccounts method is invoked to request a list of account objects in the server's database. The method can be called multiple times to return its output in fragments.

```
NTSTATUS LsarEnumerateAccounts(
   [in] LSAPR_HANDLE PolicyHandle,
   [in, out] unsigned long* EnumerationContext,
   [out] PLSAPR_ACCOUNT_ENUM_BUFFER EnumerationBuffer,
   [in] unsigned long PreferedMaximumLength
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

EnumerationContext: A pointer to a context value that is used to resume enumeration, if necessary.

EnumerationBuffer: A pointer to a structure that will contain the results of the enumeration.

PreferedMaximumLength: A value that indicates the approximate size of the data to return.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0x00000105 STATUS_MORE_ENTRIES	More information is available to successive calls.
0x8000001A STATUS_NO_MORE_ENTRIES	No more entries are available from the enumeration.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or PolicyHandle.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that PolicyHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY_VIEW_LOCAL_INFORMATION. If IsRequestorAnonymous() returns TRUE (section 3.1.4.2.3) and LsaRestrictAnonymous is set to TRUE, the call MUST fail with STATUS ACCESS DENIED.

EnumerationContext: A number that indicates a starting index at which to begin the enumeration. The server MUST always return all account objects in the same order, starting at the object whose index is <code>EnumerationContext</code>. To initiate a new enumeration, the client sets <code>EnumerationContext</code> to zero; otherwise, the client sets <code>EnumerationContext</code> to a value returned by a previous call to the method.

The server MUST return STATUS_INVALID_PARAMETER if the *EnumerationContext* parameter is NULL.

EnumerationBuffer: Used to return the results of enumeration. The server MUST fill EnumerationBuffer with as many account objects as possible, as determined by PreferedMaximumLength. If the size of all remaining objects is less than or equal to PreferedMaximumLength, the server MUST fill EnumerationBuffer with all objects. If the size of all remaining objects is greater than PreferedMaximumLength, the server MUST fill EnumerationBuffer with objects such that the size of the account objects returned is greater than or equal to PreferedMaximumLength, but would be less than PreferedMaximumLength if the last object had not been added to EnumerationBuffer. If there are no more objects than are returned in EnumerationBuffer, the server MUST return STATUS_NO_MORE_ENTRIES. If there are more database objects than are returned in EnumerationBuffer, the server MUST set the EnumerationContext value to the index value that would allow it to resume enumeration correctly when this method is called again, and the server MUST return STATUS MORE ENTRIES. Note that this return value is not an error status.

PreferedMaximumLength: An indication about the approximate size, in bytes, of the data to return. Any unsigned 32-bit value is valid for the *PreferedMaximumLength* parameter.

3.1.4.5.3 LsarOpenAccount (Opnum 17)

The LsarOpenAccount method is invoked to obtain a handle to an account object.

```
NTSTATUS LsarOpenAccount(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] PRPC SID AccountSid,
   [in] ACCESS_MASK DesiredAccess,
   [out] LSAPR_HANDLE* AccountHandle
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

AccountSid: A SID of the account to be opened.

DesiredAccess: A bitmask specifying accesses to be granted to the opened account at this time.

AccountHandle: Used to return a handle to the opened account object.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	Some of the parameters supplied are incorrect. For instance, this can happen when <i>AccountSid</i> is NULL.
0xC0000034 STATUS_OBJECT_NAME_NOT_FOUND	An account with this SID does not exist in the server's database.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or PolicyHandle.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. PolicyHandle.GrantedAccess MUST NOT be considered for this call, because the access check MUST happen on the account object.

AccountSid: The SID of the account to be opened. The server MUST verify that the SID is valid and fail the request with STATUS_INVALID_PARAMETER otherwise. The server MUST verify that the account object with this SID exists in its policy database and fail the request with STATUS_OBJECT_NAME_NOT_FOUND otherwise.

DesiredAccess: A bitmask specifying the type of access the caller attempts to obtain from the account object, which is access-checked according to section 3.1.4.2.1. The method-specific portion of the check is the following.

```
IF (IsRequestorAnonymous() and LsaRestrictAnonymous is set to TRUE) THEN Return STATUS OBJECT NAME NOT FOUND
```

The valid account rights bits are specified in section 2.2.1.1.3, and the security descriptor is specified in section 3.1.1.3. The IsRequestorAnonymous procedure is specified in section 3.1.4.2.3.

AccountHandle: If the request is successful, this parameter is used to return a handle (section 3.1.1.7) to the opened account object with its fields initialized as follows:

- LsaContextHandle.HandleType = "Account"
- LsaContextHandle.Object = the account object
- LsaContextHandle.GrantedAccess = as specified in section 3.1.4.2.1

3.1.4.5.4 LsarEnumeratePrivilegesAccount (Opnum 18)

The LsarEnumeratePrivilegesAccount method is invoked to retrieve a list of privileges granted to an account on the server.

```
NTSTATUS LsarEnumeratePrivilegesAccount(
  [in] LSAPR_HANDLE AccountHandle,
  [out] PLSAPR PRIVILEGE SET* Privileges
);
```

AccountHandle: An open account object handle obtained from either <u>LsarCreateAccount (section 3.1.4.5.1)</u> or <u>LsarOpenAccount (section 3.1.4.5.3)</u>.

Privileges: Used to return a list of privileges granted to the account.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC000009A STATUS_INSUFFICIENT_RESOURCES	There are insufficient resources to complete the request.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC0000008 STATUS_INVALID_HANDLE	AccountHandle is not a valid handle.

Processing:

This message takes two arguments:

AccountHandle: An open handle to an account object. If the handle is not a valid context handle to an account object or AccountHandle. Handle Type does not equal "Account", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that AccountHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to ACCOUNT_VIEW.

Privileges: Used to return a set of privileges associated with the account. It is valid for the set of privileges to be empty.

The server MUST return STATUS_INSUFFICIENT_RESOURCES if it runs out of memory while processing this request.

3.1.4.5.5 LsarAddPrivilegesToAccount (Opnum 19)

The LsarAddPrivilegesToAccount method is invoked to add new privileges to an existing account object.

```
NTSTATUS LsarAddPrivilegesToAccount(
  [in] LSAPR_HANDLE AccountHandle,
  [in] PLSAPR_PRIVILEGE_SET Privileges
);
```

AccountHandle: An open account object handle obtained from either <u>LsarCreateAccount (section 3.1.4.5.1)</u> or <u>LsarOpenAccount (section 3.1.4.5.3)</u>.

Privileges: Contains a list of privileges to add to the account.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	Some of the parameters supplied were invalid.
0xC0000008 STATUS_INVALID_HANDLE	AccountHandle is not a valid handle.

Processing:

This message takes two arguments:

AccountHandle: An open handle to an account object. If the handle is not a valid context handle to an account object or AccountHandle. Handle Type does not equal "Account", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that AccountHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to ACCOUNT_ADJUST_PRIVILEGES.

Privileges: A set of privileges to add to an account. Each privilege is a LUID-Attributes pair where the LUID field MUST match a LUID of a privilege on the server. The attributes replace any attributes of the privilege if one was associated with the account previously. Any LUID not recognized as valid by the server SHOULD cause the message to be rejected with STATUS_INVALID_PARAMETER.<60>

3.1.4.5.6 LsarRemovePrivilegesFromAccount (Opnum 20)

The LsarRemovePrivilegesFromAccount method is invoked to remove privileges from an account object.

```
NTSTATUS LsarRemovePrivilegesFromAccount(
[in] LSAPR_HANDLE AccountHandle,

[in] unsigned char AllPrivileges,
```

```
[in, unique] PLSAPR_PRIVILEGE_SET Privileges
);
```

AccountHandle: An open account object handle obtained from either LsarCreateAccount (section 3.1.4.5.1) or LsarOpenAccount (section 3.1.4.5.3).

AllPrivileges: If this parameter is not FALSE (0), all privileges will be stripped from the account object.

Privileges: Contains a (possibly empty) list of privileges to remove from the account object.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	Some of the parameters supplied were invalid.
0xC0000008 STATUS_INVALID_HANDLE	AccountHandle is not a valid handle.

Processing:

This message takes three arguments:

AccountHandle: An open handle to an account object. If the handle is not a valid context handle to an account object or AccountHandle. Handle Type does not equal "Account", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that AccountHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to ACCOUNT_ADJUST_PRIVILEGES.

AllPrivileges: A Boolean value; if not FALSE (0), all privileges associated with the account are removed. In this case, the server MUST check that the *Privileges* parameter is NULL, and fail the request with STATUS INVALID PARAMETER otherwise.

Privileges: If *AllPrivileges* is FALSE (0), this parameter cannot be NULL. It will be used to remove *Privileges* from the account object. The server MUST verify that *Privileges* is not NULL and fail the request with STATUS_INVALID_PARAMETER otherwise.<a href="mailto:server-muse-server-mus

3.1.4.5.7 LsarGetSystemAccessAccount (Opnum 23)

The LsarGetSystemAccessAccount method is invoked to retrieve system access account flags for an account object. System access account flags are described as part of the account object data model, as specified in section 3.1.1.3.

```
NTSTATUS LsarGetSystemAccessAccount(
  [in] LSAPR HANDLE AccountHandle,
  [out] unsigned long* SystemAccess
);
```

AccountHandle: An open account object handle obtained from either LsarCreateAccount (section 3.1.4.5.1) or LsarOpenAccount (section 3.1.4.5.3).

SystemAccess: Used to return a bitmask of access flags associated with the account.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC0000008 STATUS_INVALID_HANDLE	AccountHandle is not a valid handle.

Processing:

This message takes two arguments:

AccountHandle: An open handle to an account object. If the handle is not a valid context handle to an account object or AccountHandle. Handle Type does not equal "Account", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that AccountHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to ACCOUNT_VIEW.

SystemAccess: Used to return a bitmask of system access bits.

3.1.4.5.8 LsarSetSystemAccessAccount (Opnum 24)

The LsarSetSystemAccessAccount method is invoked to set system access account flags for an account object.

```
NTSTATUS LsarSetSystemAccessAccount(
   [in] LSAPR_HANDLE AccountHandle,
   [in] unsigned long SystemAccess
);
```

AccountHandle: An open account object handle obtained from either LsarCreateAccount (section 3.1.4.5.1) or LsarOpenAccount (section 3.1.4.5.3).

SystemAccess: A bitmask containing the account flags to be set on the account.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied parameters was invalid.

Return value/code	Description
0xC0000008 STATUS_INVALID_HANDLE	AccountHandle is not a valid handle.

Processing:

This message takes two arguments:

AccountHandle: An open handle to an account object. If the handle is not a valid context handle to an account object or AccountHandle. Handle Type does not equal "Account", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that AccountHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to ACCOUNT ADJUST SYSTEM ACCESS.

SystemAccess: Specifies the set of access bits to be added to account's system access. The server MUST verify that the bits do not fall outside the set of system access rights defined on the system, and fail the request with STATUS_INVALID_PARAMETER otherwise. The new system access bits replace the old ones.

3.1.4.5.9 LsarEnumerateAccountsWithUserRight (Opnum 35)

The LsarEnumerateAccountsWithUserRight method is invoked to return a list of account objects that have the user right equal to the passed-in value.

```
NTSTATUS LsarEnumerateAccountsWithUserRight(
   [in] LSAPR HANDLE PolicyHandle,
   [in, unique] PRPC_UNICODE_STRING UserRight,
   [out] PLSAPR_ACCOUNT_ENUM_BUFFER EnumerationBuffer
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

UserRight: The name of the right to use in enumeration.

EnumerationBuffer: Used to return the list of account objects that have the specified right.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC0000060 STATUS_NO_SUCH_PRIVILEGE	The supplied name is not recognized by the server.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied arguments is invalid.
0x8000001A STATUS_NO_MORE_ENTRIES	No account was found with the specified privilege.

Processing:

This message takes three arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or PolicyHandle.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that PolicyHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY_VIEW_LOCAL_INFORMATION.<62>

UserRight: A string representation of an account right. If the server does not recognize the account right, it MUST return STATUS NO SUCH PRIVILEGE.

The server executes the request by going through all accounts in its policy database and returning a set of all account object SIDs that have that right or privilege.

EnumerationBuffer: Used to return a set of account SIDs that have the specified UserRight.

3.1.4.5.10 LsarEnumerateAccountRights (Opnum 36)

The LsarEnumerateAccountRights method is invoked to retrieve a list of rights associated with an existing account.

```
NTSTATUS LsarEnumerateAccountRights(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] PRPC_SID AccountSid,
   [out] PLSAPR_USER_RIGHT_SET UserRights
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

AccountSid: A SID of the account object that the caller is inquiring about.

UserRights: Used to return a list of right names associated with the account.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.
0xC0000034 STATUS_OBJECT_NAME_NOT_FOUND	The specified account object does not exist.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message takes two arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to ACCOUNT_VIEW.

AccountSid: A SID of the account to query. The server MUST verify that the SID pointed to by AccountSid is valid and fail the request with STATUS_INVALID_PARAMETER otherwise. If IsRequestorAnonymous() returns TRUE (section 3.1.4.2.3) and LsaRestrictAnonymous is set to TRUE, the call MUST fail with STATUS_OBJECT_NAME_NOT_FOUND. The server MUST verify that such an account exists in its database and fail the request with STATUS_OBJECT_NAME_NOT_FOUND otherwise.

The server MUST return the string names of all the system access rights and privileges associated with the account. It is valid for the server to return an empty set if the account object does not contain any rights.

3.1.4.5.11 LsarAddAccountRights (Opnum 37)

The LsarAddAccountRights method is invoked to add new rights to an account object. If the account object does not exist, the system will attempt to create one.

```
NTSTATUS LsarAddAccountRights(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] PRPC_SID AccountSid,
   [in] PLSAPR_USER_RIGHT_SET UserRights
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

AccountSid: A security identifier of an account to add the rights to.

UserRights: A set of right names to add to the account.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.
0xC0000060 STATUS_NO_SUCH_PRIVILEGE	The rights supplied were not recognized.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message takes three arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return

STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section <u>3.1.4.2.2</u> with:

- RequiredAccess set to POLICY_CREATE_ACCOUNT if the account identified by the AccountSid
 parameter does not exist in the server's database, or
- RequiredAccess set to ACCOUNT_ADJUST_PRIVILEGES | ACCOUNT_ADJUST_SYSTEM_ACCESS |
 ACCOUNT_VIEW if the account identified by the AccountSid parameter exists in the server's
 database

AccountSid: A security identifier of the account object. The server MUST create the account object if one does not exist.

UserRights: A set of system access rights and privileges to be added to the account. If the server does not recognize any of the rights, it MUST return STATUS NO SUCH PRIVILEGE.

3.1.4.5.12 LsarRemoveAccountRights (Opnum 38)

The LsarRemoveAccountRights method is invoked to remove rights from an account object.

```
NTSTATUS LsarRemoveAccountRights(
   [in] LSAPR HANDLE PolicyHandle,
   [in] PRPC_SID AccountSid,
   [in] unsigned char AllRights,
   [in] PLSAPR_USER_RIGHT_SET UserRights
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

AccountSid: A security descriptor of an account object.

AllRights: If this field is not set to 0, all rights will be removed.

UserRights: A set of rights to remove from the account.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.
0xC0000060 STATUS_NO_SUCH_PRIVILEGE	The rights supplied were not recognized.
0xC0000034 STATUS_OBJECT_NAME_NOT_FOUND	An account with this SID does not exist.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC00000BB	The operation is not supported by the server.

Return value/code	Description
STATUS_NOT_SUPPORTED	

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or PolicyHandle.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that PolicyHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to ACCOUNT_ADJUST_PRIVILEGES | ACCOUNT_ADJUST_SYSTEM_ACCESS | ACCOUNT_VIEW | DELETE.

If IsRequestorAnonymous() returns TRUE (section 3.1.4.2.3) and LsaRestrictAnonymous is set to TRUE, the call MUST fail with STATUS_OBJECT_NAME_NOT_FOUND.

AccountSid: The security identifier of the account to modify. The server MUST verify that such an account exists in its database and fail the request with STATUS_OBJECT_NAME_NOT_FOUND otherwise.

AllRights: If nonzero, all system access rights and privileges will be stripped from the account.

UserRights: A set of rights and privileges to remove from the account. If the server does not recognize any of the rights, server MUST return STATUS_NO_SUCH_PRIVILEGE.

The server MUST NOT allow removal of "SeAuditPrivilege", "SeChangeNotifyPrivilege", "SeImpersonatePrivilege", and "SeCreateGlobalPrivilege" from accounts represented with SIDs "S-1-5-19" and "S-1-5-20". The request MUST be rejected with STATUS NOT SUPPORTED.<63>

If the resulting set of access rights and privileges is empty, the server MUST delete the account object from its database.

3.1.4.6 Secret Object Methods

The message processing of methods in this section MUST use the abstract data model defined in section 3.1.1.4.

Method (opnum)	Summary	
LsarCreateSecret (opnum 16)	Creates a new secret object in the policy database.	
LsarOpenSecret (opnum 28)	Opens a handle to an existing secret object.	
LsarSetSecret (opnum 29)	Sets the value of the secret object.	
LsarQuerySecret (opnum 30)	Retrieves the value of the secret object.	
LsarStorePrivateData (opnum 42)	Stores private data in the server's policy database as a secret object.	
LsarRetrievePrivateData (opnum 43)	Retrieves private data from a secret object in the server's policy database.	

The server MAY NOT support the following methods: <64>

- <u>LsarSetSecret</u>
- LsarQuerySecret
- <u>LsarStorePrivateData</u>

LsarRetrievePrivateData

If the server does not support these methods, the server MUST respond with an RPC exception. If the server supports these methods, the server MUST perform the operations in the message processing section for each method.

3.1.4.6.1 LsarCreateSecret (Opnum 16)

The LsarCreateSecret method is invoked to create a new secret object in the server's database.

```
NTSTATUS LsarCreateSecret(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] PRPC_UNICODE_STRING SecretName,
   [in] ACCESS MASK DesiredAccess,
   [out] LSAPR_HANDLE* SecretHandle
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

SecretName: The name of the secret object to be created.

DesiredAccess: A bitmask that specifies accesses to be granted to the newly created and opened secret object at this time.

SecretHandle: Used to return a handle to the newly created secret object.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied parameters is invalid. This can happen, for example, if <i>SecretHandle</i> is NULL or if <i>SecretName</i> is not a valid name for a secret object. Secret naming rules are specified in the processing rules shown below for the <i>SecretName</i> parameter.
0xC0000035 STATUS_OBJECT_NAME_COLLISION	The secret object by the specified name already exists.
0xC0000106 STATUS_NAME_TOO_LONG	The length of specified secret name exceeds the maximum set by the server.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY_CREATE_SECRET.

SecretName: Name of the secret object to be created. The server MUST verify that the string satisfies the RPC_UNICODE_STRING syntax restrictions specified in section 3.1.4.10, and fail the request with STATUS_INVALID_PARAMETER otherwise. The server MUST also check that the following constraints are satisfied by SecretName, and fail the request with STATUS_INVALID_PARAMETER if the name does not check out:

- Must not be empty.
- Must not contain the "\" character.<66"><67>

DesiredAccess: Contains the access bits that the caller is asking to receive for the handle returned in *SecretHandle*. *DesiredAccess* is access-checked according to section <u>3.1.4.2.1</u>. The method-specific portion of the check is the following.

```
IF (IsRequestorAnonymous() and LsaRestrictAnonymous is set to TRUE) THEN Return STATUS OBJECT NAME NOT FOUND END IF
```

The valid secret-rights bits are specified in section 2.2.1.1.4, and the security descriptor is specified in section 3.1.1.4. The IsRequestorAnonymous procedure is specified in section 3.1.4.2.3.

SecretHandle: If the request is successful, this parameter is used to return a handle (section 3.1.1.7) to the newly created secret object with its fields initialized as follows:

- LsaContextHandle.HandleType = "Secret"
- LsaContextHandle.Object = the secret object
- LsaContextHandle.GrantedAccess = as specified in section 3.1.4.2.1

Both "current time" and "old time" attributes of a secret will be set to the server's current time at the instance of creation. Both "old value" and "current value" will be set to NULL until they are modified by the <u>LsarSetSecret</u> message.

The server MUST check that the secret by the name SecretName does not already exist and fail the request with STATUS_OBJECT_NAME_COLLISION otherwise. <68>

3.1.4.6.2 LsarOpenSecret (Opnum 28)

The LsarOpenSecret method is invoked to obtain a handle to an existing secret object.

```
NTSTATUS LsarOpenSecret(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] PRPC_UNICODE_STRING SecretName,
   [in] ACCESS_MASK DesiredAccess,
   [out] LSAPR HANDLE* SecretHandle
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

SecretName: The name of the secret object to open.

DesiredAccess: The requested type of access.

SecretHandle: Used to return the handle to the opened secret object.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC0000034 STATUS_OBJECT_NAME_NOT_FOUND	The secret with the specified name was not found.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC000000D STATUS_INVALID_PARAMETER	Some of the parameters supplied were invalid.

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*. HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. *PolicyHandle*. GrantedAccess MUST NOT be considered for this call because the access check MUST happen on the secret object.

SecretName: The name of the secret to be opened. The server MUST verify that the name syntax restrictions on secrets specified in section 3.1.4.6.1 are satisfied, and fail the request with STATUS_INVALID_PARAMETER otherwise. The server MUST verify that the secret object with this name exists in its policy database and fail the request with STATUS_OBJECT_NAME_NOT_FOUND otherwise. <69>

DesiredAccess: A bitmask specifying the type of access that the caller attempts to obtain from the secret object, which is access-checked according to section <u>3.1.4.2.1</u>. The method-specific portion of the check is as follows:

```
IF (IsRequestorAnonymous() and LsaRestrictAnonymous is set to TRUE) THEN
    Return STATUS_OBJECT_NAME_NOT_FOUND
END IF
```

The valid secret-rights bits are specified in section 2.2.1.1.4 and the security descriptor is specified in section 3.1.1.4. The IsRequestorAnonymous procedure is specified in section 3.1.4.2.3.

SecretHandle: If the request is successful, this parameter is used to return a handle (section 3.1.1.7) to the opened secret object with its fields initialized as follows:

- LsaContextHandle.HandleType = "Secret"
- LsaContextHandle.Object = the secret object
- LsaContextHandle.GrantedAccess = as specified in section 3.1.4.2.1

3.1.4.6.3 LsarSetSecret (Opnum 29)

The LsarSetSecret method is invoked to set the current and old values of the secret object.

```
NTSTATUS LsarSetSecret(
[in] LSAPR_HANDLE SecretHandle,
```

```
[in, unique] PLSAPR_CR_CIPHER_VALUE EncryptedCurrentValue,
  [in, unique] PLSAPR_CR_CIPHER_VALUE EncryptedOldValue
):
```

SecretHandle: An open secret object handle.

EncryptedCurrentValue: A binary large object (BLOB) representing a new encrypted cipher value. It is valid for this parameter to be NULL, in which case the value is deleted from the server's policy database.

EncryptedOldValue: A BLOB representing the encrypted old value. It is valid for this parameter to be NULL, in which case the current value in the policy database is copied.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.
0xC0000008 STATUS_INVALID_HANDLE	SecretHandle is not a valid handle.

Processing:

This message contains three input parameters:

SecretHandle: An open handle to a secret object. If the handle is not a valid context handle to a secret object or SecretHandle. Handle Type does not equal "Secret", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that SecretHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to SECRET SET VALUE. <70>

EncryptedCurrentValue: The version of the new secret value that is being set, encrypted as specified in section 5.1.2. It is valid for this parameter to be NULL, in which case the server MUST delete the current value in its database. If decryption fails, the server must return an implementation-specific error. <71>

EncryptedOldValue: The version of the old secret value that is being set, encrypted as specified in section 5.1.2. It is valid for this parameter to be NULL, in which case the server MUST delete the old value in its database and replace it with the previous version of "CurrentValue". If decryption fails, the server must return an implementation-specific error. <72>

The server MUST also maintain "time stamp" values for current and old values of the secret object. The following table lists the rules by which the time stamps are computed.

Old secret value	New secret value	Effect on old time	Effect on new time
NULL	NULL	Old value of "new secret time"	Current server time
NULL	Non-NULL	Old value of "new secret time"	Current server time

Old secret value	New secret value	Effect on old time	Effect on new time
Non-NULL	NULL	Current server time	Current server time
Non-NULL	Non-NULL	Current server time	Current server time

3.1.4.6.4 LsarQuerySecret (Opnum 30)

The LsarQuerySecret method is invoked to retrieve the current and old (or previous) value of the secret object.

```
NTSTATUS LsarQuerySecret(
   [in] LSAPR_HANDLE SecretHandle,
   [in, out, unique] PLSAPR_CR_CIPHER_VALUE* EncryptedCurrentValue,
   [in, out, unique] PLARGE INTEGER CurrentValueSetTime,
   [in, out, unique] PLSAPR CR CIPHER VALUE* EncryptedOldValue,
   [in, out, unique] PLARGE_INTEGER OldValueSetTime
);
```

SecretHandle: An open secret object handle.

EncryptedCurrentValue: Used to return the encrypted current value of the secret object.

CurrentValueSetTime: Used to return the time when the current value was set.

EncryptedOldValue: A BLOB representing the encrypted old value. It is valid for this parameter to be NULL, in which case the current value in the policy database is copied.

OldValueSetTime: The time corresponding to the instant that the old value was last changed.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC0000008 STATUS_INVALID_HANDLE	SecretHandle is not a valid handle.

Processing:

This message takes five arguments:

SecretHandle: An open handle to a secret object. If the handle is not a valid context handle to a secret object or SecretHandle. Handle Type does not equal "Secret", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that SecretHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to SECRET QUERY VALUE. <73>

EncryptedCurrentValue: Used to return the current value of the secret, encrypted as specified in section 5.1.2. This parameter can be NULL if the caller is not interested in this information. <74>

CurrentValueSetTime: The time corresponding to the instant that the current value was last changed. This parameter can be NULL if the caller is not interested in this information.

EncryptedOldValue: Used to return the old value of the secret, encrypted as specified in section 5.1.2. This parameter can be NULL if the caller is not interested in this information. <75>

OldValueSetTime: The time corresponding to the instance that the old value was last changed. This parameter can be NULL if the caller is not interested in this information.

3.1.4.6.5 LsarStorePrivateData (Opnum 42)

The LsarStorePrivateData method is invoked to store a secret value.

```
NTSTATUS LsarStorePrivateData(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] PRPC UNICODE STRING KeyName,
   [in, unique] PLSAPR_CR_CIPHER_VALUE EncryptedData
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

KeyName: The name under which private data will be stored.

EncryptedData: The secret value to be stored.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.

Processing:

This message takes three arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY_CREATE_SECRET.

KeyName: A string identifying the name of the secret object under which the private data would be stored. The server MUST verify that KeyName is syntactically valid and reject the request with STATUS_INVALID_PARAMETER otherwise. If a secret object by this name does not exist and the EncryptedData parameter is not NULL, the server MUST verify that the caller has POLICY_CREATE_SECRET access. If the secret does exist and the EncryptedData parameter is not NULL, the access check is performed for the SECRET_SET_VALUE right against the secret's security descriptor. If the access check fails, the server MUST return STATUS ACCESS DENIED. If the

EncryptedData parameter is NULL, the server MUST check that the caller has DELETE access to the secret object and, if so, delete the secret object from the policy database.

EncryptedData: The value of the secret to be stored. This value is encrypted as specified in section 5.1.2. As mentioned already, a caller that wants the secret to be deleted simply passes NULL for this value. If decryption fails, the server must return an implementation-specific error. <76>

3.1.4.6.6 LsarRetrievePrivateData (Opnum 43)

The LsarRetrievePrivateData method is invoked to retrieve a secret value.

```
NTSTATUS LsarRetrievePrivateData(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] PRPC UNICODE STRING KeyName,
   [in, out] PLSAPR_CR_CIPHER_VALUE* EncryptedData
):
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

KeyName: The name identifying the secret value to be retrieved.

EncryptedData: Receives the encrypted value of the secret object.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied parameters was invalid.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC0000034 STATUS_OBJECT_NAME_NOT_FOUND	The key with the specified name was not found.

Processing:

This message takes three arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to SECRET_QUERY_VALUE.

KeyName: A string identifying the name of the secret object to be queried. If IsRequestorAnonymous() returns TRUE (section 3.1.4.2.3) and LsaRestrictAnonymous is set to TRUE, the call MUST fail with STATUS_OBJECT_NAME_NOT_FOUND. If a secret object by this name does not exist, the server MUST return STATUS_OBJECT_NAME_NOT_FOUND.

EncryptedData: Used to return an encrypted version of the secret value. This value is encrypted as specified in section 5.1.2.

3.1.4.7 Trusted Domain Object Methods

Trusted domain objects SHOULD be created only on a server implementation that is in the domain controller configuration. <77>

The message processing of methods in this section MUST use the abstract data model as specified in section 3.1.1.5.

Method (opnum)	Summary
LsarCreateTrustedDomainEx2 (opnum 59)	Creates a new trusted domain object in the server's policy database.
LsarCreateTrustedDomainEx (opnum 51)	Superseded by <u>LsarCreateTrustedDomainEx2</u> .
LsarCreateTrustedDomain (opnum 12)	Superseded by LsarCreateTrustedDomainEx2.
LsarOpenTrustedDomain (opnum 25)	Opens a handle to an existing trusted domain object that matches the given domain security identifier.
LsarOpenTrustedDomainByName (opnum 55)	Opens a handle to an existing trusted domain object that matches the given DNS or NetBIOS name.
LsarQueryTrustedDomainInfo (opnum 39)	Obtains information about a trusted domain object.
LsarSetTrustedDomainInfo (opnum 40)	Sets information on a trusted domain object.
LsarSetTrustedDomainInfoByName (opnum 49)	Sets information on a trusted domain object without having to first open a handle to it.
LsarSetInformationTrustedDomain (opnum 27)	Sets information on a trusted domain object.
LsarQueryTrustedDomainInfoByName (opnum 48)	Obtains information about a trusted domain object without having to first open a handle to it.
LsarQueryInfoTrustedDomain (opnum 26)	Obtains information about a trusted domain object.
LsarDeleteTrustedDomain (opnum 41)	Removes a trusted domain object from the server's policy database.
LsarEnumerateTrustedDomainsEx (opnum 50)	Enumerates all trusted domain objects in the server's policy database.
LsarEnumerateTrustedDomains (opnum 13)	Enumerates trusted domain objects in the server's policy database.
LsarQueryForestTrustInformation (opnum 73)	Obtains information from a trusted domain object corresponding to a forest trust relationship.
LsarSetForestTrustInformation (opnum 74)	Sets information on a trusted domain object corresponding to a cross-forest trust relationship.

3.1.4.7.1 LsarOpenTrustedDomain (Opnum 25)

The LsarOpenTrustedDomain method is invoked to obtain a handle to a trusted domain object.

```
NTSTATUS LsarOpenTrustedDomain(
[in] LSAPR HANDLE PolicyHandle,
[in] PRPC_SID TrustedDomainSid,
[in] ACCESS_MASK DesiredAccess,
[out] LSAPR HANDLE* TrustedDomainHandle
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

TrustedDomainSid: A security identifier of the trusted domain that is being opened.

DesiredAccess: A bitmask of access rights to open the object with.

TrustedDomainHandle: Used to return the trusted domain object handle.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied parameters is invalid. For instance, this can happen if the security identifier <i>TrustedDomainSid</i> is not a valid domain security identifier. Section 3.1.4.10 specifies data validation rules, including what constitutes a valid domain security identifier.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC00000DF STATUS_NO_SUCH_DOMAIN	The specified trusted domain object does not exist.
0xC00002B1 STATUS_DIRECTORY_SERVICE_REQUIRED	The Active Directory service was not available on the server.

Processing:

If Active Directory is not running on this machine, the server MUST return STATUS_DIRECTORY_SERVICE_REQUIRED.

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*. Handle Type does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. *PolicyHandle*. Granted Access MUST NOT be considered for this call because the access check MUST happen on the trusted domain object.

TrustedDomainSid: A SID of the trusted domain object. The server MUST verify that the SID is a valid domain SID and reject the request with STATUS_INVALID_PARAMETER otherwise. If the trusted domain object with this SID does not exist, the server MUST fail the request with STATUS NO SUCH DOMAIN error code.

DesiredAccess: A bitmask specifying the type of access the caller attempts to obtain from the trusted domain object, which is access-checked according to section 3.1.4.2.1. There is no method-specific portion of the check. The valid trusted-domain-rights bits are specified in section 2.2.1.1.5, and the security descriptor is specified in section 3.1.1.5.

TrustedDomainHandle: If the request is successful, this parameter is used to return a handle (section 3.1.1.7) to the opened trusted domain object with its fields initialized as follows: <78><79>

- LsaContextHandle.HandleType = "Trusted Domain"
- LsaContextHandle.Object = the trusted domain object
- LsaContextHandle.GrantedAccess = as specified in section 3.1.4.2.1

3.1.4.7.2 LsarQueryTrustedDomainInfo (Opnum 39)

The LsarQueryTrustedDomainInfo method is invoked to retrieve information on a trusted domain object.

```
NTSTATUS LsarQueryTrustedDomainInfo(
  [in] LSAPR_HANDLE PolicyHandle,
  [in] PRPC SID TrustedDomainSid,
  [in] TRUSTED_INFORMATION_CLASS InformationClass,
  [out, switch_is(InformationClass)]
   PLSAPR_TRUSTED_DOMAIN_INFO* TrustedDomainInformation
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

TrustedDomainSid: A security descriptor of the trusted domain object.

InformationClass: Identifies the type of information the caller is interested in.

TrustedDomainInformation: Used to return the information on the trusted domain object to the caller.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.
0xC0000002 STATUS_NOT_IMPLEMENTED	The specified information class is not supported.
0xC0000003 STATUS_INVALID_INFO_CLASS	The InformationClass argument is outside the allowed range.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC00000DF STATUS_NO_SUCH_DOMAIN	The specified trusted domain object does not exist.
0xC00002B1 STATUS_DIRECTORY_SERVICE_REQUIRED	The Active Directory service was not available on the server.

If Active Directory is not running on this machine, the server MUST return STATUS_DIRECTORY_SERVICE_REQUIRED.

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set as specified in section 3.1.4.7.13.

TrustedDomainSid: The SID of the trusted domain object to query. The server MUST verify that the caller has supplied a valid domain SID for this parameter and fail the request with STATUS_INVALID_PARAMETER if the check fails. The server MUST verify that a trusted domain object with this SID exists in its policy database and fail the request with STATUS_NO_SUCH_DOMAIN otherwise.

InformationClass: A value from the TRUSTED_INFORMATION_CLASS enumeration that specifies which type of information the caller is requesting. Not all values are valid. For values outside the TRUSTED_INFORMATION_CLASS enumeration range, the server MUST reject the request with STATUS_INVALID_PARAMETER. For InformationClass values TrustedControllersInformation, TrustedDomainAuthInformationInternal, TrustedDomainFullInformationInternal, and for any values that would be rejected by an LsarQueryInfoTrustedDomain call, the server MUST reject the request with an implementation-specific error. For all other InformationClass values, the server MUST behave as if it is processing an LsarQueryInfoTrustedDomain call with a trusted domain handle to the trusted domain identified by the TrustedDomainSid parameter.

TrustedDomainInformation: Used to return the requested information.

3.1.4.7.3 LsarSetTrustedDomainInfo (Opnum 40)

The LsarSetTrustedDomainInfo method is invoked to set information on a trusted domain object. In some cases, if the trusted domain object does not exist, it will be created.

```
NTSTATUS LsarSetTrustedDomainInfo(
   [in] LSAPR HANDLE PolicyHandle,
   [in] PRPC SID TrustedDomainSid,
   [in] TRUSTED_INFORMATION_CLASS InformationClass,
   [in, switch_is(InformationClass)]
   PLSAPR TRUSTED DOMAIN INFO TrustedDomainInformation
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

TrustedDomainSid: A SID of the trusted domain object to be modified.

InformationClass: Identifies the type of information to be set on the trusted domain object.

TrustedDomainInformation: Information to be set on the trusted domain object.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.

Return value/code	Description
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC00000DF STATUS_NO_SUCH_DOMAIN	The specified trusted domain object does not exist.
0xC00002B1 STATUS_DIRECTORY_SERVICE_REQUIRED	The Active Directory service was not available on the server.

If Active Directory is not running on this machine, the server MUST return STATUS DIRECTORY SERVICE REQUIRED.

This method is similar to the <u>LsarSetInformationTrustedDomain</u> method, with some important differences. For one, this method takes a policy object handle instead of a trusted domain object handle. Another important distinction is that for some information classes this method, unlike LsarSetInformationTrustedDomain, will create a trusted domain object if one does not exist already.

This message takes four arguments:

PolicyHandle: An open handle to the policy object. The access rights required to perform the operation depend on the value of the InformationClass parameter. The access bits required for each information class are specified in section 3.1.4.7.14. If the handle is not a valid context handle to the policy object or PolicyHandle.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. PolicyHandle.GrantedAccess MUST NOT be considered for this call because the access check MUST happen on the trusted domain object. If the server is a read-only domain controller, it MUST return an error.<a href="mailto:kenzyllage-new-mailto:kenzyllag

TrustedDomainSid: A SID of the trusted domain object to modify. The server MUST verify that the caller has supplied a valid domain SID for this parameter and fail the request with STATUS_INVALID_PARAMETER if the check fails.

InformationClass: A value from the <u>TRUSTED INFORMATION CLASS</u> enumeration that specifies which type of information the caller is setting. Not all *InformationClass* values are valid. The valid *InformationClass* values for this method are as follows:

- TrustedDomainNameInformation: The server MUST act as if an <u>LsarCreateTrustedDomain</u> message came in with its *TrustedDomainInformation.Name* parameter as the name passed in the *TrustedDomainInformation* parameter, its *TrustedDomainInformation.Sid* parameter as the SID passed in the *TrustedDomainSid* parameter, and its *DesiredAccess* parameter set to zero.
- TrustedPosixOffsetInformation: The server MUST verify that a trusted domain object with this SID exists in its policy database. If the object does not exist, the call MUST fail with STATUS_NO_SUCH_DOMAIN. Otherwise, the server MUST verify that the caller has access to the trusted domain object as specified in section 3.1.4.2.1 with DesiredAccess set to TRUSTED_SET_POSIX. There is no method-specific portion of this check.

Then the server MUST act as if an LsarSetInformationTrustedDomain message is being processed.

The server MAY support the following *InformationClass* values. <81> If the server does not support these values, it MUST return STATUS_INVALID_PARAMETER. If the server supports these values, it MUST perform the corresponding operations:

- TrustedDomainInformationEx: The server MUST check that a trusted domain object with this SID exists in its policy database. If the object does not exist, the server MUST create a new trusted domain object using the same processing rules as <u>LsarCreateTrustedDomainEx2</u>, and using the following parameters for the LsarCreateTrustedDomainEx2 processing rules:
 - PolicyHandle set to the same PolicyHandle in the original message.
 - *TrustedDomainInformation* set to the same *TrustedDomainInformation* in the original message.
 - AuthenticationInformation set to NULL.
 - DesiredAccess set to zero.

If the object does exist, the server MUST set the trusted domain information using the same processing rules as LsarSetInformationTrustedDomain, and using the following parameters for the LsarSetInformationTrustedDomain processing rules:

- *TrustDomainHandle* set to the handle to the trusted domain object.
- InformationClass set to the same InformationClass in the original message.
- TrustedDomainInformation set to the same TrustedDomainInformation in the original message.
- TrustedPasswordInformation: The server MUST verify that a trusted domain object with this SID exists in its policy database. If the object does not exist, the call MUST fail with STATUS_NO_SUCH_DOMAIN. Otherwise, the server MUST open the secret object, as defined in section 3.1.1.4, (or create a secret object, if one does not already exist) with "Name" set to "G\$\$<Trusted Domain Name>". The server MUST then set "Old Value" of the secret object to the "OldPassword" value in *TrustedDomainInformation*, similar to the processing when an <u>LsarSetSecret</u> request has been made.

The server MUST return STATUS_INVALID_PARAMETER for all other InformationClass arguments.

TrustedDomainInformation: Contains the data supplied by the caller to be set on the trusted domain object.

3.1.4.7.4 LsarDeleteTrustedDomain (Opnum 41)

The LsarDeleteTrustedDomain method is invoked to delete a trusted domain object (TDO).

```
NTSTATUS LsarDeleteTrustedDomain(
   [in] LSAPR HANDLE PolicyHandle,
   [in] PRPC_SID TrustedDomainSid
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

TrustedDomainSid: A security descriptor of the TDO to be deleted.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC00000DF STATUS_NO_SUCH_DOMAIN	The specified TDO does not exist.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC00002B1 STATUS_DIRECTORY_SERVICE_REQUIRED	The Active Directory service was not available on the server.
0xC0000403 STATUS_USER_DELETE_TRUST_QUOTA_EXCEEDED	The caller's quota for the maximum allowed number of deleted TDOs is exceeded.

If Active Directory is not running on this machine, the server MUST return STATUS_DIRECTORY_SERVICE_REQUIRED.

If the number of deleted TDOs that were created by the caller through the control access right Create-Inbound-Trust (defined in [MS-ADTS] section 5.1.3.2.1) exceeds the value in the msDS-PerUserTrustTombstonesQuota attribute of the **domain naming context (domain NC)** root object (defined in [MS-ADTS] section 6.1.1.1.4), the server MUST return STATUS_USER_DELETE_TRUST_QUOTA_EXCEEDED. For the syntax of the msDS-PerUserTrustTombstonesQuota attribute, refer to [MS-ADA2] section 2.408. The server MUST enforce the quota check only for the TDOs created by control access right Create-Inbound-Trust and if the caller is the creator of that TDO.

This message takes two arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to TRUSTED_QUERY_DOMAIN_NAME | DELETE.

TrustedDomainSid: The SID of a TDO to be deleted. The server MUST verify that the caller has supplied a valid domain SID for this parameter and fail the request with STATUS_INVALID_PARAMETER if the check fails. The server MUST verify that a TDO with this SID exists in its policy database and fail the request with STATUS NO SUCH DOMAIN otherwise.

If the server is a read-only domain controller, it MUST return an error. <82>

The server MUST also check whether a secret with name "G\$\$<Trusted Domain Name>" exists or not. If it exists, the server MUST delete that secret along with the trusted domain.

The server MUST also check whether an **interdomain trust account** with name "<Trusted Domain NetBIOS Name>\$" exists. If it exists, the server MUST delete that account along with the trusted domain.

3.1.4.7.5 LsarQueryTrustedDomainInfoByName (Opnum 48)

The LsarQueryTrustedDomainInfoByName method is invoked to retrieve information about a trusted domain object by its string name.

```
NTSTATUS LsarQueryTrustedDomainInfoByName(
[in] LSAPR_HANDLE PolicyHandle,
[in] PRPC UNICODE STRING TrustedDomainName,
[in] TRUSTED_INFORMATION_CLASS InformationClass,
[out, switch is(InformationClass)]
PLSAPR_TRUSTED_DOMAIN_INFO* TrustedDomainInformation);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

TrustedDomainName: The name of the trusted domain object to query.

InformationClass: One of the <u>TRUSTED INFORMATION CLASS</u> values identifying the type of information the caller is interested in.

TrustedDomainInformation: Used to return the information requested by the caller.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied parameters was invalid.
0xC0000034 STATUS_OBJECT_NAME_NOT_FOUND	The trusted domain object with the specified name could not be found.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message is identical in its operation to <u>LsarQueryInfoTrustedDomain</u>; the only exception is that the *TrustedDomainName* parameter is used to locate the trusted domain object, rather than having the caller supply the trusted domain object handle.

The trusted domain object is located by matching the *TrustedDomainName* parameter against the trusted domain object in the server's policy database. The trailing period on DNS names is ignored for the purposes of comparison.

3.1.4.7.6 LsarSetTrustedDomainInfoByName (Opnum 49)

The LsarSetTrustedDomainInfoByName method is invoked to set information about a trusted domain object by its string name.

```
NTSTATUS LsarSetTrustedDomainInfoByName(
[in] LSAPR HANDLE PolicyHandle,
[in] PRPC_UNICODE_STRING TrustedDomainName,
[in] TRUSTED INFORMATION CLASS InformationClass,
```

```
[in, switch_is(InformationClass)]
    PLSAPR_TRUSTED_DOMAIN_INFO TrustedDomainInformation
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

TrustedDomainName: The name of the trusted domain object to set information on.

InformationClass: One of the TRUSTED INFORMATION CLASS values indicating the type of

information the caller is trying to set.

TrustedDomainInformation: The data being set.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied arguments is invalid.
0xC0000034 STATUS_OBJECT_NAME_NOT_FOUND	The trusted domain object with the specified name could not be found.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message is identical in its operation to <u>LsarSetInformationTrustedDomain</u>; the only exception is that the *TrustedDomainName* parameter is used to locate the trusted domain object, rather than having the caller supply the trusted domain object handle.

The trusted domain object is located by matching the *TrustedDomainName* parameter against the trusted domain object in the server's policy database. The trailing period on DNS names is ignored for the purposes of comparison.

3.1.4.7.7 LsarEnumerateTrustedDomainsEx (Opnum 50)

The LsarEnumerateTrustedDomainsEx method is invoked to enumerate trusted domain objects in the server's database. The method is designed to be invoked multiple times to retrieve the data in fragments.

```
NTSTATUS LsarEnumerateTrustedDomainsEx(
   [in] LSAPR_HANDLE PolicyHandle,
   [in, out] unsigned long* EnumerationContext,
   [out] PLSAPR_TRUSTED_ENUM_BUFFER_EX EnumerationBuffer,
   [in] unsigned long PreferedMaximumLength
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

EnumerationContext: Used to keep track of the state of the enumeration in cases where the caller obtains its information in several fragments.

EnumerationBuffer: Contains a fragment of requested information.

PreferedMaximumLength: A value that indicates the approximate size of the data to be returned.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0x8000001A STATUS_NO_MORE_ENTRIES	No more information is available.
0x00000105 STATUS_MORE_ENTRIES	More information is available by calling this method again.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY_VIEW_LOCAL_INFORMATION.

EnumerationContext: A number that indicates a starting index at which to begin the enumeration. The server MUST always return all trusted domain objects in the same order, starting at the object whose index is <code>EnumerationContext</code>. To initiate a new enumeration, the client sets <code>EnumerationContext</code> to zero; otherwise, the client sets <code>EnumerationContext</code> to a value returned by a previous call to the method.

The server MUST return STATUS_INVALID_PARAMETER if the EnumerationContext parameter is NULL.

EnumerationBuffer: Used to return the results of enumeration. The server MUST fill EnumerationBuffer with as many trusted domain objects as possible, as determined by PreferedMaximumLength. If the size of all remaining objects is less than or equal to PreferedMaximumLength, the server MUST fill EnumerationBuffer with all objects. If the size of all remaining objects is greater than PreferedMaximumLength, the server MUST fill EnumerationBuffer with objects such that the size of the trusted domain objects returned is greater than or equal to PreferedMaximumLength, but would be less than PreferedMaximumLength if the last object had not been added to EnumerationBuffer. If there are no more objects than are returned in EnumerationBuffer, the server MUST return STATUS_NO_MORE_ENTRIES. If there are more database objects than are returned in EnumerationBuffer, the server MUST set the EnumerationContext value to the index value that would allow it to resume enumeration correctly when this method is called again, and the server MUST return STATUS MORE ENTRIES. Note that this return value is not an error status.

PreferedMaximumLength: An indication about the approximate size, in bytes, of the data to be returned. Any unsigned 32-bit value is valid for the *PreferedMaximumLength* parameter.

If Active Directory is not running on this machine, the server MUST fill 0 objects in *EnumerationBuffer*, and return STATUS_NO_MORE_ENTRIES.

3.1.4.7.8 LsarEnumerateTrustedDomains (Opnum 13)

The LsarEnumerateTrustedDomains method is invoked to request a list of trusted domain objects in the server's database. The method can be called multiple times to return its output in fragments.

```
NTSTATUS LsarEnumerateTrustedDomains(
   [in] LSAPR_HANDLE PolicyHandle,
   [in, out] unsigned long* EnumerationContext,
   [out] PLSAPR TRUSTED ENUM BUFFER EnumerationBuffer,
   [in] unsigned long PreferedMaximumLength
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

EnumerationContext: A pointer to a context value that is used to resume enumeration, if necessary.

EnumerationBuffer: A pointer to a structure that will contain the results of the enumeration.

PreferedMaximumLength: A value that indicates the approximate size of the data to be returned.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC0000105 STATUS_MORE_ENTRIES	More information is available to successive calls.
0xC000001A STATUS_NO_MORE_ENTRIES	No more entries are available from the enumeration.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY_VIEW_LOCAL_INFORMATION.

EnumerationContext: A number that indicates a starting index at which to begin the enumeration. The server MUST always return all trusted domain objects in the same order, starting at the object whose index is EnumerationContext. To initiate a new enumeration, the client sets EnumerationContext to zero; otherwise, the client sets EnumerationContext to a value returned by a previous call to the method.

The server MUST return STATUS_INVALID_PARAMETER if the EnumerationContext parameter is NULL.

This method differs from the <u>LsarEnumerateTrustedDomainsEx</u> method in one significant way-in mixed-mode forests, this method returns to the caller an entire set of domains within the forest by enumerating all the cross-referenced objects in Active Directory in addition to domains that are trusted explicitly.

EnumerationBuffer: Used to return the results of enumeration. The server MUST fill EnumerationBuffer with as many trusted domain objects as possible, as determined by PreferedMaximumLength. If the size of all remaining objects is less than or equal to PreferedMaximumLength, the server MUST fill EnumerationBuffer with all objects. If the size of all remaining objects is greater than PreferedMaximumLength, the server MUST fill EnumerationBuffer with objects such that the size of the trusted domain objects returned is greater than or equal to PreferedMaximumLength, but would be less than PreferedMaximumLength if the last object had not been added to EnumerationBuffer. If there are no more objects than are returned in EnumerationBuffer, the server MUST return STATUS_NO_MORE_ENTRIES. If there are more database objects than are returned in EnumerationBuffer, the server MUST set the EnumerationContext value to the index value that would allow it to resume enumeration correctly when this method is called again, and the server MUST return STATUS MORE ENTRIES. Note that this return value is not an error status.

When enumerating trusted domain objects for this message, the server MUST limit the trusted domain objects returned to the following subset only:

- Outbound Trusts: The trust direction has the TRUST_DIRECTION_OUTBOUND bit set.
- Uplevel or Downlevel Trusts: The trust type is TRUST_TYPE_DOWNLEVEL or TRUST TYPE UPLEVEL.
- Non-uplevel-only Trusts: The Trust Attributes field does not have the TRUST_ATTRIBUTE_UPLEVEL_ONLY bit set.

Trust types and attributes are specified in [MS-ADTS] section 6.1.6.

PreferedMaximumLength: An indication about the approximate size, in bytes, of the data to be returned. Any unsigned 32-bit value is valid for the *PreferedMaximumLength* parameter.

If Active Directory is not running on this machine, the server MUST fill 0 objects in *EnumerationBuffer*, and return STATUS NO MORE ENTRIES.

3.1.4.7.9 LsarOpenTrustedDomainByName (Opnum 55)

The LsarOpenTrustedDomainByName method is invoked to open a trusted domain object handle by supplying the name of the trusted domain.

```
NTSTATUS LsarOpenTrustedDomainByName(
[in] LSAPR HANDLE PolicyHandle,
[in] PRPC UNICODE_STRING TrustedDomainName,
[in] ACCESS_MASK DesiredAccess,
[out] LSAPR_HANDLE* TrustedDomainHandle
):
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

TrustedDomainName: The name of the trusted domain object.

DesiredAccess: The type of access requested by the caller.

TrustedDomainHandle: Used to return the opened trusted domain handle.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied arguments was invalid.
0xC0000034 STATUS_OBJECT_NAME_NOT_FOUND	A trusted domain object by this name was not found.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*. HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. *PolicyHandle*. GrantedAccess MUST NOT be considered for this call because the access check MUST happen on the trusted domain object.

TrustedDomainName: Contains the name of the trusted domain to be opened. This can be a DNS or a NetBIOS name. If the server cannot locate a trusted domain object by this name in its policy database, the server MUST return STATUS_OBJECT_NAME_NOT_FOUND. The same status code MUST be returned by the server if Active Directory is not running on this machine.

DesiredAccess: The set of rights that the caller attempts to obtain from the trusted domain object, which is access-checked according to section 3.1.4.2.1. There is no method-specific portion of the check. The valid trusted-domain-rights bits are specified in section 2.2.1.1.5, and the security descriptor is specified in section 3.1.1.5.

TrustedDomainHandle: If the request is successful, this parameter is used to return a handle (section 3.1.1.7) to the opened trusted domain object with its fields initialized as follows:

- LsaContextHandle.HandleType = "Trusted Domain"
- LsaContextHandle.Object = the trusted domain object
- LsaContextHandle.GrantedAccess = as specified in section 3.1.4.2.1

3.1.4.7.10 LsarCreateTrustedDomainEx2 (Opnum 59)

The LsarCreateTrustedDomainEx2 method is invoked to create a new trusted domain object (TDO).<83>

```
NTSTATUS LsarCreateTrustedDomainEx2(
    [in] LSAPR_HANDLE PolicyHandle,
    [in] PLSAPR_TRUSTED_DOMAIN_INFORMATION_EX TrustedDomainInformation,
    [in] PLSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL AuthenticationInformation,
    [in] ACCESS_MASK DesiredAccess,
    [out] LSAPR HANDLE* TrustedDomainHandle
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

TrustedDomainInformation: Information about the new TDO to be created.

AuthenticationInformation: Encrypted authentication information for the new TDO.

DesiredAccess: An access mask specifying desired access to the TDO handle.

TrustedDomainHandle: Used to return the handle for the newly created TDO.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied arguments is invalid.
0xC0000300 STATUS_NOT_SUPPORTED_ON_SBS	The operation is not supported on a particular product. <84>
0xC00000DD STATUS_INVALID_DOMAIN_STATE	The operation cannot complete in the current state of the domain.
0xC00002B1 STATUS_DIRECTORY_SERVICE_REQUIRED	The Active Directory service was not available on the server.
0xC0000078 STATUS_INVALID_SID	The security identifier of the trusted domain is not valid.
0xC00002E9 STATUS_CURRENT_DOMAIN_NOT_ALLOWED	Trust cannot be established with the current domain.
0xC0000035 STATUS_OBJECT_NAME_COLLISION	Another TDO already exists that matches some of the identifying information of the supplied information.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC0000401 STATUS_PER_USER_TRUST_QUOTA_EXCEEDED	The caller's quota for maximum number of TDOs that can be created by control access right Create-Inbound-Trust is exceeded.
0xC0000402 STATUS_ALL_USER_TRUST_QUOTA_EXCEEDED	The combined users' quota for maximum number of TDOs that can be created by control access right Create-Inbound-Trust is exceeded.

Processing:

If Active Directory is not running on this machine, the server MUST return STATUS_DIRECTORY_SERVICE_REQUIRED.<85> If the server is a read-only domain controller, it MUST return an error.<86>

If the caller is not a member of the Domain Admins group, the server MUST return STATUS_ACCESS_DENIED for policy handle access checking.

If the TDO creation failed due to the caller not having standard access rights to create the TDO, then the server MUST check the caller's control access right (defined in [MS-ADTS] section 5.1.3.2.1). The TDO creation by control access right should be allowed if:

- The trust is an inbound-only forest trust. The server MUST return STATUS_ACCESS_DENIED if the trust to be created is not an inbound-only forest trust.
- The caller has the control access right to create an inbound trust on the domain object.
- The caller's quota for trust object creations has not been exceeded. If the number of TDOs that have been created by the caller through control access right Create-Inbound-Trust exceeds the value in the msDS-PerUserTrustQuota attribute of the domain NC root object, then the server MUST return STATUS_PER_USER_TRUST_QUOTA_EXCEEDED. For the syntax of the msDS-PerUserTrustQuota attribute, refer to [MS-ADA2] section 2.407.
- The combined users' quota for trust object creations has not been exceeded. If the number of TDOs that have been created through control access right Create-Inbound-Trust exceeds the value in the msDS-AllUsersTrustQuota attribute of the domain NC root object (defined in [MS-ADTS] section 6.1.1.1.4), then the server MUST return STATUS_ALL_USER_TRUST_QUOTA_EXCEEDED. For the syntax of the msDS-AllUsersTrustQuota attribute, refer to [MS-ADA2] section 2.212.

This message takes five arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or PolicyHandle. Handle Type does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. PolicyHandle. Granted Access MUST NOT be considered for this call because the access check MUST happen on the TDO.

TrustedDomainInformation: A structure containing most components of a TDO makeup. The data provided in this parameter MUST be checked for validity in accordance with rules for TDO consistency specified in "Trust Objects" in [MS-ADTS] section 6.1.6. The server MUST reject invalid input with STATUS_INVALID_PARAMETER. The server MUST return STATUS_INVALID_DOMAIN_STATE in the following cases:

- The TrustAttributes TRUST_ATTRIBUTE_FOREST_TRANSITIVE flag is set and the forestFunctionality specified in [MS-ADTS] section 3.1.1.3.2.27 is DS_BEHAVIOR_WIN2003 or higher.
- The TrustAttributes TRUST_ATTRIBUTE_FOREST_TRANSITIVE flag is set and the **DnsForestName** and **DnsDomainName** fields in DNS Domain Information (see section 3.1.1.1) do not contain the same value.
- The TrustAttributes TRUST_ATTRIBUTE_CROSS_ORGANIZATION flag is set and the forestFunctionality specified in [MS-ADTS] section 3.1.1.3.2.27 is DS_BEHAVIOR_WIN2003 or higher.

If one or more properties in *TrustedDomainInformation* points to the current domain (such as the domain that the server is a part of), the server MUST return STATUS_CURRENT_DOMAIN_NOT_ALLOWED. If there is another domain that claims the same properties, the server MUST return STATUS_OBJECT_NAME_COLLISION. Each field in this structure maps to a field in the TDO model, as specified in section 3.1.1.5. If the operation succeeds, the server MUST update its database with a new TDO field populated from this input parameter.

AuthenticationInformation: A structure containing authentication information for the trusted domain. The server first MUST decrypt this data structure using an algorithm (as specified in section 5.1.1) with the key being the session key negotiated by the transport. The server then MUST unmarshal the data inside this structure and then store it into a structure whose format is specified in section 2.2.7.11. This structure MUST then be stored on Trust Incoming and Outgoing Password properties.

DesiredAccess: A bitmask containing a set of access rights that the caller attempts to obtain from the TDO, which is access-checked as specified in section <u>3.1.4.2.1</u>. Whatever the set of access rights requested by the caller, the server MUST also set the TRUSTED_SET_AUTH bit inside *DesiredAccess* before performing the security descriptor check. There is no method-specific portion of the check.

The valid trusted-domain-rights bits are specified in section 2.2.1.1.5, and the security descriptor is specified in section 3.1.1.5.

TrustedDomainHandle: If the request is successful, this parameter is used to return a handle (section 3.1.1.7) to the newly created TDO with its fields initialized as follows:

- LsaContextHandle.HandleType = "Trusted Domain"
- LsaContextHandle.Object = the TDO
- LsaContextHandle.GrantedAccess = as specified in section 3.1.4.2.1

New TDOs are always created without forest trust information. The **ForestTrustInfo** and **ForestTrustLength** fields of the TDO are thus set to NULL and 0, respectively.

If the trust being created is inbound or bidirectional as defined in the **TrustDirection** field of the *TrustedDomainInformation* parameter, then the server MUST also update its database with a new interdomain trust account populated as specified in [MS-ADTS] section 6.1.6.8.

3.1.4.7.11 LsarCreateTrustedDomainEx (Opnum 51)

The LsarCreateTrustedDomainEx method is invoked to create a new trusted domain object (TDO).

```
NTSTATUS LsarCreateTrustedDomainEx(
   [in] LSAPR HANDLE PolicyHandle,
   [in] PLSAPR TRUSTED_DOMAIN_INFORMATION_EX TrustedDomainInformation,
   [in] PLSAPR TRUSTED DOMAIN AUTH INFORMATION AuthenticationInformation,
   [in] ACCESS_MASK DesiredAccess,
   [out] LSAPR_HANDLE* TrustedDomainHandle
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

TrustedDomainInformation: Information about the new TDO to be created.

AuthenticationInformation: Encrypted authentication information for the new TDO.

DesiredAccess: An access mask that specifies desired access to the TDO handle.

TrustedDomainHandle: Used to return the handle for the newly created TDO.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied arguments is invalid.

Return value/code	Description
0xC0000300 STATUS_NOT_SUPPORTED_ON_SBS	The operation is not supported on a particular product. <a><87>
0xC00000DD STATUS_INVALID_DOMAIN_STATE	The operation cannot complete in the current state of the domain.
0xC00002B1 STATUS_DIRECTORY_SERVICE_REQUIRED	The Active Directory service was not available on the server.
0xC0000078 STATUS_INVALID_SID	The security identifier of the trusted domain is not valid.
0xC00002E9 STATUS_CURRENT_DOMAIN_NOT_ALLOWED	Trust cannot be established with the current domain.
0xC0000035 STATUS_OBJECT_NAME_COLLISION	Another TDO already exists that matches some of the identifying information of the supplied information.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC0000401 STATUS_PER_USER_TRUST_QUOTA_EXCEEDED	The caller's quota for the maximum number of TDOs that can be created by control access right Create-Inbound-Trust is exceeded.
0xC0000402 STATUS_ALL_USER_TRUST_QUOTA_EXCEEDED	The combined users' quota for the maximum number of TDOs that can be created by control access right Create-Inbound-Trust is exceeded.

This message MUST be processed in an identical manner to <u>LsarCreateTrustedDomainEx2</u>, with the following exceptions.

AuthenticationInformation is a structure containing authentication information for the trusted domain. The authentication information is not encrypted, which makes this an insecure message to call. As a result, callers SHOULD NOT invoke this message and SHOULD instead call LsarCreateTrustedDomainEx2.

3.1.4.7.12 LsarCreateTrustedDomain (Opnum 12)

The LsarCreateTrustedDomain method is invoked to create an object of type trusted domain in the server's database.

```
NTSTATUS LsarCreateTrustedDomain(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] PLSAPR TRUST INFORMATION TrustedDomainInformation,
   [in] ACCESS_MASK DesiredAccess,
   [out] LSAPR_HANDLE* TrustedDomainHandle
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

TrustedDomainInformation: Information about the new trusted domain object (TDO) to be created.

DesiredAccess: An access mask that specifies the desired access to the TDO handle.

TrustedDomainHandle: Used to return the handle for the newly created TDO.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied arguments is invalid.
0xC0000300 STATUS_NOT_SUPPORTED_ON_SBS	The operation is not supported on a particular product. <88>
0xC00002B1 STATUS_DIRECTORY_SERVICE_REQUIRED	The Active Directory service was not available on the server.
0xC0000078 STATUS_INVALID_SID	The security identifier of the trusted domain is not valid.
0xC00002E9 STATUS_CURRENT_DOMAIN_NOT_ALLOWED	Trust cannot be established with the current domain.
0xC0000035 STATUS_OBJECT_NAME_COLLISION	Another TDO already exists that matches some of the identifying information of the supplied information.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC0000401 STATUS_PER_USER_TRUST_QUOTA_EXCEEDED	The caller's quota for the maximum number of TDOs that can be created by control access right Create-Inbound-Trust is exceeded.
0xC0000402 STATUS_ALL_USER_TRUST_QUOTA_EXCEEDED	The combined users' quota for the maximum number of TDOs that can be created by control access right Create-Inbound-Trust is exceeded.

Processing:

This message MUST be processed in an identical manner to <u>LsarCreateTrustedDomainEx</u> with the following mapping as input parameters.

PolicyHandle: Same.

TrustedDomainInformation:

- Name: Comes from *TrustedDomainInformation*. Name input parameter.
- **FlatName**: Comes from *TrustedDomainInformation*. Name input parameter.
- **SID**: Comes from *TrustedDomainInformation*. Security identifier (SID) input parameter.
- TrustDirection: TRUST_DIRECTION_OUTBOUND.
- TrustType: TRUST_TYPE_DOWNLEVEL.

• TrustAttributes: 0.

AuthenticationInformation: NULL.

DesiredAccess: Same.

TrustedDomainHandle: Same.

3.1.4.7.13 LsarQueryInfoTrustedDomain (Opnum 26)

The LsarQueryInfoTrustedDomain method is invoked to retrieve information about the trusted domain object.

```
NTSTATUS LsarQueryInfoTrustedDomain(
[in] LSAPR_HANDLE TrustedDomainHandle,
[in] TRUSTED INFORMATION CLASS InformationClass,
[out, switch_is(InformationClass)]
PLSAPR_TRUSTED_DOMAIN_INFO* TrustedDomainInformation
):
```

TrustedDomainHandle: An open trusted domain object handle.

InformationClass: One of the <u>TRUSTED INFORMATION CLASS</u> values indicating the type of information the caller is interested in.

TrustedDomainInformation: Used to return requested information about the trusted domain object.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the arguments supplied to the function was invalid.
0xC0000003 STATUS_INVALID_INFO_CLASS	The InformationClass argument is outside the allowed range.
0xC0000008 STATUS_INVALID_HANDLE	TrustedDomainHandle is not a valid handle.

Processing:

This message takes three arguments:

TrustedDomainHandle: An open handle to a trusted domain object. If the handle is not a valid context handle to a trusted domain object or TrustedDomainHandle. HandleType does not equal "Trusted Domain", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that TrustedDomainHandle grants access as specified in section 3.1.4.2.2. The following table specifies the RequiredAccess value to use in this access check for each InformationClass value, or indicates if no processing is supported, regardless of access granted. There are several methods in the Local Security Authority (Domain Policy) Remote Protocol that query trusted domain information. All of them enforce the same rights assignments based on information class as described in the following table.

Value of InformationClass parameter	RequiredAccess value
TrustedDomainNameInformation TrustedDomainInformationBasic TrustedDomainInformationEx TrustedDomainInformationEx2Internal	TRUSTED_QUERY_DOMAIN_NAME
TrustedControllersInformation	Does not apply: This information class is obsolete and cannot be set or queried. The server MUST return STATUS_INVALID_PARAMETER.
TrustedPosixOffsetInformation TrustedDomainSupportedEncryptionTypes	TRUSTED_QUERY_POSIX
TrustedPasswordInformation TrustedDomainAuthInformation TrustedDomainAuthInformationInternal	TRUSTED_QUERY_AUTH
TrustedDomainFullInformation TrustedDomainFullInformationInternal TrustedDomainFullInformation2Internal	TRUSTED_QUERY_DOMAIN_NAME TRUSTED_QUERY_POSIX TRUSTED_QUERY_AUTH

InformationClass: A value from the TRUSTED_INFORMATION_CLASS enumeration specifying what type of information the caller is requesting. Not all values are valid. For values outside the TRUSTED_INFORMATION_CLASS range, the server MUST reject the request with STATUS_INVALID_PARAMETER. Information class values TrustedDomainAuthInformationInternal and TrustedDomainFullInformationInternal MUST be rejected with STATUS_INVALID_INFO_CLASS.

TrustedDomainInformation: Used to return the data requested by the caller, in a structure form corresponding to the *InformationClass* parameter. Information MUST be collected from the abstract data model specified in section 3.1.1.5.

Value of InformationClass parameter	Information to return
TrustedDomainNameInformation	Flat Name
TrustedPosixOffsetInformation	Posix Offset
TrustedDomainInformationEx	Name Flat Name Security Identifier Posix Offset Trust Type Trust Direction Trust Attributes
TrustedDomainAuthInformation TrustedDomainAuthInformationInternal TrustedDomainFullInformationInternal	Not applicable: This information class cannot be queried. Server MUST return STATUS_INVALID_INFO_CLASS.
TrustedDomainFullInformation	Name Flat Name Security Identifier Posix Offset Trust Type Trust Direction Trust Attributes

Value of InformationClass parameter	Information to return
	Trust Incoming and Outgoing Password values MUST be set to 0.
TrustedDomainFullInformation2Internall	Name
	Flat Name
	Security Identifier
	Posix Offset
	Trust Type
	Trust Direction
	Trust Attributes
	Forest Trust Attributes, as stored in Active Directory under the msDs- TrustForestTrustInfo attribute ([MS-ADTS] section 6.1.6.9.3).
	Trust Incoming and Outgoing Password values MUST be set to 0.
TrustedDomainSupportedEncryptionTypes	Supported Encryption Types
Other values	Server MUST return STATUS_INVALID_PARAMETER.

If the server is not at DS_BEHAVIOR_WIN2003 forest functional level, the presence of the TRUST_ATTRIBUTE_FOREST_TRANSITIVE bit in the **Trust Attributes** field of a trusted domain object MUST NOT be returned by the server.<a href="mailto:

3.1.4.7.14 LsarSetInformationTrustedDomain (Opnum 27)

The LsarSetInformationTrustedDomain method is invoked to set information on a trusted domain object.

```
NTSTATUS LsarSetInformationTrustedDomain(
   [in] LSAPR_HANDLE TrustedDomainHandle,
   [in] TRUSTED_INFORMATION_CLASS InformationClass,
   [in, switch_is(InformationClass)]
   PLSAPR TRUSTED DOMAIN INFO TrustedDomainInformation
);
```

TrustedDomainHandle: A handle to a trusted domain object.

InformationClass: A value indicating the type of information requested by the caller.

TrustedDomainInformation: Used to supply the information to be set.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the arguments supplied to the function was invalid.
0xC00000DD STATUS_INVALID_DOMAIN_STATE	The domain is in the wrong state to perform the stated operation.

Return value/code	Description
0xC0000008 STATUS_INVALID_HANDLE	TrustedDomainHandle is not a valid handle.

This message takes three arguments:

TrustedDomainHandle: An open handle to a trusted domain object. If the handle is not a valid context handle to a trusted domain object or TrustedDomainHandle. HandleType does not equal "Trusted Domain", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that TrustedDomainHandle grants access as specified in section 3.1.4.2.2. The following table specifies the RequiredAccess value to use in this access check for each InformationClass value, or indicates if no processing is supported, regardless of access granted. There are several methods in the Local Security Authority (Domain Policy) Remote Protocol that set trusted domain information. All of them enforce the same rights assignments based on information class.

Value of InformationClass parameter	RequiredAccess value
TrustedPosixOffsetInformation TrustedDomainInformationEx	TRUSTED_SET_POSIX
TrustedDomainFullInformation TrustedDomainFullInformationInternal	TRUSTED_SET_POSIX TRUSTED_SET_AUTH
TrustedDomainAuthInformation TrustedDomainAuthInformationInternal	TRUSTED_SET_AUTH
TrustedDomainSupportedEncryptionTypes	TRUSTED_SET_POSIX

InformationClass: A value from the TRUSTED INFORMATION CLASS enumeration specifying what type of information the caller is setting. Not all values are valid. For values outside the TRUSTED_INFORMATION_CLASS range, the server MUST reject the request with STATUS_INVALID_PARAMETER. Information class values other than the following set SHOULD<a href="SHOULD<90">SHOULD<90 be rejected with STATUS INVALID PARAMETER. The set of allowed information class values is:

- TrustedPosixOffsetInformation
- TrustedDomainInformationEx
- TrustedDomainAuthInformation
- TrustedDomainFullInformation
- TrustedDomainAuthInformationInternal
- TrustedDomainFullInformationInternal
- TrustedDomainSupportedEncryptionTypes

TrustedDomainInformation: Contains information to be set, appropriate for the *InformationClass* parameter. The server MUST validate the *TrustedDomainInformation* parameter according to information class–specific rules. The rules for internal consistency checking of trusted domain objects are specified in [MS-ADTS] section 6.1.6.

Information in the abstract data model specified in section 3.1.1.5 MUST be updated using *TrustedDomainInformation* and *InformationClass* parameters as follows:

Value of InformationClass parameter	Information to set
TrustedPosixOffsetInformation	Posix Offset
TrustedDomainInformationEx	Trust Type Trust Direction Trust Attributes Forest Trust Attributes MUST be set to 0 if new trust attributes do not contain TRUST_ATTRIBUTE_FOREST_TRANSITIVE flag.
TrustedDomainAuthInformation TrustedDomainAuthInformationInternal	Trust Incoming Password Trust Outgoing Password
TrustedDomainFullInformation TrustedDomainFullInformationInternal	Posix Offset Trust Type Trust Direction Trust Attributes Trust Incoming Password Trust Outgoing Password Forest Trust Attributes MUST be set to 0 if new trust attributes do not contain TRUST_ATTRIBUTE_FOREST_TRANSITIVE flag.
TrustedDomainSupportedEncryptionTypes	Supported Encryption Types
Other values	Server MUST return STATUS_INVALID_PARAMETER.

The server MUST return STATUS INVALID DOMAIN STATE in the following cases:

- The TrustAttributes TRUST_ATTRIBUTE_FOREST_TRANSITIVE flag is set and the forestFunctionality specified in [MS-ADTS] section 3.1.1.3.2.27 is DS_BEHAVIOR_WIN2003 or higher.
- The TrustAttributes TRUST_ATTRIBUTE_FOREST_TRANSITIVE flag is set and the **DnsForestName** and **DnsDomainName** fields in DNS Domain Information (see section 3.1.1.1) do not contain the same value.
- The TrustAttributes TRUST_ATTRIBUTE_CROSS_ORGANIZATION flag is set and the forestFunctionality specified in [MS-ADTS] section 3.1.1.3.2.27 is DS_BEHAVIOR_WIN2003 or higher.

If the server is a read-only domain controller, it MUST return an error. <91>

If the trust direction is being set to incoming or bidirectional, then the server MUST create an interdomain trust account for this trust, if such an account does not yet exist, and populate it as specified in [MS-ADTS] section 6.1.6.8. The unicodePwd attribute of the account is updated (as specified in [MS-SAMR] section 3.1.1.8.7) with the clear text password (that is, the password value with AuthType being equal to 0x2) in the "Trust Incoming Passwords" information provided.

3.1.4.7.15 LsarQueryForestTrustInformation (Opnum 73)

The LsarQueryForestTrustInformation method is invoked to retrieve information about a trust relationship with another forest.

NTSTATUS LsarQueryForestTrustInformation(
[in] LSAPR_HANDLE PolicyHandle,
[in] PLSA_UNICODE_STRING TrustedDomainName,
[in] LSA FOREST TRUST RECORD TYPE HighestRecordType,
[out] PLSA FOREST TRUST INFORMATION* ForestTrustInfo

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

TrustedDomainName: The name of the trusted domain to query.

HighestRecordType: The highest ordinal number of forest trust record type that the caller

understands.

ForestTrustInfo: Used to return the forest trust information.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One of the supplied arguments was invalid.
0xC00000DD STATUS_INVALID_DOMAIN_STATE	The domain is in the wrong state of this operation.
0xC00000DF STATUS_NO_SUCH_DOMAIN	The TrustedDomainName is not a recognized domain name.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC0000225 STATUS_NOT_FOUND	Forest trust information does not exist for this trusted domain object.

Processing:

This message takes four arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or PolicyHandle. Handle Type does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. PolicyHandle. Granted Access MUST NOT be considered for this call because the access check MUST happen on the trusted domain object.

TrustedDomainName: The name of the trusted domain object to query.

The server MUST return STATUS INVALID DOMAIN STATE if any of the following conditions is TRUE:

- The **DnsForestName** and **DnsDomainName** fields in DNS Domain Information (see section 3.1.1.1) do not contain the same value.
- The forestFunctionality specified in [MS-ADTS] section 3.1.1.3.2.27 is not DS_BEHAVIOR_WIN2003 or higher.
- Active Directory is not running on this machine.

If a trusted domain object by the name TrustedDomainName does not exist, the server MUST return STATUS_NO_SUCH_DOMAIN.

HighestRecordType: The caller sets this argument to the highest <u>LSA_FOREST_TRUST_RECORD_TYPE</u> enum value recognized by the caller. This parameter is ignored by the server.

ForestTrustInfo: Used to return the forest trust information associated with the trusted domain object. This corresponds to the Forest Trust Information abstract data model specified in section 3.1.1.5.

If the trusted domain object is not of the type that supports a forest trust (as determined by the presence or absence of the TRUST_ATTRIBUTE_FOREST_TRANSITIVE attribute), the server MUST return STATUS_INVALID_PARAMETER. If the forest trust information does not exist on a trusted domain object that otherwise can support a forest trust, the server MUST return STATUS NOT FOUND.

The server MUST verify that the caller has access to the trusted domain object as specified in section 3.1.4.2.1 with *DesiredAccess* set to TRUSTED_QUERY_AUTH. There is no method-specific portion of this check.

3.1.4.7.16 LsarSetForestTrustInformation (Opnum 74)

The LsarSetForestTrustInformation method is invoked to establish a trust relationship with another forest by attaching a set of records called the forest trust information to the trusted domain object.

```
NTSTATUS LsarSetForestTrustInformation(
[in] LSAPR_HANDLE PolicyHandle,
[in] PLSA_UNICODE_STRING TrustedDomainName,
[in] LSA FOREST TRUST RECORD TYPE HighestRecordType,
[in] PLSA_FOREST_TRUST_INFORMATION ForestTrustInfo,
[in] unsigned char CheckOnly,
[out] PLSA_FOREST_TRUST_COLLISION_INFORMATION* CollisionInfo
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

TrustedDomainName: The name of the trusted domain object on which to set the forest trust information.

HighestRecordType: The highest ordinal forest trust record type that the caller understands.

ForestTrustInfo: The forest trust information that the caller is trying to set on the trusted domain object.

CheckOnly: If not 0, the operation is read-only and does not alter the state of the server's database.

CollisionInfo: Used to return information about collisions between different sets of forest trust information in the server's database.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.

Return value/code	Description
0xC00000DD STATUS_INVALID_DOMAIN_STATE	The domain is not the root domain of the forest, or the forest is not at DS_BEHAVIOR_WIN2003 forest functional level.
0xC00000DE STATUS_INVALID_DOMAIN_ROLE	The server is not the primary domain controller.
0xC00000DF STATUS_NO_SUCH_DOMAIN	The trusted domain object with the name in the <i>TrustedDomainName</i> parameter does not exist.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.
0xC000000D STATUS_INVALID_PARAMETER	Some of the parameters supplied were invalid.

This message takes six arguments:

PolicyHandle: Open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*. Handle Type does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. *PolicyHandle*. Granted Access MUST NOT be considered for this call because the access check MUST happen on the trusted domain object.

TrustedDomainName: The name of the trusted domain object to set forest trust information on.

The server MUST return STATUS_INVALID_DOMAIN_STATE if any of the following conditions is TRUE.

- The **DnsForestName** and **DnsDomainName** fields in DNS Domain Information (see section 3.1.1.1) do not contain the same value.
- Active Directory is not running on this machine.

The server MUST return STATUS_INVALID_DOMAIN_ROLE if the IsEffectiveRoleOwner function specified in [MS-ADTS] section 3.1.1.5.1.8 returns FALSE with the roleObject parameter set to default NC.

If a trusted domain object by the name TrustedDomainName does not exist, the server MUST return STATUS_NO_SUCH_DOMAIN.

The server MUST verify that the caller has access to the trusted domain object as specified in section 3.1.4.2.1 with *DesiredAccess* set to TRUSTED_SET_AUTH. There is no method-specific portion of this check.

The server MUST also make sure that the trust attributes associated with the trusted domain object referenced by the *TrustedDomainName* parameter has the TRUST_ATTRIBUTE_FOREST_TRANSITIVE set. If the attribute is not present, the server MUST return STATUS_INVALID_PARAMETER.

HighestRecordType: The caller sets this argument to the highest <u>LSA_FOREST_TRUST_RECORD_TYPE</u> enumeration value recognized by the caller. If this argument is greater in value than the highest record type recognized by the server, the server MUST return STATUS_INVALID_PARAMETER.

ForestTrustInfo: A collection of forest trust records identifying the topology of the trusted forest. The server MUST verify that the forest trust information supplied by the caller is valid by performing a consistency check, as specified in [MS-ADTS] section 6.1.6. Note that "consistent" does not necessarily mean "collision-free". The method for determining collisions is specified in section 3.1.4.7.16.1.

CheckOnly: Perform a read-only probing operation. The results will not be persisted in the Local Security Authority (Domain Policy) database, but the set of collision records returned in *CollisionInfo* will be accurate as though the information was persisted.

CollisionInfo: A list of collision records. The request is considered successful even if a non-empty set of collisions is returned. The rules for generating collision information are specified in section 3.1.4.7.16.1.

The server MUST store the generated *ForestTrustInfo* in the Forest Trust Information attribute specified in section 3.1.1.5.

3.1.4.7.16.1 Forest Trust Collision Generation

This section describes the rules that the server MUST follow to compute a set of collisions when setting forest trust information on a trusted domain object.

Forest trust information across all trusted forests is always internally consistent. This is an invariant that the server MUST enforce. When new forest trust information is added to the server's policy database, the server MUST ensure that the overall forest trust information remains consistent. The server does so by disabling the entries in the new forest trust information structure that would violate this internal consistency. The server communicates the entries that are inconsistent with existing forest trust information back to the client by computing and returning a set of "collision entries".

The rules that govern consistency of forest trust information are specified in [MS-ADTS] section 6.1.6 and are listed here for convenience. To be exact, there are two sets of rules, one for top-level name entries, and one for domain information entries.

The rules for top-level name entries are as follows:

- An enabled (that is, non-conflict) top-level name record must not be equal to an enabled top-level name for another trusted domain object or to any of the DNS tree names within the current forest. Equality is computed using case-insensitive string comparison. If the strings differ only by one trailing '.' character, the difference is ignored.
- The top-level name must not be subordinate to an enabled top-level name for another trusted domain object, unless the other trusted domain object has a corresponding exclusion record.
- A top-level name must not be superior to an enabled top-level name for another trusted domain object, unless the current trusted domain object has a corresponding exclusion record.

If any of these rules are violated, a top-level name is considered in conflict. In this case, a collision record is generated with the following values:

Index: Ordinal number of a forest trust record supplied by the caller that generated the collision.

Type: CollisionTdo or CollisionXref, depending on whether the collision was caused by an external-to-forest domain or an internal-to-forest domain.

Flags: LSA_TLN_DISABLED_CONFLICT

Name: DNS name of the TDO that contained the forest trust information with which this entry has collided.

The rules for domain information entries are as follows:

- The security identifier of this entry must not be equal to that of an enabled domain information entry belonging to a different forest or any of the domains that comprise the current forest.
- The NetBIOS name of this entry must not be claimed by any other forest with which this forest has a trust relationship or by any domain within the current forest.

• The DNS name of this entry must not be claimed by any other forest with which this forest has a trust relationship or by the current forest.

If any of these rules are violated, a domain information entry is considered to be in conflict. In this case, a collision record is generated with the following values:

Index: Ordinal number of a forest trust record supplied by the caller that generated the collision.

Type: CollisionTdo or CollisionXref, depending on whether the collision was caused by an external-to-forest or internal-to-forest domain.

Flags: LSA_SID_DISABLED_CONFLICT if the collision was caused by a security identifier component of the record. LSA_NB_DISABLED_CONFLICT if the collision was caused by a NetBIOS name component of the record.

Entries that have been disabled by administrative action or through conflict are not considered in computing consistency checks.

3.1.4.8 Privilege Methods

The message processing of methods in this section MUST use the abstract data model specified in section 3.1.1.2.1.

Method (opnum)	Summary
LsarEnumeratePrivileges (opnum 2)	Enumerates all privileges known to the server.
LsarLookupPrivilegeValue (opnum 31)	Maps the well-known name of a privilege into the server-specific locally unique identifier (LUID).
LsarLookupPrivilegeName (opnum 32)	Maps the server-specific LUID of a privilege into a well-known privilege name.
LsarLookupPrivilegeDisplayName (opnum 33)	Maps the well-known name of a privilege into a human-readable name in the caller's language.

3.1.4.8.1 LsarEnumeratePrivileges (Opnum 2)

The LsarEnumeratePrivileges method is invoked to enumerate all privileges known to the system. This method can be called multiple times to return its output in fragments.

```
NTSTATUS LsarEnumeratePrivileges(
   [in] LSAPR_HANDLE PolicyHandle,
   [in, out] unsigned long* EnumerationContext,
   [out] PLSAPR_PRIVILEGE_ENUM_BUFFER EnumerationBuffer,
   [in] unsigned long PreferedMaximumLength
);
```

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

EnumerationContext: A pointer to a context value that is used to resume enumeration, if necessary.

EnumerationBuffer: A pointer to a structure that will contain the results of the enumeration.

PreferedMaximumLength: A value that indicates the approximate size of the data to be returned.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0x00000105 STATUS_MORE_ENTRIES	More information is available to successive calls.
0x8000001A STATUS_NO_MORE_ENTRIES	No more entries are available from the enumeration.
0xC000000D STATUS_INVALID_PARAMETER	One of the parameters supplied was invalid. This can happen if EnumerationBuffer is NULL or EnumerationContext is NULL.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This method takes four arguments:

PolicyHandle: Open handle to the policy object. If the handle is not a valid context handle to the policy object or PolicyHandle.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that PolicyHandle grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY_VIEW_LOCAL_INFORMATION.

EnumerationContext: A number that indicates a starting index at which to begin the enumeration. The server MUST always return all privileges in the same order, starting at the object whose index is EnumerationContext. To initiate a new enumeration, the client sets EnumerationContext to zero; otherwise, the client sets EnumerationContext to a value returned by a previous call to the method.

The server MUST return STATUS INVALID PARAMETER if the EnumerationContext parameter is NULL.

EnumerationBuffer: Used to return the results of enumeration. The server MUST fill EnumerationBuffer with as many privilege objects as possible, as determined by PreferedMaximumLength. If the size of all remaining objects is less than or equal to PreferedMaximumLength, the server MUST fill EnumerationBuffer with all objects. If the size of all remaining objects is greater than PreferedMaximumLength, the server MUST fill EnumerationBuffer with objects such that the size of the privilege objects returned is greater than or equal to PreferedMaximumLength, but would be less than PreferedMaximumLength if the last object had not been added to EnumerationBuffer. If there are no more objects than are returned in EnumerationBuffer, the server MUST return STATUS_NO_MORE_ENTRIES. If there are more database objects than are returned in EnumerationBuffer, the server MUST set the EnumerationContext value to the index value that would allow it to resume enumeration correctly when this method is called again, and the server MUST return STATUS MORE ENTRIES. Note that this return value is not an error status.

PreferedMaximumLength: An indication about the approximate size, in bytes, of the data to return. Any unsigned 32-bit value is valid for the *PreferedMaximumLength* parameter.

3.1.4.8.2 LsarLookupPrivilegeValue (Opnum 31)

The LsarLookupPrivilegeValue method is invoked to map the name of a privilege into a locally unique identifier (LUID) by which the privilege is known on the server. The locally unique value of the privilege can then be used in subsequent calls to other methods, such as LsarAddPrivilegesToAccount.

```
NTSTATUS LsarLookupPrivilegeValue(
   [in] LSAPR_HANDLE PolicyHandle,
   [in] PRPC_UNICODE_STRING Name,
   [out] PLUID Value
);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

Name: A string containing the name of a privilege.

Value: Used to return a LUID assigned by the server to the privilege by this name.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.
0xC0000060 STATUS_NO_SUCH_PRIVILEGE	The privilege name is not recognized by the server.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message takes three arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY_LOOKUP_NAMES.

Name: The string name of the privilege.

Value: Used to return the LUID corresponding to the Name argument.

If the value in the *Name* argument is not recognized by the server, the server MUST fail the request with STATUS_NO_SUCH_PRIVILEGE. The privileges recognized by the server are specified in section 3.1.1.2.1.

3.1.4.8.3 LsarLookupPrivilegeName (Opnum 32)

The LsarLookupPrivilegeName method is invoked to map the LUID of a privilege into a string name by which the privilege is known on the server.

```
NTSTATUS LsarLookupPrivilegeName(
[in] LSAPR HANDLE PolicyHandle,
[in] PLUID Value,
[out] PRPC UNICODE STRING* Name
```

);

PolicyHandle: An RPC context handle obtained from either LsarOpenPolicy or LsarOpenPolicy2.

Value: A LUID that the caller wishes to map to a string name.

Name: Used to return the string name corresponding to the supplied LUID.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC0000060 STATUS_NO_SUCH_PRIVILEGE	The supplied LUID is not recognized by the server.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This message takes three arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY_LOOKUP_NAMES.

Value: The LUID of the privilege.

Name: Used to return the name corresponding to the LUID contained in the Value argument.

If the LUID in the *Value* argument is not recognized by the server, the server MUST fail the request with STATUS_NO_SUCH_PRIVILEGE. The privileges recognized by the server are specified in section 3.1.1.2.1.

3.1.4.8.4 LsarLookupPrivilegeDisplayName (Opnum 33)

The LsarLookupPrivilegeDisplayName method is invoked to map the name of a privilege into a display text string in the caller's language.

```
NTSTATUS LsarLookupPrivilegeDisplayName(
[in] LSAPR_HANDLE PolicyHandle,
[in] PRPC_UNICODE_STRING Name,
[in] short ClientLanguage,
[in] short ClientSystemDefaultLanguage,
[out] PRPC_UNICODE_STRING* DisplayName,
[out] unsigned short* LanguageReturned);
```

PolicyHandle: An RPC context handle obtained from either <u>LsarOpenPolicy</u> or <u>LsarOpenPolicy2</u>.

Name: A string containing the name of a privilege.

ClientLanguage: An identifier of the client's language.

ClientSystemDefaultLanguage: An identifier of the default language of the caller's machine.

DisplayName: Used to return the display name of the privilege in the language pointed to by the *LanguageReturned* value.

LanguageReturned: An identifier of the language in which *DisplayName* was returned.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.
0xC0000060 STATUS_NO_SUCH_PRIVILEGE	The supplied LUID is not recognized by the server.
0xC0000008 STATUS_INVALID_HANDLE	PolicyHandle is not a valid handle.

Processing:

This method takes six arguments:

PolicyHandle: An open handle to the policy object. If the handle is not a valid context handle to the policy object or *PolicyHandle*.HandleType does not equal "Policy", the server MUST return STATUS_INVALID_HANDLE. The server MUST verify that *PolicyHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to POLICY_LOOKUP_NAMES.

Name: A string name of the privilege. The server MUST attempt to locate the entry with the same name in the data store specified in section 3.1.1.2.1. If the entry cannot be located, the server MUST return STATUS NO SUCH PRIVILEGE.

ClientLanguage: A numerical identifier of the language in which the caller wishes to receive the display name. The server MUST try to locate the privilege description in the language that is identified by this parameter. If the data store does not have this language, the server MUST try the next parameter.

ClientSystemDefaultLanguage: An identifier of the default language of the caller. This may be different than the ClientLanguage parameter. If the data store does not have the description in the previous language, the server MUST try to find the description in this language.

DisplayName: Used to return the description of the privilege. If neither ClientLanguage nor ClientSystemDefaultLanguage can be found, the server MUST return the description in the server's own language.

LanguageReturned: Used to return the language ID of DisplayName. This may be different from the language ID that was requested.

3.1.4.9 Common Object Methods

The message processing of methods in this section MUST use the abstract data model defined in section 3.1.1.

Method (Opnum)	Summary
LsarQuerySecurityObject (opnum 3)	Retrieves the security descriptor associated with an object.
LsarSetSecurityObject (opnum 4)	Sets a security descriptor on an object.
LsarDeleteObject (opnum 34)	Deletes an object from the policy database.
LsarClose (opnum 0)	Closes an open handle.

3.1.4.9.1 LsarQuerySecurityObject (Opnum 3)

The LsarQuerySecurityObject method is invoked to query security information that is assigned to a database object. It returns the security descriptor of the object.

```
NTSTATUS LsarQuerySecurityObject(
   [in] LSAPR_HANDLE ObjectHandle,
   [in] SECURITY_INFORMATION SecurityInformation,
   [out] PLSAPR_SR_SECURITY_DESCRIPTOR* SecurityDescriptor
);
```

ObjectHandle: An open object handle of any type.

SecurityInformation: A bitmask specifying which portions of the security descriptor the caller is interested in.

SecurityDescriptor: Used to return the security descriptor containing the elements requested by the caller.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC00000BB STATUS_NOT_SUPPORTED	The request is not supported.
0xC0000008 STATUS_INVALID_HANDLE	ObjectHandle is not a valid handle.

Processing:

This message takes three arguments:

ObjectHandle: Can be an open handle of any type. If the handle is not a valid context handle to an object or ObjectHandle.PolicyType is not one of the following:

- "Policy" for handles to policy objects
- "Account" for handles to account objects
- "Secret" for handles to secret objects
- "Trusted Domain" for handles to trusted domain objects

the server MUST return STATUS_INVALID_HANDLE. The access required for a successful completion of this request depends on the *SecurityInformation* parameter. The server MUST verify that *ObjectHandle* grants access as specified in section <u>3.1.4.2.2</u>. The following pseudocode specifies the RequiredAccess value to use in this access check.

```
Set RequiredAccess equal to 0
IF ((SecurityInformation & OWNER_SECURITY_INFORMATION) || (SecurityInformation &
GROUP SECURITY INFORMATION) || (SecurityInformation & DACL SECURITY INFORMATION)) THEN
     RequiredAccess |= READ_CONTROL
END IF
IF (SecurityInformation & SACL_SECURITY_INFORMATION) THEN
     RequiredAccess |= ACCESS_SYSTEM_SECURITY
END IF
```

SecurityInformation: A set of bits specifying which portions of the security descriptor the caller is interested in retrieving. The various bits and the associated access rights are specified in section 2.2.1.3.

SecurityDescriptor: An output parameter. If access checks pass, the server MUST fill this information with a valid self-relative security descriptor containing only the fields requested by the caller. The server MUST NOT put information into the security descriptor that the caller did not request.

It is valid for the server to not support this method for all object types. If an object does not support this method, the server MUST return STATUS NOT SUPPORTED.<92>

3.1.4.9.2 LsarSetSecurityObject (Opnum 4)

The LsarSetSecurityObject method is invoked to set a security descriptor on an object.

```
NTSTATUS LsarSetSecurityObject(
   [in] LSAPR HANDLE ObjectHandle,
   [in] SECURITY_INFORMATION SecurityInformation,
   [in] PLSAPR_SR_SECURITY_DESCRIPTOR SecurityDescriptor
);
```

ObjectHandle: An open handle to an existing object.

SecurityInformation: A bitmask specifying which portions of the security descriptor are to be set.

SecurityDescriptor: The security descriptor to be set.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC000009A STATUS_INSUFFICIENT_RESOURCES	There are insufficient resources to complete the request.

Return value/code	Description
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC0000079 STATUS_INVALID_SECURITY_DESCR	The supplied security descriptor is invalid.
0xC000000D STATUS_INVALID_PARAMETER	One of the parameters supplied was invalid. For instance, SecurityDescriptor is NULL.
0xC00000BB STATUS_NOT_SUPPORTED	The operation is not supported for this object.
0xC0000008 STATUS_INVALID_HANDLE	ObjectHandle is not a valid handle.

Processing:

This message takes three arguments:

ObjectHandle: Can be an open handle of any type. If the handle is not a valid context handle to an object or ObjectHandle.PolicyType is not one of the following:

- "Policy" for handles to policy objects
- "Account" for handles to account objects
- "Secret" for handles to secret objects
- "Trusted Domain" for handles to trusted domain objects

the server MUST return STATUS_INVALID_HANDLE. The access required for a successful completion of this request depends on the *SecurityInformation* parameter. The server MUST verify that *ObjectHandle* grants access as specified in section 3.1.4.2.2. The following pseudocode specifies the RequiredAccess value to use in this access check.

SecurityInformation: A set of bits specifying which portions of the security descriptor the caller is interested in setting. The various bits and the associated access rights are specified in section 2.2.1.3.

SecurityDescriptor: Expects a valid self-relative security descriptor that the caller is trying to set. If this security descriptor is invalid, the server MUST return the STATUS_INVALID_SECURITY_DESCR status code. If the security descriptor is NULL, the server MUST return STATUS_INVALID_PARAMETER.

It is valid for the server to not support this method for all object types. <93>

The server MUST return STATUS_INSUFFICIENT_RESOURCES if it runs out of memory while servicing the request.

3.1.4.9.3 LsarDeleteObject (Opnum 34)

The LsarDeleteObject method is invoked to delete an open account object, secret object, or trusted domain object.

```
NTSTATUS LsarDeleteObject(
   [in, out] LSAPR_HANDLE* ObjectHandle
);
```

ObjectHandle: A handle to an open object of the correct type to be deleted. After successful completion of the call, the handle value cannot be reused.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000022 STATUS_ACCESS_DENIED	The caller does not have the permissions to perform this operation.
0xC000000D STATUS_INVALID_PARAMETER	One or more of the supplied parameters was invalid.
0xC0000008 STATUS_INVALID_HANDLE	ObjectHandle is not a valid handle.

Processing:

This message takes one input parameter.

ObjectHandle: An open handle to an object that is to be deleted. If the handle is not a valid context handle to an object or ObjectHandle.PolicyType is not one of the following:

- "Policy" for handles to policy objects
- "Account" for handles to account objects
- "Secret" for handles to secret objects
- "Trusted Domain" for handles to trusted domain objects

the server MUST return STATUS_INVALID_HANDLE. Policy objects cannot be deleted. Attempts to delete policy objects MUST fail with STATUS_INVALID_PARAMETER. For other object types, the server MUST verify that *ObjectHandle* grants access as specified in section 3.1.4.2.2 with RequiredAccess set to DELETE.

The server MUST make all subsequent requests to deleted objects through already opened handles fail with STATUS_INVALID_HANDLE. The deleted handle MUST be automatically closed by the server; the caller need not close it.

If the object being deleted is a trusted domain, then the server MUST also check whether an interdomain trust account with name "<Trusted Domain NetBIOS Name>\$" exists. If it exists, the server MUST delete that account along with the trusted domain.

The server MUST free any resources associated with the LsaContextHandle element (section 3.1.1.7) that is represented by *ObjectHandle*, as specified in section 3.1.6.1, LSAPR_HANDLE_rundown.

The fact that a handle is no longer usable is communicated to the RPC transport by returning a NULL value in the handle parameter, as specified in [C706] section 5.1.6.

3.1.4.9.4 LsarClose (Opnum 0)

The LsarClose method frees the resources held by a context handle that was opened earlier. After response, the context handle will no longer be usable, and any subsequent uses of this handle will fail.

```
NTSTATUS LsarClose(
   [in, out] LSAPR_HANDLE* ObjectHandle
);
```

ObjectHandle: The context handle to be freed. On response, it MUST be set to 0.

Return Values: The following is a summary of the return values that an implementation MUST return, as specified by the message processing that follows.

Return value/code	Description
0x00000000 STATUS_SUCCESS	The request was successfully completed.
0xC0000008 STATUS_INVALID_HANDLE	ObjectHandle is not a valid handle.

Processing:

A handle of any type can be closed by calling LsarClose. Successful calls to <u>LsarDeleteObject</u>, which deletes an object to which the caller has an open handle, will also close the handle.

If ObjectHandle is invalid, the server MUST return STATUS_INVALID_HANDLE.

The server MUST free any resources associated with the LsaContextHandle element (section 3.1.1.7) that is represented by *ObjectHandle*, as specified in section 3.1.6.1, LSAPR_HANDLE_rundown.

The fact that a handle is closed is communicated to the RPC transport by returning a NULL value in the handle parameter, as specified in [C706] section 5.1.6.

Closing one handle MUST NOT affect any other handle on the server; that is, handles obtained using a policy handle MUST continue to be valid after that policy handle is closed.

3.1.4.10 Data Validation

Data types defined in section 2.2 are subject to a set of validation rules, in addition to any already noted. For structures that contain other structures or sets of other structures, the validation for those structures MUST be enforced when validating the containing structure. All constraints in the following tables MUST be satisfied; on failure, an error NTSTATUS code MUST be returned.

Data type	Validations
LSA_UNICODE_STRING RPC_UNICODE_STRING LSAPR_CR_CIPHER_VALUE	 Length MUST be a multiple of 2.<94> Length MUST be less than or equal to MaximumLength. If Length is not 0, Buffer MUST NOT be NULL.
	The Buffer field MUST NOT contain any NULL Unicode

Data type	Validations	
	characters in the first Length bytes. <a><95>	
RPC_SID	 Revision MUST be 1. SubAuthorityCount MUST be less than or equal to 15. Additionally, if the security identifier (SID) is a domain SID: IdentifierAuthority MUST be {0,0,0,0,0,5}. SubAuthorityCount MUST be greater than 3. SubAuthority[0] MUST be 0x15. 	
LSAPR_SR_SECURITY_DESCRIPTOR	 Revision MUST be 1. The security descriptor must conform to the definition for self-relative security descriptor in [MS-DTYP] section 2.4.6. 	
LSAPR_LUID_AND_ATTRIBUTES	 Luid.HighPart SHOULD NOT be 0.<96> Luid.LowPart SHOULD be less than or equal to 35.<97> Attributes SHOULD have only combinations of bits (0x00000001 & 0x00000002) set. 	
LSAPR_PRIVILEGE_SET	 If PrivilegeCount is not 0, Privilege MUST NOT be NULL. Each Privilege MUST pass validation for LSAPR_LUID_AND_ATTRIBUTES. There MUST be no duplicate elements in the Privilege array. 	
LSAPR_OBJECT_ATTRIBUTES	RootDirectory MUST be NULL.	
ACCESS_MASK	SHOULD conform to the defined bits for ACCESS_MASK.	
POLICY_INFORMATION_CLASS	MUST be greater than or equal to one and MUST be less than or equal to 14, which corresponds to the value: PolicyLocalAccountDomainInformation.	
POLICY_AUDIT_LOG_INFO	No additional validation.	
LSAPR_POLICY_AUDIT_EVENTS_INFO	 MaximumAuditEventCount MUST NOT be 0. MaximumAuditEventCount MUST be less than or equal to 8. EventAuditingOptions MUST NOT be NULL. EventAuditingOptions and 0xFFFFFFF8 MUST be 0. 	
LSAPR_POLICY_ACCOUNT_DOM_INFO	 DomainName MUST satisfy RPC_UNICODE_STRING validations. 	

Data type	Validations	
	 DomainSid MUST satisfy RPC_SID validations, including those for domain SIDs. 	
LSAPR_POLICY_PRIMARY_DOM_INFO	Name MUST satisfy RPC_UNICODE_STRING validations.	
	Name.Length MUST be less than or equal 30.	
	 SID MUST either be NULL or satisfy RPC_SID validations, including those for domain SIDs. 	
LSAPR_POLICY_DNS_DOMAIN_INFO	Name MUST pass RPC_UNICODE_STRING validations.	
	Name.Length MUST be less than or equal to 30.	
	 DnsDomainName MUST satisfy RPC_UNICODE_STRING validations. 	
	 DnsForestName MUST satisfy RPC_UNICODE_STRING validations. 	
	 SID MUST either be NULL or satisfy RPC_SID validations, including those for domain SID. 	
LSAPR_POLICY_PD_ACCOUNT_INFO	Name MUST satisfy RPC_UNICODE_STRING validations.	
POLICY_LSA_SERVER_ROLE_INFO	LsaServerRole MUST be 2 OR 3.	
LSAPR_CR_CIPHER_VALUE	MaximumLength MUST be greater than or equal to Length.	
LSAPR_POLICY_REPLICA_SRCE_INFO	 ReplicaSource MUST satisfy RPC_UNICODE_STRING validation. 	
	 ReplicaAccountName must satisfy RPC_UNICODE_STRING validation. 	
POLICY_MODIFICATION_INFO	ModifiedId MUST not be 0.	
POLICY_AUDIT_FULL_SET_INFO	No validation.	
LSAPR_POLICY_DOMAIN_EFS_INFO	If InfoLength is not 0, EfsBlob MUST NOT be NULL.	
TRUSTED_INFORMATION_CLASS	MUST be greater than or equal to 1 and less than or equal to 13.	
LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION	If IncomingAuthInfos is not 0, IncomingAuthenticationInformation MUST NOT be NULL.	
	IncomingAuthInfos MUST be 0 or 1.	
	If OutgoingAuthInfos is not 0, OutgoingAuthenticationInformation MUST NOT be NULL.	
	OutgoingAuthInfos MUST be 0 or 1.	
	 Each IncomingPreviousAuthenticationInformation MUST satisfy validation for LSAPR_AUTH_INFORMATION. 	
	Each IncomingAuthenticationInformation MUST satisfy	

Data type	Validations
	validation for LSAPR_AUTH_INFORMATION.
	 Each OutgoingPreviousAuthenticationInformation MUST satisfy validation for LSAPR_AUTH_INFORMATION.
	 Each OutgoingAuthenticationInformation MUST satisfy validation for LSAPR_AUTH_INFORMATION.
LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION	 Information MUST satisfy LSAPR_TRUSTED_DOMAIN_INFORMATION_EX validation.
	 AuthInformation MUST satisfy LSAPR_TRUSTED_DOMAIN_AUTH_INFORMATION validation.
LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION2	 Information MUST satisfy LSAPR_TRUSTED_DOMAIN_INFORMATION_EX2 validation.
	 FlatName MUST satisfy RPC_UNICODE_STRING validation.
	 SID MUST be NULL or satisfy RPC_SID validation, including domain SID validation.
	 If ForestTrustLength is not 0, ForestTrustInfo MUST NOT be NULL.
LSAPR_AUTH_INFORMATION	If AuthInfoLength is not 0, AuthInfo MUST NOT be NULL.
LSA_FOREST_TRUST_DOMAIN_INFO	 SID MUST satisfy RPC_SID validation, including domain SID validation.
	 DnsName MUST satisfy RPC_UNICODE_STRING validation.
	 NetbiosName MUST satisfy RPC_UNICODE_STRING validation.
LSA_FOREST_TRUST_BINARY_DATA	If Length is not 0, Buffer MUST NOT be NULL.
LSA_FOREST_TRUST_RECORD	 For ForestTrustType = ForestTrustTopLevelName or ForestTrustTopLevelNameEx, ForestTrustData.TopLevelName MUST satisfy RPC_UNICODE_STRING validation.
	 For ForestTrustType = ForestTrustDomainInfo, ForestTrustData.DomainInfo MUST satisfy LSA_FOREST_TRUST_DOMAIN_INFO validation.
LSA_FOREST_TRUST_INFORMATION	If RecordCount is not 0, Entries MUST NOT be NULL.
	 Each one of Entries MUST satisfy LSA_FOREST_TRUST_RECORD validation.
LSA_FOREST_TRUST_COLLISION_RECORD	Name MUST satisfy RPC_UNICODE_STRING validation.

Data type	Validations	
LSA_FOREST_TRUST_COLLISION_INFORMATION	 If RecordCount is not 0, Entries MUST NOT be NULL. Each one of Entries MUST satisfy LSA_FOREST_TRUST_COLLISION_RECORD validation. 	
LSAPR_HANDLE	MUST not be NULL.	
LSAPR_ACCOUNT_INFORMATION	SID MUST satisfy RPC_SID validation.	
LSAPR_ACCOUNT_ENUM_BUFFER	 If EntriesRead is not 0, Information MUST NOT be NULL. Each Information element MUST satisfy LSAPR_ACCOUNT_INFORMATION validation. 	
LSAPR_POLICY_PRIVILEGE_DEF	Name MUST satisfy RPC_UNICODE_STRING validation.	
LSAPR_PRIVILEGE_ENUM_BUFFER	 If Entries is not 0, Privileges MUST NOT be NULL. Each element in Entries MUST satisfy LSAPR_POLICY_PRIVILEGE_DEF validation. 	
LSAPR_TRUSTED_DOMAIN_INFORMATION_BASIC	 Name MUST satisfy RPC_UNICODE_STRING validation. SID MUST be NULL or MUST satisfy RPC_SID validation including domain SID validation. 	
LSAPR_TRUSTED_ENUM_BUFFER	 If EntriesRead is not 0, Information MUST NOT be NULL. Each element in Information MUST satisfy LSAPR_TRUST_INFORMATION validation. 	
LSAPR_TRUSTED_PASSWORD_INFO	OldPassword and Password MUST satisfy LSAPR_CR_CIPHER_VALUE validation.	
LSAPR_TRUSTED_DOMAIN_NAME_INFO	Name MUST satisfy RPC_UNICODE_STRING validation.	
LSAPR_USER_RIGHT_SET	 If Entries is not 0, UserRights MUST NOT be NULL. Each element in UserRights MUST satisfy RPC_UNICODE_STRING validation. 	
LSAPR_TRUSTED_DOMAIN_INFORMATION_EX	 Name MUST satisfy RPC_UNICODE_STRING validation. FlatName MUST satisfy RPC_UNICODE_STRING validation. SID MUST be NULL or MUST satisfy RPC_SID validation including domain SID validation. 	

3.1.5 Timer Events

No protocol timer events are required on the RPC server other than the timers required in the underlying RPC transport.

3.1.6 Other Local Events

No additional local events are used on the RPC server other than the events maintained in the underlying RPC transport.

3.1.6.1 LSAPR_HANDLE_rundown

This function implements the RPC context handle rundown routine for the LsaContextHandle context handle type (section 3.1.1.7). When invoked, the LSAPR_HANDLE_rundown procedure MUST free all server resources associated with LsaContextHandle.Object. The server MUST then set LsaContextHandle.Object to 0.

For more information, see <a>[C706] section 5.1.6. An implementation of this protocol SHOULD use this functionality.

4 Protocol Examples

The following sections describe several common scenarios from the client's perspective to illustrate the function of the Local Security Authority (Domain Policy) Remote Protocol. "Send" implies that the direction is from client to server, and "Receive" implies the opposite direction.

4.1 Manipulating Account Objects

This section illustrates a message exchange pertaining to account objects.

1. Message 1: Open the policy object.

Direction and method	Parameter field	Parameter value
Send LsarOpenPolicy2	SystemName	"Arbitrary String"
Send LsarOpenPolicy2	ObjectAttributes	Ignored, except for the RootDirectory field, which is NULL.
Send LsarOpenPolicy2	DesiredAccess	POLICY_VIEW_LOCAL_INFORMATION POLICY_CREATE_ACCOUNT POLICY_LOOKUP_NAMES

2. Message 2: Success; return the policy object handle.

Direction and method	Parameter field	Parameter value
Receive LsarOpenPolicy2	Status	STATUS_SUCCESS
Receive LsarOpenPolicy2	PolicyHandle	[Implementation-specific value]

3. Message 3: Attempt to create an account object with security identifier (SID) S-1-5-21-123-123-123-1005.

Direction and method	Parameter field	Parameter value
Send LsarCreateAccount	PolicyHandle	[Implementation-specific value returned in Step 2.]
Send LsarCreateAccount	AccountSid	"S-1-5-21-123-123-1005"
Send LsarCreateAccount	DesiredAccess	READ_CONTROL WRITE_DAC ACCOUNT_ADJUST_PRIVILEGES ACCOUNT_ADJUST_SYSTEM_ACCESS ACCOUNT_VIEW

4. Message 4: Failure: Account already exists.

Direction and method	Parameter field	Parameter value
Receive LsarCreateAccount	Status	STATUS_OBJECT_NAME_COLLISION

Direction and method	Parameter field	Parameter value
Receive LsarCreateAccount	AccountHandle	NULL

5. Message 5: Attempt to open the account object with SID S-1-5-21-123-123-1005.

Direction and method	Parameter field	Parameter value
Send LsarOpenAccount	PolicyHandle	[Implementation-specific value]
Send LsarOpenAccount	AccountSid	"S-1-5-21-123-123-1205"
Send LsarOpenAccount	DesiredAccess	READ_CONTROL WRITE_DAC ACCOUNT_ADJUST_PRIVILEGES ACCOUNT_ADJUST_SYSTEM_ACCESS ACCOUNT_VIEW

6. Message 6: Success: Return the account object handle.

Direction and method	Parameter field	Parameter value
Receive LsarOpenAccount	Status	STATUS_SUCCESS
Receive LsarOpenAccount	AccountHandle	[Implementation-specific value]

7. Message 7: Retrieve the security descriptor of the account object.

Direction and method	Parameter field	Parameter value
Send LsarQuerySecurityObject	ObjectHandle	[Implementation-specific value returned in Step 6.]
Send LsarQuerySecurityObject	SecurityInformation	DACL_SECURITY_INFORMATION

8. Message 8: Success: Return the security descriptor.

Direction and method	Parameter field	Parameter value
Receive LsarQuerySecurityObject	Status	STATUS_SUCCESS
Receive LsarQuerySecurityObject	SecurityDescriptor	Security descriptor of the account object in self-relative form.

9. Message 9: Update the discretionary access control list (DACL) on the account object.

Direction and method	Parameter field	Parameter value
Send LsarSetSecurityObject	ObjectHandle	[Implementation-specific value returned in Step 6.]

Direction and method	Parameter field	Parameter value	
Send LsarSetSecurityObject	SecurityInformation	DACL_SECURITY_INFORMATION	
Send LsarSetSecurityObject	SecurityDescriptor	Security descriptor representation of the DACL in self-relative form.	

10. Message 10: Success: Security descriptor of the account object has been updated.

Direction and method	Parameter field	Parameter value
Receive	Status	STATUS_SUCCESS
LsarSetSecurityObject		

11. Message 11: Retrieve the Locally Unique Identifier (LUID) that the server assigns to the "SeTcbPrivilege" privilege.

Direction and method	Parameter field	Parameter value
Send LsarLookupPrivilegeValue	PolicyHandle	[Implementation-specific value returned in Step 2.]
Send LsarLookupPrivilegeValue	Name	"SeTcbPrivilege"

12. Message 12: Success: Return the LUID of SeTcbPrivilege.

Direction and method	Parameter field	Parameter value
Receive LsarLookupPrivilegeValue	Status	STATUS_SUCCESS
Receive LsarLookupPrivilegeValue	Value	The LUID assigned by the server to SeTcbPrivilege.

13. Message 13: Add a privilege to the account object.

Direction and method	Parameter field	Parameter value
Send LsarAddPrivilegesToAccount	AccountHandle	[Implementation-specific value returned in Step 6.]
Send LsarAddPrivilegesToAccount	Privileges	A LSAPR_PRIVILEGE_SET structure containing one privilege (the LUID of which was returned in Step 12).

14. Message 14: Success: Privilege has been added to the account object.

Direction and method	Parameter field	Parameter value
Receive LsarAddPrivilegesToAccount	Status	STATUS_SUCCESS

15. Message 15: Add a system access right to the account object.

Direction and method	Parameter field	Parameter value
Send LsarSetSystemAccessAccount	AccountHandle	[Implementation-specific value returned in Step 6.]
Send LsarSetSystemAccessAccount	SystemAccess	An unsigned long value with the POLICY_MODE_NETWORK flag set

16. Message 16: Success: Access right has been recorded.

Direction and method	Parameter field	Parameter value
Receive LsarSetSystemAccessAccount	Status	STATUS_SUCCESS

17. Message 17: Done with this account object: Close the handle.

Direction and method	Parameter field	Parameter value
Send	ObjectHandle	[Implementation-specific value returned in Step 6.]
LsarClose		

18. Message 18: Success: Account objects handle has been closed.

Direction and method	Parameter field	Parameter value
Receive LsarClose	Status	STATUS_SUCCESS

19. Message 19: Done with the policy object: Close the handle.

Direction and method	Parameter field	Parameter value
Send LsarClose	ObjectHandle	[Implementation-specific value returned in Step 2.]

20. Message 20: Success: Policy object has been closed.

Direction and method	Parameter field	Parameter value
Receive LsarClose	Status	STATUS_SUCCESS

4.2 Manipulating Secret Objects

This section illustrates a message exchange pertaining to secret objects.

1. Message 1: Open the policy object.

Direction and method	Parameter field	Parameter value
Send	SystemName	"Arbitrary String"

Direction and method	Parameter field	Parameter value
LsarOpenPolicy2		
Send LsarOpenPolicy2	ObjectAttributes	Ignored, except for the RootDirectory field, which is NULL.
Send LsarOpenPolicy2	DesiredAccess	POLICY_VIEW_LOCAL_INFORMATION POLICY_CREATE_SECRET

2. Message 2: Success: Policy object opened successfully.

Direction and method	Parameter field	Parameter value
Receive LsarOpenPolicy2	Status	STATUS_SUCCESS
Receive LsarOpenPolicy2	PolicyHandle	[Implementation-specific value]

3. Message 3: Attempt to create a secret objects with name "NL\$".

Direction and method	Parameter field	Parameter value
Send LsarCreateSecret	PolicyHandle	[Implementation-specific value returned in Step 2.]
Send LsarCreateSecret	Secretname	"NL\$"
Send LsarCreateSecret	DesiredAccess	SECRET_SET_VALUE

4. Message 4: Failure: Secret name "NL\$" is a reserved prefix name and cannot be used.

Direction and method	Parameter field	Parameter value
Receive LsarCreateSecret	Status	STATUS_INVALID_PARAMETER
Receive LsarCreateSecret	SecretHandle	NULL

5. Message 5: Attempt to create a secret object with name "MyBigSecret".

Direction and method	Parameter field	Parameter value
Send LsarCreateSecret	PolicyHandle	[Implementation-specific value returned in Step 2.]
Send LsarCreateSecret	Secretname	"MyBigSecret"
Send LsarCreateSecret	DesiredAccess	SECRET_SET_VALUE

6. Message 6: Success: Secret created.

Direction and method	Parameter field	Parameter value
Receive LsarCreateSecret	Status	STATUS_SUCCESS
Receive LsarCreateSecret	SecretHandle	[Implementation-specific value]

7. Message 7: Set the value of the secret object.

Direction and method	Parameter field	Parameter value
Send LsarSetSecret	SecretHandle	[Implementation-specific value returned in Step 6.]
Send LsarSetSecret	EncryptedCurrentValue	Byte BLOB value encrypted with session key.
Send LsarSetSecret	EncryptedOldValue	NULL

8. Message 8: Success: Secret value set.

Direction and method	Parameter field	Parameter value
Receive	Status	STATUS_SUCCESS
LsarSetSecret		

9. Message 9: Done with this secret; close the handle.

Direction and method	Parameter field	Parameter value
Send	ObjectHandle	[Implementation-specific value returned in Step 6.]
LsarClose		

10. Message 10: Success: Secret handle has been closed.

Direction and method	Parameter field	Parameter value
Receive LsarClose	Status	STATUS_SUCCESS

11. Message 11: Done with the policy handle; close the handle.

Direction and method	Parameter field	Parameter value
Send LsarClose	ObjectHandle	[Implementation-specific value returned in Step 2.]

12. Message 12: Success: Policy handle has been closed.

Direction and method	Parameter field	Parameter value
Receive	Status	STATUS_SUCCESS
LsarClose		

4.3 Manipulating Trusted Domain Objects

This section illustrates a message exchange pertaining to trusted domain objects.

1. Message 1: Open the policy object.

Direction and method	Parameter field	Parameter value
Send LsarOpenPolicy2	SystemName	"Arbitrary String"
Send LsarOpenPolicy2	ObjectAttributes	Ignored, except for the RootDirectory field, which is NULL.
Send LsarOpenPolicy2	DesiredAccess	POLICY_VIEW_LOCAL_INFORMATION

2. Message 2: Success; return the policy object handle.

Direction and method	Parameter field	Parameter value
Receive LsarOpenPolicy2	Status	STATUS_SUCCESS
Receive LsarOpenPolicy2	PolicyHandle	[Implementation-specific value]

3. Message 3: Enumerate trusted domain objects.

Direction and method	Parameter field	Parameter value
Send LsarEnumerateTrustedDomainsEx	PolicyHandle	[Implementation-specific value returned in Step 2.]
Send LsarEnumerateTrustedDomainsEx	EnumerationContext	0
Send LsarEnumerateTrustedDomainsEx	PreferredMaximumLength	0x100

4. Message 4: Success; return some trusted domain objects, with more to come.

Direction and method	Parameter field	Parameter value
Receive LsarEnumerateTrustedDomainsEx	Status	STATUS_MORE_ENTRIES
Receive LsarEnumerateTrustedDomainsEx	EnumerationContext	[Implementation-specific value]
Receive LsarEnumerateTrustedDomainsEx	TrustedDomainInformation	EntriesRead: 2 EnumerationBuffer: Contains information about two different trusted domain objects.

5. Message 5: Finish enumerating the trusted domain objects.

Direction and method	Parameter field	Parameter value
Send LsarEnumerateTrustedDomainsEx	PolicyHandle	[Implementation-specific value returned in Step 2.]
Send LsarEnumerateTrustedDomainsEx	EnumerationContext	[Value returned in Step 4.]
Send LsarEnumerateTrustedDomainsEx	PreferredMaximumLength	0x10000

6. Message 6: Success; all trusted domain objects have been enumerated.

Direction and method	Parameter field	Parameter value
Receive LsarEnumerateTrustedDomainsEx	Status	STATUS_NO_MORE_ENTRIES
Receive LsarEnumerateTrustedDomainsEx	EnumerationContext	[Implementation-specific value]
Receive LsarEnumerateTrustedDomainsEx	TrustedDomainInformation	EntriesRead: 3 EnumerationBuffer: Contains information about three different trusted domain objects.

7. Message 7: Open a trusted domain object by name.

Direction and method	Parameter field	Parameter value
Send LsarOpenTrustedDomainByName	PolicyHandle	[Implementation-specific value returned in Step 2.]
Send LsarOpenTrustedDomainByName	TrustedDomainName	[One of the DNS names returned in Step 4 or Step 6.]
Send LsarOpenTrustedDomainByName	DesiredAccess	POLICY_TRUST_ADMIN

8. Message 8: Success; the trusted domain object has been opened successfully.

Direction and method	Parameter field	Parameter value
Receive LsarOpenTrustedDomainByName	Status	STATUS_SUCCESS
Receive LsarOpenTrustedDomainByName	TrustedDomainHandle	[Implementation-specific value]

9. Message 9: Done with this trusted domain object: Close the handle.

Direction and method	Parameter field	Parameter value
Send LsarClose	ObjectHandle	[Implementation-specific value returned in Step 8.]

10. Message 10: Success: Trusted domain object has been closed.

Direction and method	Parameter field	Parameter value
Receive LsarClose	Status	STATUS_SUCCESS

11. Message 11: Done with the policy object: Close the handle.

Direction and method	Parameter field	Parameter value
Send LsarClose	ObjectHandle	[Implementation-specific value returned in Step 2.]

12. Message 12: Success: Policy object has been closed.

Direction and method	Parameter field	Parameter value
Receive LsarClose	Status	STATUS_SUCCESS

4.4 Structure Example of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB

The following is an annotated dump of <u>LSAPR TRUSTED DOMAIN AUTH BLOB</u>.

00000000	93	1e	54	57	83	78	С6	c1	15	f1	13	85	3d	93	18	1d	TW.x=
00000010	b4	eb	ee	6b	fa	79	f5	2e	8d	cb	b4	еЗ	е3	54	8a	81	k.yT
00000020	b6	38	0f	6с	4d	6b	2b	36	4f	a5	се	d8	82	44	52	23	.8.1Mk+60DR#
00000030	fc	40	b4	fd	e2	71	78	95	f4	d5	29	e1	11	7a	8c	67	.@qx)z.g
00000040	2f	3d	69	a3	54	cd	47	79	ca	3f	a8	a9	4f	08	85	9d	/=i.T.Gy.?O
00000050	93	fb	56	0b	db	84	9e	bb	da	c4	fd	58	3d	88	55	c7	VX=.U.
00000060	bb	5a	2d	aa	еЗ	26	23	a5	12	b1	1c	23	1a	aa	72	26	.Z&##r&
00000070	9f	57	b2	89	be	37	ес	32	83	25	6с	fe	7с	ae	09	2b	.W7.2.%l. +
08000000	27	15	20	01	c2	7a	d3	2a	e1	e5	5e	0с	16	17	10	4d	'z.*^M
00000090	6a	dc	9b	Зе	09	43	5a	66	8e	17	4c	27	d1	40	9b	19	j>.CZfL'.@
000000a0	82	ab	d4	81	07	83	78	98	78	a1	f8	2a	b2	9b	7с	5f	x.x*
000000b0	81	6f	11	37	e1	e5	90	4b	47	b4	0d	9a	ac	3b	35	40	.o.7KG;5@
000000c0	79	45	04	0e	59	07	67	ea	f2	ea	57	c2	5d	25	03	94	yЕY.gW.]%
000000d0	46	35	7с	1f	01	e4	89	d9	1b	9d	fe	94	e8	9e	3f	4e	F5 ?N
000000e0	b1	18	43	2f	27	a7	f1	0a	ff	1d	42	e2	се	54	f9	2a	C/'BT.*
000000f0	b9	b2	43	81	f0	ed	22	2d	e0	a0	37	2a	c1	19	67	f0	C"7*g.
00000100	fa	5f	37	0a	9f	58	90	77	eb	0a	95	1c	fe	5f	a0	e7	7X.w
00000110	dc	4f	28	fa	18	d7	22	23	9b	54	e7	fd	e5	ed	67	a2	.0("#.Tg.
00000120	da	a4	3d	cb	0b	f3	5a	се	е9	dd	de	0b	d6	e7	e5	91	=z
00000130	92	20	8f	ac	2f	bс	be	11	55	b1	5e	0a	79	ed	00	4a	/U.^.yJ
00000140	e6	94	34	8e	29	09	ef	b5	2e	36	62	73	84	4d	4a	77	4.)6bs.MJw
00000150	3f	df	9a	6f	4 f	Зс	Зе	1a	11	e7	1с	8d	84	43	2e	1a	?oO<>C
00000160								6d									.YGm)'{h.{
00000170	03	07	43	bf	8a	96	80	30	b9	1c	1e	36	e4	с0	d1	a6	C06
00000180								a3									.5uq).@Ph.
00000190	02	e7	aa	96	43	c2	46	1d	cd	f3	ba	9с	94	ff	f6	74	C.Ft
000001a0								42									<b.>4H</b.>
000001b0								20]t~3X 8
000001c0								dc								f8	@L.+~
000001d0	87	a3	ed	20	ff	50	4f	ee	6с	сЗ	b1	4c	2a	17	96	61	PO.lL*a
000001e0								9e									.[^.RpV.
000001f0								03									i.lx"4p.uw`.;/B.
00000200								00									0IB
00000210								00									.UOutg
00000220								68							00		oingAuthInfo
00000230			b8												00		IBU
00000240	4 f	75	74	67	6f	69	6e	67	50	72	65	76	69	6f	75	73	OutgoingPrevious

```
00000250 41 75 74 68 49 6e 66 6f 00 00 00 01 00 00 00 AuthInfo......
00000260 0c 00 00 00 30 00 00 49 42 b8 1c b4 55 c9 01 ....0...IB...U..
00000270 02 00 00 01 11 00 00 04 96 66 36 f6 d6 96 66 7
00000280 41 75 74 68 49 6e 66 6f 00 00 00 04 42 b8 1c AuthInfo....IB..
00000290 b4 55 c9 01 02 00 00 01 19 00 00 49 6e 63 6f ........Incoming
000002a0 6d 69 6e 67 50 72 65 76 69 6f 75 73 41 75 74 68 mingPreviousAuth
000002b0 49 6e 66 6f 00 00 00 05 50 00 00 5c 00 00 00 Info............
```

The LSAPR TRUSTED DOMAIN AUTH BLOB leads with 512 bytes of random data:

```
00000000 93 1e 54 57 83 78 c6 c1 15 f1 13 85 3d 93 18 1d ...TW.x....=...
00000010
        b4 eb ee 6b fa 79 f5 2e 8d cb b4 e3 e3 54 8a 81
                                                     ...k.y......T..
00000020 b6 38 0f 6c 4d 6b 2b 36 4f a5 ce d8 82 44 52 23 .8.1Mk+60....DR#
00000030 fc 40 b4 fd e2 71 78 95 f4 d5 29 e1 11 7a 8c 67
                                                     .@...qx...)..z.g
00000040 2f 3d 69 a3 54 cd 47 79 ca 3f a8 a9 4f 08 85 9d /=i.T.Gy.?..O...
00000050 93 fb 56 0b db 84 9e bb da c4 fd 58 3d 88 55 c7
00000060 bb 5a 2d aa e3 26 23 a5 12 b1 1c 23 1a aa 72 26 .z-..&#....#..r&
00000070 9f 57 b2 89 be 37 ec 32 83 25 6c fe 7c ae 09 2b .W...7.2.%1.|..+
00000080 27 15 20 01 c2 7a d3 2a e1 e5 5e 0c 16 17 10 4d
                                                      '. ..z.*..^...M
00000090 6a dc 9b 3e 09 43 5a 66 8e 17 4c 27 d1 40 9b 19
                                                      j..>.CZf..L'.@..
000000a0 82 ab d4 81 07 83 78 98 78 al f8 2a b2 9b 7c 5f
                                                     ....x.x..*..|
                                                     .o.7...KG....;5@
000000b0 81 6f 11 37 e1 e5 90 4b 47 b4 0d 9a ac 3b 35 40
000000c0
        79 45 04 0e 59 07 67 ea f2 ea 57 c2 5d 25 03 94
                                                      yE..Y.g...W.]%..
000000d0 46 35 7c 1f 01 e4 89 d9 1b 9d fe 94 e8 9e 3f 4e F5|..............?N
000000f0 b9 b2 43 81 f0 ed 22 2d e0 a0 37 2a c1 19 67 f0
                                                      ..C..."-..7*..q.
00000100 fa 5f 37 0a 9f 58 90 77 eb 0a 95 1c fe 5f a0 e7
                                                      . 7..X.w....
00000120 da a4 3d cb 0b f3 5a ce e9 dd de 0b d6 e7 e5 91
                                                      ..=...z......
00000130 92 20 8f ac 2f bc be 11 55 bl 5e 0a 79 ed 00 4a
                                                     . ../...U.^.y..J
00000140 e6 94 34 8e 29 09 ef b5 2e 36 62 73 84 4d 4a 77
                                                      ..4.)....6bs.MJw
00000150 3f df 9a 6f 4f 3c 3e 1a 11 e7 1c 8d 84 43 2e 1a
                                                      ?..oO<>.....C..
00000160 aa 59 88 96 47 0b f0 6d 29 27 7b 68 c2 7b 2e be
                                                      .Y..G..m) '{h.{..
00000170 03 07 43 bf 8a 96 80 30 b9 1c 1e 36 e4 c0 d1 a6
                                                      ..C....0...6....
00000180 a0 35 75 71 d5 ac f1 a3 1c d4 29 ee 40 50 68 93
                                                     .5uq.....).@Ph.
00000190 02 e7 aa 96 43 c2 46 1d cd f3 ba 9c 94 ff f6 74
                                                     ....c.F.....t
000001a0
        3c 19 5f f6 1d 1c 11 42 ff 3e 34 0b 94 48 dc de
                                                      <. ....B.>4..H..
000001b0 5d 74 7e 33 d8 cd 58 20 20 38 1a d5 e4 b6 fd 1d | t~3..X 8.....
000001c0 c3 a7 ef 40 82 11 4c dc 2b 7e b4 ea 1a 85 ce f8
                                                     ...@..L.+~....
000001d0 87 a3 ed 20 ff 50 4f ee 6c c3 b1 4c 2a 17 96 61
                                                      ... .PO.l..L*..a
000001e0 bc 5b 5e 17 52 d0 92 9e 11 70 d0 1d 98 a7 56 fa
                                                      .[^.R...p....V.
000001f0 69 95 6c 78 22 34 70 03 75 77 60 c5 3b 2f 42 e0 i.lx"4p.uw`.;/B.
```

The data following that is for **CountOutgoingAuthInfos**, in little-endian byte order:

```
00000200 01 00 00 00 ....
```

This indicates that there is one entry present in the **CurrentOutgoingAuthInfos** field.

The data following that is for ByteOffsetCurrentOutgoingAuthInfo, in little-endian byte order:

```
00000204 0c 00 00 00 ....
```

This means that the byte offset from the beginning of **CountOutgoingAuthInfos** to the start of the **CurrentOutgoingAuthInfos** field is 0x0000000c.

The data following that is for **ByteOffsetPreviousOutgoingAuthInfo**, in little-endian byte order:

```
00000208 30 00 00 00 0...
```

This means that the byte offset from the beginning of **CountOutgoingAuthInfos** to the start of the **PreviousOutgoingAuthInfos** field is 0x00000030, so the size of **CurrentOutgoingAuthInfos** is 0x30 - 0xc = 0x24 bytes.

The data following that is for **CurrentOutgoingAuthInfos**; the last 3 padding bytes are for data alignment purposes:

```
0000020c 49 42 b8 1c IB..
00000210 b4 55 c9 01 02 00 00 00 11 00 00 00 4f 75 74 67 .U......Outg
00000220 6f 69 6e 67 41 75 74 68 49 6e 66 6f 00 00 00 oingAuthInfo...
```

This is an array of **CountOutgoingAuthInfos** of <u>LSAPR AUTH INFORMATION</u> (section 2.2.7.17) entries in self-relative format.

The data following that is for **PreviousOutgoingAuthInfos**; the last 3 padding bytes are for data alignment purposes:

This is an array of **CountOutgoingAuthInfos** of LSAPR_AUTH_INFORMATION entries in self-relative format.

The data following that is for **CountIncomingAuthInfos**, in little-endian byte order:

```
0000025c 01 00 00 00 ....
```

This means there is one entry present in the **CountIncomingAuthInfos** field.

The data following that is for ByteOffsetCurrentIncomingAuthInfo, in little-endian byte order:

```
00000260 0c 00 00 00 ....
```

This means that the byte offset from the beginning of **CountIncomingAuthInfos** to the start of the **CurrentIncomingAuthInfos** field is 0x0000000c.

The data following that is for **ByteOffsetPreviousIncomingAuthInfo**, in little-endian byte order:

```
00000264 30 00 00 00 0...
```

This means that the byte offset from the beginning of **CountIncomingAuthInfos** to the start of the **PreviousIncomingAuthInfos** field is 0x00000030, so the size of **CurrentIncomingAuthInfos** is 0x30 - 0xc = 0x24 bytes.

The data following that is for **CurrentIncomingAuthInfos**; the last 3 padding bytes are for data alignment purposes:

This is an array of **CountIncomingAuthInfos** of LSAPR_AUTH_INFORMATION entries in self-relative format.

The data following that is for **PreviousIncomingAuthInfos**; the last 3 padding bytes are for data alignment purposes:

This is an array of **CountIncomingAuthInfos** of LSAPR_AUTH_INFORMATION entries in self-relative format.

The data following that is for **OutgoingAuthInfoSize**, in little-endian byte order:

```
000002b8 5c 00 00 00 \...
```

This means that the size, in bytes, of the sub-portion of the structure from the beginning of the **CountOutgoingAuthInfos** field through the end of the **PreviousOutgoingAuthInfos** field is 0x0000005c.

The data following that is for **IncomingAuthInfoSize**, in little-endian byte order:

```
000002bc 5c 00 00 00 \...
```

This means that the size, in bytes, of the sub-portion of the structure from the beginning of the **CountIncomingAuthInfos** field through the end of the **PreviousIncomingAuthInfos** field is 0x0000005c.

5 Security

5.1 Security Considerations for Implementers

Usage of RC4 is specified in section 5.1.1. This protocol employs an implementation that reuses RC4 key stream, which subjects it to Xor and other cryptanalysis attacks. This vulnerability is applicable when multiple RC4-encrypted opnum requests are made over the same transport session, as specified in section 2.1.

Usage of Data Encryption Standard (DES) in Electronic Code Book (ECB) mode is specified in section 5.1.2. This algorithm is considered inadequate for maintaining confidentiality considering the efficiency of brute-force and cryptanalysis attacks that are enabled by using year 2006, off-the-shelf computer hardware.

The session key for sections 5.1.1 and 5.1.2 is obtained from the SMB transport, as specified in section 2.1. The session key is obtained from the SMB transport every time a message that needs encryption is to be sent or a message that needs decryption is to be received.

5.1.1 RC4 Cipher Usage

Implementations of this protocol protect the <u>LSAPR TRUSTED DOMAIN AUTH BLOB</u> structure by encrypting the data referenced by that structure's **AuthBlob** field. The RC4 algorithm is used to encrypt the data on request (and reply) and decrypt the data on receipt. The key, required during runtime by the RC4 algorithm, is the 16-byte key specified by the method that uses this structure (for example, see section <u>3.1.4.7.10</u>). The size of data (the **AuthSize** field of LSAPR_TRUSTED_DOMAIN_AUTH_BLOB) must remain unencrypted.

5.1.2 Secret Encryption and Decryption

This cipher is used to provide confidentiality of wire traffic for operations that reference this section.

The encrypt_secret routine is used to encrypt a cleartext value into ciphertext prior to transmission. The decrypt_secret routine is used to decrypt a ciphertext value into cleartext after receipt. The appropriate mode is selected based on the requirements of the interface.

The definitions of **des_ecb_lm_dec** and **des_ecb_lm_enc** are specified in section 5.1.3.

```
encrypt secret(input : LSA UNICODE STRING, sessionkey : byte[16],
output : LSA UNICODE STRING)
   LET blocklen be 8
   LET keyindex be 0
    // Set version, length
   // temporary buffer.
   LET buffer be an array of blocklen bytes
   DECLEARE Version as ULONG
   SET Version to 1
   SET buffer to input->length
   SET (buffer + 4) to Version
   CALL des_ecb_lm_enc(buffer, sessionkey[keyindex],
                        output->buffer)
    INCREMENT output->buffer by blocklen
   INCREMENT output->length by blocklen
   SET keyindex to AdvanceKey(keyindex)
   LET remaining be input->length
```

```
WHILE remaining > blocklen
        CALL des ecb lm enc(input->buffer,
            sessionkey[keyindex], output->buffer)
        INCREMENT input->buffer by blocklen
        INCREMENT output->buffer by blocklen
        INCREMENT output->length by blocklen
        SET keyindex to AdvanceKey(keyindex)
        DECREMENT remaining by blocklen
   ENDWHILE
    IF (remaining > 0) THEN
        // zero pad the last block.
        SET bytes in buffer to 0
        COPY remaining bytes from input->buffer to buffer
        CALL des ecb lm enc(buffer, sessionkey[keyindex],
                            output->buffer)
        INCREMENT output->length by blocklen
   ENDIF
}
decrypt secret(input : LSA UNICODE STRING, sessionkey : byte[16],
output : LSA UNICODE STRING)
{
   LET keyindex be 0
   LET blocklen be 8
    // Check version, get clear length.
   CALL des ecb lm dec(input->buffer, sessionkey[keyindex],
                        output->buffer)
   LET outputlength be output[0]
   LET version be output[1]
    IF (version \neq 1) THEN // version check
        FAIL
   ENDIF
   INCREMENT input->buffer by blocklen
   SET keyindex to AdvanceKey(keyindex)
   LET remaining be outputlength
    WHILE remaining > blocklen
        CALL des ecb lm dec(input->buffer,
                 sessionkey[keyindex], output->buffer)
        INCREMENT input->buffer by blocklen
        INCREMENT output->buffer by blocklen
        SET keyindex to AdvanceKey(keyindex)
        DECREMENT remaining by blocklen
   ENDWHILE
   IF (remaining > 0) THEN
        CALL des ecb lm dec(input->buffer,
                 sessionkey[keyindex], output->buffer)
   SET output->length to outputlength
}
```

```
ULONG AdvanceKey(pos : ULONG)
{
   LET KeyBlockLen be 7;
   DECLARE overrun as ULONG
   DECLARE currpos as ULONG;
   DECLARE nextpos as ULONG;

   LET pos = pos + KeyBlockLen;
   LET currpos = pos;
   LET nextpos = pos + KeyBlockLen;

IF (nextpos > sizeof(sessionKey)) THEN
   LET overrun = nextpos- sizeof(sessionKey);
   LET currpos = (KeyBlockLen - overrun);
   ENDIF
   RETURN currpos;
}
```

5.1.3 DES-ECB-LM Cipher Definition

des_ecb_lm_dec utilizes DES-ECB-LM in cipher-mode decryption.

des ecb Im enc utilizes DES-ECB-LM in cipher-mode encryption.

DES-ECB-LM is defined as follows.

```
des ecb lm(input:byte[8], encryptionKey: byte[8],
            output:byte[8])
InputKey:byte[7]
OutputKey:byte[8]
Let InputKey be the first 7 bytes of encryptionKey [0-6]
    OutputKey[0] = InputKey[0] >> 0x01;
    OutputKey[1] = ((InputKey[0]&0x01)<<6) \mid (InputKey[1]>>2);
    OutputKey[2] = ((InputKey[1] \& 0x03) << 5) | (InputKey[2] >> 3);
    OutputKey[3] = ((InputKey[2]&0x07) <<4) \mid (InputKey[3]>>4);
    OutputKey[4] = ((InputKey[3]&0x0F) << 3) | (InputKey[4] >> 5);
    OutputKey[5] = ((InputKey[4]&0x1F) << 2) | (InputKey[5] >> 6);
    OutputKey[6] = ((InputKey[5]\&0x3F)<<1) | (InputKey[6]>>7);
    OutputKey[7] = InputKey[6] & 0x7F;
    ((unsigned long*)OutputKey)[0] <<= 1;
    ((unsigned long*)OutputKey)[1] <<= 1;</pre>
    ((unsigned long*)OutputKey)[0] &= Oxfefefefe;
    ((unsigned long*)OutputKey)[1] &= Oxfefefefe;
Let the left-most bit of OutputKey be the parity bit. That is,
if the sum of the other 7 bits is odd, the parity bit is zero;
otherwise the parity bit is one. The processing starts at the
left-most bit of OutputKey.
des ecb ( input, OutputKey, output )
END
```

The algorithm des_ecb is the Data Encryption Standard (DES) encryption in Electronic Code Book (ECB) mode, as specified in [FIPS81].

5.1.4 Encryption and Decryption Examples

This section provides an encryption and decryption example of the algorithms specified in section 5.1.2.

5.1.4.1 Encryption Example

This section provides an example of how the encrypt_secret routine defined in section 5.1.2 encrypts a given cleartext value into a ciphertext using a session key, and given the following parameters:

Parameters	Value
input	50 00 61 00 73 00 73 00 77 00 6f 00 72 00 64 00 31 00 32 00 33 00
sessionkey	4e 98 c9 10 b2 a9 88 d7 92 fb 5a a3 3e 8e f7 86

The following table describes the values *keyindex* (defined in **encrypt_secret**) and *input*, *InputKey*, *OutputKey*, and *output* (defined in **des_ecb_lm**) after successive calls to **des_ecb_lm_enc**.

keyindex	input	InputKey	OutputKey	output
0	16 00 00 00 01 00 00 00	4e 98 c9 10 b2 a9 88	4f 4c 32 23 0b 94 a7 10	af 78 44 03 fb a0 92 27
7	50 00 61 00 73 00 73 00	d7 92 fb 5a a3 3e 8e	d6 c8 bf 6b ab 19 fb 1c	8c 95 fc 7e 88 56 4c cd
2	77 00 6f 00 72 00 64 00	c9 10 b2 a9 88 d7 92	c8 89 2c 54 98 46 5e 25	7c d0 c2 41 da 6f 14 41
9	31 00 32 00 33 00 00 00	fb 5a a3 3e 8e f7 86	fb ad a8 67 e9 76 df 0d	56 26 cd a5 81 e9 22 3d

The *output* variable fields are:

Parameters	Value
output->buffer	af 78 44 03 fb a0 92 27 8c 95 fc 7e 88 56 4c cd 7c d0 c2 41 da 6f 14 41 56 26 cd a5 81 e9 22 3d
output- >length	0x20

5.1.4.2 Decryption Example

This section provides an example of how the **decrypt_secret** routine defined in section <u>5.1.2</u> decrypts a given ciphertext value into cleartext using a session key, and given the following parameters:

Parameters	Value
Input	af 78 44 03 fb a0 92 27 8c 95 fc 7e 88 56 4c cd 7c d0 c2 41 da 6f 14 41 56 26 cd a5 81 e9 22 3d
sessionkey	4e 98 c9 10 b2 a9 88 d7 92 fb 5a a3 3e 8e f7 86

The following table describes the values *keyindex* (defined in **decrypt_secret**) and *input*, *InputKey*, *OutputKey*, and *output* (defined in **des_ecb_lm**) after successive calls to **des_ecb_lm_dec**.

keyi	index	input	InputKey	OutputKey	output
0		af 78 44 03 fb a0 92 27	4e 98 c9 10 b2 a9 88	4f 4c 32 23 0b 94 a7 10	16 00 00 00

keyindex	input	InputKey	OutputKey	output
				01 00 00 00
7	8c 95 fc 7e 88 56 4c cd	d7 92 fb 5a a3 3e 8e	d6 c8 bf 6b ab 19 fb 1c	50 00 61 00 73 00 73 00
2	7c d0 c2 41 da 6f 14 41	c9 10 b2 a9 88 d7 92	c8 89 2c 54 98 46 5e 25	77 00 6f 00 72 00 64 00
9	56 26 cd a5 81 e9 22 3d	fb 5a a3 3e 8e f7 86	fb ad a8 67 e9 76 df 0d	31 00 32 00 33 00 00 00

The *output* variable fields are:

Parameters	Value
output->buffer	50 00 61 00 73 00 73 00 77 00 6f 00 72 00 64 00 31 00 32 00 33 00 00 00
output->length	0x16

5.2 Index of Security Parameters

Security parameter	Section
Usage of RC4 stream cipher	<u>5.1.1</u>
Usage of DES_ECB_LM	<u>5.1.2</u>

6 Appendix A: Full IDL

For ease of implementation, the full IDL is provided, where ms-dtyp.idl is the IDL specified in [MS-DTYP] Appendix A.

Note The Isarpc interface is shared between this protocol and the Local Security Authority (Translation Methods) Remote Protocol [MS-LSAT]. For convenience, the IDL definitions that appear below and the IDL definitions in [MS-LSAT] section 6 have been merged and are available for download. For more information, see [MSFT-LSA-IDL].

```
import "ms-dtyp.idl";
   uuid(12345778-1234-ABCD-EF00-0123456789AB),
   version(0.0),
   ms union,
   pointer default (unique)
interface lsarpc
{
// Type definitions.
// Start of common types.
typedef [context handle] void * LSAPR HANDLE;
typedef unsigned char SECURITY CONTEXT TRACKING MODE,
                      *PSECURITY CONTEXT TRACKING MODE;
typedef unsigned short SECURITY DESCRIPTOR CONTROL,
                       *PSECURITY DESCRIPTOR CONTROL;
typedef struct STRING {
   unsigned short Length;
    unsigned short MaximumLength;
    [size is(MaximumLength), length is(Length)]
    char * Buffer;
} STRING, *PSTRING;
typedef struct LSAPR ACL {
   unsigned char AclRevision;
    unsigned char Sbz1;
    unsigned short AclSize;
    [size is(AclSize - 4)] unsigned char Dummy1[*];
} LSAPR ACL, *PLSAPR ACL;
typedef struct LSAPR SECURITY DESCRIPTOR {
   unsigned char Revision;
    unsigned char Sbz1;
    SECURITY DESCRIPTOR CONTROL Control;
   PRPC SID Owner;
    PRPC SID Group;
    PLSAPR ACL Sacl;
    PLSAPR ACL Dacl;
} LSAPR SECURITY DESCRIPTOR, *PLSAPR SECURITY DESCRIPTOR;
typedef enum SECURITY IMPERSONATION LEVEL {
    SecurityAnonymous = 0,
    SecurityIdentification = 1,
```

```
SecurityImpersonation = 2,
    SecurityDelegation = 3
} SECURITY IMPERSONATION LEVEL, * PSECURITY IMPERSONATION LEVEL;
typedef struct SECURITY QUALITY OF SERVICE {
    unsigned long Length;
    SECURITY IMPERSONATION LEVEL ImpersonationLevel;
    SECURITY CONTEXT TRACKING MODE ContextTrackingMode;
    unsigned char EffectiveOnly;
} SECURITY QUALITY OF SERVICE, * PSECURITY QUALITY OF SERVICE;
typedef struct LSAPR OBJECT ATTRIBUTES {
    unsigned long Length;
    unsigned char * RootDirectory;
    PSTRING ObjectName;
    unsigned long Attributes;
    PLSAPR SECURITY DESCRIPTOR SecurityDescriptor;
    PSECURITY QUALITY OF SERVICE SecurityQualityOfService;
} LSAPR OBJECT ATTRIBUTES, *PLSAPR OBJECT ATTRIBUTES;
typedef struct _LSAPR_TRUST_INFORMATION {
    RPC UNICODE STRING Name;
    PRPC SID Sid;
} LSAPR TRUST INFORMATION, *PLSAPR TRUST INFORMATION;
// End of common types.
typedef enum POLICY INFORMATION CLASS {
   PolicyAuditLogInformation = 1,
    PolicyAuditEventsInformation,
    PolicyPrimaryDomainInformation,
    PolicyPdAccountInformation,
    PolicyAccountDomainInformation,
    PolicyLsaServerRoleInformation,
    PolicyReplicaSourceInformation,
    PolicyInformationNotUsedOnWire,
    PolicyModificationInformation,
    PolicyAuditFullSetInformation,
    PolicyAuditFullQueryInformation,
    PolicyDnsDomainInformation,
    PolicyDnsDomainInformationInt,
    PolicyLocalAccountDomainInformation,
    PolicyLastEntry
} POLICY INFORMATION CLASS, *PPOLICY INFORMATION CLASS;
typedef enum POLICY AUDIT EVENT TYPE {
    AuditCategorySystem,
    AuditCategoryLogon,
    AuditCategoryObjectAccess,
    AuditCategoryPrivilegeUse,
    AuditCategoryDetailedTracking,
    AuditCategoryPolicyChange,
    AuditCategoryAccountManagement,
    AuditCategoryDirectoryServiceAccess,
    {\tt AuditCategoryAccountLogon}
} POLICY AUDIT EVENT TYPE, *PPOLICY AUDIT EVENT TYPE;
typedef RPC UNICODE STRING LSA UNICODE STRING,
                             *PLSA UNICODE STRING;
typedef struct POLICY AUDIT LOG INFO {
    unsigned long AuditLogPercentFull;
    unsigned long MaximumLogSize;
    LARGE INTEGER AuditRetentionPeriod;
    unsigned char AuditLogFullShutdownInProgress;
    LARGE INTEGER TimeToShutdown;
```

```
unsigned long NextAuditRecordId;
} POLICY AUDIT LOG INFO, *PPOLICY AUDIT LOG INFO;
typedef enum POLICY LSA SERVER ROLE {
    PolicyServerRoleBackup = 2,
    PolicyServerRolePrimary
} POLICY LSA SERVER ROLE, *PPOLICY LSA SERVER ROLE;
typedef struct _POLICY_LSA_SERVER_ROLE_INFO {
    POLICY_LSA_SERVER_ROLE LsaServerRole;
} POLICY LSA SERVER ROLE INFO, *PPOLICY LSA SERVER ROLE INFO;
typedef struct POLICY MODIFICATION INFO {
    LARGE INTEGER ModifiedId;
    LARGE INTEGER DatabaseCreationTime;
} POLICY MODIFICATION INFO, *PPOLICY MODIFICATION INFO;
typedef struct POLICY AUDIT FULL SET INFO {
    unsigned char ShutDownOnFull;
} POLICY AUDIT FULL SET INFO,
*PPOLICY AUDIT FULL SET INFO;
typedef struct POLICY AUDIT FULL QUERY INFO {
    unsigned char ShutDownOnFull;
    unsigned char LogIsFull;
} POLICY AUDIT_FULL_QUERY_INFO,
*PPOLICY AUDIT FULL QUERY INFO;
typedef enum POLICY DOMAIN INFORMATION CLASS {
    PolicyDomainQualityOfServiceInformation = 1,
    PolicyDomainEfsInformation = 2,
    PolicyDomainKerberosTicketInformation = 3
} POLICY DOMAIN INFORMATION CLASS,
*PPOLICY DOMAIN INFORMATION CLASS;
typedef struct POLICY DOMAIN KERBEROS TICKET INFO {
    unsigned long AuthenticationOptions;
    LARGE INTEGER MaxServiceTicketAge;
    LARGE INTEGER MaxTicketAge;
    LARGE INTEGER MaxRenewAge;
    LARGE INTEGER MaxClockSkew;
    LARGE INTEGER Reserved;
} POLICY DOMAIN KERBEROS TICKET INFO,
  *PPOLICY DOMAIN KERBEROS TICKET INFO;
typedef struct TRUSTED POSIX OFFSET INFO {
    unsigned long Offset;
} TRUSTED POSIX OFFSET INFO,
*PTRUSTED POSIX OFFSET INFO;
typedef enum TRUSTED INFORMATION CLASS {
    TrustedDomainNameInformation = 1,
    TrustedControllersInformation.
    TrustedPosixOffsetInformation,
    TrustedPasswordInformation,
    TrustedDomainInformationBasic,
    TrustedDomainInformationEx,
    TrustedDomainAuthInformation,
    TrustedDomainFullInformation,
    TrustedDomainAuthInformationInternal,
    TrustedDomainFullInformationInternal,
    TrustedDomainInformationEx2Internal,
    TrustedDomainFullInformation2Internal,
    TrustedDomainSupportedEncryptionTypes,
} TRUSTED INFORMATION CLASS,
*PTRUSTED INFORMATION CLASS;
typedef enum LSA FOREST TRUST RECORD TYPE {
    ForestTrustTopLevelName = \overline{0},
```

```
ForestTrustTopLevelNameEx = 1,
    ForestTrustDomainInfo = 2,
} LSA FOREST TRUST RECORD TYPE;
typedef struct LSA FOREST TRUST BINARY DATA {
    [range(0, 131072)] unsigned long Length;
    [size is( Length )] unsigned char * Buffer;
} LSA FOREST TRUST BINARY DATA,
*PLSA_FOREST_TRUST_BINARY_DATA;
typedef struct LSA FOREST TRUST DOMAIN INFO {
    PRPC SID Sid;
   LSA_UNICODE_STRING DnsName;
LSA_UNICODE_STRING NetbiosName;
} LSA FOREST TRUST DOMAIN INFO,
*PLSA_FOREST_TRUST_DOMAIN_INFO;
typedef struct LSA FOREST TRUST RECORD {
    unsigned long Flags;
    LSA FOREST TRUST RECORD TYPE ForestTrustType;
    LARGE INTEGER Time;
    [switch type ( LSA FOREST TRUST RECORD TYPE ),
        switch is( ForestTrustType )]
    union
        [case( ForestTrustTopLevelName,
             ForestTrustTopLevelNameEx )]
            LSA UNICODE STRING TopLevelName;
        [case( ForestTrustDomainInfo )]
            LSA_FOREST_TRUST_DOMAIN_INFO DomainInfo;
        [default] LSA FOREST TRUST BINARY DATA Data;
    } ForestTrustData;
} LSA FOREST TRUST RECORD, *PLSA FOREST TRUST RECORD;
typedef struct _LSA_FOREST_TRUST_INFORMATION {
    [range(0,4000)] unsigned long RecordCount;
    [size is( RecordCount )] PLSA FOREST TRUST RECORD * Entries;
} LSA FOREST TRUST INFORMATION, *PLSA FOREST TRUST INFORMATION;
typedef enum LSA FOREST TRUST COLLISION RECORD TYPE {
    CollisionTdo = 0,
    CollisionXref,
    CollisionOther
} LSA_FOREST_TRUST_COLLISION_RECORD_TYPE;
typedef struct LSA FOREST TRUST COLLISION RECORD {
    unsigned long Index;
    LSA FOREST TRUST COLLISION RECORD TYPE Type;
    unsigned long Flags;
    LSA UNICODE STRING Name;
} LSA FOREST TRUST COLLISION RECORD,
  *PLSA FOREST TRUST COLLISION RECORD;
typedef struct LSA FOREST TRUST COLLISION INFORMATION {
    unsigned long RecordCount;
    [size is( RecordCount )]
        PLSA FOREST TRUST COLLISION RECORD * Entries;
} LSA FOREST TRUST COLLISION INFORMATION,
  *PLSA FOREST TRUST COLLISION INFORMATION;
typedef LSAPR HANDLE *PLSAPR HANDLE;
typedef struct LSAPR ACCOUNT INFORMATION {
    PRPC SID Sid;
} LSAPR ACCOUNT INFORMATION, *PLSAPR ACCOUNT INFORMATION;
typedef struct _LSAPR ACCOUNT ENUM BUFFER {
    unsigned long EntriesRead;
    [size_is(EntriesRead)] PLSAPR_ACCOUNT_INFORMATION Information;
```

```
} LSAPR ACCOUNT ENUM BUFFER, *PLSAPR ACCOUNT ENUM BUFFER;
typedef struct LSAPR SR SECURITY DESCRIPTOR {
    [range(0,262144)] unsigned long Length;
    [size_is(Length)] unsigned char * SecurityDescriptor;
} LSAPR SR SECURITY DESCRIPTOR, *PLSAPR SR SECURITY DESCRIPTOR;
typedef struct LSAPR LUID AND ATTRIBUTES {
    LUID Luid:
    unsigned long Attributes;
} LSAPR LUID AND ATTRIBUTES, * PLSAPR LUID AND ATTRIBUTES;
typedef struct LSAPR PRIVILEGE SET {
    [range(0,1000)] unsigned long PrivilegeCount;
    unsigned long Control;
    [size is(PrivilegeCount)] LSAPR LUID AND ATTRIBUTES Privilege[*];
} LSAPR PRIVILEGE SET, *PLSAPR PRIVILEGE SET;
typedef struct LSAPR POLICY PRIVILEGE DEF {
    RPC UNICODE STRING Name;
    LUID LocalValue;
} LSAPR POLICY PRIVILEGE DEF, *PLSAPR POLICY PRIVILEGE DEF;
typedef struct LSAPR PRIVILEGE ENUM BUFFER {
    unsigned long Entries;
    [size is(Entries)] PLSAPR POLICY PRIVILEGE DEF Privileges;
} LSAPR PRIVILEGE ENUM BUFFER, *PLSAPR PRIVILEGE ENUM BUFFER;
typedef struct LSAPR CR CIPHER VALUE {
    [range(0, 131088)] unsigned long Length;
    [range(0, 131088)] unsigned long MaximumLength;
    [size is(MaximumLength), length_is(Length)]
        unsigned char *Buffer;
} LSAPR CR CIPHER VALUE, *PLSAPR CR CIPHER VALUE;
typedef struct LSAPR TRUSTED ENUM BUFFER {
    unsigned long EntriesRead;
    [size is(EntriesRead)] PLSAPR TRUST INFORMATION Information;
} LSAPR TRUSTED ENUM BUFFER, *PLSAPR TRUSTED ENUM BUFFER;
typedef struct _LSAPR_POLICY_ACCOUNT_DOM_INFO {
    RPC UNICODE STRING DomainName;
    PRPC SID DomainSid;
} LSAPR_POLICY_ACCOUNT_DOM_INFO, *PLSAPR_POLICY_ACCOUNT_DOM_INFO;
typedef struct LSAPR POLICY PRIMARY DOM INFO {
    RPC UNICODE STRING Name;
    PRPC SID Sid;
} LSAPR POLICY PRIMARY DOM INFO, *PLSAPR POLICY PRIMARY DOM INFO;
typedef struct _LSAPR_POLICY_DNS_DOMAIN_INFO {
    RPC UNICODE STRING Name;
    RPC UNICODE STRING DnsDomainName;
    RPC UNICODE STRING DnsForestName;
    GUID DomainGuid;
    PRPC SID Sid;
} LSAPR POLICY DNS DOMAIN INFO, *PLSAPR POLICY DNS DOMAIN INFO;
typedef struct LSAPR POLICY PD ACCOUNT INFO {
    RPC UNICODE STRING Name;
} LSAPR POLICY PD ACCOUNT INFO, *PLSAPR POLICY PD ACCOUNT INFO;
typedef struct LSAPR POLICY REPLICA SRCE INFO {
    RPC UNICODE STRING ReplicaSource;
    RPC UNICODE STRING ReplicaAccountName;
} LSAPR POLICY REPLICA SRCE INFO, *PLSAPR POLICY REPLICA SRCE INFO;
typedef struct LSAPR POLICY AUDIT EVENTS INFO {
   unsigned char AuditingMode;
```

```
[size is(MaximumAuditEventCount)]
        unsigned long *EventAuditingOptions;
    [range(0,1000)] unsigned long MaximumAuditEventCount;
} LSAPR POLICY AUDIT EVENTS INFO, *PLSAPR POLICY AUDIT EVENTS INFO;
typedef [switch type(POLICY INFORMATION CLASS)]
union LSAPR POLICY INFORMATION {
    [case(PolicyAuditLogInformation)]
        POLICY AUDIT LOG INFO PolicyAuditLogInfo;
    [case(PolicyAuditEventsInformation)]
        LSAPR POLICY AUDIT EVENTS INFO PolicyAuditEventsInfo;
    [case(PolicyPrimaryDomainInformation)]
        LSAPR POLICY PRIMARY DOM INFO PolicyPrimaryDomainInfo;
    [case(PolicyAccountDomainInformation)]
        LSAPR POLICY ACCOUNT DOM INFO PolicyAccountDomainInfo;
    [case(PolicyPdAccountInformation)]
        LSAPR POLICY PD ACCOUNT INFO PolicyPdAccountInfo;
    [case(PolicyLsaServerRoleInformation)]
        POLICY LSA SERVER ROLE INFO PolicyServerRoleInfo;
    [case(PolicyReplicaSourceInformation)]
        LSAPR POLICY REPLICA SRCE INFO PolicyReplicaSourceInfo;
    [case(PolicyModificationInformation)]
        POLICY MODIFICATION INFO PolicyModificationInfo;
    [case(PolicyAuditFullSetInformation)]
        POLICY AUDIT FULL SET INFO PolicyAuditFullSetInfo;
    [case(PolicyAuditFullQueryInformation)]
        POLICY AUDIT FULL QUERY INFO PolicyAuditFullQueryInfo;
    [case(PolicyDnsDomainInformation)]
        LSAPR POLICY DNS DOMAIN INFO PolicyDnsDomainInfo;
    [case(PolicyDnsDomainInformationInt)]
        LSAPR POLICY DNS DOMAIN INFO PolicyDnsDomainInfoInt;
    [case(PolicyLocalAccountDomainInformation)]
        LSAPR POLICY ACCOUNT DOM INFO PolicyLocalAccountDomainInfo;
} LSAPR POLICY INFORMATION, *PLSAPR POLICY INFORMATION;
typedef struct POLICY DOMAIN QUALITY OF SERVICE INFO {
    unsigned long QualityOfService;
} POLICY DOMAIN QUALITY OF SERVICE INFO,
*PPOLICY DOMAIN QUALITY OF SERVICE INFO;
typedef struct LSAPR POLICY DOMAIN EFS INFO {
    unsigned long InfoLength;
    [size_is(InfoLength)] unsigned char * EfsBlob;
} LSAPR POLICY DOMAIN EFS INFO, *PLSAPR POLICY DOMAIN EFS INFO;
typedef [switch type(POLICY DOMAIN INFORMATION CLASS)]
union LSAPR POLICY DOMAIN INFORMATION {
    [case(PolicyDomainQualityOfServiceInformation)]
        POLICY DOMAIN QUALITY OF SERVICE INFO
            PolicyDomainQualityOfServiceInfo;
    [case(PolicyDomainEfsInformation)]
        LSAPR POLICY DOMAIN EFS INFO PolicyDomainEfsInfo;
    [case(PolicyDomainKerberosTicketInformation)]
        POLICY DOMAIN KERBEROS TICKET INFO
            PolicyDomainKerbTicketInfo;
} LSAPR POLICY DOMAIN INFORMATION, *PLSAPR POLICY DOMAIN INFORMATION;
typedef struct LSAPR TRUSTED DOMAIN NAME INFO {
    RPC UNICODE STRING Name;
} LSAPR TRUSTED DOMAIN NAME INFO, *PLSAPR TRUSTED DOMAIN NAME INFO;
typedef struct LSAPR TRUSTED CONTROLLERS INFO {
    [range(0,5)] unsigned long Entries;
    [size is(Entries)] PRPC UNICODE STRING Names;
} LSAPR TRUSTED CONTROLLERS INFO, *PLSAPR TRUSTED CONTROLLERS INFO;
typedef struct LSAPR TRUSTED PASSWORD INFO {
    PLSAPR CR_CIPHER_VALUE Password;
```

```
PLSAPR CR CIPHER VALUE OldPassword;
} LSAPR TRUSTED PASSWORD INFO, *PLSAPR TRUSTED PASSWORD INFO;
typedef struct LSAPR TRUSTED DOMAIN INFORMATION EX {
   RPC UNICODE STRING Name;
   RPC UNICODE STRING FlatName;
   PRPC SID Sid;
    unsigned long TrustDirection;
    unsigned long TrustType;
    unsigned long TrustAttributes;
} LSAPR TRUSTED DOMAIN INFORMATION EX,
  *PLSAPR TRUSTED DOMAIN INFORMATION EX;
typedef struct LSAPR AUTH INFORMATION {
    LARGE INTEGER LastUpdateTime;
    unsigned long AuthType;
    [range(0,65536)] unsigned long AuthInfoLength;
    [size is(AuthInfoLength)] unsigned char * AuthInfo;
} LSAPR AUTH INFORMATION, *PLSAPR AUTH INFORMATION;
typedef struct LSAPR TRUSTED DOMAIN AUTH INFORMATION {
    [range(0,1)] unsigned long IncomingAuthInfos;
    PLSAPR AUTH INFORMATION IncomingAuthenticationInformation;
    PLSAPR AUTH INFORMATION
       IncomingPreviousAuthenticationInformation;
    [range(0,1)] unsigned long OutgoingAuthInfos;
    PLSAPR AUTH INFORMATION OutgoingAuthenticationInformation;
   PLSAPR AUTH_INFORMATION
       OutgoingPreviousAuthenticationInformation;
} LSAPR TRUSTED DOMAIN AUTH INFORMATION,
  *PLSAPR TRUSTED DOMAIN AUTH INFORMATION;
typedef struct LSAPR TRUSTED DOMAIN FULL INFORMATION {
    LSAPR TRUSTED DOMAIN INFORMATION EX Information;
   TRUSTED POSIX OFFSET INFO PosixOffset;
   LSAPR TRUSTED DOMAIN AUTH INFORMATION AuthInformation;
} LSAPR TRUSTED DOMAIN FULL INFORMATION,
  *PLSAPR TRUSTED DOMAIN FULL INFORMATION;
typedef LSAPR TRUST INFORMATION
   LSAPR TRUSTED DOMAIN INFORMATION BASIC;
typedef struct LSAPR TRUSTED DOMAIN AUTH BLOB {
    [range(0, 6\overline{5}536)] unsigned long AuthSize;
    [size is( AuthSize )] unsigned char * AuthBlob;
} LSAPR TRUSTED DOMAIN AUTH BLOB, *PLSAPR TRUSTED DOMAIN AUTH BLOB;
typedef struct LSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL {
    LSAPR TRUSTED DOMAIN AUTH BLOB AuthBlob;
} LSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL,
  *PLSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL;
typedef struct LSAPR TRUSTED DOMAIN FULL INFORMATION INTERNAL {
    LSAPR TRUSTED DOMAIN INFORMATION EX Information;
    TRUSTED_POSIX_OFFSET_INFO PosixOffset;
   LSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL AuthInformation;
} LSAPR TRUSTED DOMAIN FULL INFORMATION INTERNAL,
  *PLSAPR TRUSTED DOMAIN FULL INFORMATION INTERNAL;
typedef struct LSAPR TRUSTED DOMAIN INFORMATION EX2 {
   RPC UNICODE STRING Name;
   RPC UNICODE STRING FlatName;
   PRPC SID Sid;
   unsigned long TrustDirection;
    unsigned long TrustType;
    unsigned long TrustAttributes;
   unsigned long ForestTrustLength;
    [size is(ForestTrustLength)] unsigned char * ForestTrustInfo;
} LSAPR TRUSTED DOMAIN INFORMATION EX2,
```

```
*PLSAPR TRUSTED DOMAIN INFORMATION EX2;
typedef struct LSAPR TRUSTED DOMAIN FULL INFORMATION2 {
    LSAPR TRUSTED DOMAIN INFORMATION EX2 Information;
    TRUSTED POSIX OFFSET INFO PosixOffset;
    LSAPR TRUSTED DOMAIN AUTH INFORMATION AuthInformation;
} LSAPR_TRUSTED_DOMAIN_FULL_INFORMATION2,
  *PLSAPR TRUSTED DOMAIN FULL INFORMATION2;
typedef struct _TRUSTED_DOMAIN_SUPPORTED_ENCRYPTION_TYPES {
   unsigned long SupportedEncryptionTypes;
} TRUSTED DOMAIN SUPPORTED ENCRYPTION TYPES,
  *PTRUSTED DOMAIN SUPPORTED ENCRYPTION TYPES;
typedef [switch type(TRUSTED INFORMATION CLASS)]
union LSAPR TRUSTED DOMAIN INFO {
    [case(TrustedDomainNameInformation)]
        LSAPR TRUSTED DOMAIN NAME INFO TrustedDomainNameInfo;
    [case(TrustedControllersInformation)]
        LSAPR TRUSTED CONTROLLERS INFO TrustedControllersInfo;
    [case(TrustedPosixOffsetInformation)]
        TRUSTED POSIX OFFSET INFO TrustedPosixOffsetInfo;
    [case(TrustedPasswordInformation)]
        LSAPR TRUSTED PASSWORD INFO TrustedPasswordInfo;
    [case(TrustedDomainInformationBasic)]
        LSAPR TRUSTED DOMAIN INFORMATION BASIC TrustedDomainInfoBasic;
    [case(TrustedDomainInformationEx)]
        LSAPR TRUSTED DOMAIN INFORMATION EX TrustedDomainInfoEx;
    [case(TrustedDomainAuthInformation)]
        LSAPR TRUSTED DOMAIN AUTH INFORMATION TrustedAuthInfo;
    [case(TrustedDomainFullInformation)]
        LSAPR TRUSTED DOMAIN FULL INFORMATION TrustedFullInfo;
    [case(TrustedDomainAuthInformationInternal)]
        LSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL
            TrustedAuthInfoInternal;
    [case(TrustedDomainFullInformationInternal)]
        LSAPR TRUSTED DOMAIN FULL INFORMATION INTERNAL
            TrustedFullInfoInternal;
    [case(TrustedDomainInformationEx2Internal)]
        LSAPR TRUSTED DOMAIN INFORMATION EX2 TrustedDomainInfoEx2;
    [case(TrustedDomainFullInformation2Internal)]
        LSAPR TRUSTED DOMAIN FULL INFORMATION2 TrustedFullInfo2;
    [case(TrustedDomainSupportedEncryptionTypes)]
        TRUSTED_DOMAIN_SUPPORTED_ENCRYPTION_TYPES TrustedDomainSETs;
} LSAPR TRUSTED DOMAIN INFO, *PLSAPR TRUSTED DOMAIN INFO;
typedef struct LSAPR USER RIGHT SET {
    [range(0,256)] unsigned long Entries;
    [size is(Entries)] PRPC UNICODE STRING UserRights;
} LSAPR USER RIGHT SET, *PLSAPR USER RIGHT SET;
typedef struct LSAPR TRUSTED ENUM BUFFER EX {
    unsigned long EntriesRead;
    [size is(EntriesRead)]
        PLSAPR TRUSTED DOMAIN INFORMATION EX EnumerationBuffer;
} LSAPR TRUSTED ENUM BUFFER EX, *PLSAPR TRUSTED ENUM BUFFER EX;
// Methods
// The following notation conventions are used for some IDL methods:
11
// void
// Lsar LSA TM XX( void );
//
     (where XX represents the opnum.)
```

```
This notation indicates that the method is defined in this
     interface but is described in the
//
     Local Security Authority (Translation Methods) protocol
//
     specification.
11
// void OpnumXXNotUsedOnWire(void);
//
//
     (where XX represents the opnum.)
//
//
     This notation indicates that the method is defined in this
     interface but is not seen on the wire.
// Opnum 0
NTSTATUS
LsarClose(
    [in,out] LSAPR HANDLE *ObjectHandle
// Opnum 1
void Opnum1NotUsedOnWire(void);
// Opnum 2
NTSTATUS
LsarEnumeratePrivileges(
    [in] LSAPR HANDLE PolicyHandle,
    [in, out] unsigned long *EnumerationContext,
    [out] PLSAPR PRIVILEGE ENUM BUFFER EnumerationBuffer,
    [in] unsigned long PreferedMaximumLength
    );
// Opnum 3
NTSTATUS
LsarQuerySecurityObject(
    [in] LSAPR HANDLE ObjectHandle,
    [in] SECURITY INFORMATION SecurityInformation,
    [out] PLSAPR SR SECURITY DESCRIPTOR *SecurityDescriptor
// Opnum 4
NTSTATUS
LsarSetSecurityObject(
    [in] LSAPR HANDLE ObjectHandle,
    [in] SECURITY_INFORMATION SecurityInformation,
    [in] PLSAPR SR SECURITY DESCRIPTOR SecurityDescriptor
    );
// Opnum 5
void Opnum5NotUsedOnWire(void);
// Opnum 6
NTSTATUS
LsarOpenPolicy(
    [in,unique] wchar t *SystemName,
    [in] PLSAPR OBJECT ATTRIBUTES ObjectAttributes,
    [in] ACCESS MASK DesiredAccess,
    [out] LSAPR HANDLE *PolicyHandle
    );
// Opnum 7
NTSTATUS
LsarQueryInformationPolicy(
    [in] LSAPR HANDLE PolicyHandle,
    [in] POLICY INFORMATION CLASS InformationClass,
    [out, switch is(InformationClass)]
        PLSAPR POLICY INFORMATION *PolicyInformation
    );
// Opnum 8
```

```
NTSTATUS
LsarSetInformationPolicy(
    [in] LSAPR HANDLE PolicyHandle,
    [in] POLICY_INFORMATION_CLASS InformationClass,
    [in, switch is (InformationClass)]
        PLSAPR POLICY INFORMATION PolicyInformation
    );
// Opnum 9
void Opnum9NotUsedOnWire(void);
// Opnum 10
NTSTATUS
LsarCreateAccount(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC_SID AccountSid,
    [in] ACCESS MASK DesiredAccess,
    [out] LSAPR HANDLE *AccountHandle
    );
// Opnum 11
NTSTATUS
LsarEnumerateAccounts(
    [in] LSAPR HANDLE PolicyHandle,
    [in] [out] unsigned long *EnumerationContext,
    [out] PLSAPR ACCOUNT ENUM BUFFER EnumerationBuffer,
    [in] unsigned long PreferedMaximumLength
    );
// Opnum 12
NTSTATUS
LsarCreateTrustedDomain(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PLSAPR TRUST INFORMATION TrustedDomainInformation,
    [in] ACCESS MASK DesiredAccess,
    [out] LSAPR HANDLE *TrustedDomainHandle
    );
// Opnum 13
NTSTATUS
LsarEnumerateTrustedDomains(
    [in] LSAPR HANDLE PolicyHandle,
    [in] [out] unsigned long *EnumerationContext,
    [out] PLSAPR TRUSTED ENUM BUFFER EnumerationBuffer,
    [in] unsigned long PreferedMaximumLength
    );
// Opnum 14
void
Lsar LSA TM 14( void );
// Opnum 15
void
Lsar LSA TM 15( void );
// Opnum 16
NTSTATUS
LsarCreateSecret(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC UNICODE STRING SecretName,
    [in] ACCESS MASK DesiredAccess,
    [out] LSAPR_HANDLE *SecretHandle
    );
// Opnum 17
NTSTATUS
LsarOpenAccount(
    [in] LSAPR_HANDLE PolicyHandle,
    [in] PRPC_SID AccountSid,
```

```
[in] ACCESS MASK DesiredAccess,
    [out] LSAPR HANDLE *AccountHandle
    );
// Opnum 18
NTSTATUS
LsarEnumeratePrivilegesAccount(
    [in] LSAPR HANDLE AccountHandle,
    [out] PLSAPR PRIVILEGE SET *Privileges
// Opnum 19
NTSTATUS
{\tt LsarAddPrivilegesToAccount} \ (
    [in] LSAPR HANDLE AccountHandle,
    [in] PLSAPR PRIVILEGE SET Privileges
// Opnum 20
NTSTATUS
LsarRemovePrivilegesFromAccount(
    [in] LSAPR HANDLE AccountHandle,
    [in] unsigned char AllPrivileges,
    [in, unique] PLSAPR PRIVILEGE SET Privileges
    );
// Opnum 21
void Opnum21NotUsedOnWire(void);
// Opnum 22
void Opnum22NotUsedOnWire(void);
// Opnum 23
NTSTATUS
LsarGetSystemAccessAccount(
    [in] LSAPR HANDLE AccountHandle,
    [out] unsigned long *SystemAccess
// Opnum 24
NTSTATUS
LsarSetSystemAccessAccount(
    [in] LSAPR HANDLE AccountHandle,
    [in] unsigned long SystemAccess
    );
// Opnum 25
NTSTATUS
LsarOpenTrustedDomain(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC SID TrustedDomainSid,
    [in] ACCESS MASK DesiredAccess,
    [out] LSAPR HANDLE *TrustedDomainHandle
    );
// Opnum 26
NTSTATUS
LsarQueryInfoTrustedDomain(
    [in] LSAPR HANDLE TrustedDomainHandle,
    [in] TRUSTED INFORMATION CLASS InformationClass,
    [out, switch is(InformationClass)]
        PLSAPR TRUSTED DOMAIN_INFO *TrustedDomainInformation
    );
// Opnum 27
NTSTATUS
LsarSetInformationTrustedDomain(
    [in] LSAPR HANDLE TrustedDomainHandle,
    [in] TRUSTED_INFORMATION_CLASS InformationClass,
```

```
[in, switch is(InformationClass)]
        PLSAPR TRUSTED DOMAIN INFO TrustedDomainInformation
// Opnum 28
NTSTATUS
LsarOpenSecret (
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC UNICODE STRING SecretName,
    [in] ACCESS MASK DesiredAccess,
    [out] LSAPR HANDLE *SecretHandle
    );
// Opnum 29
NTSTATUS
LsarSetSecret(
    [in] LSAPR HANDLE SecretHandle,
    [in, unique] PLSAPR_CR CIPHER VALUE EncryptedCurrentValue,
    [in, unique] PLSAPR CR CIPHER VALUE EncryptedOldValue
// Opnum 30
NTSTATUS
LsarQuerySecret(
    [in] LSAPR HANDLE SecretHandle,
    [in, out, unique] PLSAPR_CR_CIPHER_VALUE *EncryptedCurrentValue,
    [in, out, unique] PLARGE_INTEGER CurrentValueSetTime,
[in, out, unique] PLSAPR CR CIPHER VALUE *EncryptedOldValue,
    [in, out, unique] PLARGE INTEGER OldValueSetTime
    );
// Opnum 31
NTSTATUS
LsarLookupPrivilegeValue(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC UNICODE STRING Name,
    [out] PLUID Value
    );
// Opnum 32
NTSTATUS
LsarLookupPrivilegeName(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PLUID Value,
[out] PRPC_UNICODE_STRING *Name
    );
// Opnum 33
NTSTATUS
LsarLookupPrivilegeDisplayName(
    [in] LSAPR_HANDLE PolicyHandle,
    [in] PRPC UNICODE STRING Name,
    [in] short ClientLanguage,
    [in] short ClientSystemDefaultLanguage,
    [out] PRPC UNICODE STRING *DisplayName,
    [out] unsigned short *LanguageReturned
    );
// Opnum 34
NTSTATUS
LsarDeleteObject(
    [in,out] LSAPR HANDLE *ObjectHandle
    );
// Opnum 35
NTSTATUS
LsarEnumerateAccountsWithUserRight(
    [in] LSAPR HANDLE PolicyHandle,
    [in,unique] PRPC UNICODE STRING UserRight,
```

```
[out] PLSAPR ACCOUNT ENUM BUFFER EnumerationBuffer
// Opnum 36
NTSTATUS
LsarEnumerateAccountRights(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC SID AccountSid,
    [out] PLSAPR USER RIGHT SET UserRights
// Opnum 37
NTSTATUS
LsarAddAccountRights(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC SID AccountSid,
    [in] PLSAPR USER RIGHT SET UserRights
    );
// Opnum 38
NTSTATUS
LsarRemoveAccountRights(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC SID AccountSid,
    [in] unsigned char AllRights,
    [in] PLSAPR USER RIGHT SET UserRights
    );
// Opnum 39
NTSTATUS
LsarQueryTrustedDomainInfo(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC SID TrustedDomainSid,
    [in] TRUSTED INFORMATION CLASS InformationClass,
    [out, switch is(InformationClass)]
        PLSAPR TRUSTED DOMAIN INFO * TrustedDomainInformation
    );
// Opnum 40
NTSTATUS
LsarSetTrustedDomainInfo(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC SID TrustedDomainSid,
    [in] TRUSTED INFORMATION CLASS InformationClass,
    [in, switch is(InformationClass)]
        PLSAPR TRUSTED DOMAIN INFO TrustedDomainInformation
    );
// Opnum 41
NTSTATUS
LsarDeleteTrustedDomain(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC SID TrustedDomainSid
    );
// Opnum 42
NTSTATUS
LsarStorePrivateData(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC UNICODE STRING KeyName,
    [in,unique] PLSAPR CR CIPHER VALUE EncryptedData
// Opnum 43
NTSTATUS
LsarRetrievePrivateData(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC UNICODE STRING KeyName,
    [in, out] PLSAPR_CR_CIPHER_VALUE *EncryptedData
```

```
);
// Opnum 44
NTSTATUS
LsarOpenPolicy2(
    [in,unique,string] wchar t *SystemName,
    [in] PLSAPR OBJECT ATTRIBUTES ObjectAttributes,
    [in] ACCESS MASK DesiredAccess,
    [out] LSAPR HANDLE *PolicyHandle
    );
// Opnum 45
Lsar_LSA_TM_45(void);
// Opnum 46
NTSTATUS
LsarQueryInformationPolicy2(
    [in] LSAPR HANDLE PolicyHandle,
    [in] POLICY INFORMATION CLASS InformationClass,
    [out, switch is(InformationClass)]
        PLSAPR POLICY INFORMATION *PolicyInformation
    );
// Opnum 47
NTSTATUS
LsarSetInformationPolicy2(
    [in] LSAPR HANDLE PolicyHandle,
    [in] POLICY INFORMATION CLASS InformationClass,
    [in, switch_is(InformationClass)]
        PLSAPR POLICY INFORMATION PolicyInformation
// Opnum 48
NTSTATUS
LsarQueryTrustedDomainInfoByName(
    [in] LSAPR_HANDLE PolicyHandle,
[in] PRPC_UNICODE_STRING TrustedDomainName,
[in] TRUSTED_INFORMATION_CLASS InformationClass,
    [out, switch is(InformationClass)]
        PLSAPR TRUSTED DOMAIN INFO *TrustedDomainInformation
    );
// Opnum 49
NTSTATUS
LsarSetTrustedDomainInfoByName(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PRPC UNICODE STRING TrustedDomainName,
    [in] TRUSTED INFORMATION CLASS InformationClass,
    [in, switch is (InformationClass)]
        PLSAPR TRUSTED DOMAIN INFO TrustedDomainInformation
    );
// Opnum 50
NTSTATUS
LsarEnumerateTrustedDomainsEx(
    [in] LSAPR HANDLE PolicyHandle,
    [in, out] unsigned long *EnumerationContext,
    [out] PLSAPR TRUSTED ENUM BUFFER EX EnumerationBuffer,
    [in] unsigned long PreferedMaximumLength
    );
// Opnum 51
NTSTATUS
LsarCreateTrustedDomainEx(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PLSAPR TRUSTED DOMAIN INFORMATION EX
        TrustedDomainInformation,
    [in] PLSAPR TRUSTED DOMAIN AUTH INFORMATION
```

```
AuthenticationInformation,
    [in] ACCESS MASK DesiredAccess,
    [out] LSAPR HANDLE *TrustedDomainHandle
// Opnum 52
void Opnum52NotUsedOnWire(void);
// Opnum 53
NTSTATUS
LsarQueryDomainInformationPolicy(
    [in] LSAPR HANDLE PolicyHandle,
    [in] POLICY DOMAIN INFORMATION CLASS InformationClass,
    [out, switch_is(InformationClass)]
        PLSAPR POLICY DOMAIN INFORMATION *PolicyDomainInformation
    );
// Opnum 54
NTSTATUS
LsarSetDomainInformationPolicy(
    [in] LSAPR HANDLE PolicyHandle,
    [in] POLICY_DOMAIN_INFORMATION CLASS InformationClass,
    [in, unique, switch is(InformationClass)]
        PLSAPR POLICY DOMAIN INFORMATION PolicyDomainInformation
// Opnum 55
NTSTATUS
LsarOpenTrustedDomainByName(
    [in] LSAPR_HANDLE PolicyHandle,
    [in] PRPC UNICODE STRING TrustedDomainName,
    [in] ACCESS MASK DesiredAccess,
    [out] LSAPR HANDLE *TrustedDomainHandle
    );
// Opnum 56
void Opnum56NotUsedOnWire(void);
// Opnum 57
void
Lsar LSA TM 57( void );
// Opnum 58
biov
Lsar LSA TM 58 (void);
// Opnum 59
NTSTATUS
LsarCreateTrustedDomainEx2(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PLSAPR TRUSTED DOMAIN INFORMATION EX
        TrustedDomainInformation,
    [in] PLSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL
       AuthenticationInformation,
    [in] ACCESS MASK DesiredAccess,
    [out] LSAPR HANDLE *TrustedDomainHandle
    );
// Opnum 60
void Opnum60NotUsedOnWire(void);
// Opnum 61
void Opnum61NotUsedOnWire(void);
// Opnum 62
void Opnum62NotUsedOnWire(void);
// Opnum 63
void Opnum63NotUsedOnWire(void);
```

```
// Opnum 64
void Opnum64NotUsedOnWire(void);
// Opnum 65
void Opnum65NotUsedOnWire(void);
// Opnum 66
void Opnum66NotUsedOnWire(void);
// Opnum 67
void Opnum67NotUsedOnWire(void);
// Opnum 68
void
Lsar_LSA_TM_68( void );
// Opnum 69
void Opnum69NotUsedOnWire(void);
// Opnum 70
void Opnum70NotUsedOnWire(void);
// Opnum 71
void Opnum71NotUsedOnWire(void);
// Opnum 72
void Opnum72NotUsedOnWire(void);
// Opnum 73
NTSTATUS
LsarQueryForestTrustInformation(
    [in] LSAPR_HANDLE PolicyHandle,
    [in] PLSA UNICODE STRING TrustedDomainName,
    [in] LSA FOREST TRUST RECORD TYPE HighestRecordType,
    [out] PLSA FOREST TRUST INFORMATION * ForestTrustInfo
    );
// Opnum 74
NTSTATUS
LsarSetForestTrustInformation(
    [in] LSAPR HANDLE PolicyHandle,
    [in] PLSA UNICODE STRING TrustedDomainName,
    [in] LSA FOREST_TRUST_RECORD_TYPE HighestRecordType,
[in] PLSA_FOREST_TRUST_INFORMATION ForestTrustInfo,
    [in] unsigned char CheckOnly,
    [out] PLSA FOREST TRUST COLLISION INFORMATION * CollisionInfo
}
```

7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

Note: Some of the information in this section is subject to change because it applies to a preliminary product version, and thus may differ from the final version of the software when released. All behavior notes that pertain to the preliminary product version contain specific references to it as an aid to the reader.

- Windows NT operating system
- Windows 2000 operating system
- Windows XP operating system
- Windows Server 2003 operating system
- Windows Server 2003 for Small Business Server 2003
- Windows Server 2003 R2 operating system
- Windows Vista operating system
- Windows Server 2008 operating system
- Windows 7 operating system
- Windows Server 2008 R2 operating system
- Windows 8 operating system
- Windows Server 2012 operating system
- Windows 8.1 operating system
- Windows Server 2012 R2 operating system
- Windows 10 operating system
- Windows Server 2016 Technical Preview operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

<1> Section 2.1: By default, the "\PIPE\lsarpc" endpoint allows anonymous access on Windows NT 3.1 operating system, Windows NT 3.5 operating system, Windows NT 3.51 operating system, Windows NT 4.0 operating system, Windows 2000, Windows XP, Windows Server 2003, Windows Server 2003 R2, and Windows Vista RTM. Anonymous access to this pipe is removed by default on Windows Vista operating system with Service Pack 1 (SP1), Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview in both the non-domain controller configuration and the read-only domain controller configuration. The pipe access check happens before any other access check; therefore, it overrides any other access.

<2> Section 2.1: Windows implementations of the client and server role for this protocol use the tamper-resistance functionality provided by SMB transport on the products that are available, and are enabled as specified in [MS-SMB] section 3.1.1.1 (the MessageSigningPolicy parameter), and [MS-SMB2] section 3.1.1.1 (the RequireMessageSigning parameter).

<3> Section 2.1: If an implementation of the client role violates this specification and uses the RPC-provided security-support-provider mechanism for the RPC connection to a Windows implementation, Windows processes all messages as specified in section 3.1 (that is, there is no change in message processing behavior), except for the messages that use encryption specified in section 5.1. During encryption and decryption, Windows implementations for the server role use a hard-coded key instead of the SMB transport-provided session key. The hard-coded key is represented below as bytes in hexadecimal form.

"53 79 73 74 65 6d 4c 69-62 72 61 72 79 44 54 43"

<a><- Section 2.1: The Windows implementation of the server role for this protocol supports the RPC-provided security-support-provider mechanisms, as specified in [MS-RPCE] section 3.2.1.4.1. The following security-support providers are registered by the responder.</p>

Windows version	Security support provider registered
Windows NT, Windows XP, Windows Vista, Windows 7, Windows 8, Windows 8.1, and Windows 10	RPC_C_AUTHN_WINNT
Windows 2000, Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview	RPC_C_AUTHN_WINNT On the domain controllers the following are also supported: RPC_C_AUTHN_GSS_KERBEROS RPC_C_AUTHN_GSS_NEGOTIATE

<5> Section 2.1: The server implementation of this protocol in Windows 2000 Server operating system, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview places a limit of 1 MB on the packets received. The limit in Windows XP and Windows Server 2003 is 4 MB.

<6> Section 2.2: Data type fields that are described as "Reserved" or "MUST be ignored" are sent as 0 (or NULL in the case of pointers) by Windows client implementations, and are ignored upon receipt by Windows Server operating system implementations.

<7> Section 2.2: The following table is a timeline of when each structure, data type, or enumeration was introduced. All structures, data types, and enumerations listed in the table continue to be available in subsequent versions of Windows according to the applicability list at the beginning of this section.

Data type	Product
LSAPR HANDLE (section 2.2.2.1)	Windows NT 3.1
STRING (section 2.2.3.1)	Windows NT 3.1
LSAPR ACL (section 2.2.3.2)	Windows NT 3.1
SECURITY DESCRIPTOR CONTROL (section 2.2.3.3)	Windows NT 3.1
LSAPR SECURITY DESCRIPTOR (section 2.2.3.4)	Windows NT 3.1
SECURITY IMPERSONATION LEVEL (section 2.2.3.5)	Windows NT 3.1

Data type	Product
SECURITY CONTEXT TRACKING MODE (section 2.2.3.6)	Windows NT 3.1
SECURITY QUALITY OF SERVICE (section 2.2.3.7)	Windows NT 3.1
LSAPR OBJECT ATTRIBUTES (section 2.2.2.4)	Windows NT 3.1
ACCESS MASK (section 2.2.1.1)	Windows NT 3.1
SECURITY INFORMATION (section 2.2.1.3)	Windows NT 3.1
LSAPR POLICY PRIVILEGE DEF (section 2.2.8.1)	Windows NT 3.1
LSAPR PRIVILEGE ENUM BUFFER (section 2.2.8.2)	Windows NT 3.1
LSAPR ACCOUNT INFORMATION (section 2.2.5.1)	Windows NT 3.1
LSAPR ACCOUNT ENUM BUFFER (section 2.2.5.2)	Windows NT 3.1
POLICY SYSTEM ACCESS CODE (section 2.2.1.2)	Windows NT 3.1
LSA UNICODE STRING (section 2.2.2.3)	Windows NT 3.1
LSAPR TRUST INFORMATION (section 2.2.7.1)	Windows NT 3.1
LSAPR TRUSTED DOMAIN INFORMATION BASIC (section 2.2.7.8)	Windows NT 3.1
LSAPR SR SECURITY DESCRIPTOR (section 2.2.2.5)	Windows NT 3.1
POLICY INFORMATION CLASS (section 2.2.4.1)	Windows NT 3.1
POLICY AUDIT LOG INFO (section 2.2.4.3)	Windows NT 3.1
LSAPR POLICY AUDIT EVENTS INFO (section 2.2.4.4)	Windows NT 3.1
LSAPR POLICY PRIMARY DOM INFO (section 2.2.4.5)	Windows NT 3.1
LSAPR POLICY ACCOUNT DOM INFO (section 2.2.4.6)	Windows NT 3.1
LSAPR POLICY PD ACCOUNT INFO (section 2.2.4.7)	Windows NT 3.1
POLICY LSA SERVER ROLE (section 2.2.4.8)	Windows NT 3.1
POLICY LSA SERVER ROLE INFO (section 2.2.4.9)	Windows NT 3.1
LSAPR POLICY REPLICA SRCE INFO (section 2.2.4.10)	Windows NT 3.1
POLICY MODIFICATION INFO (section 2.2.4.11)	Windows NT 3.1
POLICY AUDIT FULL SET INFO (section 2.2.4.12)	Windows NT 3.1
POLICY AUDIT FULL QUERY INFO (section 2.2.4.13)	Windows NT 3.1
LSAPR POLICY DNS DOMAIN INFO (section 2.2.4.14)	Windows NT 3.1
LSAPR POLICY INFORMATION (section 2.2.4.2)	Windows 2000
LSAPR TRUSTED ENUM BUFFER (section 2.2.7.19)	Windows NT 3.1
LSAPR PRIVILEGE SET (section 2.2.5.5)	Windows NT 3.1
TRUSTED INFORMATION CLASS (section 2.2.7.2)	Windows NT 3.1
LSAPR TRUSTED DOMAIN INFO (section 2.2.7.3)	Windows NT 3.1

Data type	Product
LSAPR TRUSTED DOMAIN NAME INFO (section 2.2.7.4)	Windows NT 3.1
LSAPR TRUSTED CONTROLLERS INFO (section 2.2.7.5)	Windows NT 3.1
TRUSTED POSIX OFFSET INFO (section 2.2.7.6)	Windows NT 3.1
LSAPR TRUSTED PASSWORD INFO (section 2.2.7.7)	Windows NT 3.1
LSAPR CR CIPHER VALUE (section 2.2.6.1)	Windows NT 3.51
LSAPR USER RIGHT SET (section 2.2.5.3)	Windows NT 3.1
POLICY DOMAIN INFORMATION CLASS (section 2.2.4.15)	Windows NT 3.51
LSAPR POLICY DOMAIN INFORMATION (section 2.2.4.16)	Windows 2000
LSAPR POLICY DOMAIN EFS INFO (section 2.2.4.18)	Windows 2000
LSAPR DOMAIN KERBEROS TICKET INFO (section 2.2.4.19)	Windows 2000
LSAPR TRUSTED DOMAIN INFORMATION EX (section 2.2.7.9)	Windows 2000
LSAPR TRUSTED DOMAIN INFORMATION EX2 (section 2.2.7.10)	Windows 2000
LSAPR AUTH INFORMATION (section 2.2.7.17)	Windows XP
LSAPR TRUSTED DOMAIN AUTH INFORMATION (section 2.2.7.11)	Windows 2000
LSAPR TRUSTED DOMAIN AUTH BLOB (section 2.2.7.16)	Windows 2000
LSAPR TRUSTED DOMAIN AUTH INFORMATION INTERNAL (section 2.2.7.12)	Windows 2000
LSAPR TRUSTED DOMAIN FULL INFORMATION (section 2.2.7.13)	Windows 2000
LSAPR TRUSTED DOMAIN FULL INFORMATION INTERNAL (section 2.2.7.14)	Windows 2000
LSAPR TRUSTED DOMAIN FULL INFORMATION2 (section 2.2.7.15)	Windows XP
LUID ([MS-DTYP] section 2.3.7)	Windows NT 3.1
TRUSTED DOMAIN SUPPORTED ENCRYPTION TYPES (section 2.2.7.18)	Windows Vista
LSAPR LUID AND ATTRIBUTES (section 2.2.5.4)	Windows NT 3.1
LSA FOREST TRUST RECORD TYPE (section 2.2.7.22)	Windows XP
LSA FOREST TRUST BINARY DATA (section 2.2.7.23)	Windows XP
LSA FOREST TRUST DOMAIN INFO (section 2.2.7.24)	Windows XP
LSA FOREST TRUST RECORD (section 2.2.7.21)	Windows XP
LSA FOREST TRUST INFORMATION (section 2.2.7.25)	Windows XP
LSA FOREST TRUST COLLISION RECORD TYPE (section 2.2.7.26)	Windows XP
LSA FOREST TRUST COLLISION RECORD (section 2.2.7.27)	Windows XP
LSA FOREST TRUST COLLISION INFORMATION (section 2.2.7.28)	Windows XP

<8> Section 2.2.1.1.2: The following is a timeline of when each access mask was introduced. All access masks continue to be available in subsequent versions of Windows according to the applicability list at the beginning of this section.

Value	Product
0x00000000	Windows NT 3.1
POLICY_VIEW_LOCAL_INFORMATION 0x00000001	Windows NT 3.1
POLICY_VIEW_AUDIT_INFORMATION 0x00000002	Windows NT 3.1
POLICY_GET_PRIVATE_INFORMATION 0x00000004	Windows NT 3.1
POLICY_TRUST_ADMIN 0x00000008	Windows NT 3.1
POLICY_CREATE_ACCOUNT 0x00000010	Windows NT 3.1
POLICY_CREATE_SECRET 0x00000020	Windows NT 3.1
POLICY_CREATE_PRIVILEGE 0x00000040	Windows NT 3.1
POLICY_SET_DEFAULT_QUOTA_LIMITS 0x00000080	Windows NT 3.1
POLICY_SET_AUDIT_REQUIREMENTS 0x00000100	Windows NT 3.1
POLICY_AUDIT_LOG_ADMIN 0x00000200	Windows NT 3.1
POLICY_SERVER_ADMIN 0x00000400	Windows NT 3.1
POLICY_LOOKUP_NAMES 0x00000800	Windows NT 3.1
POLICY_NOTIFICATION 0x00001000	Windows 2000

<9> Section 2.2.1.1.5: The following is a timeline of when each access mask was introduced. All access masks continue to be available in subsequent versions of Windows according to the applicability list at the beginning of this section.

Value	Product
TRUSTED_QUERY_DOMAIN_NAME 0x000000001	Windows NT 3.1
TRUSTED_QUERY_CONTROLLERS	Windows NT 3.1

Value	Product
0x00000002	
TRUSTED_SET_CONTROLLERS 0x00000004	Windows NT 3.1
TRUSTED_QUERY_POSIX 0x000000008	Windows NT 3.1
TRUSTED_SET_POSIX 0x00000010	Windows NT 3.1
TRUSTED_SET_AUTH 0x00000020	Windows 2000
TRUSTED_QUERY_AUTH 0x00000040	Windows 2000

<10> Section 2.2.1.2: The POLICY_MODE_ALL flag applies to Windows 2000 Server and later versions.

<11> Section 2.2.1.2: The POLICY_MODE_ALL_NT4 flag applies to Windows NT 3.1 through Windows NT 4.0.

<12> Section 2.2.1.2: The following is a timeline of when each mode was introduced. All modes continue to be available in subsequent versions of Windows according to the applicability list at the beginning of this section.

Value	Product
0x00000000 No access	Windows NT 3.1
0x00000001 POLICY_MODE_INTERACTIVE	Windows NT 3.1
0x00000002 POLICY_MODE_NETWORK	Windows NT 3.1
0x00000004 POLICY_MODE_BATCH	Windows NT 3.1
0x00000010 POLICY_MODE_SERVICE	Windows NT 3.1
0x00000020 POLICY_MODE_PROXY	Windows NT 3.1
0x00000040 POLICY_MODE_DENY_INTERACTIVE	Windows 2000
0x00000080 POLICY_MODE_DENY_NETWORK	Windows 2000
0x00000100 POLICY_MODE_DENY_BATCH	Windows 2000

Value	Product
0x00000200 POLICY_MODE_DENY_SERVICE	Windows 2000
0x00000400 POLICY_MODE_REMOTE_INTERACTIVE	Windows XP
0x00000800 POLICY_MODE_DENY_REMOTE_INTERACTIVE	Windows XP

<13> Section 2.2.2.4: The Windows implementation of the RPC client for this protocol leaves this structure to be filled by a higher-layer application and does not verify the structure's contents except for **RootDirectory**, which must be NULL.

<14> Section 2.2.2.5: In Windows NT, Windows 2000, Windows XP, and Windows XP operating system Service Pack 1 (SP1), the Windows RPC server and RPC client do not enforce restrictions on the **Length** field of this structure (using the range primitive specified in [MS-RPCE]).

<15> Section 2.2.4.1: The following is a timeline of when each enumeration value was introduced. All enumeration values continue to be available in subsequent versions of Windows according to the applicability list at the beginning of this section.

Value	Product
PolicyAuditLogInformation	Windows NT 3.1
PolicyAuditEventsInformation	Windows NT 3.1
PolicyPrimaryDomainInformation	Windows NT 3.1
PolicyPdAccountInformation	Windows NT 3.1
PolicyAccountDomainInformation	Windows NT 3.1
PolicyLsaServerRoleInformation	Windows NT 3.1
PolicyReplicaSourceInformation	Windows NT 3.1
PolicyInformationNotUsedOnWire	Windows NT 3.1
PolicyModificationInformation	Windows NT 3.1
PolicyAuditFullSetInformation	Windows NT 3.1
PolicyAuditFullQueryInformation	Windows NT 3.1
PolicyDnsDomainInformation	Windows 2000
PolicyDnsDomainInformationInt	Windows 2000
PolicyLocalAccountDomainInformation	Windows Vista

<16> Section 2.2.4.4: In Windows NT, Windows 2000, Windows XP, and Windows XP SP1, the Windows RPC server and RPC client do not enforce restrictions on the **MaximumAuditEventCount** field of this structure (using the range primitive, as specified in [MS-RPCE]).

<17> Section 2.2.4.14: The following applies to Windows 2000, Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview.

The Windows RPC server always throws an RPC_S_PROCNUM_OUT_OF_RANGE exception for the message processing of LsarQueryInformationPolicy, LsarQueryInformationPolicy2, LsarSetInformationPolicy, and LsarSetInformationPolicy2, if the server is configured to emulate Windows NT 4.0 for PolicyDnsDomainInformation information level.

- <18> Section 2.2.4.16: The PolicyDomainQualityOfServiceInformation enumeration value and corresponding POLICY DOMAIN QUALITY OF SERVICE INFO structure are parts of LSAPR_POLICY_DOMAIN_INFORMATION only in the Windows 2000 Server implementation of this protocol.
- <19> Section 2.2.4.18: Microsoft implementations of the Local Security Authority (Domain Policy) Remote Protocol do not enforce data in **EfsBlob** to conform to the layout specified in [MS-GPEF] section 2.2.1.2.1.
- <20> Section 2.2.5.3: In Windows NT, Windows 2000, Windows XP, and Windows XP SP1, the Windows RPC server and RPC client do not enforce restrictions on the **Entries** field of this structure (using the range primitive defined in [MS-RPCE]).
- <21> Section 2.2.5.5: In Windows NT, Windows 2000, Windows XP, and Windows XP SP1, the Windows RPC server and RPC client do not enforce restrictions on the **PrivilegeCount** field of this structure (using the range primitive specified in [MS-RPCE]).
- <22> Section 2.2.6.1: In Windows NT, Windows 2000, Windows XP, and Windows XP SP1, the Windows RPC server and RPC client do not enforce restrictions on the **Length** field of this structure (using the range primitive as specified in [MS-RPCE]).
- <23> Section 2.2.6.1: In Windows NT, Windows 2000, Windows XP, and Windows XP SP1, the Windows RPC server and RPC client do not enforce restrictions on the **MaximumLength** field of this structure (using the range primitive defined in [MS-RPCE]).
- <24> Section 2.2.7.2: The following is a timeline of when each enumeration value was introduced. All enumeration values continue to be available in subsequent versions of Windows according to the applicability list at the beginning of this section.

Value	Product
TrustedDomainNameInformation	Windows NT 3.1
TrustedControllersInformation	Windows NT 3.1
TrustedPosixOffsetInformation	Windows NT 3.1
TrustedPasswordInformation	Windows NT 3.51
TrustedDomainInformationBasic	Windows 2000
TrustedDomainInformationEx	Windows 2000
TrustedDomainAuthInformation	Windows 2000
TrustedDomainFullInformation	Windows 2000
TrustedDomainAuthInformationInternal	Windows 2000
TrustedDomainFullInformationInternal	Windows 2000

Value	Product
TrustedDomainInformationEx2Internal	Windows XP
TrustedDomainFullInformation2Internal	Windows XP
TrustedDomainSupportedEncryptionTypes	Windows Vista

<25> Section 2.2.7.5: In Windows NT, Windows 2000, Windows XP, and Windows XP SP1, the Windows RPC server and RPC client do not enforce restrictions on the **Entries** field of this structure (using the range primitive defined in [MS-RPCE]).

<26> Section 2.2.7.9: The following is a timeline of when each flag value was introduced. Unless otherwise specified, all flag values continue to be available in subsequent versions of Windows according to the applicability list at the beginning of this section.

Possible value	Value	Product
TANT (TRUST_ATTRIBUTE_NON_TRANSITIVE)	0x0000001	Windows 2000.
TAUO (TRUST_ATTRIBUTE_UPLEVEL_ONLY)	0x00000002	Windows 2000.
TAQD (TRUST_ATTRIBUTE_QUARANTINED_DOMAIN)	0x00000004	Windows 2000 operating system Service Pack 2 (SP2) and Windows XP.
TAFT (TRUST_ATTRIBUTE_FOREST_TRANSITIVE)	0x00000008	Windows Server 2003.
TACO (TRUST_ATTRIBUTE_CROSS_ORGANIZATION)	0x0000010	Windows Server 2003.
TAWF (TRUST_ATTRIBUTE_WITHIN_FOREST)	0x00000020	Windows Server 2003.
TATE (TRUST_ATTRIBUTE_TREAT_AS_EXTERNAL)	0x00000040	Windows Server 2003.
TANC (TRUST_ATTRIBUTE_CROSS_ORGANIZATION_NO_TGT_DELEGATION)	0x00000200	Windows Server 2012 operating system
TAPT (TRUST_ATTRIBUTE_PIM_TRUST)	0x00000400	Windows Server 2016 Technical Preview
Obsolete	0x00400000	Introduced in Windows 2000 RTM. Became obsolete in Windows 2000 operating system Service Pack 4 (SP4).
Obsolete	0x00800000	Introduced in Windows 2000 RTM. Became obsolete in Windows 2000 SP4.

<27> Section 2.2.7.11: In Windows NT, Windows 2000, Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Vista, and Windows Server 2008, the Windows RPC server and RPC client do not enforce restrictions on the **IncomingAuthInfos** field of this structure (using the range primitive defined in [MS-RPCE]).

<a>28> Section 2.2.7.11: In Windows NT, Windows 2000, Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Vista, and Windows Server 2008, the Windows RPC server and RPC client

do not enforce restrictions on the **OutgoingAuthInfos** field of this structure (using the range primitive defined in [MS-RPCE]).

<29> Section 2.2.7.16: In Windows NT, Windows 2000, Windows XP, and Windows XP SP1, the Windows RPC server and RPC client do not enforce restrictions on the **AuthSize** field of this structure (using the range primitive defined in [MS-RPCE]).

<30> Section 2.2.7.17: In Windows NT, Windows 2000, Windows XP, and Windows XP SP1, the Windows RPC server and RPC client do not enforce restrictions on the **AuthInfoLength** field of this structure (using the range primitive defined in [MS-RPCE]).

<31> Section 2.2.7.23: In Windows NT, Windows 2000, Windows XP, and Windows XP SP1, the Windows RPC server and RPC client do not enforce restrictions on the **Length** field of this structure (using the range primitive defined in [MS-RPCE]).

<32> Section 2.2.7.25: In Windows NT, Windows 2000, Windows XP, and Windows XP SP1, the Windows RPC server and RPC client do not enforce restrictions on the **RecordCount** field of this structure (using the range primitive defined in [MS-RPCE]).

<33> Section 3.1.1.1: A Windows responder for this protocol contains the following values for the policy object after setup.

Name	Value
Auditing Log Informati on	Windows maintains the following hard-coded information about the state of the audit log: MaximumLogSize = 8192 AuditLogPercentFull = 0 AuditRetentionPeriod = 8533315 AuditLogFullShutdownInProgress = FALSE TimeToShutdown = 288342 NextAuditRecordId = 0
Audit Full Informati on	Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview return STATUS_INVALID_PARAMETER for this information class.
Event Auditing Options	On Windows 2000 and Windows XP: AuditingMode = FALSE MaximumAuditEventCount = 9 EventAuditingOptions = { 0, 0, 0, 0, 0, 0, 0, 0 } On Windows Server 2003 and Windows Server 2003 R2: AuditingMode = TRUE MaximumAuditEventCount = 9 EventAuditingOptions = { 0, 1, 0, 0, 0, 0, 0, 0, 1 } On Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview: AuditingMode = TRUE MaximumAuditEventCount = 9 EventAuditingOptions = { 0, 0, 0, 0, 0, 0, 0, 0, 0 }
Primary Domain Informati on	Name = <workgroup name=""> Sid = NULL</workgroup>

Name	Value
DNS Domain Informati on	Name = <workgroup name=""> DnsDomainName = <empty string=""> DnsForestName = <empty string=""> DomainGuid = { 0 } Sid = NULL</empty></empty></workgroup>
Account Domain Informati on	DomainName = <machine name="" netbios=""> DomainSid = < S-1-5-21-X-Y-Z> where X, Y, Z are random numbers</machine>
Server Role Informati on	LsaServerRole = PolicyServerRolePrimary
Replica Source Informati on	ReplicaSource= <empty string=""> ReplicaAccountName=<empty string=""></empty></empty>
Kerberos Policy Informati on	<no value=""></no>
Encrypti ng File System (EFS) Policy Informati on	<no value=""></no>
Security Descript or	The security descriptor in Windows NT 3.1, Windows NT 3.5, Windows NT 3.51, Windows NT 4.0, and Windows 2000 can be expressed in Security Description Definition Language (SDDL), as specified in [MS-DTYP] section 2.5.1, as follows: O:BAG:SYD:(A;;GA;;;BA)(A;;GX;;;WD) In Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview, the security descriptor can be expressed in SDDL as follows: O:BAG:SYD:(A;;GA;;;BA)(A;;GX;;;WD)(A;;0x0000801;;;AN)(A;;0x00001000;;;LS)(A;;0x00001000;;;NS) In Windows Vista, Windows 7, Windows 8, Windows 8.1, and Windows 10, the security descriptor can be expressed in SDDL as follows: O:BAG:SYD:(A;;GA;;;BA)(A;;GX;;;WD)(A;;0x0000801;;;AN)(A;;0x00001000;;;LS)(A;;0x00001000;;;NS)(A;;0x00001000;;;S-1-5-17)
	See sections 2.2.1.1.1 and 2.2.1.1.2 for the definitions of the generic and object-specific access rights, respectively, that are included in these security descriptors.

<34> Section 3.1.1.1: Windows NT 3.1, Windows NT 3.5, Windows NT 3.51, and Windows NT 4.0 do not store this information.

 \leq 35> Section 3.1.1.1: Windows NT 3.1, Windows NT 3.5, Windows NT 3.51, and Windows NT 4.0 do not store this information.

<36> Section 3.1.1.1: Windows NT 3.1, Windows NT 3.5, Windows NT 3.51, and Windows NT 4.0 do not store this information.

<37> Section 3.1.1.1: Only the Windows 2000 implementation of this protocol stores quality of service information.

<38> Section 3.1.1.1: The security descriptor in Windows NT 3.1, Windows NT 3.5, Windows NT 3.5, Windows NT 4.0, and Windows 2000 can be expressed in Security Description Definition Language (SDDL), as specified in [MS-DTYP] section 2.5.1, as follows:

```
O:BAG:SYD:(A;;GA;;;BA)(A;;GX;;;WD)
```

In Windows XP, Windows Server 2003, and Windows Server 2003 R2, the security descriptor can be expressed in SDDL as follows:

```
O:BAG:SYD:(A;;GA;;;BA)(A;;GX;;;WD)(A;;0x0000801;;;AN)(A;;0x00001000;;;LS)
(A;;0x00001000;;;NS)
```

In Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview, the security descriptor can be expressed in SDDL as follows:

```
O:BAG:SYD:(A;;GA;;;BA)(A;;GX;;;WD)(A;;0x0000801;;;AN)(A;;0x00001000;;;LS)
(A;;0x00001000;;;NS) (A;;0x00001000;;;S-1-5-17)
```

See sections 2.2.1.1.1 and 2.2.1.1.2 for the definitions of the generic and object-specific access rights, respectively, that are included in these security descriptors.

<39> Section 3.1.1.1: Windows NT 3.1, Windows NT 3.5, Windows NT 3.51, and Windows NT 4.0 domain controllers use the Netlogon Remote Protocol, as specified in [MS-NRPC] section 1.3.3, to converge Event Auditing Options abstract data. These versions of Windows do not implement Kerberos Policy Information abstract data.

Windows 2000, Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, Windows Server 2018 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview domain controllers use the Group Policy: Security Protocol Extension, as specified in [MS-GPSB] section 2.2.2 to converge Kerberos Policy Information abstract data and [MS-GPSB] section 2.2.4 to converge Event Auditing Options abstract data.

<a href="<><40> Section 3.1.1.2.1: The following is a timeline of when each privilege value was introduced. All privilege values continue to be supported in all subsequent versions of Windows according to the applicability list at the beginning of this section.

Name	Product
SE_ASSIGNPRIMARYTOKEN_NAME "SeAssignPrimaryTokenPrivilege"	Windows NT 3.1
SE_AUDIT_NAME "SeAuditPrivilege"	Windows NT 3.1
SE_BACKUP_NAME "SeBackupPrivilege"	Windows NT 3.1
SE_CHANGE_NOTIFY_NAME "SeChangeNotifyPrivilege"	Windows NT 3.1
SE_CREATE_GLOBAL_NAME "SeCreateGlobalPrivilege"	Windows 2000 SP4, Windows XP operating system Service Pack 2 (SP2), and Windows Server 2003

Name	Product
SE_CREATE_PAGEFILE_NAME "SeCreatePagefilePrivilege"	Windows NT 3.1
SE_CREATE_PERMANENT_NAME "SeCreatePermanentPrivilege"	Windows NT 3.1
SE_CREATE_TOKEN_NAME "SeCreateTokenPrivilege"	Windows NT 3.1
SE_DEBUG_NAME "SeDebugPrivilege"	Windows NT 3.1
SE_ENABLE_DELEGATION_NAME "SeEnableDelegationPrivilege"	Windows 2000
SE_IMPERSONATE_NAME "SeImpersonatePrivilege"	Windows 2000 SP4, Windows XP SP2, and Windows Server 2003
SE_INC_BASE_PRIORITY_NAME "SeIncreaseBasePriorityPrivilege"	Windows NT 3.1
SE_INCREASE_QUOTA_NAME "SeIncreaseQuotaPrivilege"	Windows NT 3.1
SE_LOAD_DRIVER_NAME "SeLoadDriverPrivilege"	Windows NT 3.1
SE_LOCK_MEMORY_NAME "SeLockMemoryPrivilege"	Windows NT 3.1
SE_MACHINE_ACCOUNT_NAME "SeMachineAccountPrivilege"	Windows NT 3.5
SE_MANAGE_VOLUME_NAME "SeManageVolumePrivilege"	Windows 2000 SP4 and Windows XP
SE_PROF_SINGLE_PROCESS_NAME "SeProfileSingleProcessPrivilege"	Windows NT 3.1
SE_REMOTE_SHUTDOWN_NAME "SeRemoteShutdownPrivilege"	Windows NT 3.1
SE_RESTORE_NAME "SeRestorePrivilege"	Windows NT 3.1
SE_SECURITY_NAME "SeSecurityPrivilege"	Windows NT 3.1
SE_SHUTDOWN_NAME "SeShutdownPrivilege"	Windows NT 3.1
SE_SYNC_AGENT_NAME "SeSyncAgentPrivilege"	Windows 2000
SE_SYSTEM_ENVIRONMENT_NAME "SeSystemEnvironment"	Windows NT 3.1

Name	Product
SE_SYSTEM_PROFILE_NAME "SeSystemProfilePrivilege"	Windows NT 3.1
SE_SYSTEMTIME_NAME "SeSystemtimePrivilege"	Windows NT 3.1
SE_TAKE_OWNERSHIP_NAME "SeTakeOwnershipPrivilege"	Windows NT 3.1
SE_TCB_NAME "SeTcbPrivilege"	Windows NT 3.1
SE_UNDOCK_NAME "SeUndockPrivilege"	Windows NT 3.1
SE_CREATE_SYMBOLIC_LINK_NAME "SeCreateSymbolicLinkPrivilege"	Windows Vista
SE_INC_WORKING_SET_NAME "SeIncreaseWorkingSetPrivilege"	Windows Vista
SE_RELABEL_NAME "SeRelabelPrivilege"	Windows Vista
SE_TIME_ZONE_NAME "SeTimeZonePrivilege"	Windows Vista
SE_TRUSTED_CREDMAN_ACCESS_NAME "SeTrustedCredManAccessPrivilege"	Windows Vista

<41> Section 3.1.1.2.2: Windows products implement the exact set of system access rights that the protocol supports for a given version. See the Windows Behavior note in section 2.2.1.2 for a timeline of the system access introduction.

<42> Section 3.1.1.3: The default security descriptor that is assigned to newly created account objects can be expressed in Security Description Definition Language (SDDL) as O:BAG:SYD:(A;;GA;;;BA)(A;;GX;;;WD).

See section 2.2.1.1.1 for the definitions of the generic access rights that are included in this security descriptor.

<a>43> Section 3.1.1.3: Windows NT 3.1, Windows NT 3.5, Windows NT 3.51, and Windows NT 4.0 domain controllers use the Netlogon Remote Protocol, as specified in [MS-NRPC] section 1.3.3.

Windows 2000, Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, Windows Server 2018 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview domain controllers use the Group Policy: Security Protocol Extension, as specified in [MS-GPSB] section 2.2.6.

<44> Section 3.1.1.4: The following is a timeline of when each secret name or name pattern was introduced. All secret names and name patterns continue to be available in subsequent versions of Windows according to the applicability list at the beginning of this section.

Secret name or name pattern	Product
Starts with "G\$\$"	Windows NT 3.1 operating system

Secret name or name pattern	Product
Starts with "G\$"	Windows NT 3.1
Starts with "L\$"	Windows 2000
Starts with "M\$"	Windows 2000
Starts with "_sc_"	Windows 2000
Starts with "NL\$"	Windows 2000
Starts with "RasDialParams"	Windows 2000
Starts with "RasCredentials"	Windows 2000
Equal to "\$MACHINE.ACC"	Windows NT 3.1
Equal to "SAC"	Windows 2000
Equal to "SAI"	Windows 2000
Equal to "SANSC"	Windows 2000

The Trusted Domain Secret type is used only in Windows NT 3.1, Windows NT 3.5, Windows NT 3.51, and Windows NT 4.0.

For replication of secrets, Windows NT 3.1, Windows NT 3.5, Windows NT 3.51, and Windows NT 4.0 use Netlogon-based replication; while Windows 2000, Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview use Active Directory replication.

<45> Section 3.1.1.4: By default, the security descriptor assigned to newly created secret objects of type Local Secret can be expressed in Security Description Definition Language (SDDL) as O:BAG:SYD:(A;;GA;;;BA)(A;;GX;;;WD). This security descriptor implies that the secrets are shared between users by default, which means that a secret object created by an administrator is available to another administrator. An implementation may choose to not allow this behavior by assigning a different security descriptor.

See section 2.2.1.1.1 for the definitions of the generic access rights that are included in this security descriptor.

<a href="<46"><46> Section 3.1.1.5: The following is a timeline of when each information value was introduced. All information values continue to be available in subsequent versions of Windows according to the applicability list at the beginning of this section.

Name	Product
Name	Windows NT 3.1
Flat Name	Windows 2000
Security Identifier	Windows NT 3.1
Trust Type	Windows 2000
Trust Direction	Windows 2000
Trust Attributes	Windows 2000
Posix Offset	Windows NT 3.1

Name	Product	
Trust Incoming Passwords	Windows NT 3.51	
Trust Outgoing Passwords	Windows NT 3.51	
Forest Trust Information	Windows Server 2003	
Supported Encryption Types	Windows Vista	
Security Descriptor	Windows NT 3.1	

<47> Section 3.1.1.6.1: The default setting value is FALSE for Windows NT, Windows 2000, and Windows XP. The default setting value is TRUE for Windows Server 2003, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview.

This setting can be set to FALSE on Windows Server 2003, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview by setting a "non-0" value on the following REG_DWORD registry value:

HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Lsa\TurnOffAnonymousBlock

Changes made to this setting must take effect immediately.

Note that the Boolean meaning of the TurnOffAnonymousBlock registry value is reversed from that of the LsaRestrictAnonymous setting in section 3.1.1.6.1.

<48> Section 3.1.4: The Windows implementation of this protocol asks the RPC engine to perform a strict Network Data Representation (NDR) data consistency check at target level 5.0 (as specified in [MS-RPCE] section 3) in Windows 2000 RTM, Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview.

<49> Section 3.1.4: The Windows implementation of this protocol asks the RPC engine to include support for both NDR and NDR64 transfer syntaxes, in addition to the negotiation mechanism for determining what transfer syntax will be used (as specified in [MS-RPCE] section 3) in Windows XP RTM, Windows Server 2003, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview.

<50> Section 3.1.4: The Windows implementation of this protocol asks the RPC engine via the strict_context_handle attribute to reject use of context handles created by a method of a different RPC interface from this one, as specified in [MS-RPCE] section 3.

<51> Section 3.1.4: The following is a timeline of when each method was introduced. All methods continue to be available in subsequent versions of Windows according to the applicability list at the beginning of this section.

Method	Product
LsarClose (section 3.1.4.9.4)	Windows NT 3.1
LsarEnumeratePrivileges (section 3.1.4.8.1)	Windows NT 3.1

Method	Product
LsarQuerySecurityObject (section 3.1.4.9.1)	Windows NT 3.1
LsarSetSecurityObject (section 3.1.4.9.2)	Windows NT 3.1
LsarOpenPolicy (section 3.1.4.4.2)	Windows NT 3.1
LsarQueryInformationPolicy (section 3.1.4.4.4)	Windows NT 3.1
LsarSetInformationPolicy (section 3.1.4.4.6)	Windows NT 3.1
LsarCreateAccount (section 3.1.4.5.1)	Windows NT 3.1
LsarEnumerateAccounts (section 3.1.4.5.2)	Windows NT 3.1
LsarCreateTrustedDomain (section 3.1.4.7.12)	Windows NT 3.1
LsarEnumerateTrustedDomains (section 3.1.4.7.8)	Windows NT 3.1
LsarCreateSecret (section 3.1.4.6.1)	Windows NT 3.1
LsarOpenAccount (section 3.1.4.5.3)	Windows NT 3.1
LsarEnumeratePrivilegesAccount (section 3.1.4.5.4)	Windows NT 3.1
LsarAddPrivilegesToAccount (section 3.1.4.5.5)	Windows NT 3.1
LsarRemovePrivilegesFromAccount (section 3.1.4.5.6)	Windows NT 3.1
LsarGetSystemAccessAccount (section 3.1.4.5.7)	Windows NT 3.1
LsarSetSystemAccessAccount (section 3.1.4.5.8)	Windows NT 3.1
LsarOpenTrustedDomain (section 3.1.4.7.1)	Windows NT 3.1
LsarQueryInfoTrustedDomain (section 3.1.4.7.13)	Windows NT 3.1
LsarSetInformationTrustedDomain (section 3.1.4.7.14)	Windows NT 3.1
LsarOpenSecret (section 3.1.4.6.2)	Windows NT 3.1
LsarSetSecret (section 3.1.4.6.3)	Windows NT 3.1
LsarQuerySecret (section 3.1.4.6.4)	Windows NT 3.1
LsarLookupPrivilegeValue (section 3.1.4.8.2)	Windows NT 3.1
LsarLookupPrivilegeName (section 3.1.4.8.3)	Windows NT 3.1
LsarLookupPrivilegeDisplayName (section 3.1.4.8.4)	Windows NT 3.1
LsarDeleteObject (section 3.1.4.9.3)	Windows NT 3.1
LsarEnumerateAccountsWithUserRight (section 3.1.4.5.9)	Windows NT 3.51
LsarEnumerateAccountRights (section 3.1.4.5.10)	Windows NT 3.51
LsarAddAccountRights (section 3.1.4.5.11)	Windows NT 3.51
LsarRemoveAccountRights (section 3.1.4.5.12)	Windows NT 3.51
LsarQueryTrustedDomainInfo (section 3.1.4.7.2)	Windows NT 3.51
LsarSetTrustedDomainInfo (section 3.1.4.7.3)	Windows NT 3.51

Method	Product
LsarDeleteTrustedDomain (section 3.1.4.7.4)	Windows NT 3.51
LsarStorePrivateData (section 3.1.4.6.5)	Windows NT 3.51
LsarRetrievePrivateData (section 3.1.4.6.6)	Windows NT 3.51
LsarOpenPolicy2 (section 3.1.4.4.1)	Windows NT 3.51
LsarQueryInformationPolicy2 (section 3.1.4.4.3)	Windows 2000
LsarSetInformationPolicy2 (section 3.1.4.4.5)	Windows 2000
LsarQueryTrustedDomainInfoByName (section 3.1.4.7.5)	Windows 2000
LsarSetTrustedDomainInfoByName (section 3.1.4.7.6)	Windows 2000
LsarEnumerateTrustedDomainsEx (section 3.1.4.7.7)	Windows 2000
LsarCreateTrustedDomainEx (section 3.1.4.7.11)	Windows 2000
LsarQueryDomainInformationPolicy (section 3.1.4.4.7)	Windows 2000
LsarSetDomainInformationPolicy (section 3.1.4.4.8)	Windows 2000
LsarOpenTrustedDomainByName (section 3.1.4.7.9)	Windows 2000
LsarCreateTrustedDomainEx2 (section 3.1.4.7.10)	Windows 2000
LsarQueryForestTrustInformation (section 3.1.4.7.15)	Windows XP
LsarSetForestTrustInformation (section 3.1.4.7.16)	Windows XP

<52> Section 3.1.4: Some gaps in the opnum numbering sequence correspond to opnums that are specified in [MS-LSAT]. All other gaps in the opnum numbering sequence apply to Windows as follows.

Opnum	Description
1	Used only locally by Windows, never remotely.
5	Not used by Windows.
9	Not used by Windows.
21	Not used by Windows.
22	Not used by Windows.
52	Not used by Windows.
56	Used only locally by Windows, never remotely.
60	Used only locally by Windows, never remotely.
61	Used only locally by Windows, never remotely.
62	Used only locally by Windows, never remotely.
63	Used only locally by Windows, never remotely.
64	Used only locally by Windows, never remotely.

Opnum	Description
65	Used only locally by Windows, never remotely.
66	Used only locally by Windows, never remotely.
67	Used only locally by Windows, never remotely.
69	Used only locally by Windows, never remotely.
70	Used only locally by Windows, never remotely.
71	Used only locally by Windows, never remotely.
72	Used only locally by Windows, never remotely.
75	Used only locally by Windows, never remotely.

- <53> Section 3.1.4.4.1: The Windows RPC server for this protocol ignores this parameter except for the **RootDirectory** field. It verifies whether the value is NULL and returns STATUS INVALID PARAMETER if it is not.
- <54> Section 3.1.4.4.2: The Windows RPC server for this protocol ignores this parameter except for the **RootDirectory** field. It verifies whether the value is NULL and returns STATUS_INVALID_PARAMETER if it is not.
- <55> Section 3.1.4.4.3: Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview return STATUS INVALID PARAMETER for this information class.
- <56> Section 3.1.4.4.3: In the case of Windows 2000, Windows XP, Windows Server 2003, Windows Server 2008 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview, the Windows RPC server always throws an RPC_NT_PROCNUM_OUT_OF_RANGE exception if the server is configured to emulate NT4 for PolicyDnsDomainInformation information level.
- <57> Section 3.1.4.4.5: Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview return STATUS_INVALID_PARAMETER for this information class.
- <58> Section 3.1.4.4.5: Windows 2000, Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview behavior: The Windows RPC server always throws an RPC_NT_PROCNUM_OUT_OF_RANGE exception if the server is configured to emulate NT4 for PolicyDnsDomainInformation information level.
- \leq 59> Section 3.1.4.5.1: Windows checks whether the SID is valid, but does not validate the structure of the SID.
- <a href="Mindows 2000"
- <a href="<><61> Section 3.1.4.5.6"><61> Section 3.1.4.5.6: Windows Vista, Windows 7, Windows 8, Windows 8.1, and Windows 10 do not allow removal of "SeAuditPrivilege", "SeChangeNotifyPrivilege", "SeImpersonatePrivilege", and

- "SeCreateGlobalPrivilege" from accounts represented with SIDs "S-1-5-19" and "S-1-5-20". Such requests are rejected with STATUS_NOT_SUPPORTED.
- <62> Section 3.1.4.5.9: Furthermore, Windows checks that the caller is a member of Builtin Administrators.
- <63> Section 3.1.4.5.12: Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview do not allow removal of "SeAuditPrivilege", "SeChangeNotifyPrivilege", "SeImpersonatePrivilege", and "SeCreateGlobalPrivilege" from accounts represented with SIDs "S-1-5-19" and "S-1-5-20". Such requests are rejected with STATUS_NOT_SUPPORTED.
- <64> Section 3.1.4.6: Windows 2000 Server, Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Vista, and Windows Server 2008 support these methods. Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview support these methods by default, but can be configured not to support them.
- <65> Section 3.1.4.6.1: Windows NT 4.0, Windows 2000, Windows XP, Windows Server 2003, Windows Server 2003 R2, Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview limit the secret name length to 128 characters. Windows NT 4.0, Windows 2000, Windows XP, Windows Server 2003, and Windows Server 2003 R2 return STATUS_NAME_TOO_LONG for lengths that are greater than 128 characters. Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview return STATUS_INVALID_PARAMETER for lengths that are greater than 128 characters.
- <66> Section 3.1.4.6.1: Windows 2000, Windows XP, Windows Server 2003, Windows Server 2008 R2, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview do not allow a secret whose name is prefixed by "G\$\$" to be created, and return STATUS_INVALID_PARAMETER to indicate this constraint failure to the caller.
- <67> Section 3.1.4.6.1: Windows Server 2003, Windows Server 2003 R2, Windows Server 2003 operating system with Service Pack 1 (SP1), Windows Vista, Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview do not allow the secret name to be "G\$\$", "G\$", "L\$", "M\$", "_sc_", "NL\$", "RasDialParams" or "RasCredentials". They return STATUS_INVALID_PARAMETER to indicate this constraint failure to the caller.
- <a href="Mailto: Section 3.1.4.6.1: Global secrets (those that are prefixed with "G\$") cannot be created on domain controllers on which the directory service is stopped. A request to create a global secret on a domain controller on which the directory service is stopped fails with status code STATUS_DIRECTORY_SERVICE_REQUIRED.
- <69> Section 3.1.4.6.2: Windows 2000, Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, Windows Server 2018 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview have a special case for secret name search for downlevel compatibility with Windows NT 3.1, Windows NT 3.5, and Windows NT 3.51. If the secret name is in the form "G\$\$<NAME>", where "<NAME>" matches the name of a trusted domain, the response is STATUS_SUCCESS. In this case, secret information is Authentication Information of type TRUST_AUTH_TYPE_CLEAR ([MS-ADTS] section 6.1.6.9.1.1, the AuthType field) from the trusted domain object.
- <70> Section 3.1.4.6.3: Windows 2000, Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, Windows Server 2012 R2, and Windows Server 2016 Technical Preview have a special case for secret set operation for downlevel

compatibility with Windows NT 3.1, Windows NT 3.5, and Windows NT 3.51. If the secret name is in the form "G\$\$<NAME>", where "<NAME>" matches the name of a trusted domain, the result is that the set request writes the secret value into the authentication information section of the trusted domain object. The access check in this case is identical to that required for setting authentication information on a trusted domain object, rather than that pertaining to changing a secret value.

<71> Section 3.1.4.6.3: If decryption of EncryptedCurrentValue fails, Windows NT 4.0, Windows 2000, Windows XP, Windows Server 2003, Windows Server 2003 R2, and Windows Vista return STATUS_UNKNOWN_REVISION (0xC0000058); Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview return STATUS_INVALID_PARAMETER_1 (0xC00000EF).

<72> Section 3.1.4.6.3: If decryption of EncryptedOldValue fails, Windows NT 4.0, Windows 2000, Windows XP, Windows Server 2003, Windows Server 2003 R2, and Windows Vista return STATUS_UNKNOWN_REVISION (0xC0000058); Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview return STATUS_INVALID_PARAMETER_1 (0xC00000EF).

<73> Section 3.1.4.6.4: Windows rejects the secret query requests of type "system" by returning STATUS_ACCESS_DENIED. Windows also rejects the secret query requests of type "local" from network clients with STATUS ACCESS DENIED.

<74> Section 3.1.4.6.4: If Windows 2000 Server, Windows Server 2003, or Windows Server 2003 R2 process a global secret with a value that has its **Length** field set to 0, they fill in the *EncryptedCurrentValue* with the following values before encryption.

```
Length = 0
MaximumLength = 0
```

Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview set the value of *EncryptedCurrentValue* to NULL.

<75> Section 3.1.4.6.4: If Windows 2000 Server, Windows Server 2003, or Windows Server 2003 R2 process a global secret with a value that has its **Length** field set to 0, they fill in the *EncryptedOldValue* with the following values before encryption.

```
Length = 0
MaximumLength = 0
```

Windows Server 2008, Windows Server 2018 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview set the value of *EncryptedOldValue* to NULL.

<76> Section 3.1.4.6.5: If decryption of *EncryptedData* fails, Windows NT 4.0, Windows 2000, Windows XP, Windows Server 2003, Windows Server 2003 R2, and Windows Vista return STATUS_UNKNOWN_REVISION (0xC0000058); Windows Server 2008, Windows 7, Windows Server 2008 R2, Windows 8, Windows Server 2012, Windows 8.1, Windows Server 2012 R2, Windows 10, and Windows Server 2016 Technical Preview return STATUS_INVALID_PARAMETER_1 (0xC00000EF).

<77> Section 3.1.4.7: Windows NT 3.1, Windows NT 3.5, Windows NT 3.51, and Windows NT 4.0 use trusted domain objects on non-domain controllers to join a machine to a domain. Therefore, trusted domain object methods are allowed on these products even when the machine is not a domain controller. There is, however, one extra check in this case, which is that the trusted domain object's security identifier must be the same as the security identifier in Primary Domain Information. This also artificially limits the number of trusted domain objects on such systems to one.

<78> Section 3.1.4.7.1: Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016

Technical Preview disallow callers that do not have the AuthenticatedUsers SID in their token from accessing trusted domain objects. Requests by such users are rejected with STATUS ACCESS DENIED.

- <79> Section 3.1.4.7.1: On Windows 2000, Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, Windows Server 2018 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview, Active Directory must be running on the server in order for this request to succeed. Failing that, the STATUS_DIRECTORY_SERVICE_REQUIRED status code is returned.
- <80> Section 3.1.4.7.3: Read-only domain controllers are supported on servers running Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview. They return the STATUS_OBJECT_NAME_NOT_FOUND error.
- <81> Section 3.1.4.7.3: Windows 2000 Server, Windows Server 2003, and Windows Server 2003 R2 support these *InformationClass* values.
- <82> Section 3.1.4.7.4: Read-only domain controllers are supported on servers running Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview. They return the STATUS OBJECT NAME NOT FOUND error.
- <83> Section 3.1.4.7.10: Windows Server 2003 for Small Business Server 2003 does not support this message. Attempts to create a TDO in this environment causes the server to return STATUS NOT SUPPORTED ON SBS.
- <84> Section 3.1.4.7.10: The operation is not supported on Windows Server 2003 for Small Business Server 2003.
- <85> Section 3.1.4.7.10: Servers running Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, or Windows Server 2008 R2 return the STATUS_INVALID_DOMAIN_STATE error when the TRUST_ATTRIBUTE_FOREST_TRANSITIVE or the TRUST_ATTRIBUTE_CROSS_ORGANIZATION bit is set in the **TrustAttributes** field of the *TrustedDomainInformation* input parameter.
- <86> Section 3.1.4.7.10: Read-only domain controllers are supported on servers running Windows Server 2008, Windows Server 2018, Windows Server 2012, Windows Server 2012 R2, or Windows Server 2016 Technical Preview. They return the STATUS_OBJECT_NAME_NOT_FOUND error.
- <87> Section 3.1.4.7.11: The operation is not supported on Windows Server 2003 for Small Business Server 2003.
- <88> Section 3.1.4.7.12: The operation is not supported on Windows Server 2003 for Small Business Server 2003.
- <89> Section 3.1.4.7.13: When not at DS_BEHAVIOR_WIN2003 forest functional level, Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview hide the presence of the TRUST_ATTRIBUTE_FOREST_TRANSITIVE bit in the **Trust Attributes** field of a trusted domain object.
- <90> Section 3.1.4.7.14: Servers running Windows 2000 Server, Windows Server 2003, and Windows Server 2003 R2 return the STATUS_INVALID_INFO_CLASS error when the information class is TrustedDomainInformationBasic.
- <91> Section 3.1.4.7.14: Servers running Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, or Windows Server 2016 Technical Preview return the STATUS OBJECT NAME NOT FOUND error.
- <92> Section 3.1.4.9.1: The server will not return the security descriptor of objects that it stores in Active Directory. It will return the security descriptor of objects in its local policy only. The objects stored in Active Directory include Global Secrets and trusted domain objects in Windows 2000,

Windows Server 2003, Windows Server 2003 R2, Windows Server 2008, Windows Server 2018 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview. For objects that fall into this category, the server will return the STATUS NOT SUPPORTED status code.

<93> Section 3.1.4.9.2: The server will not return the security descriptor of objects that it stores in Active Directory. It will return the security descriptor of objects in its local policy only. The objects stored in Active Directory include Global Secrets and trusted domain objects. For objects that fall into this category, a Windows server returns the STATUS_NOT_SUPPORTED status code.

<94> Section 3.1.4.10: On Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview, when processing the LsarOpenSecret (section 3.1.4.6.2) and LsarCreateSecret (section 3.1.4.6.1) methods, the length of the string is allowed to not be a multiple of 2. If **Length** is not a multiple of 2, the length of the Unicode string will be assumed to be **Length** – 1.

<95> Section 3.1.4.10: Windows NT, Windows 2000, Windows XP, Windows Server 2003, and Windows Server 2003 R2 do not perform this check. On Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, and Windows Server 2016 Technical Preview, when processing the LsarOpenSecret and LSarCreateSecret methods, the **Buffer** field is allowed to contain zero or many NULL Unicode characters at the end of the string.

<96> Section 3.1.4.10: Windows 2000, Windows XP, Windows Server 2003, and Windows Server 2003 R2 implementations of this protocol do not validate the Luid. HighPart field.

<97> Section 3.1.4.10: Windows 2000, Windows XP, Windows Server 2003, and Windows Server 2003 R2 implementations of this protocol do not validate the Luid.LowPart field.

<98> Section 3.1.4.10: Windows 2000, Windows XP, Windows Server 2003, and Windows Server 2003 R2 implementations of this protocol do not validate the Attributes field.

8 Change Tracking No table of changes is available. The document is either new or has had no changes since its last release.

9 Index

A	п
Abstract data model 67	Handles
server 67	closing 88
Access	obtaining 84
checks 84	
rights 84	I
Access Rights and Access Checks method 84	· -
Account Object Methods method 98	IDL 178
Account objects	Implementer - security considerations 173
data model 73	<u>Implementers - security considerations</u> 173
example 161	<u>Index of security parameters</u> 177
methods 98	<u>Informative references</u> 14
Accounts Rights data model 69	Initialization 79
Applicability 21	server 79
•	Introduction 8
C	
Canability pagatiation 31	L
Capability negotiation 21 Change tracking 217	Local avente
Closing handles 88	LSAPR HANDLE rundown 160
Closing Handles method 88	
Common data types 23	overview 160 server 160
Common object methods 151	LSA FOREST TRUST BINARY DATA structure 63
Common Object Methods method 151	LSA FOREST TRUST COLLISION INFORMATION
	structure 65
D	LSA FOREST TRUST COLLISION RECORD structure
	64
Data model - abstract 67	LSA FOREST TRUST COLLISION RECORD TYPE
server 67	enumeration 64
Data types 23	LSA FOREST TRUST DOMAIN INFO structure 63
<u>common - overview</u> 23	LSA FOREST TRUST INFORMATION structure 64
Data validation 155	LSA FOREST TRUST RECORD structure 61
<u>Data Validation method</u> 155	LSA FOREST TRUST RECORD TYPE enumeration 63
Decryption - secret 173	LSAPR ACCOUNT ENUM BUFFER structure 46
DES-ECB-LM cipher definition 175	LSAPR ACCOUNT INFORMATION structure 46
<u>Directory service schema elements</u> 66	LSAPR ACL structure 35
-	LSAPR AUTH INFORMATION structure 59
E	LSAPR CR CIPHER VALUE structure 48 LSAPR LUID AND ATTRIBUTES structure 47
Elements - directory service schema 66	LSAPR OBJECT ATTRIBUTES structure 33
Encryption - secret 173	LSAPR POLICY ACCOUNT DOM INFO structure 41
Events	LSAPR POLICY AUDIT EVENTS INFO structure 40
local - server 160	LSAPR POLICY DNS DOMAIN INFO structure 43
timer - server 160	LSAPR POLICY DOMAIN EFS INFO structure 44
Examples 161	LSAPR POLICY PD ACCOUNT INFO structure 41
manipulating account objects 161	LSAPR POLICY PRIMARY DOM INFO structure 40
manipulating secret objects 164	LSAPR POLICY PRIVILEGE DEF structure 65
manipulating trusted domain objects 167	LSAPR POLICY REPLICA SRCE INFO structure 42
overview 161	LSAPR PRIVILEGE ENUM BUFFER structure 65
structure example of	LSAPR PRIVILEGE SET structure 47
Isapr trusted domain auth blob 169	LSAPR SECURITY DESCRIPTOR structure 35
_	LSAPR SR SECURITY DESCRIPTOR structure 34
F	LSAPR TRUST INFORMATION structure 48 LSAPR TRUSTED CONTROLLERS INFO structure 51
F111 - 1 - 1 - 1 - 24	LSAPR TRUSTED DOMAIN AUTH BLOB structure 57
Fields - vendor-extensible 21	LSAPR TRUSTED DOMAIN AUTH INFORMATION
Full IDL 178	structure 55
G	LSAPR TRUSTED DOMAIN AUTH INFORMATION IN
u	TERNAL structure 56
Glossary 8	LSAPR TRUSTED DOMAIN FULL INFORMATION
<u> </u>	structure 56

LSAPR TRUSTED DOMAIN FULL INFORMATION INT	
ERNAL structure 56	Manipulating account objects example 161
LSAPR TRUSTED DOMAIN FULL INFORMATION2	Manipulating secret objects example 164
structure 57	Manipulating trusted domain objects example 167
LSAPR TRUSTED DOMAIN INFORMATION EX	Message processing 79
structure 52	server 79
LSAPR TRUSTED DOMAIN INFORMATION EX2	Messages
structure 54	common data types 23
LSAPR TRUSTED DOMAIN NAME INFO structure 51	overview 23
LSAPR TRUSTED ENUM BUFFER structure 61	transport 23
LSAPR TRUSTED ENUM BUFFER EX structure 61	Methods
LSAPR TRUSTED PASSWORD INFO structure 52	Access Rights and Access Checks 84
LSAPR USER RIGHT SET structure 47	account object 98
<u>LsarAddAccountRights method</u> 109	Account Object Methods 98
<u>LsarAddPrivilegesToAccount method</u> 104	Closing Handles 88
<u>LsarClose method</u> 155	common object 151
<u>LsarCreateAccount method</u> 99	Common Object Methods 151
LsarCreateSecret method 112	Data Validation 155
LsarCreateTrustedDomain method 135	Obtaining Handles 84
LsarCreateTrustedDomainEx method 134	policy object 88
<u>LsarCreateTrustedDomainEx2 method</u> 131	Policy Object Methods 88
<u>LsarDeleteObject method</u> 153	<u>privilege</u> 146
<u>LsarDeleteTrustedDomain method</u> 124	Privilege Methods 146
LsarEnumerateAccountRights method 108	secret object 111
LsarEnumerateAccounts method 100	Secret Object Methods 111
LsarEnumerateAccountsWithUserRight method 107	trusted domain object 119
LsarEnumeratePrivileges method 146	Trusted Domain Object Methods 119
LsarEnumeratePrivilegesAccount method 103	Trastea Domain Object Methods 119
<u>LsarEnumerateTrustedDomains method</u> 129	N
<u>LsarEnumerateTrustedDomainsEx method</u> 127	
<u>LsarGetSystemAccessAccount method</u> 105	Normative references 13
<u>LsarLookupPrivilegeDisplayName method</u> 149	
<u>LsarLookupPrivilegeName method</u> 148	0
LsarLookupPrivilegeValue method 147	
LsarOpenAccount method 102	Obtaining bandles 04
LsarOpenPolicy method 89	Obtaining handles 84
LsarOpenPolicy2 method 88	Obtaining Handles method 84
Lear Open Policy 2 Method 00	Overview (synopsis) 14
LsarOpenSecret method 113	
LsarOpenTrustedDomain method 119	P
<u>LsarOpenTrustedDomainByName method</u> 130	
LsarQueryDomainInformationPolicy method 95	
	Parameters - security 177
	Parameters - security 177
LsarQueryForestTrustInformation method 141	Parameters - security index 177
<u>LsarQueryForestTrustInformation method</u> 141 <u>LsarQueryInformationPolicy method</u> 92	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63
<u>LsarQueryForestTrustInformation method</u> 141 <u>LsarQueryInformationPolicy method</u> 92 <u>LsarQueryInformationPolicy2 method</u> 90	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR CR CIPHER VALUE 48
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95 LsarSetInformationPolicy2 method 93	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR CR CIPHER VALUE 48 PLSAPR LUID AND ATTRIBUTES 47
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR CR CIPHER VALUE 48 PLSAPR LUID AND ATTRIBUTES 47 PLSAPR OBJECT ATTRIBUTES 33
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95 LsarSetInformationPolicy2 method 93	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR CR CIPHER VALUE 48 PLSAPR LUID AND ATTRIBUTES 47 PLSAPR OBJECT ATTRIBUTES 33 PLSAPR POLICY ACCOUNT DOM INFO 41
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95 LsarSetInformationPolicy2 method 93 LsarSetInformationTrustedDomain method 139 LsarSetSecret method 114	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR AUTH INFORMATION 59 PLSAPR CR CIPHER VALUE 48 PLSAPR LUID AND ATTRIBUTES 47 PLSAPR OBJECT ATTRIBUTES 33 PLSAPR POLICY ACCOUNT DOM INFO 41 PLSAPR POLICY AUDIT EVENTS INFO 40
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95 LsarSetInformationPolicy2 method 93 LsarSetInformationTrustedDomain method 139 LsarSetSecret method 114 LsarSetSecret method 114 LsarSetSecret method 152	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR AUTH INFORMATION 59 PLSAPR LUID AND ATTRIBUTES 47 PLSAPR OBJECT ATTRIBUTES 47 PLSAPR POLICY ACCOUNT DOM INFO 41 PLSAPR POLICY AUDIT EVENTS INFO 40 PLSAPR POLICY DNS DOMAIN INFO 43
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95 LsarSetInformationPolicy2 method 93 LsarSetInformationTrustedDomain method 139 LsarSetSecret method 114 LsarSetSecurityObject method 152 LsarSetSystemAccessAccount method 106	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR AUTH INFORMATION 59 PLSAPR CR CIPHER VALUE 48 PLSAPR DID AND ATTRIBUTES 47 PLSAPR OBJECT ATTRIBUTES 33 PLSAPR POLICY ACCOUNT DOM INFO 41 PLSAPR POLICY AUDIT EVENTS INFO 40 PLSAPR POLICY DNS DOMAIN INFO 43 PLSAPR POLICY DOMAIN EFS INFO 44
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95 LsarSetInformationPolicy2 method 93 LsarSetInformationTrustedDomain method 139 LsarSetSecret method 114 LsarSetSecurityObject method 152 LsarSetSystemAccessAccount method 106 LsarSetTrustedDomainInfo method 122	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR AUTH INFORMATION 59 PLSAPR LUID AND ATTRIBUTES 47 PLSAPR OBJECT ATTRIBUTES 47 PLSAPR POLICY ACCOUNT DOM INFO 41 PLSAPR POLICY AUDIT EVENTS INFO 40 PLSAPR POLICY DNS DOMAIN INFO 43
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95 LsarSetInformationPolicy2 method 93 LsarSetInformationTrustedDomain method 139 LsarSetSecret method 114 LsarSetSecurityObject method 152 LsarSetSystemAccessAccount method 106 LsarSetTrustedDomainInfo method 122 LsarSetTrustedDomainInfo method 122 LsarSetTrustedDomainInfoByName method 126	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR AUTH INFORMATION 59 PLSAPR CR CIPHER VALUE 48 PLSAPR DID AND ATTRIBUTES 47 PLSAPR OBJECT ATTRIBUTES 33 PLSAPR POLICY ACCOUNT DOM INFO 41 PLSAPR POLICY AUDIT EVENTS INFO 40 PLSAPR POLICY DNS DOMAIN INFO 43 PLSAPR POLICY DOMAIN EFS INFO 44
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95 LsarSetInformationPolicy2 method 93 LsarSetInformationTrustedDomain method 139 LsarSetSecret method 114 LsarSetSecurityObject method 152 LsarSetSystemAccessAccount method 106 LsarSetTrustedDomainInfo method 122	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR AUTH INFORMATION 59 PLSAPR LUID AND ATTRIBUTES 47 PLSAPR OBJECT ATTRIBUTES 33 PLSAPR POLICY ACCOUNT DOM INFO 41 PLSAPR POLICY DOMAIN EFS INFO 40 PLSAPR POLICY DOMAIN EFS INFO 44 PLSAPR POLICY PD ACCOUNT INFO 41 PLSAPR POLICY PRIMARY DOM INFO 40
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95 LsarSetInformationPolicy2 method 93 LsarSetInformationTrustedDomain method 139 LsarSetSecret method 114 LsarSetSecurityObject method 152 LsarSetSystemAccessAccount method 106 LsarSetTrustedDomainInfo method 122 LsarSetTrustedDomainInfo method 122 LsarSetTrustedDomainInfoByName method 126	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR AUTH INFORMATION 59 PLSAPR LUID AND ATTRIBUTES 47 PLSAPR OBJECT ATTRIBUTES 33 PLSAPR POLICY ACCOUNT DOM INFO 41 PLSAPR POLICY DOMAIN EVENTS INFO 40 PLSAPR POLICY DOMAIN EFS INFO 44 PLSAPR POLICY PD ACCOUNT INFO 41 PLSAPR POLICY PRIMARY DOM INFO 40 PLSAPR POLICY PRIMARY DOM INFO 40 PLSAPR POLICY PRIVILEGE DEF 65
LsarQueryForestTrustInformation method 141 LsarQueryInformationPolicy method 92 LsarQueryInformationPolicy2 method 90 LsarQueryInfoTrustedDomain method 137 LsarQuerySecret method 116 LsarQuerySecurityObject method 151 LsarQueryTrustedDomainInfo method 121 LsarQueryTrustedDomainInfoByName method 125 LsarRemoveAccountRights method 110 LsarRemovePrivilegesFromAccount method 104 LsarRetrievePrivateData method 118 LsarSetDomainInformationPolicy method 97 LsarSetForestTrustInformation method 143 LsarSetInformationPolicy method 95 LsarSetInformationPolicy2 method 93 LsarSetInformationTrustedDomain method 139 LsarSetSecret method 114 LsarSetSecurityObject method 152 LsarSetSystemAccessAccount method 106 LsarSetTrustedDomainInfo method 122 LsarSetTrustedDomainInfo method 122 LsarSetTrustedDomainInfoByName method 126	Parameters - security index 177 PLSA FOREST TRUST BINARY DATA 63 PLSA FOREST TRUST COLLISION INFORMATION 65 PLSA FOREST TRUST COLLISION RECORD 64 PLSA FOREST TRUST DOMAIN INFO 63 PLSA FOREST TRUST INFORMATION 64 PLSA FOREST TRUST RECORD 61 PLSAPR ACCOUNT ENUM BUFFER 46 PLSAPR ACCOUNT INFORMATION 46 PLSAPR ACL 35 PLSAPR AUTH INFORMATION 59 PLSAPR AUTH INFORMATION 59 PLSAPR LUID AND ATTRIBUTES 47 PLSAPR OBJECT ATTRIBUTES 33 PLSAPR POLICY ACCOUNT DOM INFO 41 PLSAPR POLICY DOMAIN EFS INFO 40 PLSAPR POLICY DOMAIN EFS INFO 44 PLSAPR POLICY PD ACCOUNT INFO 41 PLSAPR POLICY PRIMARY DOM INFO 40

PLSAPR PRIVILEGE SET 47	References 12
PLSAPR SECURITY DESCRIPTOR 35	informative 14
PLSAPR SR SECURITY DESCRIPTOR 34	normative 13
PLSAPR TRUST INFORMATION 48 PLSAPR TRUSTED CONTROLLERS INFO 51	Relationship to other protocols 19
PLSAPR TRUSTED DOMAIN AUTH BLOB 57	S
PLSAPR TRUSTED DOMAIN AUTH INFORMATION	3
55	Schema elements - directory service 66
PLSAPR TRUSTED DOMAIN AUTH INFORMATION I	Secret
NTERNAL 56	decryption 173
PLSAPR TRUSTED DOMAIN FULL INFORMATION 56	encryption 173
PLSAPR TRUSTED DOMAIN FULL INFORMATION IN	Secret Object Methods method 111
TERNAL 56	Secret objects
PLSAPR TRUSTED DOMAIN FULL INFORMATION2 57	data model 73
PLSAPR TRUSTED DOMAIN INFORMATION EX 52	example 164 methods 111
PLSAPR TRUSTED DOMAIN INFORMATION EX2 54	Security 173
PLSAPR TRUSTED DOMAIN NAME INFO 51	implementer considerations 173
PLSAPR TRUSTED ENUM BUFFER 61	parameter index 177
PLSAPR TRUSTED ENUM BUFFER EX 61	SECURITY IMPERSONATION LEVEL enumeration 36
PLSAPR TRUSTED PASSWORD INFO 52	SECURITY QUALITY OF SERVICE structure 37
PLSAPR USER RIGHT SET 47	Sequencing rules 79
Policy object	server 79
data model 67 methods 88	Server
Policy Object Methods method 88	abstract data model 67 Access Rights and Access Checks method 84
POLICY AUDIT EVENT TYPE enumeration 46	Account Object Methods method 98
POLICY AUDIT FULL QUERY INFO structure 43	Closing Handles method 88
POLICY AUDIT FULL SET INFO structure 42	Common Object Methods method 151
POLICY AUDIT LOG INFO structure 39	Data Validation method 155
POLICY DOMAIN INFORMATION CLASS	initialization 79
enumeration 43	<u>local events</u> 160
POLICY DOMAIN KERBEROS TICKET INFO	message processing 79
structure 45 POLICY DOMAIN QUALITY OF SERVICE INFO	Obtaining Handles method 84
structure 44	Policy Object Methods method 88
POLICY INFORMATION CLASS enumeration 37	Privilege Methods method 146 Secret Object Methods method 111
POLICY LSA SERVER ROLE enumeration 41	sequencing rules 79
POLICY LSA SERVER ROLE INFO structure 42	timer events 160
POLICY MODIFICATION INFO structure 42	timers 79
PPOLICY AUDIT FULL QUERY INFO 43	Trusted Domain Object Methods method 119
PPOLICY AUDIT FULL SET INFO 42	<u>Server - overview</u> 67
PPOLICY AUDIT LOG INFO 39	Standards assignments 21
PPOLICY DOMAIN KERBEROS TICKET INFO 45 PPOLICY DOMAIN QUALITY OF SERVICE INFO 44	STRING structure 34
PPOLICY LSA SERVER ROLE INFO 42	Structure example of lsapr trusted domain auth blob example 169
PPOLICY MODIFICATION INFO 42	System access rights data model 72
Preconditions 21	System decess rights data model /2
Prerequisites 21	T
Privilege	
data model 69	<u>Timer events</u> 160
methods 146	server 160
Privilege Methods method 146 Product behavior 194	Timers 79
Protocol Details	server 79
overview 67	Tracking changes 217
PSECURITY QUALITY OF SERVICE 37	Transport 23 Transport - message 23
PSTRING 34	Trusted Domain Object Methods method 119
PTRUSTED DOMAIN SUPPORTED ENCRYPTION TYP	Trusted domain objects
<u>ES</u> 60	data model 75
PTRUSTED POSIX OFFSET INFO 52	example 167
_	methods 119
R	TRUSTED DOMAIN SUPPORTED ENCRYPTION TYPE
PC4 ciphor usage 172	S structure 60
RC4 cipher usage 173	TRUSTED INFORMATION CLASS enumeration 49

TRUSTED POSIX OFFSET INFO structure 52

V

<u>Validation - data</u> 155 <u>Vendor-extensible fields</u> 21 <u>Versioning</u> 21