[MS-EMFSPOOL]: Enhanced Metafile Spool Format

Intellectual Property Rights Notice for Open Specifications Documentation

- Technical Documentation. Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- No Trade Secrets. Microsoft does not claim any trade secret rights in this documentation.
- Patents. Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft Open Specification Promise or the Community Promise. If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting ipla@microsoft.com.
- Trademarks. The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
06/01/2007	2.0	Major	Updated and revised the technical content.
07/03/2007	2.1	Minor	Updated the technical content.
08/10/2007	2.2	Minor	Updated the technical content.
09/28/2007	2.3	Minor	Updated the technical content.
10/23/2007	3.0	Major	Updated and revised the technical content; restructured for easier navigation.
01/25/2008	3.0.1	Editorial	Revised and edited the technical content.
03/14/2008	4.0	Major	Windows version-specific behavior added.
06/20/2008	4.0.1	Editorial	Revised and edited the technical content.
07/25/2008	4.0.2	Editorial	Revised and edited the technical content.
08/29/2008	4.0.3	Editorial	Revised and edited the technical content.
10/24/2008	4.0.4	Editorial	Revised and edited the technical content.
12/05/2008	4.1	Minor	Updated the technical content.
01/16/2009	4.1.1	Editorial	Revised and edited the technical content.
02/27/2009	4.2	Minor	Updated the technical content.
04/10/2009	4.3	Minor	Updated the technical content.
05/22/2009	5.0	Major	Updated and revised the technical content.
07/02/2009	5.1	Minor	Updated the technical content.
08/14/2009	5.1.1	Editorial	Revised and edited the technical content.
09/25/2009	5.2	Minor	Updated the technical content.
11/06/2009	5.2.1	Editorial	Revised and edited the technical content.
12/18/2009	5.2.2	Editorial	Revised and edited the technical content.
01/29/2010	5.3	Minor	Updated the technical content.
03/12/2010	5.4	Minor	Updated the technical content.
04/23/2010	5.4.1	Editorial	Revised and edited the technical content.
06/04/2010	5.5	Minor	Updated the technical content.
07/16/2010	5.5	No change	No changes to the meaning, language, or formatting of

Date	Revision History	Revision Class	Comments
			the technical content.
08/27/2010	5.5.1	Editorial	Changed language and formatting in the technical content.
10/08/2010	5.5.1	No change	No changes to the meaning, language, or formatting of the technical content.
11/19/2010	5.5.1	No change	No changes to the meaning, language, or formatting of the technical content.
01/07/2011	5.5.1	No change	No changes to the meaning, language, or formatting of the technical content.
02/11/2011	5.5.1	No change	No changes to the meaning, language, or formatting of the technical content.
03/25/2011	5.5.1	No change	No changes to the meaning, language, or formatting of the technical content.
05/06/2011	5.5.1	No change	No changes to the meaning, language, or formatting of the technical content.
06/17/2011	5.6	Minor	Clarified the meaning of the technical content.
09/23/2011	5.6	No change	No changes to the meaning, language, or formatting of the technical content.
12/16/2011	6.0	Major	Significantly changed the technical content.
03/30/2012	6.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/12/2012	6.0	No change	No changes to the meaning, language, or formatting of the technical content.
10/25/2012	6.0	No change	No changes to the meaning, language, or formatting of the technical content.
01/31/2013	6.0	No change	No changes to the meaning, language, or formatting of the technical content.
08/08/2013	7.0	Major	Significantly changed the technical content.
11/14/2013	7.0	No change	No changes to the meaning, language, or formatting of the technical content.
02/13/2014	7.0	No change	No changes to the meaning, language, or formatting of the technical content.

Contents

1	Introduction	
	1.1 Glossary	
	1.2 References	
	1.2.1 Normative References	. 10
	1.2.2 Informative References	. 10
	1.3 Overview	. 10
	1.3.1 Metafile Structure	. 10
	1.3.2 Byte Ordering	. 12
	1.4 Relationship to Protocols and Other Structures	. 12
	1.5 Applicability Statement	. 12
	1.6 Versioning and Localization	. 12
	1.7 Vendor-Extensible Fields	. 12
2	Structures	
	2.1 EMFSPOOL Enumerations	
	2.1.1 RecordType Enumeration	
	2.1.2 SpecVersion Enumeration	
	2.2 EMFSPOOL Records	. 15
	2.2.1 Record Syntax	
	2.2.2 Header Record	
	2.2.3 Data Records	
	2.2.3.1 Page Content Records	
	2.2.3.2 Page Offset Records	
	2.2.3.3 Font Definition Records	
	2.2.3.3.1 EMRI_ENGINE_FONT Record	
	2.2.3.3.2 EMRI_TYPE1_FONT Record	
	2.2.3.3.3 EMRI_DESIGNVECTOR Record	
	2.2.3.3.4 EMRI_SUBSET_FONT Record	
	2.2.3.3.5 EMRI_DELTA_FONT Record	
	2.2.3.4 Font Offset Records	
	2.2.3.5 EMRI_DEVMODE Record	
	2.2.3.6 EMRI_PRESTARTPAGE Record	
	2.2.3.7 EMRI_PS_JOB_DATA Record	. 28
3	Structure Examples	
	3.1 Byte Ordering Example	
	3.2 EMFSPOOL Metafile Example	
	3.2.1 EMFSPOOL Header Example	. 40
	3.2.2 EMRI_METAFILE_DATA Example	
	3.2.2.1 EMR_HEADER Example	
	3.2.2.2 EMR_SETICMMODE Example	
	3.2.2.3 EMR_SELECTOBJECT Example	
	3.2.2.4 EMR_SELECTOBJECT Example	
	3.2.2.5 EMR_SELECTOBJECT Example	
	3.2.2.6 EMR_MOVETOEX Example	
	3.2.2.7 EMR_SETBRUSHORGEX Example	
	3.2.2.8 EMR_SETICMMODE Example	
	3.2.2.9 EMR_SETCOLORSPACE Example	
	3.2.2.10 EMR_SETTEXTALIGN Example	
	3.2.2.11 EMR_SELECTOBJECT Example	. 48

3.2.2.12 EMR_SETTEXTALIGN Example	48
3.2.2.13 EMR_SETBKMODE Example	
3.2.2.14 EMR_SETVIEWPORTORGEX Example	49
3.2.2.15 EMR_SETBKMODE Example	50
3.2.2.16 EMR_EXTCREATEFONTINDIRECTW Example	50
3.2.2.17 EMR_SELECTOBJECT Example	
3.2.2.18 EMR_SETTEXTCOLOR Example	54
3.2.2.19 EMR_FORCEUFIMAPPING Example	54
3.2.2.20 EMR_COMMENT_EMFSPOOL Example	55
3.2.2.20.1 EMRI_ENGINE_FONT Example	55
3.2.2.21 EMR_EXTTEXTOUTW Example	56
3.2.2.22 EMR_EXTTEXTOUTW Example	58
3.2.2.23 EMR_SETBKMODE Example	60
3.2.2.24 EMR_EXTTEXTOUTW Example	61
3.2.2.25 EMR_EXTTEXTOUTW Example	62
3.2.2.26 EMR_SETBKMODE Example	64
3.2.2.27 EMR_EXTTEXTOUTW Example	65
3.2.2.28 EMR_EXTTEXTOUTW Example	67
3.2.2.29 EMR_EXTTEXTOUTW Example	69
3.2.2.30 EMR_EXTTEXTOUTW Example	71
3.2.2.31 EMR_SETBKMODE Example	73
3.2.2.32 EMR_EXTTEXTOUTW Example	
3.2.2.33 EMR_SELECTOBJECT Example	76
3.2.2.34 EMR_SETICMMODE Example	76
3.2.2.35 EMR_EOF Example	76
3.2.3 EMRI_ENGINE_FONT_EXT Example	77
3.2.4 EMRI_DEVMODE Example	78
3.2.5 EMRI_BW_METAFILE_EXT Example	82
3.2.6 EMRI_METAFILE_DATA Example	
3.2.6.1 EMR_HEADER Example	83
3.2.6.2 EMR_SETICMMODE Example	86
3.2.6.3 EMR_SELECTOBJECT Example	87
3.2.6.4 EMR_SELECTOBJECT Example	87
3.2.6.5 EMR_SELECTOBJECT Example	88
3.2.6.6 EMR_MOVETOEX Example	88
3.2.6.7 EMR_SETBRUSHORGEX Example	89
3.2.6.8 EMR_SETICMMODE Example	89
3.2.6.9 EMR_SETCOLORSPACE Example	89
3.2.6.10 EMR_SETTEXTALIGN Example	90
3.2.6.11 EMR_SELECTOBJECT Example	90
3.2.6.12 EMR_SETTEXTALIGN Example	91
3.2.6.13 EMR_SETBKMODE Example	91
3.2.6.14 EMR_SETVIEWPORTORGEX Example	92
3.2.6.15 EMR_SETBKMODE Example	
3.2.6.16 EMR_EXTCREATEFONTINDIRECTW Example	
3.2.6.17 EMR_SELECTOBJECT Example	
3.2.6.18 EMR_FORCEUFIMAPPING Example	
3.2.6.19 EMR_EXTTEXTOUTW Example	
3.2.6.20 EMR_EXTTEXTOUTW Example	
3.2.6.21 EMR_SETBKMODE Example	100
3.2.6.22 EMR_EXTTEXTOUTW Example	
3.2.6.23 EMR_EXTTEXTOUTW Example	
3.2.6.24 EMR_EXTTEXTOUTW Example	L04

	3.2.6.25	EMR_EXTTEXTOUTW Example	106
		EMR_EXTTEXTOUTW Example	
		EMR_EXTTEXTOUTW Example	
		EMR_SETBKMODE Example	
		EMR_EXTTEXTOUTW Example	
		EMR_SELECTOBJECT Example	
	3.2.6.31	EMR_SETICMMODE Example	115
		EMR_EOF Example	
		RI_DEVMODE Example	
	3.2.8 EMR	RI_BW_METAFILE_EXT Example	120
4	Security Co	onsiderations	122
5	Appendix A	A: Product Behavior	123
	5.1 Version-	-Specific Support	124
6	Change Tra	acking	127
7	Index		128

1 Introduction

This document is a specification of the Enhanced Metafile Spool Format (EMFSPOOL) structure. The **EMFSPOOL** structure specifies a **metafile** format that can store a **print job** in portable form. The stored print job contains information for printing a document outside the control of the original application, either on the same computer or on another computer.

An EMFSPOOL metafile is a series of variable-length records, called EMFSPOOL records, that contain the page content, font definitions, and device settings. The metafile begins with a header record, which includes the metafile version, its size, the name of the document, and identification of an output device. An EMFSPOOL metafile is "played back" when its records are parsed and processed and the print job is sent to its destination.

Sections 1.7 and 2 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [MS-GLOS]:

American National Standards Institute (ANSI) character set **ASCII** attribute big-endian device enhanced metafile format (EMF) enhanced metafile spool format (EMFSPOOL) **Graphics Device Interface (GDI)** Image Color Management (ICM) little-endian page description language (PDL) **PostScript** print job print server printer driver spool file Unicode universal serial bus (USB) UTF-16LE (Unicode Transformation Format, 16-bits, little-endian) Windows metafile format (WMF)

The following terms are specific to this document:

bitmap: A collection of structures that contain a device-independent representation of a graphical image, a logical palette, dimensions, and other information.

color matching: The conversion of a color, sent from its original color space, to its visually closest color in the destination color space. See also: **Image Color Management**.

delta font: Partial **TrueType** and **OpenType** font that contains new **glyphs** to be merged with data from a previous **subset font** definition.

design vector: A set of specific values for the font axes of a multiple master font.

- dithering: A form of digital halftoning.
- **embedded font:** A font that is attached to a document so that the font may be used wherever the document is used, regardless of whether the font is installed on the system.
- encapsulated PostScript (EPS): A file of PostScript-language raw data that describes the appearance of a single page. EPS data can describe text, graphics, and images, but the primary purpose of an EPS file is to be encapsulated within another PostScript-language page definition.
- **font association:** The automatic pairing of a font that contains ideographs with a font that does not contain ideographs. Font association is used to maintain font **attributes** across changes in locale. For example, it allows the user to enter ideographic characters regardless of which font is selected.
- **font axis:** A property of font design that can assume a linear range of values. In general, a font has multiple axes. For example, a font may define an axis for **weight**, along which range the possible values for that property.
- **font mapper:** An operating system component that maps specified font **attributes** to available, installed fonts on the system.
- **glyph:** A graphical representation of a character, a part of a character, or a sequence of characters, in a font used for graphical output.
- **grayscale:** A continuum of shades of gray used to represent an image. Continuous-tone images, such as black-and-white photographs, use an almost unlimited number of shades of gray. Conventional computer hardware and software, however, can only represent a limited number of gray shades, typically 16 or 256. **Grayscaling** is the process of converting a continuoustone image to an image that a computer can manipulate.
 - Note that **grayscaling** is different from **dithering**. **Dithering** simulates shades of gray by altering the density and pattern of black and white dots. In **grayscaling**, each individual dot can have a different shade of gray.
- **halftoning:** The process of converting **grayscale**, or continuous-tone graphics or images, to a representation with a discrete number of gray (or tone) levels.
- inclusive-inclusive: When referring to the bounds of a rectangle that consist of two coordinates—one coordinate for one corner and the other coordinate for the opposite corner—inclusive-inclusive means that the coordinates are part of the rectangle. If not inclusive-inclusive, the coordinates are not part of the rectangle and instead are one logical unit outside the bounds of the rectangle along both coordinate axes.
- **metafile:** A sequence of record structures that store an image in an application-independent format. Metafile records contain drawing commands, object definitions, and configuration settings. When a metafile is processed, the stored image can be rendered on a display, output to a printer or plotter, stored in memory, or saved to a file or stream.
- **multiple master:** A font technology that is a variation of Adobe's **PostScript Type 1 font** format. Multiple master fonts support the creation of an unlimited number of custom variations, called instances, as well as the emulation of typefaces. Multiple master fonts are scalable, so changing their size does not affect the quality of their output.
- **OpenGL:** A software API for graphics hardware, which supports the rendering of multidimensional graphical objects. The Microsoft implementation of **OpenGL** for the Windows operating system is industry-standard graphics software with which implementers can create

- high-quality still and animated three-dimensional color images. See <a>[OPENGL] for further information.
- **OpenType:** A **Unicode**-based font technology developed by Microsoft and Adobe. It is an extension to **TrueType** and **Type 1 font** technologies; **OpenType** allows both **PostScript glyph** definitions and **TrueType glyph** definitions to reside in a common container format.
- **port:** A logical name representing a connection to a **device**. A **port** can represent a network address (for example, a TCP/IP address) or a local connection (for example, a **USB port**).
- region: A graphics object that is nonrectilinear in shape and is defined by an array of scanlines.
- **stock object:** A predefined graphics object. Stock objects are standard, commonly used objects, such as a black brush and pen. The set of predefined stock objects is specified in the StockObject enumeration in [MS-EMF] section 2.1.31.
- subset font: A subset of TrueType and OpenType fonts, which can be merged to form more complete fonts. Subset fonts are embedded in metafiles in order to save space. Information is present only for the characters that are actually used in a document.
- **TrueType:** A scalable font technology that renders fonts for both the printer and the screen. Originally developed by Apple, it was enhanced jointly by Apple and Microsoft. Each **TrueType** font contains its own algorithms for converting printer outlines into screen **bitmaps**, which means that both the outline and **bitmap** information is rasterized from the same font data. The lower-level language embedded within the **TrueType** font allows great flexibility in its design. Both **TrueType** and **Type 1 font** technologies are part of the **OpenType** format.
- **Type 1 font:** A public, standard type format originally developed by Adobe for use with **PostScript** printers. **Type 1 fonts** contain two components—the outline font, used for printing; and the **bitmap** font set, used for screen display.
- **typeface:** The terms **typeface** and font are used interchangeably. However, a **typeface** is the primary design of a set of printed characters such as Courier, Helvetica, and Times Roman. A font is the particular implementation and variation of the **typeface** such as roman, bold, or italic. The distinguishing characteristic of a **typeface** is often the presence or absence of serifs.
- **weight:** A property or **font axis** of a font that specifies the degree of emphasis or boldness of the characters.
- MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

A reference marked "(Archived)" means that the reference document was either retired and is no longer being maintained or was replaced with a new document that provides current implementation details. We archive our documents online [Windows Protocol].

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[ISO/IEC-8859-1] International Organization for Standardization, "Information Technology -- 8-Bit Single-Byte Coded Graphic Character Sets -- Part 1: Latin Alphabet No. 1", ISO/IEC 8859-1, 1998, http://www.iso.org/iso/home/store/catalogue_tc/catalogue_detail.htm?csnumber=28245

Note There is a charge to download the specification.

[MS-DTYP] Microsoft Corporation, "Windows Data Types".

[MS-EMF] Microsoft Corporation, "Enhanced Metafile Format".

[MS-RPRN] Microsoft Corporation, "Print System Remote Protocol".

[MS-WMF] Microsoft Corporation, "Windows Metafile Format".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, http://www.rfc-editor.org/rfc/rfc2119.txt

[UNICODE] The Unicode Consortium, "Unicode Home Page", 2006, http://www.unicode.org/

1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "Windows Protocols Master Glossary".

[MS-PAR] Microsoft Corporation, "Print System Asynchronous Remote Protocol".

[OPENGL] Segal, M. and Akeley, K., "The OpenGL Graphics System: A Specification, Version 2.1", December 2006, http://www.opengl.org/registry/doc/qlspec21.20061201.pdf

1.3 Overview

1.3.1 Metafile Structure

The enhanced metafile spool format (EMFSPOOL) is a metafile structure that defines a graphical image that can be recreated outside the control of the application that created it, either on the same computer or on a network. Metafile records specify general information about the image and the **device** on which it was created, and the graphics functions and objects that are needed to draw the picture.<1>

EMFSPOOL records contain graphics commands, which specify drawing operations, graphics objects, and properties that define how to render the document, including:

- The overall structure of the document.
- The format and content of individual pages.
- Print device settings, such as paper size.
- Embedded fonts.
- Image bitmaps.

10 / 129

Injected PostScript commands.

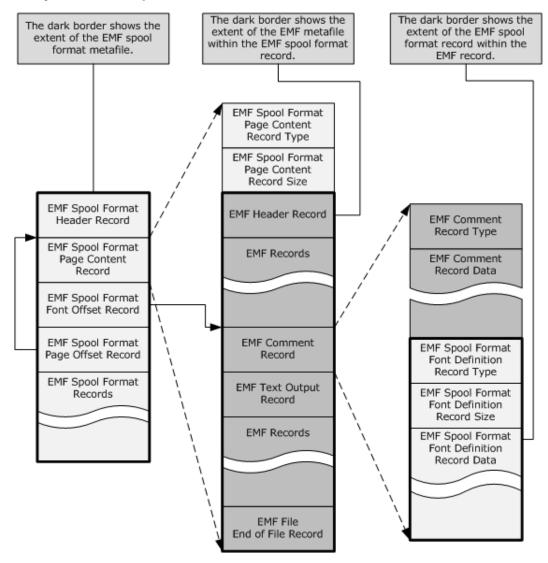


Figure 1: High-level structure of an EMF spool file

This figure shows the following about EMFSPOOL files:

- A header record is always present, specified in section 2.2.2.
- A page content record actually contains an entire EMF metafile, as specified in [MS-EMF].
- A font definition can be embedded in an EMF <u>EMR COMMENT EMFSPOOL</u> record, which is embedded in an EMF metafile, which is embedded in a page content record. For more information, see <u>[MS-EMF]</u> section 2.3.3.3.
- No end-of-file record is defined.

1.3.2 Byte Ordering

Data in metafile records are stored in little-endian format.

Some computer architectures number bytes in a binary word from left to right, which is referred to as **big-endian**. The byte numbering used for bitfields in this specification is big-endian. Other architectures number the bytes in a binary word from right to left, which is referred to as little-endian. The byte numbering used for enumerations, objects, and records in this specification is little-endian.

Using the big-endian and little-endian methods, the number 0x12345678 would be stored as shown in the following table.

Byte order	Byte 0	Byte 1	Byte 2	Byte 3
big-endian	0x12	0x34	0x56	0x78
little-endian	0x78	0x56	0x34	0x12

1.4 Relationship to Protocols and Other Structures

Enhanced Metafile Spool Format (EMFSPOOL) **spool files** can contain entire EMF metafiles, which are specified in [MS-EMF].<2>

The data format defined in this specification may be used by print jobs sent from a client to a server using the <u>Print System Remote Protocol</u> [MS-RPRN] or <u>Print System Asynchronous Remote Protocol</u> [MS-PAR].

1.5 Applicability Statement

The Enhanced Metafile Spool Format (EMFSPOOL) was defined and intended for use as a device-independent spool file format. It can be used as a portable, system-independent container for documents. The graphics supported in EMF spool format are applicable to document content representation, including printing and plotting. <3>

1.6 Versioning and Localization

This specification covers versioning issues in the following areas:

Structure Versions: There is only one version of the Enhanced Metafile Spool Format (EMFSPOOL) structure.

Localization: The EMF Spool Format structure defines no locale-specific processes or data.

1.7 Vendor-Extensible Fields

The EMF Spool Format (EMFSPOOL), because it can contain EMF metafiles, supports a mechanism for the encapsulation of arbitrary, vendor-defined data. The EMF is as specified in [MS-EMF].

2 Structures

The following topics specify:

- Common enumerations.
- EMF spool format records, as they are marshaled on the wire.

This protocol references commonly used data types as defined in [MS-DTYP].

2.1 EMFSPOOL Enumerations

2.1.1 RecordType Enumeration

The **RecordType** enumeration specifies the types of records allowed in an EMF spool format metafile.

```
typedef enum
  EMRI METAFILE = 0 \times 00000001,
  EMRI ENGINE FONT = 0 \times 000000002,
  EMRI DEVMODE = 0 \times 00000003,
  EMRI TYPE1 FONT = 0 \times 000000004,
  EMRI PRESTARTPAGE = 0 \times 000000005,
  EMRI DESIGNVECTOR = 0 \times 000000006,
  EMRI SUBSET FONT = 0 \times 000000007,
  EMRI DELTA FONT = 0 \times 000000008,
  EMRI FORM METAFILE = 0 \times 00000009,
  EMRI BW METAFILE = 0 \times 00000000A,
  EMRI BW FORM METAFILE = 0 \times 00000000B,
  EMRI METAFILE DATA = 0 \times 00000000C,
  EMRI METAFILE EXT = 0x0000000D,
  EMRI BW METAFILE EXT = 0 \times 00000000E,
  EMRI ENGINE FONT EXT = 0 \times 00000000F,
  EMRI TYPE1 FONT EXT = 0 \times 00000010,
  EMRI DESIGNVECTOR EXT = 0 \times 00000011,
  EMRI SUBSET FONT EXT = 0 \times 00000012,
  EMRI DELTA FONT EXT = 0 \times 00000013,
  EMRI PS JOB DATA = 0 \times 00000014,
  EMRI EMBED FONT EXT = 0 \times 00000015
} RecordType;
```

EMRI_METAFILE: Document content in the form of an EMF metafile, as specified in section 2.2.3.1.

EMRI_ENGINE_FONT: A **TrueType** font definition, as specified in section 2.2.3.3.1.

EMRI_DEVMODE: Device settings, as specified in section 2.2.3.5.

EMRI_TYPE1_FONT: A PostScript **Type 1 font** definition, as specified in section 2.2.3.3.2.

EMRI_PRESTARTPAGE: The start page for **encapsulated PostScript (EPS)**, as specified in section <u>2.2.3.6</u>.

EMRI_DESIGNVECTOR: A font **design vector**, as specified in section 2.2.3.3.3.

- EMRI_SUBSET_FONT: A subset font definition, as specified in section 2.2.3.3.4.
- **EMRI_DELTA_FONT:** A **delta font** definition, as specified in section 2.2.3.3.5.
- **EMRI_FORM_METAFILE:** Document content in the form of an EMF metafile, as specified in section 2.2.3.1.
- **EMRI_BW_METAFILE:** Monochrome document content in the form of an EMF metafile, as specified in section 2.2.3.1.
- **EMRI_BW_FORM_METAFILE:** Monochrome document content in the form of an EMF metafile, as specified in section <u>2.2.3.1</u>.
- **EMRI_METAFILE_DATA:** Document content in the form of an EMF metafile, as specified in section 2.2.3.1.
- **EMRI_METAFILE_EXT:** An offset to document content, as specified in section 2.2.3.2.
- **EMRI_BW_METAFILE_EXT:** An offset to monochrome document content, as specified in section 2.2.3.2.
- **EMRI_ENGINE_FONT_EXT:** An offset to a TrueType font definition, as specified in section 2.2.3.4.
- **EMRI_TYPE1_FONT_EXT:** An offset to a PostScript Type 1 font definition, as specified in section 2.2.3.4.
- **EMRI_DESIGNVECTOR_EXT:** An offset to a font design vector, as specified in section 2.2.3.4.
- **EMRI_SUBSET_FONT_EXT:** An offset to a subset font definition, as specified in section 2.2.3.4.
- **EMRI_DELTA_FONT_EXT:** An offset to a delta font definition, as specified in section 2.2.3.4.
- **EMRI_PS_JOB_DATA:** Document-level PostScript data, as specified in section 2.2.3.7.
- **EMRI_EMBED_FONT_EXT:** An offset to embedded font identifiers, as specified in section 2.2.3.4.

2.1.2 SpecVersion Enumeration

The **SpecVersion** enumeration specifies Windows system versions, for comparison with **printer driver** versions.

```
typedef enum
{
    _WIN32_WINNT_NT4 = 0x0400,
    _WIN32_WINNT_WIN2K = 0x0500,
    _WIN32_WINNT_WINXP = 0x0501,
    _WIN32_WINNT_WS03 = 0x0502,
    _WIN32_WINNT_VISTA = 0x0600,
    _WIN32_WINNT_WIN7 = 0x0601,
    _WIN32_WINNT_WIN8 = 0x0602
} SpecVersion;
```

_WIN32_WINNT_NT4: Windows NT 4.0

```
_WIN32_WINNT_WIN2K: Windows 2000
_WIN32_WINNT_WINXP: Windows XP
_WIN32_WINNT_WS03: Windows Server 2003
_WIN32_WINNT_VISTA: Windows Vista and Windows Server 2008
_WIN32_WINNT_WIN7: Windows 7 and Windows Server 2008 R2
_WIN32_WINNT_WIN8: Windows 8 and Windows Server 2012
```

2.2 EMFSPOOL Records

This section specifies Records, including syntax and record types. This information is organized as follows.

Name	Section	Description
Record syntax	<u>2.2.1</u>	The structure and syntax of EMFSPOOL records.
Header record	2.2.2	The EMFSPOOL header record, which specifies global properties, including the size of the spool file, the name of the document being spooled, and the name of the output device.
Data records	2.2.3	EMFSPOOL data records, which specify page content, fonts, and output device information.

All string data in EMFSPOOL records MUST be encoded in **Unicode UTF-16LE** format, as specified in **[UNICODE]**, unless stated otherwise.

2.2.1 Record Syntax

The Record Syntax is specified as follows.


These record types perform the following roles:

- An **<EMRI_PS_JOB_DATA_record>** stores injected PostScript code at the document level. If an **<EMRI_PS_JOB_DATA_record>** is present in the metafile, it MUST be the first EMF spool format record after the **<Header_record>**.
- <page_content_records> store drawing commands for rendering and formatting individual pages of output. Within a <page_content_record>, a complete EMF metafile may be defined, as specified in [MS-EMF].
- <page_offset_records> point to <page_content_records>, which MUST precede the
 <page_offset_records> in the metafile. Two types of <page_offset_records> are provided, for
 color and monochrome pages.
- <font_definition_records> store font information within an EMF EMR COMMENT EMFSPOOL record that is identified with the signature "TONF", as specified in [MS-EMF] section 2.3.3.3. The EMR_COMMENT_EMFSPOOL record is part of an EMF metafile that is embedded in a <page_content_record>.
- <font_offset_records> point to the embedded font definitions within preceding
 <page_content_records>.
- An <EMRI_DEVMODE_record> stores device settings and information about device capabilities.
- An <EMRI_PRESTARTPAGE_record> stores encapsulated PostScript (EPS).

All record types are specified in section 2.2.

2.2.2 Header Record

The Header record is always the first record of an EMFSPOOL metafile.




16 / 129


[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Release: Thursday, February 13, 2014

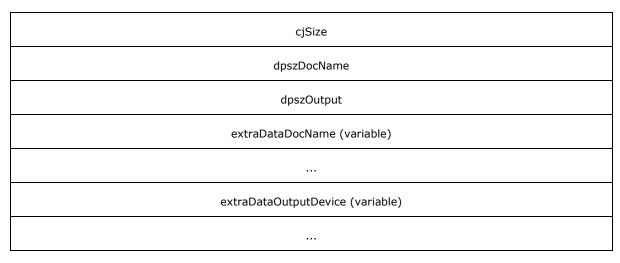

- **dwVersion (4 bytes):** A 32-bit unsigned integer that specifies the version of EMFSPOOL. This value MUST be 0x00010000.
- **cjSize (4 bytes):** A 32-bit unsigned integer that specifies the size, in bytes, of the header record, including extra data attached. The size of each record in EMFSPOOL MUST be rounded up to a multiple of 32 bits.
- dpszDocName (4 bytes): A 32-bit unsigned integer that specifies the offset of the document name from the start of the record (dwVersion field). The document name is stored as a NULL-terminated Unicode string, as specified in [UNICODE], in the extraDataDocName field. If this value is 0x00000000, a document name string SHOULD NOT be present in the header record.
- **dpszOutput (4 bytes):** A 32-bit unsigned integer that specifies the offset of the output device name from the start of the record (**dwVersion** field). The output device name is stored as a NULL-terminated Unicode string in the **extraDataOutputDevice** field. If this value is 0x00000000, an output device name string SHOULD NOT be present in the header record.
- **extraDataDocName (variable):** Variable-size storage area for the document name string. This structure MUST be 32-bit aligned.

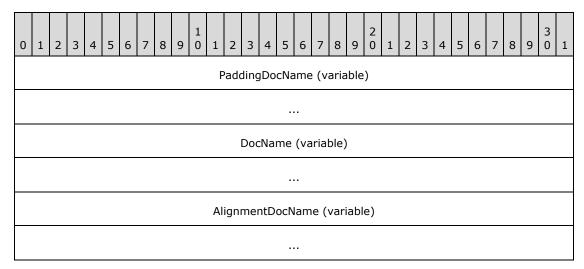


PaddingDocName (variable): An optional array of <u>WORD</u> structures as padding, because the **DocName** field is not required to immediately follow the **dpszOutput** field. The values of these structures are indeterminate and MUST be ignored.

DocName (variable): A null-terminated string that specifies the name of the output file, or the name of the printer port.

AlignmentDocName (variable): An optional array of **WORD** structures to ensure 32-bit alignment. The values of these structures are indeterminate and MUST be ignored.

extraDataOutputDevice (variable): Variable-size storage area for the output device name string. This structure MUST be 32-bit aligned.

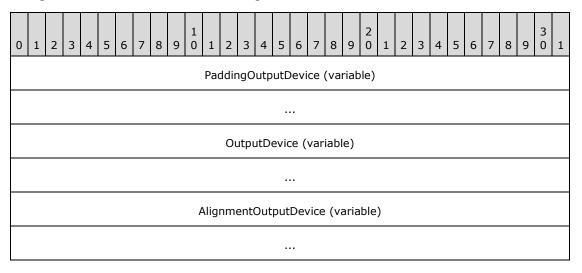

PaddingOutputDevice (variable): An optional array of **WORD** structures as padding, because the **OutputDevice** field is not required to immediately follow the **extraDataDocName** field. The values of these structures are indeterminate and MUST be ignored.

OutputDevice (variable): A null-terminated string that specifies the name of the output file, or the name of the printer port.

AlignmentOutputDevice (variable): An optional array of **WORD** structures to ensure 32-bit alignment. The values of these structures are indeterminate and MUST be ignored.


2.2.3 Data Records

This section specifies the Data records, which follow the EMF spool format <u>Header Record (section 2.2.2)</u>. These records have been grouped into the following categories, as described in <u>Record Syntax (section 2.2.1)</u>.

Name	Section	Description
Page Content records	2.2.3.1	Page content records specify formatting and graphical content, in the form of embedded EMF metafiles.
Page Offset records	2.2.3.2	Page offset records specify the location of page content records in the EMF spool format metafile.

Name	Section	Description
Font Definition records	2.2.3.3	Font definition records specify partial fonts, complete fonts, and font properties.
Font Offset records	2.2.3.4	Font offset records specify offsets to embedded font definition records.
EMRI_DEVMODE record	2.2.3.5	EMRI_DEVMODE records store device settings and properties.
EMRI_PRESTARTPAGE record	2.2.3.6	EMRI_PRESTARTPAGE records contain information used in encapsulated PostScript (EPS) printing.
EMRI_PS_JOB_DATA record	2.2.3.7	EMRI_PS_JOB_DATA records store injected PostScript data at the job level.


All EMF spool format data records have the generic format specified as follows.

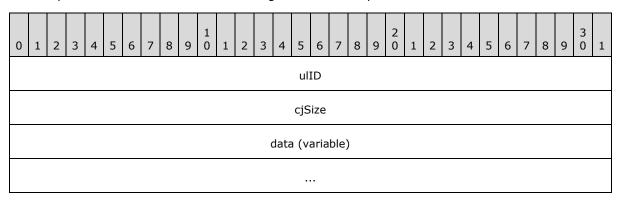

- **ulID (4 bytes):** A 32-bit unsigned identifier that specifies the type of record from the **RecordType Enumeration (section 2.1.1)**.
- **cjSize (4 bytes):** A 32-bit unsigned integer that specifies the size, in bytes, of the data attached to the record. The size of each record in an EMF spool format metafile MUST be rounded up to a multiple of 4 bytes.
- **data (variable):** A variable-size array that stores the data information of the record, according to its record type. The data array MUST be 32-bit aligned.

2.2.3.1 Page Content Records

The Page Content records include five record types, and they all have the structure shown as follows. Page content records specify formatting and graphical content, in the form of embedded EMF metafiles, specified in [MS-EMF].

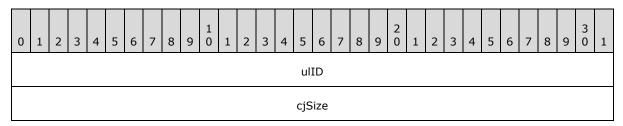

EmfMetafile (variable)	

ulID (4 bytes): A 32-bit unsigned integer that identifies the type of record. This value MUST be in the **RecordType** (section 2.1.1) enumeration.


Value	Meaning	
EMRI_METAFILE 0x00000001	This record defines the same function as the EMRI_METAFILE_DATA record. $\leq 4 \geq$	
EMRI_FORM_METAFILE 0x00000009	This record defines the same function as the EMRI_METAFILE_DATA record. <a href="mailto:</td></tr><tr><td>EMRI_BW_METAFILE
0x0000000A</td><td>This record defines the same function as the EMRI_METAFILE_DATA record, except that the content is monochrome.<a href=" mailto:second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-second-<="" td="">	
EMRI_BW_FORM_METAFILE 0x0000000B	This record defines the same function as the EMRI_METAFILE_DATA record, except that the content is monochrome. <7>	
EMRI_METAFILE_DATA 0x0000000C	The record contains an EMF metafile, which specifies the content for a page of output. It can be followed by font offset records (section 2.2.3.4).	

cjSize (4 bytes): A 32-bit unsigned integer that specifies the size, in bytes, of the metafile data attached to the record. The size of each record in EMF spool format MUST be rounded up to a multiple of 4 bytes.

EmfMetafile (variable): A complete EMF metafile.

2.2.3.2 Page Offset Records

The Page Offset records include two record types, and they both have the structure shown as follows. Page offset records specify the location of <u>page content</u> records in the EMF spool format metafile. Page content records are specified in section <u>2.2.3.1</u>.

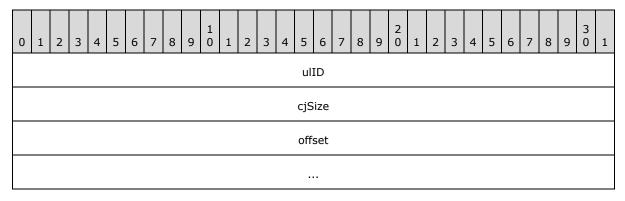

ulID (4 bytes): A 32-bit unsigned integer that identifies the type of record, from the **RecordType** (section 2.1.1) enumeration.

Value	Meaning
EMRI_METAFILE_EXT 0x0000000D	Offset to a page content record.
EMRI_BW_METAFILE_EXT 0x0000000E	Offset to a page content record that contains only monochrome data.

cjSize (4 bytes): A 32-bit unsigned integer that specifies the size, in bytes, of the data attached to the record. The size of each record in EMF spool format MUST be rounded up to a multiple of 4 bytes.

offset (8 bytes): A 64-bit unsigned integer that specifies the offset, in bytes, from the start of the page offset record to the start of a page content record. That page content record MUST be located ahead of the corresponding page offset record, which means that the offset is counted backward in the metafile.

2.2.3.3 Font Definition Records

The Font Definition records include five record types, listed in the following table. Font definition records specify partial fonts, complete fonts, and font properties.

Name	Section	Description
EMRI_ENGINE_FONT	2.2.3.3.1	Defines a font in TrueType format.
EMRI_TYPE1_FONT	2.2.3.3.2	Defines a font in PostScript Type 1 font format.
EMRI_DESIGNVECTOR	2.2.3.3.3	Contains a font's design vector, which characterizes a font's appearance in 16 properties.
EMRI_SUBSET_FONT	2.2.3.3.4	Contains a partial font in TrueType format, with enough glyph outlines for pages up to the current page.
EMRI_DELTA_FONT	2.2.3.3.5	Contains new glyphs to be merged with data from a preceding EMRI_SUBSET_FONT record.


The **EMRI_ENGINE_FONT** and **EMRI_TYPE1_FONT** records have similar structures, and the **EMRI_SUBSET_FONT** and **EMRI_DELTA_FONT** records have similar structures.

In an EMF spool format metafile, a font definition record MUST be embedded in an EMF EMFSPOOL record that contains the "TONF" signature in ASCII (0x544F4E46), as specified in [MS-EMF] section 2.3.3.3.

The EMR_COMMENT_EMFSPOOL record itself is part of a complete EMF metafile that is embedded in an EMF spool format <u>page content (section 2.2.3.1)</u> record. This multiple embedding scheme is shown in the structure overview figure in section $\underline{1.3.1}$.

2.2.3.3.1 EMRI_ENGINE_FONT Record


The EMRI_ENGINE_FONT record contains embedded TrueType fonts. This record and the EMRI_TYPE1_FONT (section 2.2.3.3.2) record have similar structures.

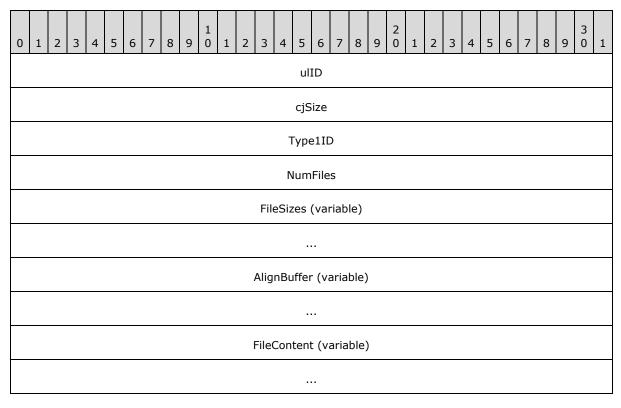

- uIID (4 bytes): A 32-bit unsigned integer that identifies the type of record. The value MUST be 0x00000002, which specifies the EMRI_ENGINE_FONT record type from the RecordType Enumeration (section 2.1.1).
- **cjSize (4 bytes):** A 32-bit unsigned integer that specifies the size, in bytes, of the data attached to the record. The size of each record in an EMF spool format file MUST be rounded up to a multiple of 4 bytes.
- **Type1ID (4 bytes):** A 32-bit unsigned integer. The value MUST be 0x00000000, to indicate a TrueType.
- **NumFiles (4 bytes):** A 32-bit unsigned integer that specifies the number of files attached to this record.
- **FileSizes (variable):** Variable number of 32-bit unsigned integers that define the sizes of the files attached to this record.
- **AlignBuffer (variable):** Up to 7 bytes, to make the data that follows 64-bit aligned.
- **FileContent (variable):** Variable-size, 32-bit aligned data that represents the definitions of glyphs in the font. The content is in TrueType format.

2.2.3.3.2 EMRI_TYPE1_FONT Record

The EMRI_TYPE1_FONT record contains embedded PostScript Type 1 fonts. This record and the <u>EMRI_ENGINE_FONT (section 2.2.3.3.1)</u> record have similar structures.

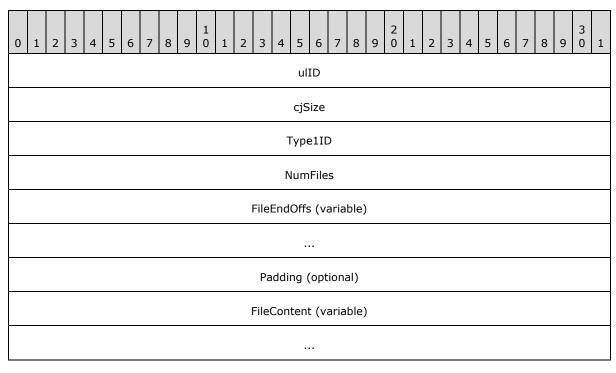

- uIID (4 bytes): A 32-bit unsigned integer that identifies the type of record. The value MUST be 0x00000004, which specifies the EMRI_TYPE1_FONT record type from the RecordType (section 2.1.1) enumeration.
- **cjSize (4 bytes):** A 32-bit unsigned integer that specifies the size, in bytes, of this record, not including the **uIID** and **cjSize** fields. The size of each record in EMF spool format MUST be rounded up to a multiple of 4 bytes.
- **Type1ID (4 bytes):** A 32-bit unsigned integer that SHOULD be 0x00000000 and MUST be ignored. <8>
- **NumFiles (4 bytes):** A 32-bit unsigned integer that specifies the number of files included in this record. This value MUST NOT be zero.
- **FileEndOffs (variable):** An array of 32-bit unsigned integers that specify the locations of the font files in this record. For each font file, this value is the byte offset of the end of that file, starting from the beginning of the first file. Thus, the first **FileEndOffs** value is the size, in bytes, of the first file; the second value is the sum of the sizes of the first and second files, and so on.

The **FileEndOffs** values are limited as follows:


```
FileEndOffs[0] < FileEndOffs[1] < ... < FileEndOffs[NumFiles - 1]
<= (cjSize - (8 + (nFiles * 4))</pre>
```

Each offset value MUST be a multiple of 4 bytes, and each file MUST have a size greater than zero.

- **Padding (4 bytes):** An optional 32-bit field, which is padding used to align the **FileContent** field on an 8-byte boundary. The contents of this field are indeterminate and MUST be ignored.
- **FileContent (variable):** Variable-size, 32-bit aligned data, which represents the definitions of glyphs in the font. The content is in PostScript **Type 1** font format.

2.2.3.3.3 EMRI_DESIGNVECTOR Record

The EMRI_DESIGNVECTOR record specifies a design vector for a font, which characterizes the font's appearance in up to 16 dimensions. $\leq 9 \geq 10^{-5}$

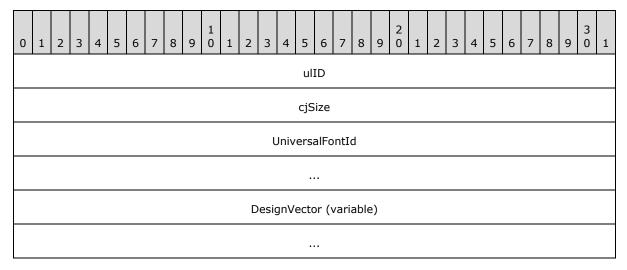

- ulID (4 bytes): A 32-bit unsigned integer that identifies the type of record. The value MUST be 0x00000006, which specifies the EMRI_DESIGNVECTOR record type from the RecordType Enumeration (section 2.1.1).
- **cjSize (4 bytes):** A 32-bit unsigned integer that specifies the size, in bytes, of the data attached to the record. The size of each record in EMF spool format MUST be rounded up to a multiple of 4 bytes.
- **UniversalFontId (8 bytes):** An EMF <u>UniversalFontId</u> object (<u>[MS-EMF]</u> section 2.2.27) that identifies the font.
- **DesignVector (variable):** An EMF <u>DesignVector</u> object (<u>[MS-EMF]</u> section 2.2.3) that specifies the properties of the font.

The first **DWORD** MUST contain the design vector signature, which is the value given by the equation.


```
0x08000000 + 'd' + ('v' << 8)
```

Using 8-bit ASCII for the character code points, this value is 0x08007664.

2.2.3.3.4 EMRI_SUBSET_FONT Record

The EMRI_SUBSET_FONT record contains a subset of TrueType and **OpenType** fonts, which can be merged to form more complete fonts. An EMRI_SUBSET_FONT record defines enough glyph outlines for pages up to the current one.

This record and the **EMRI DELTA FONT** (section 2.2.3.3.5) record have similar structures.

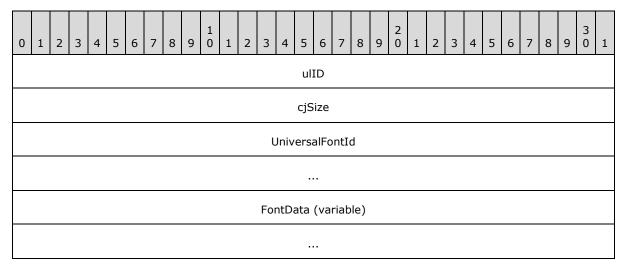

ulID (4 bytes): A 32-bit unsigned integer that identifies the type of record. The value MUST be 0x00000007, which specifies the EMRI_SUBSET_FONT record type from the RecordType Enumeration (section 2.1.1).

cjSize (4 bytes): A 32-bit unsigned integer that specifies the size, in bytes, of the data attached to the record. The size of each record in EMF spool format MUST be rounded up to a multiple of 4 bytes.


UniversalFontId (8 bytes): An EMF <u>UniversalFontId</u> object (<u>[MS-EMF]</u> section 2.2.27) that identifies the font.


FontData (variable): The 32-bit-aligned data that contains the definitions of glyphs in the font.

2.2.3.3.5 EMRI_DELTA_FONT Record

The EMRI_DELTA_FONT record contains partial TrueType and OpenType font data, which can be merged to form more complete fonts. An EMRI_DELTA_FONT record defines new glyphs to be merged with data from a preceding **EMRI_SUBSET_FONT** record.

This record and the EMRI SUBSET FONT (section 2.2.3.3.4) have similar structures.



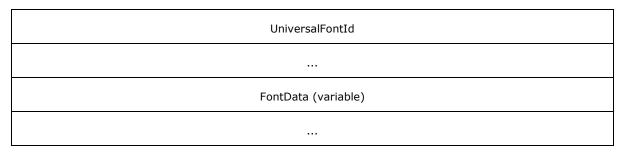

uIID (4 bytes): A 32-bit unsigned integer that identifies the type of record. The value MUST be 0x00000008, which specifies the EMRI_DELTA_FONT record type from the RecordType Enumeration (section 2.1.1).


cjSize (4 bytes): A 32-bit unsigned integer that specifies the size, in bytes, of the data attached to the record. The size of each record in EMF spool format MUST be rounded up to a multiple of 4 bytes.

UniversalFontId (8 bytes): An EMF <u>UniversalFontId</u> object (<u>[MS-EMF]</u> section 2.2.27) that identifies the font.

FontData (variable): The 32-bit-aligned data that contains the definitions of glyphs in the font.

2.2.3.4 Font Offset Records

The Font Offset records include six record types, and they all have the structure shown as follows. Font offset records specify offsets to embedded font definition records in an EMF spool format metafile.

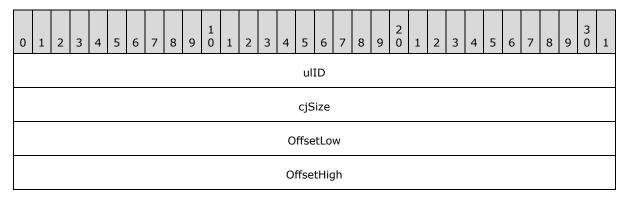

uIID (4 bytes): A 32-bit unsigned integer that identifies the type of record, from the **RecordType** (section 2.1.1) enumeration.

Value	Meaning
EMRI_ENGINE_FONT_EXT 0x0000000F	This type of record specifies an offset to a TrueType font within a page content record.
EMRI_TYPE1_FONT_EXT 0x00000010	This type of record specifies an offset to a PostScript Type 1 font within a page content record.
EMRI_DESIGNVECTOR_EXT 0x00000011	This type of record specifies an offset to a TrueType font design vector within a page content record.

Value	Meaning										
EMRI_SUBSET_FONT_EXT 0x00000012	This type of record specifies an offset to embedded subset fonts within a page content record.										
EMRI_DELTA_FONT_EXT 0x00000013	This type of record specifies an offset to embedded delta fonts within a page content record.										
EMRI_EMBED_FONT_EXT 0x00000015	This type of record specifies an offset to embedded font identifiers within a page content record.										

cjSize (4 bytes): A 32-bit unsigned integer that specifies the size, in bytes, of the data attached to the record. The size of each record in EMF spool format MUST be aligned to a multiple of 4 bytes.


OffsetLow (4 bytes): The lower 32 bits of a 64-bit unsigned integer that contains the font offset.

OffsetHigh (4 bytes): The upper 32 bits of a 64-bit unsigned integer that contains the font offset.

The offset is the number of bytes from the start of the offset record to the start of a <u>font definition</u> (<u>section 2.2.3.3</u>) record, which is embedded within a <u>page content</u> record. Font definition records are embedded in <u>EMR_COMMENT_EMFSPOOL</u> records, as specified in <u>[MS-EMF]</u> section 2.3.3.3.

2.2.3.5 EMRI_DEVMODE Record

The EMRI_DEVMODE record specifies settings and capabilities for an output device.

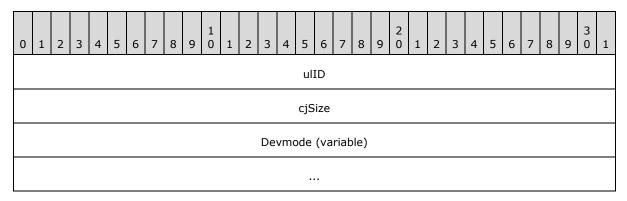


ulID (4 bytes): A 32-bit unsigned integer that identifies the type of record. The value MUST be 0x00000003, from the **RecordType** (section 2.1.1) enumeration.

cjSize (4 bytes): A 32-bit unsigned integer that specifies the size, in bytes, of the data attached to the record. Each record size in EMF spool format MUST be aligned to a multiple of 32 bits.

Devmode (variable): A <u>DEVMODE</u> structure ([MS-RPRN] section 2.2.2.1), containing configuration and capabilities information about a particular output device.

2.2.3.6 EMRI_PRESTARTPAGE Record


The EMRI_PRESTARTPAGE record specifies the start of encapsulated PostScript (EPS) data.

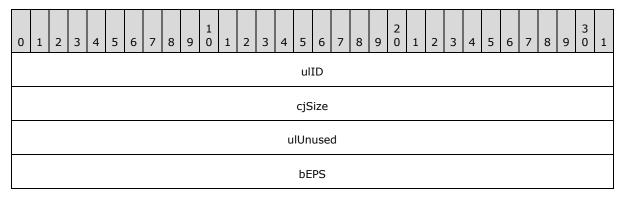

- **ulID (4 bytes):** A 32-bit unsigned integer that identifies the type of record. The value MUST be 0x00000005, from the **RecordType** (section 2.1.1) enumeration.
- **cjSize (4 bytes):** A 32-bit unsigned integer that specifies the size, in bytes, of the data attached to the record. Each record in EMF spool format MUST be aligned to a multiple of 4 bytes.
- ulUnused (4 bytes): A 32-bit unsigned integer that is not used. Its value MUST be 0xFFFFFFF.
- **bEPS (4 bytes):** A 32-bit unsigned integer that specifies whether EPS printing is enabled. EPS printing is enabled if the value is nonzero. When EPS printing is enabled, the printer driver is only used to generate a minimum header, and the rest of the output is generated through PostScript pass-through.

2.2.3.7 EMRI_PS_JOB_DATA Record

The EMRI_PS_JOB_DATA record stores encapsulated PostScript (EPS) data at the document level. If this record is present, it MUST appear immediately after an EMFSPOOL <u>Header Record (section 2.2.2)</u>, as shown in the <u>Record Syntax (section 2.2.1)</u>.

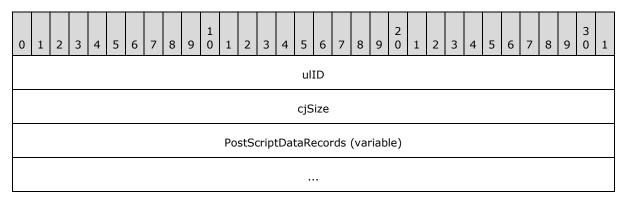

- **uIID (4 bytes):** A 32-bit unsigned integer that identifies the type of record. The value MUST be 0x0000014, from the **RecordType Enumeration (section 2.1.1)**.
- cjSize (4 bytes): A 32-bit unsigned integer that specifies the size, in bytes, of the data attached to the record. Each record in EMFSPOOL format MUST be aligned to a multiple of 4 bytes.

PostScriptDataRecords (variable): Data after the **uIID** and **cjSize** fields comes as multiple PostScript data records until all **cjSize** bytes are accounted for. Each variable-size record has the following structure.

0	1	2	3	4	5	6	7	8	9	1	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
	PostScriptDataRecordSize																														
	nEscape													nIgnore																	
	PostScriptDataSize																														
												Pos	stSo	crip	tDa	ita ((vai	riab	ole)												
												n	Aliç	ınm	nent	t (v	aria	able	e)												

PostScriptDataRecordSize (4 bytes): A 32-bit unsigned integer that specifies the size, in bytes, of this PostScript data record. This value is based upon the value of **PostScriptDataSize** as follows:

Value of (PostScriptDataSize modulo 4)	Value of PostScriptDataRecordSize
0	PostScriptDataSize + 16
1	PostScriptDataSize + 15
2	PostScriptDataSize + 18
3	PostScriptDataSize + 17

nEscape (2 bytes): A 16-bit unsigned integer that specifies the escape code. It SHOULD be one of the following values ([MS-WMF]] section 2.1.1.17); otherwise, the record SHOULD be ignored.

Value	Meaning									
POSTSCRIPT_IDENTIFY 0x1005	Specify either PostScript-centric or GDI -centric mode to the printer driver.									
POSTSCRIPT_INJECTION 0x1006	Insert a block of raw data into a PostScript stream.									

nIgnore (2 bytes): A 16-bit unsigned integer that MUST be zero and ignored upon receipt.

PostScriptDataSize (4 bytes): A 32-bit signed integer that specifies the size, in bytes, of the **PostScriptData** field.

PostScriptData (variable): The PostScript data. The size of this field, in bytes, is **PostScriptDataSize**.

nAlignment (variable): A buffer that is included so that the record is 32-bit aligned. The contents of this field MUST be ignored. The size of this field is based upon the value of **PostScriptDataSize** as follows:

Value of (PostScriptDataSize modulo 4)	Size of nAlignment
0	4 bytes
1	3 bytes
2	6 bytes
3	5 bytes

3 Structure Examples

3.1 Byte Ordering Example

The following code snippet illustrates how the use of the big-endian and little-endian methods can affect the compatibility of applications.

```
#include <unistd.h>
#include <sys/stat.h>
#include <fcntl.h>
int main()
{
    int buf;
    int in;
    int nread;
    in = open("file.in", O_RDONLY);

    nread = read(in, (int *) &buf, sizeof(buf));
    printf("First Integer in file.in = %x\n", buf);
    exit(0);
}
```

In the preceding code, if the first integer word stored in the file.in file on a big-endian computer was the hexadecimal number 0x12345678, the resulting output on that computer would be as follows.

```
% ./test
First Integer in file.in = 12345678
%
```

If the file.in file were read by the same program running on a little-endian computer, the resulting output would be as follows.

```
% ./test
First Integer in file.in = 78563412
%
```

Because of the difference in output, one would need to implement metafile record processing so that it could read integers from a file based on the endian method that the computer uses.

3.2 EMFSPOOL Metafile Example

This section provides an example of an EMFSPOOL metafile, which when processed renders the following images.

31 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Release: Thursday, February 13, 2014

This is page 1. Page 1 is letter. Page 1 orientation is portrait.

Figure 2: EMFSPOOL Metafile Example, Page 1

This is page 2. Page 2 is letter. Page 2 orientation is landscape.

Figure 3: EMFSPOOL Metafile Example, Page 2

The contents of this metafile example are shown as follows in hexadecimal bytes. The far-left column is the byte count; the far-right characters are the interpretation of the bytes in the Latin-1 **ANSI Character Set**, as specified in [ISO/IEC-8859-1]. The sections that follow describe the metafile records that convey this series of bytes.

```
00000000:00 00 01 00 54 00 00 00 10 00 00 46 00 00 00
                                                  ....T......F...
00000010:4d 00 69 00 63 00 72 00 6f 00 73 00 6f 00 66 00 M.i.c.r.o.s.o.f.
00000020:74 00 20 00 57 00 6f 00 72 00 64 00 20 00 2d 00 t. .W.o.r.d. .-.
00000030:20 00 44 00 6f 00 63 00 75 00 6d 00 65 00 6e 00
                                                  .D.o.c.u.m.e.n.
00000040:74 00 31 00 00 00 4e 00 65 00 30 00 32 00 3a 00
                                                 t.1...N.e.0.2.:.
                                                 ....XF.....
00000050:00 00 00 00 0c 00 00 058 46 06 00 01 00 00 00
00000060:84 00 00 00 67 01 00 00 3d 01 00 00 3b 04 00 00
                                                  "...g...=...;...
00000070:4f 02 00 00 00 00 00 00 00 00 00 4c 4f 00 00
                                                  O.....LO..
00000080:14 69 00 00 20 45 4d 46 00 00 01 00 58 46 06 00
                                                  .i.. EMF....XF..
00000090:23 00 00 00 02 00 00 0c 00 00 06 00 00 00 #.....l...
000000a0:00 00 00 00 3f 0b 00 00 e9 0e 00 00 cb 00 00 00
                                                  ....?...é...Ë...
. . . . . . . . . . . . . . . . . . .
000000c0:79 19 03 00 ff 1b 04 00 50 00 72 00 69 00 6e 00 y...ÿ...P.r.i.n.
000000d0:74 00 20 00 74 00 65 00 73 00 74 00 00 00 00
                                                  t. .t.e.s.t....
000000e0:62 00 00 00 0c 00 00 02 00 00 00 25 00 00 00
                                                 b....%...
                                                  .......€%......
000000f0:0c 00 00 00 07 00 00 80 25 00 00 00 0c 00 00 00
00000100:00 00 00 80 25 00 00 00 0c 00 00 00 0e 00 00 80
                                                   ...€%.....€
. . . . . . . . . . . . . . . . . . .
```

```
00000130:62 00 00 00 0c 00 00 00 02 00 00 00 64 00 00 00
                                                        b....d...
00000140:0c 00 00 00 14 00 00 80 16 00 00 00 0c 00 00 00
                                                        ......€.......
00000150:18 00 00 00 25 00 00 00 0c 00 00 00 0e 00 00 80
                                                         .....%..........€
00000160:16 00 00 00 0c 00 00 18 00 00 00 12 00 00 00
                                                         . . . . . . . . . . . . . . . .
00000170:0c 00 00 00 01 00 00 0c 00 00 00 10 00 00
                                                         . . . . . . . . . . . . . . . .
00000180:00 00 00 00 00 00 00 12 00 00 00 0c 00 00
                                                         . . . . . . . . . . . . . . . .
00000190:01 00 00 00 52 00 00 00 70 01 00 00 01 00 00
                                                         ....R...p.....
Äÿÿÿ.....
000001b0:90 01 00 00 00 00 00 07 40 00 12 54 00 69 00
                                                         000001c0:6d 00 65 00 73 00 20 00 4e 00 65 00 77 00 20 00
                                                        m.e.s. .N.e.w. .
000001d0:52 00 6f 00 6d 00 61 00 6e 00 00 00 00 00 00
                                                        R.o.m.a.n....
. . . . . . . . . . . . . . . .
00000200:08 5a 18 00 24 a8 56 07 d0 ee 7d 07 c4 f0 7d 07
                                                         .7. $"V.Đî}.Äð}.
00000210:37 a4 07 30 90 00 b7 00 b8 1a e2 01 00 00 00 00
                                                         7¤.0□.•.¸.â....
                                                         ....,.â.oìî"Ô¥.0
00000220:00 00 00 00 b8 1a e2 01 6f ec ee 94 d4 a5 07 30
00000230:48 f1 7d 07 40 f8 a9 30 84 f8 a9 30 78 a3 07 30 \,
                                                         H\tilde{n} } . @@@@0_{m}@@0x£.0
00000240:28 48 24 00 01 00 00 00 02 00 00 00 50 ee 7d 07
                                                         (H$.....Pî}.
00000250:54 ee 7d 07 ac 1e 24 00 00 90 fd 7f 00 90 fd 7f
                                                        Tî}.¬.$..•ý.•ý
                                                         ..¹n,.¹n.î}...¹n
00000260:00 00 b9 6e b8 00 b9 6e 18 ee 7d 07 00 00 b9 6e
00000270:50 ee 7d 07 14 00 00 00 01 00 00 00 00 00 00 00
                                                         Pî}.....
00000280:00 00 00 00 00 00 00 47 16 90 01 00 00 00
                                                         00000290:00 00 00 00 00 00 00 87 3a 00 20 00 00 00
                                                         ..........................
000002a0:00 00 00 00 00 00 00 ff 01 00 00 00 00 00
                                                         ....ÿ....ÿ
000002b0:54 00 69 00 6d 00 65 00 73 00 20 00 00 00 65 00
                                                        \texttt{T.i.m.e.s.} \ \ldots \texttt{e.}
000002c0:77 00 20 00 52 00 6f 00 6d 00 61 00 6e 00 00 00
                                                        w. .R.o.m.a.n...
. . . . . . . . . . . . . . . . . . .
000002e0:00 00 00 00 00 00 00 f0 ee 7d 07 5a b0 02 30
                                                         .....ðî}.Z°.0
000002f0:f0 ee 7d 07 8c 63 ab 30 08 ef 7d 07 64 76 00 08
                                                        ðî}.Œc«0.ï}.dv..
00000300:00 00 00 00 25 00 00 00 0c 00 00 01 00 00 00
                                                         .....
00000310:18 00 00 00 0c 00 00 00 00 00 02 6d 00 00 00
                                                         ..........m...
00000320:10 00 00 00 df a6 a0 78 01 00 00 00 46 00 00 00
                                                         ....ߦ x....F...
00000330:ec 3e 06 00 e0 3e 06 00 00 00 00 04 4e 4f 54
                                                         i>...a>.....FNOT
00000340:02 00 00 00 d0 3e 06 00 00 00 00 00 01 00 00 00
                                                         ....Ð>......
00000350:c0 3e 06 00 00 00 00 00
                                                         À>....
***** Embedded TrueType Font ****
                                                                T..."...
00064210:
                               54 00 00 00 a8 00 00 00
00064220:67 01 00 00 3d 01 00 00 c4 02 00 00 80 01 00 00
                                                         g...=...Ä...€...
00064230:01 00 00 00 47 a2 e1 40 76 84 e1 40 67 01 00 00
                                                         ....G¢á@v"á@g...
00064240:73 01 00 00 0f 00 00 00 4c 00 00 04 10 00 00
                                                         s....L....
00064250:00 00 00 00 00 00 00 f4 0b 00 00 78 0f 00 00
                                                         ...x...ô...x...
00064260:6c 00 00 00 54 00 68 00 69 00 73 00 20 00 69 00
                                                        l...T.h.i.s. .i.
00064270:73 00 20 00 70 00 61 00 67 00 65 00 20 00 31 00
                                                         s. .p.a.g.e. .1.
00064280:2e 00 00 00 25 00 00 00 1e 00 00 00 11 00 00 00
                                                         . . . . 8 . . . . . . . . . . . . .
00064290:17 00 00 00 0f 00 00 00 11 00 00 00 17 00 00 00
                                                         . . . . . . . . . . . . . . . .
000642a0:0f 00 00 00 1e 00 00 00 1b 00 00 00 1d 00 00
000642b0:1b 00 00 00 0f 00 00 1e 00 00 00 0f 00 00
000642c0:54 00 00 00 54 00 00 00 c5 02 00 00 3d 01 00 00
                                                         T...T...Å...=...
000642d0:df 02 00 00 80 01 00 00 01 00 00 47 a2 e1 40
                                                         ß...€.....G¢á@
000642e0:76 84 e1 40 c5 02 00 00 73 01 00 00 01 00 00
                                                         v"á@Å...s.....
000642f0:4c 00 00 00 04 10 00 00 00 00 00 00 00 00 00 00
                                                         L...........
00064300:f4 0b 00 00 78 0f 00 00 50 00 00 00 20 00 00
                                                         ô...x...P....
00064310:1b 00 00 00 12 00 00 00 0c 00 00 00 01 00 00 00
                                                         . . . . . . . . . . . . . . . .
00064320:54 00 00 00 b4 00 00 00 67 01 00 00 82 01 00 00
                                                        T...'...g...,...
00064330:d9 02 00 00 c5 01 00 00 01 00 00 47 a2 e1 40
                                                         Ù...Å......G¢á@
                                                         v"á@g...,.....
00064340:76 84 e1 40 67 01 00 00 b8 01 00 00 11 00 00 00
00064350:4c 00 00 00 04 10 00 00 00 00 00 00 00 00 00 00
                                                         L.....
```

00064360:f4	0b	00	00	78	0f	00	00	70	00	00	00	50	00	61	00	ôxpP	.a.
00064370:67	00	65	00	20	00	31	00	20	00	69	00	73	00	20	00	g.e1i.s	
00064380:6c	00	65	00	74	00	74	00	65	00	72	00	2e	00	00	00	l.e.t.t.e.r	
00064390:21	00	00	00	1b	00	00	00	1d	00	00	00	1b	00	00	00	!	
000643a0:0f	00	00	00	1e	00	00	00	0f	00	00	00	11	00	00	00		
000643b0:17	00	00	00	0f	00	00	00	11	00	00	00	1b	00	00	00		
000643c0:11				11		00		1b		00		14		0.0	00		
000643d0:0f														0.0	00	Ú	
000643e0:82									01			01			00	,óå	
000643f0:47												b8			00	G¢á@v"á@Ú	
00064400:01	0.0	0.0	0.0	4 c	00	00	0.0	04	10	00	0.0	00	0.0	0.0	00	L	
00064410:00				f4					0 f			50		00	00	ôxP	
00064420:20				1a			0.0	12	00	00		0 c			00	• • • • • • • • • • • •	
00064430:01		0.0	0.0	54	0.0	0.0			00			67		0.0	00	TĐg	
00064440:c7												01			00	Ça	
00064450:47									01			fd			00	G¢á@v"á@gý	
00064460:16							00		10		00	00		00	00	L	
00064470:00							00		0 f			78			00	ôxx	
00064480:50					00		00	20		31	00		00		00	P.a.g.e1.	
00064490:72					00				00			74		69	00	r.i.e.n.t.a.t	
000644a0:6f												21			00	o.ni.s!	
000644b0:1b								1b		00		0f			00		
000644c0:1e						00			00			14		00	00		
000644d0:11							00	1e		00		11			00		
000644e0:1b								11		00		1e			00		
000644f0:1e				0e		00		11		00		17		0.0	00		
00064500:0f	00	00	00	54	00	00	00	7с	00	00	00	62	03	00	00	T b	
00064510:c7	01	00	00	12	04	00	00	0 a	02	00	00	01	00	00	00	Ç	
00064520:47	a2	e1	40	76	84	e1	40	62	03	00	00	fd	01	00	00	G¢á@v"á@bý	
00064530:08	00	00	00	4c	00	00	00	04	10	00	00	00	00	00	00	L	
00064540:00	00	00	00	f4	0b	00	00	78	0f	00	00	5с	00	00	00	ôx\	
00064550:70	00	6f	00	72	00	74	00	72	00	61	00	69	00	74	00	p.o.r.t.r.a.i	.t.
00064560:1e	00	00	00	1e	00	00	00	14	00	00	00	11	00	00	00		
00064570:14	00	00	00	1b	00	00	00	10	00	00	00	11	00	00	00		
00064580:54	00	00	00	54	00	00	00	13	04	00	00	с7	01	00	00	TÇ	
00064590:21	04	00	00	0a	02	00	00	01	00	00	00	47	a2	e1	40	!	¢á@
000645a0:76	84	e1	40	13	04	00	00	fd	01	00	00	01	00	00	00	v"á@ý	
000645b0:4c	00	00	00	04	10	00	00	00	00	00	00	00	00	00	00	L	
000645c0:f4	0b	00	00	78	0f	00	00	50	00	00	00	2e	00	00	00	ôxP	
000645d0:0f	00	00	00	54	00	00	00	54	00	00	00	22	04	00	00	TT"	
000645e0:c7				3b					02		00	01	00	00	00	Ç;	
000645f0:47	a2	e1	40	76	84	e1	40	22	04	00	00	fd	01	00	00	G¢á@v"á@"ý	
00064600:01				4c		00	00	04	10	00	00	00	00	00	00	L	
00064610:00									0f						00	ôxP	
00064620:20																• • • • • • • • • • • •	
00064630:01																TTg	
00064640:0c																•0	
00064650:47																G¢á@v"á@gB	
00064660:01																L	
00064670:00																ôxP	
00064680:20																	
00064690:0e																€b	
000646a0:0e																	
000646b0:14																to	
000646c0:00																	
000646d0:70																p.r.i.n.t.e.r	
000646e0:65																e.r.v.e.r.\.C	
000646f0:6e																n.o.nB.u.b	
00064700:6c	UÜ	65	00	2d	UΟ	4a	UΟ	00	00	UΟ	00	01	04	UÜ	06	l.eJ	

00064710:dc	00	64	03	43	ef	80	07	01	00	01	00	ea	0a	6f	08	Ü.d.Cï€	ê.o.
00064720:64	0.0	0.1	0.0	0 f	0.0	fd	ff	02	0.0	01	0.0	fd	ff	02	00	dýÿ	ýΫ
00064730:01							00					72		00	00	L.e.t.t.e.	
00064740:00									00		00		00		00		• • • •
00064750:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064760:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064770:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064780:01	0.0	0.0	0.0	0.0	0.0	00	00	02	0.0	00	0.0	02	0.0	0.0	00		
00064790:01							00		00			0.0			00		
000647a0:00					00	00	00	44	49			22		00	01	DINU	
000647b0:44			00				99		00	00	00		00		00	DYذ™	
000647c0:00	00	00	00	01	00	00	00	00	00	00	00	00	00	00	00		
000647d0:00	00	00	00	08	00	00	00	01	00	00	00	03	00	01	00		
000647e0:01	00	02	00	02	00	00	00	00	00	00	00	00	00	00	00		
000647f0:00	0.0	0.0	0.0	0.0	0.0	00	00	0.0	00	00	00	0.0	00	0.0	00		
00064800:00			00	00	00	00	00	00	00	00	00	00	00	00	00		
											00				00		
00064810:00			00			00	00		00	00			00				
00064820:00					00	00	00		00	00	00		00		00		• • • •
00064830:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064840:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064850:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064860:00				00	00	00	00	00	00	00	00	00	00	00	00		
00064870:00			00		00		00		00	00	00	00			00		
00064880:00			00		00	00	00	00	00	00	00		00	00	00		
00064890:00					00	00	00	00	00	00	00	00	00	00	00		• • • •
000648a0:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
000648b0:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
000648c0:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
000648d0:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
000648e0:00	0.0	0.0	00	00	00	00	00	00	00	00	00	00	00	00	00		
000648f0:00			00		00	00	00	00	00	00	00			00	00		
00064910:00							00		00	00	00		00		00		
																• • • • • • • • • • • • • • • • • • • •	
00064910:00			00		00	00	00	00	00	00	00		00	00	00		
00064920:00			00		00	00	00	00	00	00	00	00			00		• • • •
00064930:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064940:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064950:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064960:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064970:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064980:00			0.0		00	00	00	00		00	0.0			00	00		
00064990:00			00	00	00	00	00	00	0.0	00	00	00	00	00	00		
000649a0:00			00		00	00	00	00	00	00	00		00	00	00		
																• • • • • • • • • • • • • • • • • • • •	
000649b0:00			00		00	00	00	00	00	00	00	00		00	00	• • • • • • • • • • • • •	• • • •
000649c0:00						00	00		00				00	00	00		
000649d0:00	00	00	00	00	00	00	00	01	00	00	00	00	00	00	00		
000649e0:00	00	00	00	00	01	00	00	53	4d	54	4a	18	00	00	00	SMTJ	
000649f0:4e	55	4a	42	00	00	01	00	34	00	00	00	00	00	00	00	NUJB4	
00064a00:00	00	00	00	08	01	00	00	53	4d	54	4a	00	00	00	00	SMTJ	
00064a10:14	0.0	0.0	0.0	0.0	0.0	f4	0.0	4.3	0.0	61	0.0	6e	0.0	6f	0.0	ô.C.a.	n.o.
00064a20:6e																nB.u.b.b.	
00064a30:2d																J.e.tB.	
00064a40:2d																5.0Inpu	
00064a50:00																.MANUAL.RESD	
00064a60:6e																niresDLL.Pap	
00064a70:7a	65	00	4c	45	54	54	45	52	00	52	65	73	6f	6с	75	ze.LETTER.Re	solu
00064a80:74	69	6f	6e	00	53	54	41	4e	44	41	52	44	00	4d	65	tion.STANDAR	D.Me
00064a90:64	69	61	54	79	70	65	00	53	54	41	4e	44	41	52	44	diaType.STAN	DARD
00064aa0:00	43	6f	6с	6f	72	4d	6f	64	65	00	43	4d	59	4b	32	.ColorMode.C	
00064ab0:34																4.Halftone.H	
	20			20	20	. ±		20	20	5 5		- 1					

00064ac0:54	53	49	5a	45	5f	41	55	54	4f	00	4f	72	69	65	6e	TSIZE AUTO.Or	ien
00064ad0:74	61	74	69	6f	6e	00	50	4 f	52	54	52	41	49	54	00	tation.PORTRA	IT.
00064ae0:00	0.0	0.0	00	0.0	0.0	00	00	0.0	00	00	0.0	00	0.0	0.0	00		
00064af0:00															00		
00064b00:00			00		00	00	00	00	00			0e			00		
00064b10:08			00		4a		00			00		0c			00	,J	
00064b20:64	07	00	00	01	00	00	00	84	00	00	00	3d	01	00	00	d=	
00064b30:68	01	00	00	4d	04	00	00	7a	02	00	00	00	00	00	00	hMz	
00064b40:00	00	00	00	14	69	00	00	4c	4 f	00	00	20	45	4d	46	iLO	EMF
00064b50:00	00	01	00	64	07	00	00	21	00	00	00	02	00	00	00	d!	
00064b60:0c	0.0	0.0	0.0	60	0.0	0.0	0.0	0.0	00	0.0	0.0	e 9	0e	0.0	00	l	
00064b70:3f										00		00			00	?Ë	
00064b80:00		00		00		00			1b			79		03	00		
00064b90:50			00						00							P.r.i.n.tt	
00064ba0:73			00			00			00							s.tb	
00064bb0:02		00		25		00			00	00	00		00	00	80		
00064bc0:25									00				00		00	%€%	
00064bd0:0c	00	00	00	0e	00	00				00	00	10	00	00	00	€	• • •
00064be0:00	00	00	00	00	00	00	00	0d	00	00	00	10	00	00	00		• • •
00064bf0:00	00	00	00	00	00	00	00	62	00	00	00	0с	00	00	00	b	
00064c00:02	00	00	00	64	00	00	00	0с	00	00	00	14	00	00	80	d	€
00064c10:16	00	00	00	0с	00	00	00	18	00	00	00	25	00	00	00		
00064c20:0c	00	00	00	0e	00	00	80	16	00	00	00	0с	00	00	00	€	
00064c30:18						00			00			01		00	00		
00064c40:0c			00					00		00			00		00		
00064c50:12															00		
00064c50:12						00		c4				00		00	00		
																р	
00064c70:00			00			00		90	01		00		00		00	•	
00064c80:07									00			73			00	.@T.i.m.e.s	
00064c90:4e	00	65	00	77	00	20	00	52	00	6f	00	6d	00	61	00	N.e.wR.o.m	.a.
00064ca0:6e	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	n	
00064cb0:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064cc0:00	00	00	00	00	00	20	00	08	5a	18	00	24	a8	56	07	Z\$	V .
00064cd0:24	a8	56	07	c4	f0	7d	07	с9	a4	07	30	90	00	b7	00	\$"V.Äð}.ɤ.0□	. • .
00064ce0:b8	1a	e2	01	43	00	00	00	00	00	00	00	b8	1a	e2	01	,.â.C,	.â.
00064cf0:6f								48				40			30	oìî"Ô¥.0Hñ}.@	
00064d00:84							30		00	00			7c		30	"ø©0x£.0/{	
00064d10:31					00	00		f4		9b			5a		00	1□ô^>	
00064d10:31																	
								04				68			00	h	
00064d30:78				31		18		00	00	00			00		00	xî}.1•	
00064d40:7c									00	00	00	00	00	00	00	î}}	
00064d50:47				00		00	00	00	00	00			00	00	00	G.•	• • •
00064d60:87			20		00	00	00	00	00	00	00	00	00	00	00	‡:	• • •
00064d70:ff	01	00	00	00	00	00	00	54	00	69	00	6d	00	65	00	ÿT.i.m	.e.
00064d80:73	00	20	00	00	00	65	00	77	00	20	00	52	00	6f	00	se.wR	.0.
00064d90:6d	00	61	00	6e	00	00	00	00	00	00	00	00	00	00	00	m.a.n	
00064da0:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00		
00064db0:f0																ðî}.Z°.0ðî}.Œ	c«0
00064dc0:08	ef	7d	07	64	76	00	08	00	00	00	00	25	00	00	00	.ï}.dv%	
00064dd0:0c																m	
00064de0:df																ߦ xT	
00064df0:3d																=hš«	
00064e00:01 00064e10:9e																v"á@G¢á@=	
																žL	
00064e20:00																xô	
00064e30:6c																lT.h.i.s.	
00064e40:73																sp.a.g.e.	
00064e50:2e																	
00064e60:17	00	00	00	0f	00	00	00	11	00	00	00	17	00	00	00		

00064e70:0f	00	00	00	1e	00	00	00	1b	00	00	00	1d	00	00	00		
00064e80:1b	00	00	00	0f	00	00	00	1e	00	00	00	0f	00	00	00		
00064e90:54	00	00	00	54	00	00	00	9b	02	00	00	68	01	00	00	TTh.	
00064ea0:b5	02	00	00	ab	01	00	00	01	00	00	00	76	84	е1	40	μ«ν"ε	á@
00064eb0:47	a2	e1	40	9b	02	00	00	9e	01	00	00	01	00	00	00	G¢á@ >ž	
00064ec0:4c	00	00	00	04	10	00	00	00	00	00	00	00	00	00	00	$\mathrm{L}_1,\ldots,\ldots$	
00064ed0:78	0f	00	00	f4	0b	00	00	50	00	00	00	20	00	00	56	xôP	.V
00064ee0:1b	00	00	00	12	00	00	00	0c	00	00	00	01	00	00	00		
00064ef0:54	00	00	00	88	00	00	00	3d	01	00	00	ad	01	00	00	T^=	
00064f00:23	02	00	00	f0	01	00	00	01	00	00	00	76	84	e1	40	#ðv"	á@
00064f10:47	a2	e1	40	3d	01	00	00	е3	01	00	00	0a	00	00	00	G¢á@=ã	
00064f20:4c	00	00	00	04	10	00	00	00	00	00	00	00	00	00	00	L	
00064f30:78															00	xô`P.a	a.
00064f40:67	00	65	00	20	00	32	00	20	00	69	00	73	00	20	00	g.e2i.s.	
00064f50:21	00	00	00	1b	00	00	00	1d	00	00	00	1b	00	00	00	!	
00064f60:0f																• • • • • • • • • • • • • • • • • • • •	
00064f70:17																Tp.	
00064f80:24																\$ð.	
00064f90:01																v"á@G¢á@\$.	
00064fa0:e3																ãL	
00064fb0:00																xô.	
00064fc0:58																Xl.e.t.t.e.	
00064fd0:11																	
00064fe0:1b																T.	
00064ff0:a1															00	;ð.	
00065000:01																v"á@G¢á@;.	
00065010:e3																ãL	
00065020:00																xô.	
00065030:50																Pp&T.	
00065040:54																T°É.	
00065050:f0																ðv"á@G¢a	
00065060:b0																°ãL.	
00065070:04																X.	
00065080:f4 00065090:12															00	ôP	
00065090:12																T.	
000650a0:00																5v"á@G¢a	
000650b0:35																=(L.	
000650d0:04								00					0f			(X.	
000650d0:04																ôŒP.a.g.e	
000650E0:14																.2o.r.i.e.	
00065100:74																t.a.t.i.o.n:	
00065110:73																sl.a.n.d.s.	
00065120:75																	
00065130:1d																	
00065140:0f																	
00065150:1b																	
00065160:11																	
00065170:0e																	
00065180:11																	
00065190:17																	
000651a0:1b																TT.	
000651b0:34																	
000651c0:01																v"á@G¢á@4.	
000651d0:28																(L	
000651e0:00																	
000651f0:50																P<	
00065200:0c	00	00	00	01	00	00	00	54	00	00	00	54	00	00	00		
00065210:3d	01	00	00	37	02	00	00	57	01	00	00	7a	02	00	00	=7Wz.	

00065220:01	00	00	00	76	84	e1	40	47	a2	e1	40	3d	01	00	00	v"á@G¢á@=
00065230:6d	02	00	00	01	00	00	00	4c	00	00	00	04	10	00	00	mL
00065240:00	00	00	00	00	00	00	00	78	0f	00	00	f4	0b	00	00	xô
00065250:50	00	00	00	20	00	00	4a	1b	00	00	00	25	00	00	00	PJ%
00065260:0c	00	00	00	0e	00	00	80	62	00	00	00	0с	00	00	00	€b
00065270:01			0.0		00	00	00	14	00	00	00	00	00	00	00	
00065280:10					00	00		03	00	00	00	40	04	00	00	
00065290:10												74			00	\.\.p.r.i.n.t.e.
000652a0:72								76		65						-
												72				r.s.e.r.v.e.r.\.
000652b0:43										20	00		00	75	00	C.a.n.o.nB.u.
000652c0:62															00	b.b.l.eJ
000652d0:01							03				07	02		01		Ü.d.Cï€
000652e0:ea									00	fd		02	00	01	00	ê.o.dýÿ
000652f0:fd	ff	02	00	01	00	4c	00	65	00	74	00	74	00	65	00	ýÿL.e.t.t.e.
00065300:72	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	r
00065310:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065320:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065330:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065340:00	00	00	00	01	00	00	00	00	00	00	00	02	00	00	00	
00065350:02	00	00	00	01	00	00	00	01	01	00	00	00	00	00	00	
00065360:00			0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	44	49	4e	55	DINU
00065370:22						18	00		d8		99	0.0	00	0.0		"DYذ™
00065380:00			00		00	00	00		00	00	00	00	00	00	00	
00065390:00						00		08		00	00		00		00	
00065390:00 000653a0:03					00	02				00	00	00	00	00	00	
										00						• • • • • • • • • • • • • • • • • • • •
000653b0:00				00	00	00	0.0	00	00		00	0.0	00	00	00	• • • • • • • • • • • • • • • • • • • •
000653c0:00					00				00			00			00	• • • • • • • • • • • • • • • • • • • •
000653d0:00					00		00		00		00	00	00		00	
000653e0:00				00	00	00	00	00	00	00	00	00	00	00	00	
000653f0:00					00	00		00	00	00	00	00	00	00	00	
00065400:00					00	00	00	00	00	00	00	00	00	00	00	
00065410:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065420:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065430:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065440:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065450:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065460:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065470:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065480:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
00065490:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
000654a0:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
000654b0:00			00		00	00	00	0.0	00	00	00	0.0	00	00	00	
000654c0:00				00	00	00	00	00	00	00	00	00	00	0.0	00	
000654d0:00						00					00		00		0.0	
000654e0:00																
000654f0:00																
00065500:00																
00065510:00																
																• • • • • • • • • • • • • • • • • • • •
00065520:00																• • • • • • • • • • • • • • • • • • • •
00065530:00																
00065540:00																
00065550:00																
00065560:00																
00065570:00																
00065580:00																
00065590:00	00	00	00	00	00	00	00	00	00	00	00	01	00	00	00	
000655a0:00	00	00	00	00	00	00	00	00	01	00	00	53	4d	54	4a	SMTJ
000655b0:18	00	00	00	4e	55	4a	42	00	00	01	00	34	00	00	00	NUJB4
000655c0:00	00	00	00	00	00	00	00	08	01	00	00	53	4d	54	4a	SMTJ

```
000655d0:00 00 00 00 14 00 00 00 00 f4 00 43 00 61 00
                                                 .......ô.C.a.
000655e0:6e 00 6f 00 6e 00 20 00 42 00 75 00 62 00 62 00 n.o.n. .B.u.b.b.
000655f0:6c 00 65 00 2d 00 4a 00 65 00 74 00 20 00 42 00
                                               l.e.-.J.e.t. .B.
00065600:4a 00 43 00 2d 00 35 00 30 00 00 00 49 6e 70 75
                                                 J.C.-.5.0...Inpu
00065610:74 42 69 6e 00 4d 41 4e 55 41 4c 00 52 45 53 44
                                                 tBin.MANUAL.RESD
00065620:4c 4c 00 55 6e 69 72 65 73 44 4c 4c 00 50 61 70
                                                 LL.UniresDLL.Pap
00065630:65 72 53 69 7a 65 00 4c 45 54 54 45 52 00 52 65
                                                 erSize.LETTER.Re
00065640:73 6f 6c 75 74 69 6f 6e 00 53 54 41 4e 44 41 52
                                                 solution.STANDAR
00065650:44 00 4d 65 64 69 61 54 79 70 65 00 53 54 41 4e D.MediaType.STAN
00065660:44 41 52 44 00 43 6f 6c 6f 72 4d 6f 64 65 00 43 DARD.ColorMode.C
00065670:4d 59 4b 32 34 00 48 61 6c 66 74 6f 6e 65 00 48 MYK24.Halftone.H
00065690:72 69 65 6e 74 61 74 69 6f 6e 00 50 4f 52 54 52 rientation.PORTR
000656a0:41 49 54 00 00 00 00 00 00 00 00 00 00 00 00
                                                 AIT.........
. . . . . . . . . . . . . . . .
000656d0:0e 00 00 00 08 00 00 00 b4 0b 00 00 00 00 00
```

3.2.1 EMFSPOOL Header Example

This section provides an example of a Header record, as specified in section 2.2.2.

```
00000000:00 00 01 00 54 00 00 00 10 00 00 46 00 00 00 00000010:4d 00 69 00 63 00 72 00 6F 00 73 00 6f 00 66 00 00000020:74 00 20 00 57 00 6F 00 72 00 64 00 20 00 2D 00 0000030:20 00 44 00 6f 00 63 00 75 00 6d 00 65 00 6E 00 00000040:74 00 31 00 00 4E 00 65 00 30 00 32 00 3A 00 0000050:00 00 00
```

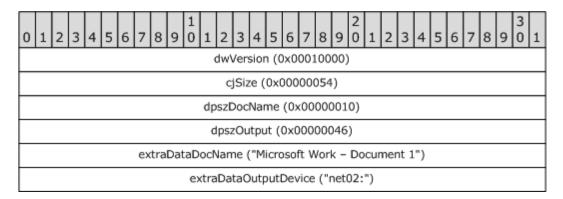


Figure 4: EMFSPOOL Header Example

dwVersion: 0x00010000 specifies the version of EMFSPOOL.

cjSize: 0x00000054 specifies the size, in bytes, of the header record, including any extra data attached.

dpszDocName: 0x00000010 specifies the offset of the document name from the start of the record (the **dwVersion** field). The document name is stored as a NULL-terminated Unicode string, as specified in [UNICODE], in the **extraData** area. If the value is 0x00000000, no document name is specified.

40 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Release: Thursday, February 13, 2014

dpszOutput: 0x00000046 specifies the offset of the output device name from the start of the record (**dwVersion** field). The output device name is stored as a NULL-terminated Unicode string in the **extraData** area. If the value is 0, no output device name is specified.

extraData: Variable-size storage area for document name and output device name, 4-byte aligned.

3.2.2 EMRI_METAFILE_DATA Example

This section provides an example of the <u>EMRI METAFILE DATA</u> record, as specified in section 2.2.3.1.

00000050: 0C 00 00 00 58 46 06 00

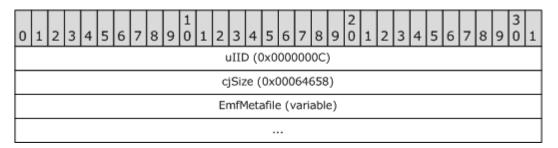


Figure 5: EMRI_METAFILE_DATA Record Example

uIID: 0x0000000C identifies the type of record as **EMRI_METAFILE_DATA**, which is a page content record.

cjSize: 0x00064658 specifies the 4-byte-aligned size in bytes of the data in this record.

EmfMetafile: A variable-size field that contains a complete EMF metafile. This embedded metafile itself contains an embedded <u>Font Definition Record (section 2.2.3.3)</u>, the corresponding example of which is presented in section <u>3.2.2.20.1</u>.

3.2.2.1 EMR_HEADER Example

This section provides an example of the EMF EMR HEADER record ([MS-EMF] section 2.3.4.2).

00000050:												01	00	00	00	
00000060:84	00	00	00	67	01	00	00	3D	01	00	00	3В	04	00	00	
00000070:4F	02	00	00	00	00	00	00	00	00	00	00	4C	4 F	00	00	
00000080:14	69	00	00	20	45	4 D	46	00	00	01	00	58	46	06	00	
00000090:23	00	00	00	02	00	00	00	0 C	00	00	00	6C	00	00	00	
000000a0:00	00	00	00	3F	0b	00	00	E9	ΟE	00	00	СВ	00	00	00	
000000b0:0D	01	00	00	00	00	00	00	00	00	00	00	00	00	00	00	
000000c0:79	19	03	00	FF	1B	04	00	50	00	72	00	69	00	6E	00	
000000d0:74	00	20	00	74	00	65	00	73	00	74	00	00	00	00	00	

0	1	2	3	4	5	6	7	8	9	1	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
Г												7	ур	e (()x0	000	000	01)												٦
												5	Size	e (0)x0	000	000	84))												
												Во	un	ds	(0x	000	000	16	7)												
Г														(0x	000	000	13	D)													\neg
Г														(0x	00	000)43	B)													
Г														(0x	00	000)24	F)													
Г												Fı	am	ne (0x0	000	00	000))												\neg
														(0x	:00	000	000	0)													\neg
														(0x	:00	004	F4	C)													\neg
														(0x	:00	006	91	4)													

Figure 6: EMF EMR_HEADER Record Example, Part 1

Type: 0x00000001 identifies this EMF record type as EMR_HEADER.

Size: 0x00000084 specifies the record size in bytes.

Bounds: 0x00000167, 0x0000013D, 0x0000043B, 0x0000024F specifies the rectangular **inclusive** inclusive bounds in device units of the smallest rectangle that can be drawn around the image stored in the metafile.

Frame: 0x00000000, 0x00000000, 0x00004F4C, 0x00006914 specifies the rectangular inclusive inclusive dimensions, in .01 millimeter units, of a rectangle that surrounds the image stored in the metafile.

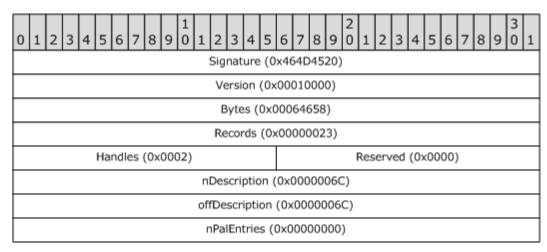


Figure 7: EMF EMR_HEADER Record Example, Part 2

Signature: 0x464D4520 specifies the record signature, which consists of the ASCII string "EMF".

Version: 0x00010000 specifies EMF metafile interoperability.

Bytes: 0x00064658 specifies the size of the metafile in bytes.

Records: 0x00000023 specifies the number of records in the metafile.

Handles: 0x0002 specifies the number of indexes that will need to be defined during the processing of the metafile. These indexes correspond to graphics objects that are used in drawing commands. Index 0 is reserved for references to the metafile itself.

Reserved: 0x0000 is not used.

nDescription: 0x0000000C specifies the number of characters in the array that contains the description of the EMF metafile's contents.

offDescription: 0x0000006C specifies the offset from the beginning of this record to the array that contains the description of the EMF metafile's contents.

nPalEntries: 0x00000000 specifies the number of entries in the metafile palette. The location of the palette is specified in the <u>EMR_EOF</u> record in <u>[MS-EMF]</u> section 2.3.4.1.

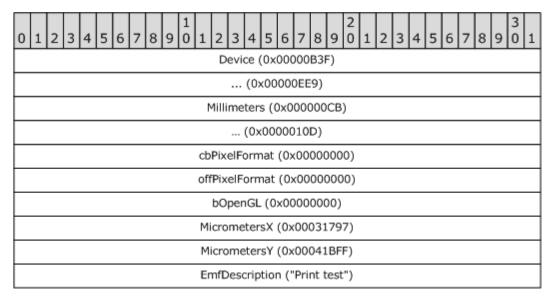


Figure 8: EMF EMR_HEADER Record Example, Part 3

Device: 0x00000B3F, 0x00000EE9 specifies the size of the reference device in pixels.

Millimeters: 0x000000CB, 0x0000010D specifies the size of the reference device in millimeters.

cbPixelFormat: 0x00000000 specifies the size of the <u>PixelFormatDescriptor</u> structure, as specified in [MS-EMF] section 2.2.22. This value indicates that no pixel format is defined.

offPixelFormat: 0x00000000 specifies the offset to the PixelFormatDescriptor in the metafile. In this case, no pixel format structure is present.

bOpenGL: 0x00000000 specifies that no **OpenGL** commands are present in the metafile.

MicrometersX: 0x00031979 specifies the horizontal size of the reference device in micrometers.

 $\textbf{MicrometersY}: 0 x 0 0 0 4 1 BFF \ specifies \ the \ vertical \ size \ of \ the \ reference \ device \ in \ micrometers.$

EmfDescription: "Print test".

3.2.2.2 EMR_SETICMMODE Example

This section provides an example of the <u>EMR_SETICMMODE</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.14.

000000E0:62 00 00 00 0C 00 00 00 02 00 00 00

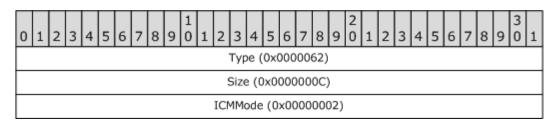


Figure 9: EMF EMR_SETICMMODE Record Example

Type: 0x00000062 identifies this EMF record type as EMR_SETICMMODE.

Size: 0x0000000C is the size of this record in bytes.

ICMMode: 0x00000002 is an **Image Color Management (ICM)** mode value from the **ICMMode** enumeration as specified in [MS-EMF] section 2.1.18.

3.2.2.3 EMR_SELECTOBJECT Example

This section provides an example of the <u>EMR_SELECTOBJECT</u> record, as specified in <u>[MS-EMF]</u> section 2.3.8.5.

000000E0: 25 00 00 00 00 00 00 00 00 00

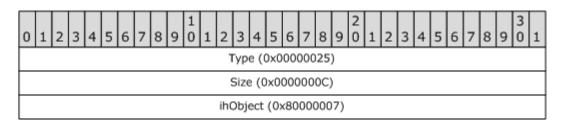


Figure 10: EMF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

ihObject: 0x80000007 is the index of a **BLACK_PEN stock object** from the EMF <u>StockObject</u> enumeration, specified in [MS-EMF] section 2.1.31.

3.2.2.4 EMR_SELECTOBJECT Example

This section provides an example of the EMR SELECTOBJECT record as specified in [MS-EMF] section 2.3.8.5.

000000F0: 25 00 00 00 0C 00 00 00

00000100: 00 00 00 80

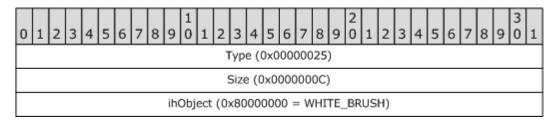


Figure 11: MF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

ihObject: 0x80000000 specifies the index of an object in the object table or the stock object if it is negative.

3.2.2.5 EMR_SELECTOBJECT Example

This section provides an example of the <u>EMR_SELECTOBJECT</u> record as specified in <u>[MS-EMF]</u> section 2.3.8.5.

00000100: 25 00 00 00 0C 00 00 0E 00 00 80

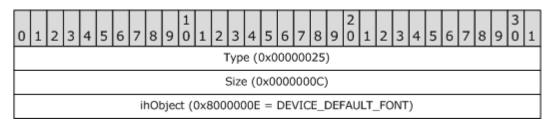


Figure 12: MF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

ihObject: 0x8000000E specifies the index of an object in the object table or the stock object if it is negative.

3.2.2.6 EMR_MOVETOEX Example

This section provides an example of the <u>EMR_MOVETOEX</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.4.

45 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Release: Thursday, February 13, 2014




Figure 13: EMF EMR_MOVETOEX Record Example

Type: 0x0000001B identifies this EMF record type as EMR_MOVETOEX.

Size: 0x00000010 is the size of this record in bytes.

Offset: 0x0000000000000000 specifies the coordinates of the new current position in logical units.

3.2.2.7 EMR_SETBRUSHORGEX Example

This section provides an example of the <a>EMR <a>SETBRUSHORGEX record as specified in <a>[MS-EMF] section 2.3.11.12.

00000120:0D 00 00 10 00 00 00 00 00 00 00 00 00 00




Figure 14: EMF EMR_SETBRUSHORGEX Record Example

Type: 0x0000000D identifies this EMF record type as EMR_SETBRUSHORGEX.

Size: 0x00000010 is the size of this record in bytes.

Origin: 0x00000000, 0x00000000 defines the brush horizontal and vertical origin in device units.

3.2.2.8 EMR_SETICMMODE Example

This section provides an example of the EMR SETICMMODE record as specified in [MS-EMF] section 2.3.11.14.

00000130:62 00 00 00 0C 00 00 00 02 00 00 00




Figure 15: EMF EMR_SETICMMODE Record Example

Type: 0x00000062 identifies this EMF record type as EMR_SETICMMODE.

Size: 0x0000000C is the size of this record in bytes.

ICMMode: 0x00000002 is an Image Color Management (ICM) mode value from the **ICMMode** enumeration, as specified in [MS-EMF] section 2.1.18.

3.2.2.9 EMR_SETCOLORSPACE Example

This section provides an example of the <u>EMR_SETCOLORSPACE</u> record as specified in <u>[MS-EMF]</u> section 2.3.8.7.

00000130: 64 00 00 00 00 00 00 00 00 80

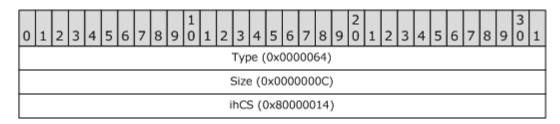


Figure 16: EMF EMR_SETCOLORSPACE Record Example

Type: 0x00000064 identifies this EMF record type as EMR_SETCOLORSPACE.

Size: 0x0000000C is the size of this record in bytes.

ihCS: 0x80000014 specifies the **ColorSpace** by using the values in the **ColorSpace** enumeration specified in [MS-EMF] section 2.1.7.

3.2.2.10 EMR_SETTEXTALIGN Example

This section provides an example of an EMF $\underline{\sf EMR}$ $\underline{\sf SETTEXTALIGN}$ record ($\underline{\sf [MS-EMF]}$ section 2.3.11.25).

47 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Release: Thursday, February 13, 2014




Figure 17: EMF EMR_SETTEXTALIGN Record Example

Type: 0x00000016 identifies the record type as EMR_SETTEXTALIGN.

Size: 0x0000000C is the size of this record in bytes.

TextAlignmentMode: 0x00000018 specifies the text alignment mode by using **WMF TextAlignmentMode Flags** ([MS-WMF] section 2.1.2.3).

3.2.2.11 EMR_SELECTOBJECT Example

This section provides an example of the <u>EMR_SELECTOBJECT</u> record as specified in <u>[MS-EMF]</u> section 2.3.8.5.

00000150: 25 00 00 00 0C 00 00 0E 00 00 80

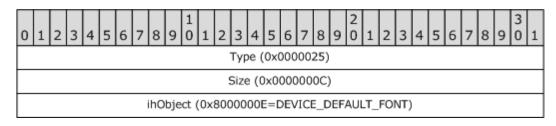


Figure 18: MF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

ihObject: 0x8000000E specifies the index of an object in the object table or stock object to be selected.

3.2.2.12 EMR_SETTEXTALIGN Example

This section provides an example of the EMF <u>EMR_SETTEXTALIGN</u> record (<u>[MS-EMF]</u> section 2.3.11.25).

00000160:16 00 00 00 0C 00 00 00 18 00 00 00



Figure 19: EMF EMR_SETTEXTALIGN Record Example

Type: 0x00000016 identifies the record type as EMR_SETTEXTALIGN.

Size: 0x0000000C is the size of this record in bytes.

TextAlignmentMode: 0x00000018 specifies the text alignment mode by using WMF **TextAlignmentMode Flags** ([MS-WMF] section 2.1.2.3).

3.2.2.13 EMR_SETBKMODE Example

This section provides an example of the $\underline{\sf EMR_SETBKMODE}$ record as specified in $\underline{\sf [MS-EMF]}$ section 2.3.11.11.

00000160: 12 00 00 00 00 00 00 00 00




Figure 20: EMF EMR_SETBKMODE Record Example

Type: 0x00000012 identifies this EMF record type as EMR_SETBKMODE.

Size: 0x0000000C is the size of this record in bytes.

BackgroundMode: 0x00000001 specifies background mode.

3.2.2.14 EMR_SETVIEWPORTORGEX Example

This section provides an example of the EMR SETVIEWPORTORGEX record as specified in [MS-EMF] section 2.3.11.29.

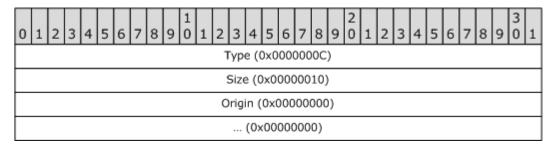


Figure 21: EMF EMR_SETVIEWPORTORGEX Record Example

Type: 0x0000000C identifies this EMF record type as EMR_SETVIEWPORTORGEX.

Size: 0x00000010 is the size of this record in bytes.

Origin: 0x00000000, 0x00000000 specifies the viewport horizontal and vertical origin in device units.

3.2.2.15 EMR_SETBKMODE Example

This section provides an example of the <a>EMR <a>SETBKMODE record as specified in <a>[MS-EMF] section 2.3.11.11.

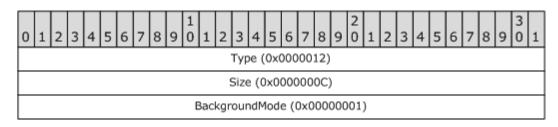


Figure 22: EMF EMR_SETBKMODE Record Example

Type: 0x00000012 identifies this EMF record type as EMR_SETBKMODE.

Size: 0x0000000C is the size of this record in bytes.

BackgroundMode: 0x00000001 specifies background mode.

3.2.2.16 EMR_EXTCREATEFONTINDIRECTW Example

This section provides an example of an EMF <u>EMR_EXTCREATEFONTINDIRECTW</u> record (<u>[MS-EMF]</u> section 2.3.7.8).

50 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Release: Thursday, February 13, 2014

00000200:08 5A 18 00 24 A8 56 07 D0 EE 7D 07 C4 F0 7D 07 00000210:37 A4 07 30 90 00 B7 00 B8 1A E2 01 00 00 00 00000220:00 00 00 00 B8 1A E2 01 6F EC EE 94 D4 A5 07 30 00000230:48 F1 7D 07 40 F8 A9 30 84 F8 A9 30 78 A3 07 30 00000240:28 48 24 00 01 00 00 00 02 00 00 00 50 EE 7D 07 00000250:54 EE 7D 07 AC 1E 24 00 00 90 FD 7F 00 90 FD 7F 00000260:00 00 B9 6E B8 00 B9 6E 18 EE 7D 07 00 00 B9 6E 00000270:50 EE 7D 07 14 00 00 00 01 00 00 00 00 00 00 00 00000280:00 00 00 00 00 00 00 47 16 90 01 00 00 00 00000290:00 00 00 00 00 00 00 87 3A 00 20 00 00 00 000002A0:00 00 00 00 00 00 00 FF 01 00 00 00 00 00 000002B0:54 00 69 00 6D 00 65 00 73 00 20 00 00 00 65 00 000002CO:77 00 20 00 52 00 6F 00 6D 00 61 00 6E 00 00 00 000002E0:00 00 00 00 00 00 00 F0 EE 7D 07 5A B0 02 30 000002F0:F0 EE 7D 07 8C 63 AB 30 08 EF 7D 07 64 76 00 08 00000300:00 00 00 00

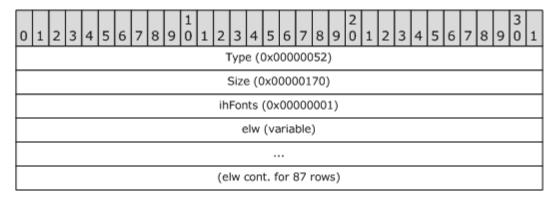


Figure 23: EMF EMR_EXTCREATEFONTINDIRECTW Record Example

Type: 0x00000052 identifies the record type as EMR_EXTCREATEFONTINDIRECTW.

Size: 0x00000170 specifies the size of this record in bytes.

ihFonts: 0x00000001 specifies the object index in the <u>EMF Object Table</u> ([MS-EMF] section 3.1.1) to assign to the font.

elw: To determine the type of logical font object in this field, an algorithm ([MS-EMF] section 2.3.7.8) is applied, which indicates that this is a variable-length EMF <u>LogFontExDv</u> object ([MS-EMF] section 2.2.15).

0	1	2	3	4	5	6	7	8	9	1 0	1	2	3	4	5	6	7	8	9	2 0	1	2	3	4	5	6	7	8	9	3	1
												Н	eig	ht ((0)	FFF	FFI	FC4)												
	Width (0x0000000)																														
	Escapement (0x0000000)																														
											C)rie	nta	tio	n (0x0	000	000	00)											
												W	eig	ht ((O)	(000	000	190	0)												
		Ital	ic (0x	00)				Ur	der	line	e (C)x0	0)			St	rike	:Ou	it (()x0	0)			С	har	Set	(0	x00))	
(Outl	Pre	cisi	on	(0x	07)	(Clip	Pre	cisi	on	(0x	40)		Ç)ual	lity	(0)	<00)			Pi		An (0x		mil	У	
										F	ace	nar	ne	("T	im	es I	Nev	v R	om	an")										
											(Fa	cer	nan	ne (00	nt. f	or	14	rov	vs)											

Figure 24: EMF LogFontExDv Object, Part 1

Height: 0xFFFFFC4 has an absolute value of 60, which specifies the character height for this font in logical units.

Width: 0x00000000 specifies a computed font width. The aspect ratio of the device is matched against the digitization aspect ratio of the font to find the closest match, determined by the absolute value of the difference.

Escapement: 0x00000000 specifies an angle of 0 degrees between the baseline of a row of text and the x-axis of the device.

Orientation: 0x00000000 specifies an angle of 0 degrees between each character's baseline and the x-axis of the device.

Weight: 0x000000190 specifies that the **weight** of the font is 400, in the range 0 through 1000, from lightest to darkest, with 400 (0x00000190) considered normal.

Italic: 0x00 specifies that the font is not italic.

Underline: 0x00 specifies that the font is not underlined.

Strikeout: 0x00 specifies that the font characters do not have a strike-out graphic.

CharSet: 0x00 specifies the **ANSI_CHARSET**, as defined in the WMF <u>CharacterSet</u> enumeration (<u>[MS-WMF]</u> section 2.1.1.5).

OutPrecision: 0x07 specifies the output precision, which is how closely the output must match the requested font properties, from the WMF <u>OutPrecision</u> enumeration (<u>[MS-WMF]</u> section 2.1.1.21). The value 0x07 specifies that the **font mapper** should choose a TrueType font.

ClipPrecision: 0x40 specifies the clipping precision, which is how to clip characters that are partially outside the clipping **region**, from the WMF <u>ClipPrecision Flags</u> ([MS-WMF] section 2.1.2.1). The value 0x40 specifies that **font association** be turned off.

Quality: 0x00 specifies default output quality, from the WMF **FontQuality** enumeration ([MS-WMF] section 2.1.1.10).

PitchAndFamily: 0x12 specifies a variable-pitch font with serifs, from the WMF **FamilyFont** and **PitchFont** enumerations ([MS-WMF] sections 2.1.1.8 and 2.1.1.24, respectively).

Facename: "Times New Roman" specifies the typeface name of the font in Unicode characters.

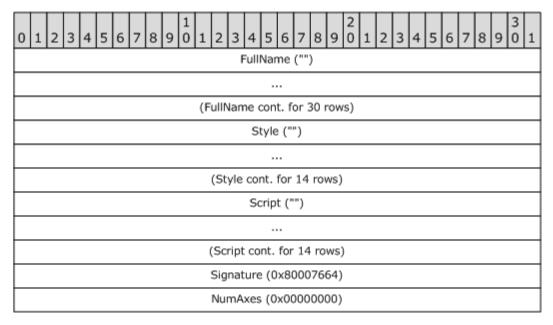


Figure 25: EMF LogFontExDv Object, Part 2

FullName: An empty string specifies the font's full name.

Style: An empty string describes the font's style.

Script: An empty string describes the font's character set.

Signature: 0x80007664 specifies the signature of an EMF <u>DesignVector</u> object (<u>[MS-EMF]</u> section 2.2.3).

NumAxes: 0x00000000 specifies the number of font axes described in the DesignVector object.

3.2.2.17 EMR_SELECTOBJECT Example

This section provides an example of the <u>EMR_SELECTOBJECT</u> record as specified in <u>[MS-EMF]</u> section 2.3.8.5.

00000300: 25 00 00 00 0C 00 00 01 00 00 00




Figure 26: EMF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

ihObject: 0x00000001 specifies the index of an object in the object table or stock object to be selected.

3.2.2.18 EMR_SETTEXTCOLOR Example

This section provides an example of the <u>EMR_SETTEXTCOLOR</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.26.

00000310:18 00 00 00 0C 00 00 00 00 00 02




Figure 27: EMF EMR_SETTEXTCOLOR Record Example

Type: 0x00000018 identifies this EMF record type as EMR_SETTEXTCOLOR.

Size: 0x0000000C is the size of this record in bytes.

Color: 0x02000000 specifies the text color value.

3.2.2.19 EMR_FORCEUFIMAPPING Example

This section provides an example of the <a>EMR FORCEUFIMAPPING record as specified in <a>[MS-EMF] section 2.3.11.2.

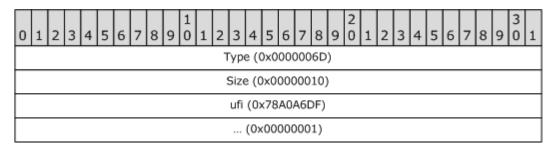


Figure 28: EMF EMR_FORCEUFIMAPPING Record Example

Type: 0x0000006D identifies this EMF record type as EMR_FORCEUFIMAPPING.

54 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Release: Thursday, February 13, 2014

Size: 0x00000010 is the size of this record in bytes.

ufi: 0x78A0A6DF,0x00000001 specifies the font ID to use. This consists of a 32-bit checksum (0x78A0A6DF) followed by a 32-bit index (0x00000001).

3.2.2.20 EMR_COMMENT_EMFSPOOL Example

This section provides an example of the <u>EMR_COMMENT_EMFSPOOL</u> record, as specified in <u>[MS-EMF]</u> section 2.3.3.3.

```
00000320: 46 00 00 00 00 00 00 00 3e 06 00 00 00 00 00 46 4e 4f 54
```

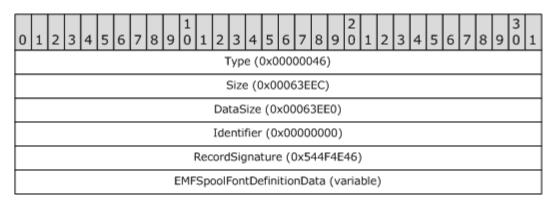


Figure 29: EMF EMR_COMMENT_EMFSPOOL Record Example

Type: 0x00000046 identifies this EMF record type as an <u>EMR_COMMENT</u> record, specified in <u>[MS-EMF]</u> section 2.3.3.

Size: 0x00063EEC is the size in bytes of this entire EMF record.

DataSize: 0x00063EE0 specifies the size in bytes of the data that follows, including the embedded EMF spool format EMRI ENGINE FONT (section 2.2.3.3.1) record.

Identifier: 0x00000000 identifies this EMR_COMMENT record type as EMR_COMMENT_EMFSPOOL.

RecordSignature: 0x544F4E46 ("TONF") identifies this EMR_COMMENT_EMFSPOOL record as one that contains embedded EMF spool format font definition data.

EMFSpoolFontDefinitionData: A DataSize length array of bytes that contains the data.

3.2.2.20.1 EMRI_ENGINE_FONT Example

This section provides an example of an $\underline{\sf EMRI}$ $\underline{\sf ENGINE}$ font definition record, as specified in section $\underline{\sf 2.2.3.3.1}$.

```
00000340:02 00 00 00 d0 3e 06 00 00 00 00 00 01 00 00 00 00 00000350:c0 3e 06 00 00 00 00
```

0 1 2 3 4 5	6 7	8 9	1 0	1	2	3 4	4 5	5 6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
					u	IID	(0x	(000	000	02))												
					cj:	Size	(0:	x000	631	EDO))												
					Тур	e1I	D (0x0	000	000	0)												
					Nun	nFile	es (0x0	000	000)1)												
					File	Size	es (0x0	006	3EC	(0)												\neg
				Α	dign	Buf	fer	(0x	000	000	000)											\Box
					File	eCo	nte	nt (/ari	able	e)												

Figure 30: EMRI_ENGINE_FONT Record Example

ulID: 0x00000002 identifies the type of record as an EMFSPOOL **EMRI_ENGINE_FONT** font definition record.

cjSize: 00063ED0 specifies the size, in bytes, of the data attached to the record, rounded up to a multiple of 4 bytes.

Type1ID: 0x00000000 identifies the font format as TrueType.

NumFiles: 0x00000001 specifies the number of font files embedded within this record.

FileSizes: 0x00063EC0 specifies the sizes of the files attached within this record.

AlignBuffer: 0x00000000 specifies the number of bytes to skip to make the data that follows 64-bit aligned.

FileContent: The actual bits of the fonts, each 32-bit aligned, in TrueType format.

3.2.2.21 EMR_EXTTEXTOUTW Example

0 1 2 3 4 5 6 7 8	9 0	1	2 3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
			Ту	pe (0x0	000	000)54)												
			Siz	e (0	0x0	000	00	A8))												
			Bou	nds	(0x	000	000	16	7)												
				. (0)	×00	000)13	D)													
				. (0:	×00	000)20	:4)													
				. (0:	x00	000	018	30)													
		iGr	aphi	sMo	ode	(0>	(00	000	000	1)											
			exS	ale	(0x	40I	E1/	۱24	7)												
			eyS	cale	(0x	401	E18	347	6)												
			Er	nrTe	xt (vai	riat	ole)													

Figure 31: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x000000A8 is the size of this record in bytes.

Bounds: 0x00000167, 0x0000013D, 0x000002C4, 0x00000180 values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

 ${\it exScale}$: 0x40E1A247 specifies the X scale from Page units to .01mm units if the graphics mode is ${\it GM_COMPATIBLE}$.

eyScale: 0x40E18476 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

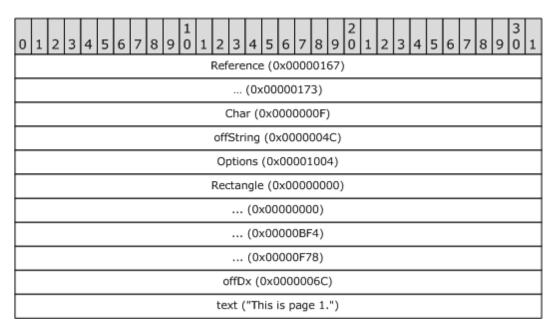


Figure 32: EMF EmrText Object Example

Reference: 0x00000167, 0x00000173 specifies the coordinates of the reference point used to position the string.

Chars: 0x0000000F specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000BF4, 0x00000F78 defines the clipping rectangle in logical units.

offDx: 0x0000006C specifies the offset to the intercharacter spacing array.

text: "This is page 1.".

3.2.2.22 EMR_EXTTEXTOUTW Example

0	1	2	3	4	5	6	7	8	9	1 0	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
Г																		54		_											
												,	Size	e (0	x0	000	000	05))												
												Вс	un	ds	(0x	000	000	2C	5)												
Г														(0x	00	000)13	D)													
Г														(0x	(00	000)2[F)													
Г														(0)	(00	000	018	80)													
Г											iGr	rapi	nics	sМо	de	(0)	(OO	000	000	1)											
Г												ex	Sca	ale	(0x	401	E1/	\24	7)												
Г												ey	Sca	ale	(0x	40	E18	347	6)												
												-	Em	rTe	xt ((va	rial	ole)													

Figure 33: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x0000005 is the size of this record in bytes.

Bounds: 0x000002C5, 0x0000013D, 0x000002DF, 0x00000180 values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E1A247 specifies the X scale from page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E18476 specifies the Y scale from Page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

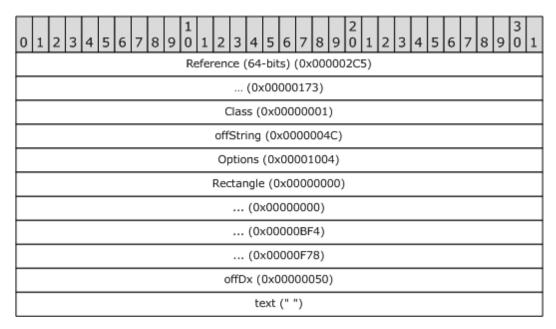


Figure 34: EMF EmrText Object Example

Reference: 0x000002C5, 0x00000173 specifies the coordinates of the reference point used to position the string.

Chars: 0x00000001 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000BF4, 0x00000F78 defines the clipping rectangle in logical units.


offDx: 0x00000050 specifies the offset to the intercharacter spacing array.

text: " ".

3.2.2.23 EMR_SETBKMODE Example

This section provides an example of the $\underline{\sf EMR}$ SETBKMODE record as specified in $\underline{\sf [MS-EMF]}$ section 2.3.11.11.

00064310: 12 00 00 00 0C 00 00 01 00 00 00



60 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Release: Thursday, February 13, 2014

Figure 35: EMF EMR_SETBKMODE Record Example

Type: 0x00000012 identifies this EMF record type as EMR_SETBKMODE.

Size: 0x0000000C is the size of this record in bytes.

Mode: 0x00000001 specifies the background color value.

3.2.2.24 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF EMR EXTTEXTOUTW record ([MS-EMF] section 2.3.5.8).

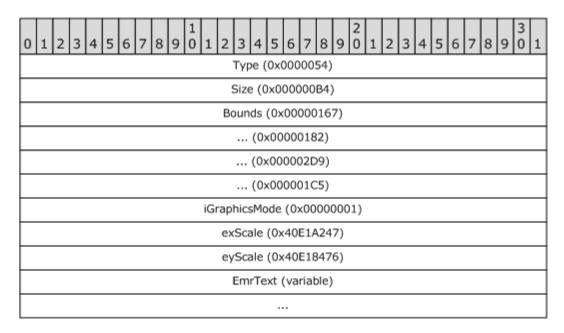


Figure 36: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x000000B4 is the size of this record in bytes.

Bounds: 0x00000167, 0x00000182, 0x000002D9, 0x000001C5 values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E1A247 specifies the X scale from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E18476 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

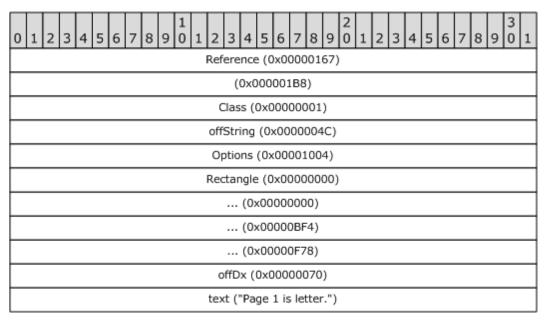


Figure 37: EMF EmrText Object Example

Reference: 0x00000167, 0x000001B8 specifies the coordinates of the reference point used to position the string.

Chars: 0x00000011 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000BF4, 0x0x00000F78 defines the clipping rectangle in logical units.

offDx: 0x00000070 specifies the offset to intercharacter spacing array.

text: "Page 1 is letter.".

3.2.2.25 EMR_EXTTEXTOUTW Example

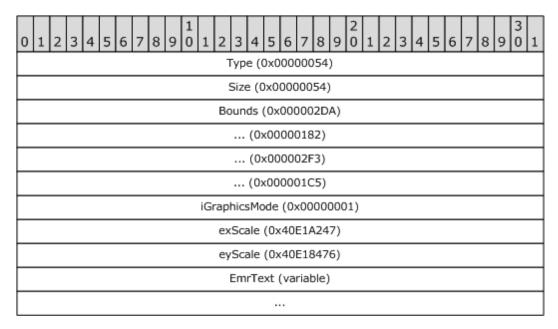


Figure 38: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR EXTTEXTOUTW.

Size: 0x00000054 is the size of this record in bytes.

Bounds: 0x000002DA, 0x00000182, 0x0000002F3, 0x000001C5 values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E1A247 specifies the X scale from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E18476 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

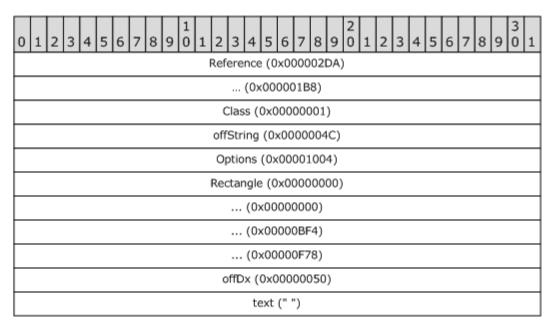


Figure 39: EMF EmrText Object Example

Reference: 0x000002DA, 0x000001B8 specifies the coordinates of the reference point used to position the string.

Chars: 0x00000001 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x00000BF4, 0x00000F78 defines the clipping rectangle in logical units.

offDx: 0x00000050 specifies the offset to the intercharacter spacing array.

text: " ".

3.2.2.26 EMR_SETBKMODE Example

This section provides an example of the $\underline{\sf EMR}$ SETBKMODE record as specified in $\underline{\sf [MS-EMF]}$ section 2.3.11.11.




Figure 40: EMF EMR_SETBKMODE Record Example

Type: 0x00000012 identifies this EMF record type as EMR_SETBKMODE.

Size: 0x0000000C is the size of this record in bytes.

BackgroundMode: 0x00000001 specifies background mode.

3.2.2.27 EMR_EXTTEXTOUTW Example

0	1	2	3	4	5	6	7	8	9	1 0	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
Г	_											7	ур	e (()x0	000	000	54)	_											
												Ş	Size	(0	×0	000	00	D0))												
												Во	un	ds	(0x	000	000	16	7)												
Г														(0x	00	000)10	7)													
Г														(0)	(F0	000)36	51)													
														(0×	00	000)20	A)													
Г											iGr	apl	hics	sМо	de	(0)	(00	000	000	1)											
												ex	Sca	ale	(0x	401	E1/	۱24	7)												
Г												еу	Sca	ale	(0x	40	E18	347	6)												
												ı	Em	rTe	xt ((va	riat	ole)													

Figure 41: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x000000D0 is the size of this record in bytes.

Bounds: 0x00000167, 0x000001C7, 0xF00000361, 0x0000020A values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E1A247 specifies the X scale from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E18476 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

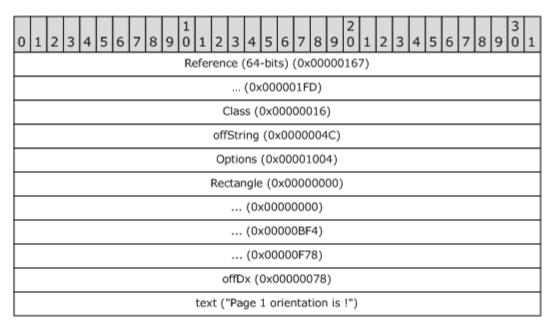


Figure 42: EMF EmrText Object Example

Reference: 0x00000167, 0x000001FD specifies the coordinates of the reference point used to position the string.

Chars: 0x00000016 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000BF4, 0x00000F78 defines the clipping rectangle in logical units.

offDx: 0x00000078 specifies the offset to the intercharacter spacing array.

text: "Page 1 orientation is !".

3.2.2.28 EMR_EXTTEXTOUTW Example

0 1 2 3 4 5 6 7 8	9 0	1 2	2 3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
			Тур	e ((0x0	000	000	54)												\neg
			Size	e (C)x00	000	00	7C))												
			Boun	ds	(0x0	000	000	36	2)												
				(0)	(000	000	10	7)													
				(0)	(000	000	41	2)													
				(0)	(00(000	20	A)													
		iGra	aphic	sMc	de	(0x	00	000	000	1)											
		(exSc	ale	(0x	40E	1/	\24	7)												\neg
		(eySc	ale	(0x	40E	18	347	6)												\neg
			Em	rTe	xt (var	iat	ole)													\neg

Figure 43: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x0000007C is the size of this record in bytes.

Bounds: 0x00000362, 0x000001C7, 0x000000412, 0x0000020A values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 35.260418 specifies the X scale from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 35.250000 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

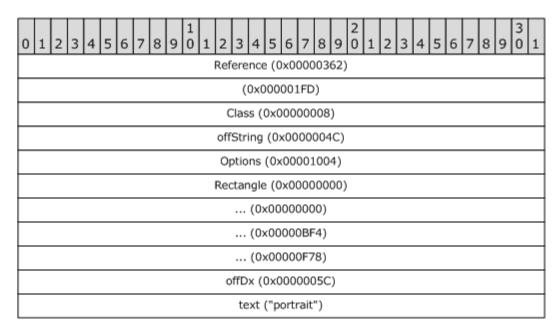


Figure 44: EMF EmrText Object Example

Reference: 0x00000362, 0x000001FD specifies the coordinates of the reference point used to position the string.

Chars: 0x00000008 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000BF4, 0x00000F78 defines the clipping rectangle in logical units.

offDx: 0x0000005C specifies the offset to the intercharacter spacing array.

text: "portrait".

3.2.2.29 EMR_EXTTEXTOUTW Example

0	1	2	3	4	5	6	7	8	9	1 0	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
Г																		54		_											
												5	Size	e (0	x0	000	000	54))												
												Во	un	ds	(0x	000	000)41	3)												
Г														(0x	(00	000)10	7)													
Г														(0)	(00	000)42	21)													
Г														(0×	00	000)20	A)													
Г											iGr	apl	nics	sМо	de	(0)	(OO	000	000	1)											
Г												ex	Sca	ale	(0x	401	E1/	۱24	7)												
Г												еу	Sca	ale	(0x	40	E18	347	6)												
Г												ı	Em	rTe	xt ((va	rial	ole)													П

Figure 45: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x00000054 is the size of this record in bytes.

Bounds: 0x00000413, 0x000001C7, 0x000000421, 0x0000020A values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

 ${\it exScale}$: 0x40E1A247 specifies the X scale from Page units to .01mm units if the graphics mode is ${\it GM_COMPATIBLE}$.

eyScale: 0x40E18476 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

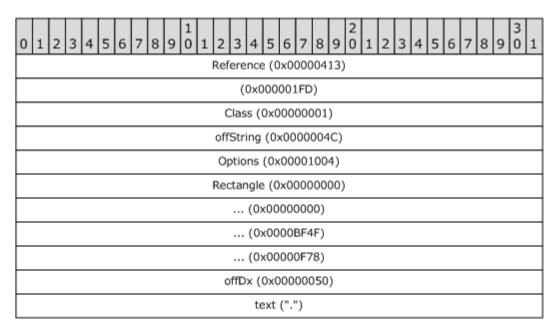


Figure 46: EMF EmrText Object Example

Reference: (0x00000413, 0x000001FD) specifies the coordinates of the reference point used to position the string.

Chars: 0x00000001 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: (0x00000000, 0x00000000, 0x000000BF4F, 0x00000F78) defines the clipping rectangle in logical units.

offDx: 0x00000050 specifies the offset to the intercharacter spacing array.

text: ".".

3.2.2.30 EMR_EXTTEXTOUTW Example

0 1 2 3 4 5 6 7 8 9	1 0	1	2 3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1								
Type (0x00000054)																													
Size (0x00000054)																													
Bounds (0x00000422)																													
(0x000001C7)																													
(0x0000043B)																													
(0x0000020A)																													
iGraphicsMode (0x00000001)																													
exScale (0x40E1A247)																													
eyScale (0x40E18476)																													
EmrText (variable)																													

Figure 47: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x00000054 is the size of this record in bytes.

Bounds: 0x00000422, 0x000001C7, 0x00000043B, 0x0000020A values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E1A247 0x00000001 specifies the X scale from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E18476 0x00000001 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

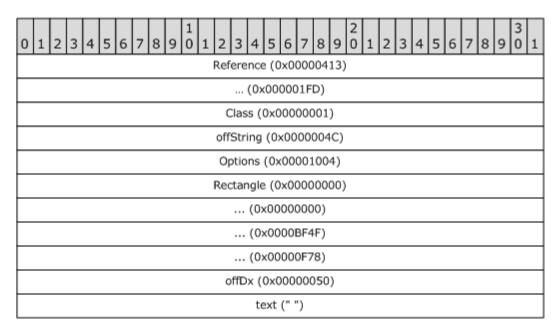


Figure 48: EMF EmrText Object Example

Reference: 0x00000413, 0x000001FD specifies the coordinates of the reference point used to position the string.

Chars: 0x00000001 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000BF4F, 0x000000F78 defines the clipping rectangle in logical units.

offDx: 0x00000050 specifies the offset to the intercharacter spacing array.

text: " ".

3.2.2.31 EMR_SETBKMODE Example

This section provides an example of the $\underline{\sf EMR}$ SETBKMODE record as specified in $\underline{\sf [MS-EMF]}$ section 2.3.11.11.




Figure 49: EMF EMR_SETBKMODE Record Example

Type: 0x00000012 identifies this EMF record type as EMR_SETBKMODE.

Size: 0x0000000C is the size of this record in bytes. **Mode**: 0x00000001 specifies the background mode.

3.2.2.32 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF EMR EXTTEXTOUTW record ([MS-EMF] section 2.3.5.8).

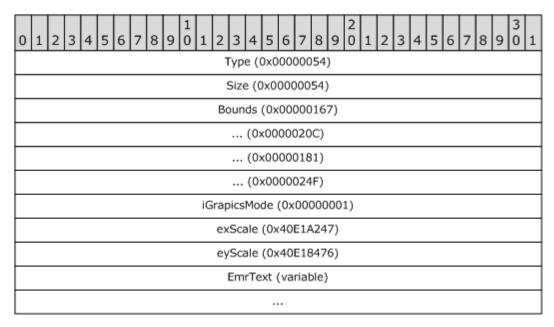


Figure 50: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x00000054 is the size of this EMF record in bytes.

Bounds: 0x00000167, 0x0000020C, 0x00000181, 0x0000024F values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E1A247 specifies the X scale from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E18476 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

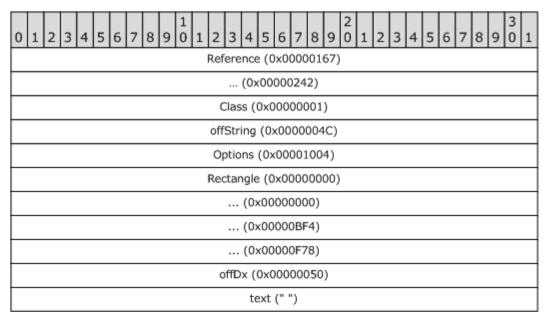


Figure 51: EMF EmrText Object Example

Reference: 0x00000167, 0x00000242 specifies the coordinates of the reference point used to position the string.

Chars: 0x00000001 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x00000BF4F, 0x00000F78 defines the clipping rectangle in logical units.

offDx: 0x00000050 specifies the offset to the intercharacter spacing array.

text: " ".

3.2.2.33 EMR_SELECTOBJECT Example

This section provides an example of the EMR SELECTOBJECT record as specified in [MS-EMF] section 2.3.8.5.




Figure 52: EMF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

ihObject: 0x8000000E specifies the index of an object in the object table or the stock object if it is negative.

3.2.2.34 EMR_SETICMMODE Example

This section provides an example of the <u>EMR_SETICMMODE</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.14.

00064690: 62 00 00 00 0C 00 00 01 00 00 00

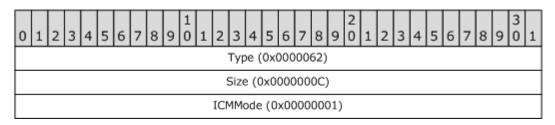


Figure 53: EMF EMR_SETICMMODE Record Example

Type: 0x00000062 identifies this EMF record type as EMR_SETICMMODE.

Size: 0x0000000C is the size of this record in bytes.

ICMMode: 0x00000001 is an Image Color Management (ICM) mode value from the **ICMMode** enumeration as specified in [MS-EMF] section 2.1.18.

3.2.2.35 EMR_EOF Example

This section provides an example of an <u>EMR_EOF</u> record, as specified in <u>[MS-EMF]</u> section 2.3.4.1.

76 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

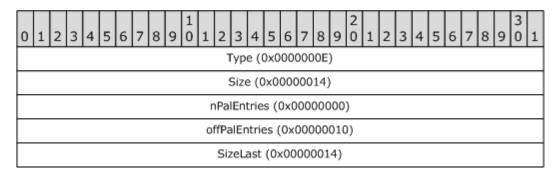


Figure 54: EMF EMR_EOF Record Example

Type: 0x0000000E identifies the type of record as an EMF **EMR_EOF** record.

Size: 0x00000014 is the size of this record in bytes.

nPalEntries: 0x00000000 specifies the number of palette entries.

offPalEntries: 0x00000010 specifies the offset to the palette entries.

SizeLast: 0x00000014 is the same as **Size**.

3.2.3 EMRI_ENGINE_FONT_EXT Example

This section provides an example of the <u>EMRI_ENGINE_FONT_EXT</u> record specified in section <u>2.2.3.4</u>.

000646B0: 0F 00 00 00 08 00 00 00 74 43 06 00 000646C0:00 00 00 00

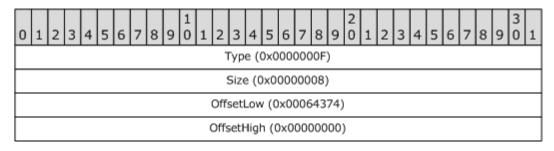


Figure 55: EMRI_ENGINE_FONT_EXT Record Example

Type: 0x0000000F specifies this record type as **EMRI_ENGINE_FONT_EXT**, which is a font offset record.

Size: 0x00000008 is the size in bytes of the data in this EMF spool record.

OffsetLow: 0x00064374 is the lower (least-significant) 32 bits of the offset, which is the location of the embedded font in a previous **EMRI_METAFILE_DATA** record, relative to the start of this record.

77 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

OffsetHigh: 0x00000000 is the upper (most-significant) 32 bits of the offset.

3.2.4 EMRI_DEVMODE Example

This section provides an example of the **EMRI DEVMODE** record (section 2.2.3.5).

```
03 00 00 00 40 04 00 00 5C 00 5C 00
000646D0:70 00 72 00 69 00 6E 00 74 00 65 00 72 00 73 00
000646E0:65 00 72 00 76 00 65 00 72 00 5C 00 43 00 61 00
000646F0:6E 00 6F 00 6E 00 20 00 42 00 75 00 62 00 62 00
00064700:6C 00 65 00 2D 00 4A 00 00 00 00 01 04 00 06
00064710:DC 00 64 03 43 EF 80 07 01 00 01 00 EA 0A 6F 08
00064720:64 00 01 00 0F 00 FD FF 02 00 01 00 FD FF 02 00
00064730:01 00 4C 00 65 00 74 00 74 00 65 00 72 00 00 00
00064780:01 00 00 00 00 00 00 02 00 00 02 00 00 00
000647A0:00 00 00 00 00 00 00 44 49 4E 55 22 00 00 01
000647B0:44 02 18 00 59 D8 B0 99 00 00 00 00 00 00 00 00
000647D0:00 00 00 00 08 00 00 01 00 00 03 00 01 00
000649E0:00 00 00 00 00 01 00 00 53 4D 54 4A 18 00 00 00
000649F0:4E 55 4A 42 00 00 01 00 34 00 00 00 00 00 00
```

00064A00:00 00 00 00 08 01 00 00 53 4D 54 4A 00 00 00 00 00064A10:14 00 00 00 00 00 F4 00 43 00 61 00 6E 00 6F 00 00064A20:6E 00 20 00 42 00 75 00 62 00 62 00 6C 00 65 00 00064A30:2D 00 4A 00 65 00 74 00 20 00 42 00 4A 00 43 00 00064A40:2D 00 35 00 30 00 00 00 49 6E 70 75 74 42 69 6E 00064A50:00 4D 41 4E 55 41 4C 00 52 45 53 44 4C 4C 00 55 00064A60:6E 69 72 65 73 44 4C 4C 00 50 61 70 65 72 53 69 00064A70:7A 65 00 4C 45 54 54 45 52 00 52 65 73 6F 6C 75 00064A80:74 69 6F 6E 00 53 54 41 4E 44 41 52 44 00 4D 65 00064A90:64 69 61 54 79 70 65 00 53 54 41 4E 44 41 52 44 00064AA0:00 43 6F 6C 6F 72 4D 6F 64 65 00 43 4D 59 4B 32 00064AB0:34 00 48 61 6C 66 74 6F 6E 65 00 48 54 5F 50 41 00064ACO:54 53 49 5A 45 5F 41 55 54 4F 00 4F 72 69 65 6E 00064AD0:74 61 74 69 6F 6E 00 50 4F 52 54 52 41 49 54 00 00064B00:00 00 00 00 00 00 00 00 00 00 00

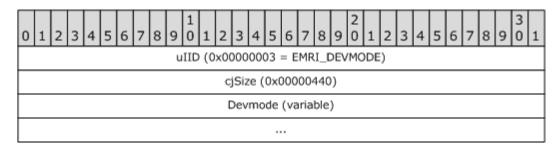


Figure 56: EMRI_DEVMODE Record Example

uIID: 0x00000003 specifies the type of the record, **EMRI_DEVMODE**, from the **RecordType enumeration** (section 2.1.1).

cjSize: 0x00000440 is the size, in bytes, of all the data in the record, including private driver-specific data. Each EMFSPOOL record is aligned to a multiple of 4 bytes.

Devmode: A complete, variable-length _DEVMODE structure ([MS-RPRN] section 2.2.2.1).

0 1 2 3 4 5 6 7 8 9 0 1 2 3 4	5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1													
dmDeviceName ("\\p	nterserver\Canon Bubble-J")													
(des Devilor Norman cont. for 1.4 years)														
(dmDeviceName cont. for 14 rows)														
dmSpecVersion (0x0401) dmDriverVersion (0x0600)														
dmSize (0x00DC)	dmDriverExtra (0x0364)													
dmField	(0x0780EF43)													
dmOrientation (0x0001)	dmPaperSize (0x0001)													
dmPaperLength (0x0AEA)	dmPaperWidth (0x086F)													
dmScale (0x0064)	dmCopies (0x0001)													
dmDefaultSource (0x000F)	dmPrintQuality (0xFFFD)													
dmColor (0x0002)	dmDuplex (0x0001)													

Figure 57: Print System _DEVMODE Structure, Part 1

dmDeviceName: "\\printerserver\Canon Bubble-J" specifies the text name of the printer, truncated to fit into a 32-character Unicode string with null terminator.

dmSpecVersion: 0x0401 specifies the version of the initialization data specification on which the structure is based.

dmDriverVersion: 0x0600 specifies the version assigned by the implementer of the printer driver.

dmSize: 0x00DC specifies the size, in bytes, of the fixed-length portion of the **_DEVMODE** structure, which does not include the private driver-specific data that follows.

dmDriverExtra: 0x0364 specifies size, in bytes, of the variable-length driver-specific data that follows the fixed-length portion of the **_DEVMODE** structure.

dmFields: 0x0780EF43 specifies whether certain fields of the **_DEVMODE** structure are initialized. If a field is initialized, its corresponding bit is set; otherwise the bit is clear.

dmOrientation: 0x0001 specifies Portrait page orientation.

dmPaperSize: 0x0001 specifies **Letter** size paper, 8 1/2 x 11 inches.

dmPaperLength: 0x0AEA specifies the length of the printable area, in tenths of a millimeter.

dmPaperWidth: 0x086F specifies the width of the printable area, in tenths of a millimeter.

dmScale: 0x0064 specifies the factor by which the printed output is meant to be scaled, in percent.

dmCopies: 0x0001 specifies the number of copies to be printed.

dmDefaultSource: 0x000F specifies a device-specific value for the paper source, from which the output bin can be determined.

dmPrintQuality: 0xFFFD specifies medium-resolution printing quality with a predefined value. If this field contained a positive value, it would specify the dots per inch resolution of the device.

dmColor: 0x0002 specifies color printing.

dmDuplex: 0x0001 specifies single-sided printing.

0	1	2	3	4	5	6	7	8	9	1	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
									(0x																0x0						
				d	lm(Coll	ate	(0:	×00	01)									dm	For	٦m١	lan	ne (("Le	ette	r")				
Г	(dmFormName cont. for 14 rows)																														
Г				((dm	For	mΝ	lam	ne o	ont	.)									r	ese	erve	ed0	(0	×00	00)				
Г											ı	ese	erv	ed1	(0	×00	000	00	00))											П
Г											ı	ese	erv	ed2	(0	x0(000	00	00))											П
Г											-	ese	erv	ed3	(0	x0(000	00	00))											\neg
Г												dn	nΝι	цρ	(0x	000	000	00	1)												\neg
											ı	ese	erv	ed4	(0	x0(000	000	00))											

Figure 58: Print System _DEVMODE Structure, Part 2

dmYResolution: 0xFFFD specifies the vertical resolution of the printer, in dots per inch.

dmTTOption: 0x0002 specifies that TrueType fonts should be downloaded as "software fonts."

dmCollate: 0x0001 specifies that collation should be used when printing multiple copies.

dmFormName: "Letter" specifies the name of the printer form, padded with nulls to fit into a 32-character Unicode string with null terminator.

reserved0: 0x0000 is not used.

reserved1: 0x00000000 is not used.
reserved2: 0x00000000 is not used.

reserved3: 0x00000000 is not used.

dmNup: 0x00000001 specifies that the **print server** handles the layout of multiple logical pages on one physical page.

one physical page.

reserved4: 0x00000000 is not used.

0	1	2	3	4	5	6	7	8	9	1 0	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
Г	_										dn	ıΙC	ММ	eth	od	(0)	(00	000	000	02)											
											dr	nlC	:MI	nte	nt ((0x	000	000	00	2)											
											dn	nMe	edia	аТу	ре	(0x	(00	000	000	01)											
Г											dn	nDi	the	rTy	pe	(0>	(00	000)10	01)											
Г												res	erv	ed5	(0	x0(000	000	00)											
Г												res	erv	ed€	(0	x0(000	000	00)											
Г												res	erv	ed7	(0	×00	000	000	00)											
Г												res	erv	ed8	(0	×00	000	000	00)											
Г											dm	nDr	ive	rEx	tral	Dat	a (var	iab	ole)											
Г																															П
									(dm	Dri	ver	Ext	raD	ata	э сс	ont.	fo	r 2	6 rc	ws)									

Figure 59: Print System _DEVMODE Structure, Part 3

dmICMMethod: 0x00000002 specifies that Image Color Management (ICM) should be handled by the system on which the **Page Description Language (PDL)** data is generated.

dmICMIntent: 0x00000002 specifies that **color matching** is optimized for contrast.

dmMediaType: 0x00000001 specifies that plain-paper media type is used.

dmDitherType: 0x00000101 specifies a printer driver-specific value for the type of dithering.

reserved5: 0x000000000 is not used.
reserved6: 0x000000000 is not used.
reserved7: 0x000000000 is not used.
reserved8: 0x000000000 is not used.

dmDriverExtraData: A block of private data, of a size specified by the **dmDriverExtra** field, which is understandable only by the printer driver.

3.2.5 EMRI_BW_METAFILE_EXT Example

This section provides an example of the <u>EMRI BW METAFILE EXT</u> record, specified in section <u>2.2.3.2</u>.



Figure 60: EMRI_BW_METAFILE_EXT Record Example

uIID: 0x0000000E identifies this record type as **EMRI_BW_METAFILE_EXT**, which is a page offset record.

cjSize: 0x00000008 is the size in bytes of the data in this record.

offset: 0x0000000000064AB8 specifies the offset backwards in the metafile to the preceding page content record (section 2.2.3.1), the corresponding example of which is presented in section 3.2.2.

This record signals the end of the page.

3.2.6 EMRI_METAFILE_DATA Example

This section provides an example of the <u>EMRI_METAFILE_DATA</u> record, as specified in section 2.2.3.1.

00064B10: 0C 00 00 00 00 000064B20:64 07 00 00

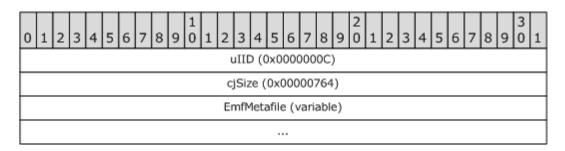


Figure 61: EMRI_METAFILE_DATA Record Example

ulID: 0x0000000C identifies the type of record as **EMRI_METAFILE_DATA**, which is a <u>page</u> <u>content record</u>.

cjSize: 0x00000764 specifies the 4-byte-aligned size in bytes of the data in this record.

EmfMetafile: A variable-size field that contains a complete EMF metafile. This embedded metafile does not contain an embedded <u>font definition record</u> (<u>section 2.2.3.3</u>).

3.2.6.1 EMR_HEADER Example


This section provides an example of the EMF EMR HEADER record ([MS-EMF] section 2.3.4.2).

00064B20: 01 00 00 00 84 00 00 00 3D 01 00 00

83 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.



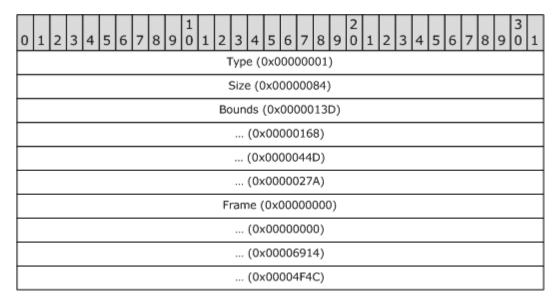


Figure 62: EMF EMR_HEADER Record Example, Part 1

Type: 0x00000001 identifies this EMF record type as EMR_HEADER.

Size: 0x00000084 is the record size in bytes.

Bounds: 0x0000013D, 0x00000168, 0x00000044D, 0x0000027A specifies the rectangular inclusive-inclusive bounds in device units of the smallest rectangle that can be drawn around the image stored in the metafile.

Frame: 0x00000000, 0x00000000, 0x00006914, 0x00004F4C specifies the rectangular inclusive-inclusive dimensions, in .01 millimeter units, of a rectangle that surrounds the image stored in the metafile.

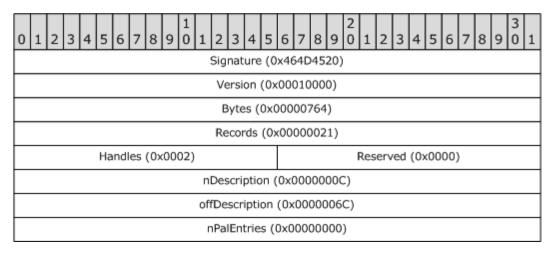


Figure 63: EMF EMR_HEADER Record Example, Part 2

Signature: 0x464D4520 specifies the record signature, which consists of the ASCII string "EMF".

Version: 0x00010000 specifies EMF metafile interoperability.

Bytes: 0x00000764 specifies the size of the metafile in bytes.

Records: 0x00000021 specifies the number of records in the metafile.

Handles: 0x0002 specifies the number of indexes that will need to be defined during the processing of the metafile. These indexes correspond to graphics objects that are used in drawing commands. Index 0 is reserved for references to the metafile itself.

Reserved: 0x0000 is not used.

nDescription: 0x0000000C specifies the number of characters in the array that contains the description of the EMF metafile's contents.

offDescription: 0x0000006C specifies the offset from the beginning of this record to the array that contains the description of the EMF metafile's contents.

nPalEntries: 0x00000000 specifies the number of entries in the metafile palette. The location of the palette is specified in the EMF end-of-file record.

0	1	2	3	4	5	6	7	8	9	1 0	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
Г	_				_							D	evi	ce (0x	000	000	взі	=)												
														(0x	:00	000	EE	9)													
	Millimeters (0x0000010D)																														
Г	(0x000000CB)																														
Г	cbPixelFormat (0x00000000)																														
Г											off	Pix	elF	orn	nat	(O)	(00	000	000	0)											
Г												bO	per	ıGL	(0:	x00	00	000	00)												
Г											Mi	cro	me	ter	sX	(0x	000	031	97	9)											
Г											Mi	cro	me	ter	sΥ	(0x	000	041	BF	F)											
											Er	nfD	esc	rip	tior	ا ("	Pri	nt t	est	")											

Figure 64: EMF EMR_HEADER Record Example, Part 3

Device: 0x00000B3F, 0x00000EE9 specifies the size of the reference device in pixels.

Millimeters: 0x0000010D, 0x000000CB specifies the size of the reference device in millimeters.

cbPixelFormat: 0x00000000 specifies the size of the <u>PixelFormatDescriptor</u> structure, as specified in <u>[MS-EMF]</u> section 2.2.22. This value indicates that no pixel format is defined.

offPixelFormat: 0x00000000 specifies the offset to the PixelFormatDescriptor in the metafile. In this case, no pixel format structure is present.

bOpenGL: 0x00000000 specifies that no OpenGL commands are present in the metafile.


MicrometersX: 0x00031979 specifies the horizontal size of the reference device in micrometers.

MicrometersY: 0x00041BFF specifies the vertical size of the reference device in micrometers.

EmfDescription: "Print test".

3.2.6.2 EMR_SETICMMODE Example

This section provides an example of the <u>EMR_SETICMMODE</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.14.

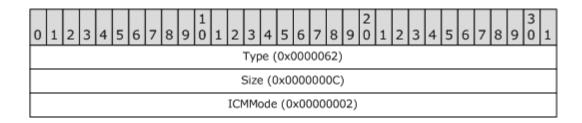

86 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Figure 65: EMF EMR_SETICMMODE Record Example

Type: 0x00000062 identifies this EMF record type as EMR_SETICMMODE.

Size: 0x0000000C is the size of this record in bytes.

ICMMode: 0x000000002 is an Image Color Management (ICM) mode value from the EMF ICMMode

enumeration, specified in [MS-EMF] section 2.1.18.

3.2.6.3 EMR_SELECTOBJECT Example

This section provides an example of the <u>EMR_SELECTOBJECT</u> record as specified in <u>[MS-EMF]</u> section 2.3.8.5.

00064BB0:

25 00 00 00 0C 00 00 00 07 00 00 80




Figure 66: EMF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

ihObject: 0x80000007 specifies the index of an object in the object table or the stock object if it is negative.

3.2.6.4 EMR_SELECTOBJECT Example

This section provides an example of the EMR SELECTOBJECT record as specified in [MS-EMF] section 2.3.8.5.

00064BC0:25 00 00 00 0C 00 00 00 00 00 00 80

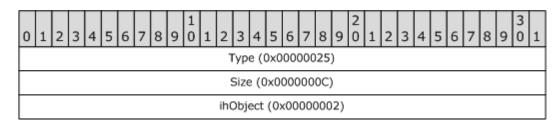


Figure 67: EMF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

87 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

ihObject: 0x00000002 specifies the index of an object in the object table or the stock object if it is negative.

3.2.6.5 EMR_SELECTOBJECT Example

This section provides an example of the EMR SELECTOBJECT record as specified in [MS-EMF] section 2.3.8.5.

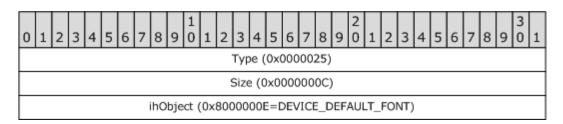


Figure 68: EMF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

ihObject: 0x8000000E specifies the index of an object in the object table or the stock object if it is negative.

3.2.6.6 EMR_MOVETOEX Example

This section provides an example of the <u>EMR_MOVETOEX</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.4.




Figure 69: EMF EMR_MOVETOEX Record Example

Type: 0x0000001B identifies this EMF record type as EMR MOVETOEX.

Size: 0x00000010 is the size of this record in bytes.

Offset: 0x0000000000000000 specifies coordinates of the new current position in logical units.

88 / 129

3.2.6.7 EMR_SETBRUSHORGEX Example

This section provides an example of the <u>EMR_SETBRUSHORGEX</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.12.

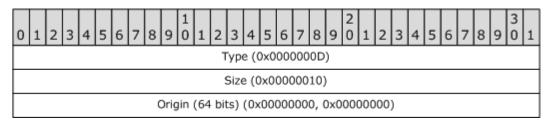


Figure 70: EMF EMR_SETBRUSHORGEX Record Example

Type: 0x0000000D identifies this EMF record type as EMR_SETBRUSHORGEX.

Size: 0x00000010 is the size of this record in bytes.

Origin: 0x00000000, 0x00000000 specifies the brush horizontal and vertical origin in device units.

3.2.6.8 EMR_SETICMMODE Example

This section provides an example of the <u>EMR_SETICMMODE</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.14.




Figure 71: EMF EMR_SETICMMODE Record Example

Type: 0x00000062 identifies this EMF record type as EMR_SETICMMODE.

Size: 0x0000000C is the size of this EMF record in bytes.

ICMMode: 0x00000002 is an Image Color Management (ICM) mode value from the **ICMMode** enumeration, specified in [MS-EMF] section 2.1.18.

3.2.6.9 EMR_SETCOLORSPACE Example

This section provides an example of the EMR SETCOLORSPACE record as specified in [MS-EMF] section 2.3.8.7.

89 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.




Figure 72: EMF EMR_SETCOLORSPACE Record Example

Type: 0x00000064 identifies this EMF record type as EMR_SETCOLORSPACE.

Size: 0x0000000C is the size of this record in bytes.

ihCS: 0x80000014 specifies the ColorSpace, as specified in the **ColorSpace** enumeration in [MS-EMF] section 2.1.7.

3.2.6.10 EMR_SETTEXTALIGN Example

This section provides an example of an EMF $\underline{\sf EMR}$ $\underline{\sf SETTEXTALIGN}$ record ($\underline{\sf [MS-EMF]}$ section 2.3.11.25).

00064C10:16 00 00 00 0C 00 00 00 18 00 00 00




Figure 73: EMF EMR_SETTEXTALIGN Record Example

Type: 0x00000016 identifies the record type as EMR_SETTEXTALIGN.

Size: 0x0000000C is the size of this record in bytes.

TextAlignmentMode: 0x00000018 specifies the text alignment mode by using WMF **TextAlignmentMode Flags** ([MS-WMF] section 2.1.2.3).

3.2.6.11 EMR_SELECTOBJECT Example

This section provides an example of the <u>EMR_SELECTOBJECT</u> record as specified in <u>[MS-EMF]</u> section 2.3.8.5.

00064C10: 00064C20:0c 00 00 00 0e 00 00 80 25 00 00 00

90 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.




Figure 74: EMF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

ihObject: 0x8000000E specifies the index of an object in the object table or the stock object if it is negative.

3.2.6.12 EMR_SETTEXTALIGN Example

This section provides an example of an EMF $\underline{\sf EMR}$ $\underline{\sf SETTEXTALIGN}$ record ($\underline{\sf [MS-EMF]}$ section 2.3.11.25).




Figure 75: EMF EMR_SETTEXTALIGN Record Example

Type: 0x00000016 identifies the record type as EMR_SETTEXTALIGN.

Size: 0x0000000C is the size of this record in bytes.

TextAlignmentMode: 0x00000018 specifies the text alignment mode by using WMF **TextAlignmentMode Flags** ([MS-WMF] section 2.1.2.3).

3.2.6.13 EMR_SETBKMODE Example

This section provides an example of the $\underline{\sf EMR}$ SETBKMODE record as specified in $\underline{\sf [MS-EMF]}$ section 2.3.11.11.

00064C30: 12 00 00 00 0C 00 00 01 00 00 00

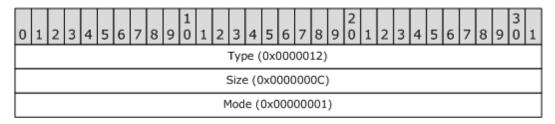


Figure 76: EMF EMR_SETBKMODE Record Example

Type: 0x00000018 identifies this EMF record type as EMR_SETBKMODE.

Size: 0x0000000C is the size of this record in bytes.

Mode: 0x00000001 specifies the background mode as **TRANSPARENT**.

3.2.6.14 EMR_SETVIEWPORTORGEX Example

This section provides an example of the EMR SETVIEWPORTORGEX record as specified in [MS-EMF] section 2.3.11.29.

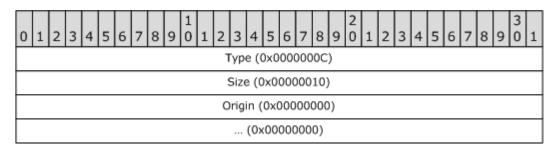


Figure 77: EMF EMR_SETVIEWPORTORGEX Record Example

Type: 0x0000000C identifies this EMF record type as EMR_SETVIEWPORTORGEX.

Size: 0x00000010 is the size of this record in bytes.

Origin: 0x00000000, 0x00000000 specifies the viewport horizontal and vertical origin in device units.

3.2.6.15 EMR_SETBKMODE Example

This section provides an example of the EMR SETBKMODE record as specified in [MS-EMF] section 2.3.11.11.

00064C50:12 00 00 00 0C 00 00 00 01 00 00 00




Figure 78: EMF EMR_SETBKMODE Record Example

Type: 0x00000012 identifies this EMF record type as EMR_SETBKMODE.

Size: 0x0000000C is the size of this record in bytes.

Mode: 0x00000001 specifies the background mode, as specified in the **BackgroundMode** enumeration in [MS-EMF] section 2.1.4.

3.2.6.16 EMR_EXTCREATEFONTINDIRECTW Example

This section provides an example of an EMF <u>EMR_EXTCREATEFONTINDIRECTW</u> record (<u>[MS-EMF]</u> section 2.3.7.8).

00064C50:												ΕO	0.0	0.0	0.0
	0.4			0.4								52			0 0
00064C60:70	01	00	00	01	00	00	00	C4	FF	FF	FF	00	00	00	00
00064C70:00	00	00	00	00	00	00	00	90	01	00	00	00	00	00	00
00064C80:07	40	00	12	54	00	69	00	6D	00	65	00	73	00	20	00
00064C90:4E	00	65	00	77	00	20	00	52	00	6F	00	6D	00	61	00
00064CA0:6E	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
00064CB0:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
00064CC0:00	00	00	00	00	00	20	00	08	5A	18	00	24	Α8	56	07
00064CD0:24	Α8	56	07	C4	F0	7D	07	С9	A4	07	30	90	00	В7	00
00064CE0:B8	1A	E2	01	43	00	00	00	00	00	00	00	В8	1A	E2	01
00064CF0:6F	EC	EE	94	D4	Α5	07	30	48	F1	7D	07	40	F8	Α9	30
00064D00:84	F8	Α9	30	78	АЗ	07	30	2F	00	00	00	7в	7C	03	30
00064D10:31	90	18	00	00	00	00	00	F4	5E	9В	00	80	5A	18	00
00064D20:04	00	00	00	08	00	00	00	04	00	00	00	68	5E	9В	00
00064D30:78	EE	7D	07	31	90	18	00	00	00	00	00	04	00	00	00
00064D40:7C	EE	7D	07	00	00	7D	07	00	00	00	00	00	00	00	00
00064D50:47	16	90	01	00	00	00	00	00	00	00	00	00	00	00	00
00064D60:87	ЗА	00	20	00	00	00	00	00	00	00	00	00	00	00	00
00064D70:FF	01	00	00	00	00	00	00	54	00	69	00	6D	00	65	00
00064D80:73	00	20	00	00	00	65	00	77	00	20	00	52	00	6F	00
00064D90:6D	00	61	00	6E	00	00	00	00	00	00	00	00	00	00	00
00064DA0:00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
00064DB0:F0	EE	7D	07	5A	В0	02	30	F0	EE	7D	07	8C	63	AB	30
00064DC0:08	EF	7D	07	64	76	00	08	00	00	00	00				

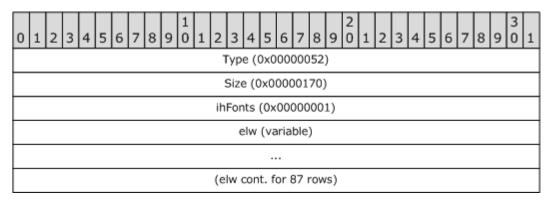


Figure 79: EMF EMR_EXTCREATEFONTINDIRECTW Record Example

Type: 0x00000052 identifies the record type as EMR_EXTCREATEFONTINDIRECTW.

Size: 0x00000170 specifies the size of this record in bytes.

ihFonts: 0x00000001 specifies the object index in the <u>EMF Object Table</u> ([MS-EMF] section 3.1.1) to assign to the font.

elw: To determine the type of logical font object in this field, an algorithm ([MS-EMF] section 2.3.7.8) is applied, which indicates that this is a variable-length EMF LogFontExDv object ([MS-EMF] section 2.2.15).

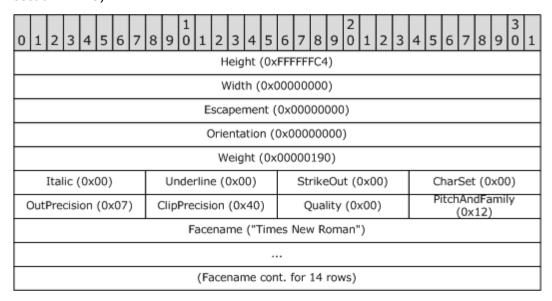


Figure 80: EMF LogFontExDv Object, Part 1

Height: 0xFFFFFFC4 has an absolute value of 60, which specifies the character height for this font in logical units.

Width: 0x00000000 specifies a computed font width. The aspect ratio of the device is matched against the digitization aspect ratio of the font to find the closest match, determined by the absolute value of the difference.

Escapement: 0x00000000 specifies an angle of 0 degrees between the baseline of a row of text and the x-axis of the device.

Orientation: 0x00000000 specifies an angle of 0 degrees between each character's baseline and the x-axis of the device.

Weight: 0x000000190 specifies that the weight of the font is 400, in the range 0 through 1000, from lightest to darkest, with 400 (0x00000190) considered normal.

Italic: 0x00 specifies that the font is not italic.

Underline: 0x00 specifies that the font is not underlined.

Strikeout: 0x00 specifies that the font characters do not have a strike-out graphic.

CharSet: 0x00 specifies the **ANSI_CHARSET** as defined in the WMF **CharacterSet** enumeration ([MS-WMF] section 2.1.1.5).

OutPrecision: 0x07 specifies the output precision, which is how closely the output must match the requested font properties, from the WMF <u>OutPrecision</u> enumeration (<u>[MS-WMF]</u> section 2.1.1.21). The value 0x07 specifies that the font mapper should choose a TrueType font.

ClipPrecision: 0x40 specifies the clipping precision, which is how to clip characters that are partially outside the clipping region, from the WMF <u>ClipPrecision Flags</u> (<u>[MS-WMF]</u> section 2.1.2.1). The value 0x40 specifies that font association be turned off.

Quality: 0x00 specifies default output quality, from the WMF **FontQuality** enumeration ([MS-WMF] section 2.1.1.10).

PitchAndFamily: 0x12 specifies a variable-pitch font with serifs, from the WMF **FamilyFont** and **PitchFont** enumerations ([MS-WMF] sections 2.1.1.8 and 2.1.1.24, respectively).

Facename: "Times New Roman" specifies the typeface name of the font in Unicode characters.

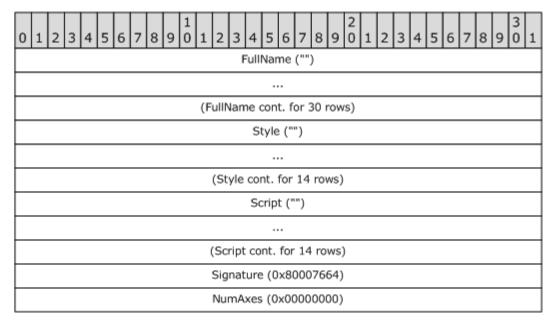


Figure 81: EMF LogFontExDv Object, Part 2

FullName: An empty string specifies the font's full name.

Style: An empty string describes the font's style.

Script: An empty string describes the font's character set.

Signature: 0x80007664 specifies the signature of an EMF <u>DesignVector</u> object (<u>[MS-EMF]</u> section

2.2.3).

NumAxes: 0x00000000 specifies the number of font axes described in the DesignVector object.

3.2.6.17 EMR_SELECTOBJECT Example

This section provides an example of the EMR SELECTOBJECT record as specified in [MS-EMF] section 2.3.8.5.

00064DC0: 25 00 00 00 00 00 00 00 00




Figure 82: EMF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x0000000C is the size of this record in bytes.

ihObject: 0x00000001 specifies the index of an object in the object table or the stock object if it is negative.

3.2.6.18 EMR_FORCEUFIMAPPING Example

This section provides an example of the <u>EMR_FORCEUFIMAPPING</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.2.

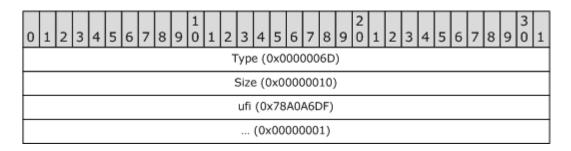


Figure 83: EMF EMR_FORCEUFIMAPPING Record Example

Type: 0x0000006D identifies this EMF record type as EMR_FORCEUFIMAPPING.

Size: 0x00000010 specifies the size of this record in bytes.

ufi: 0x78A0A6DF, 0x00000001 specifies the universal font ID to use. This consists of a 32-bit checksum (0x78A0A6DF) followed by a 32-bit index (0x00000001).

3.2.6.19 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF EMR EXTTEXTOUTW record ([MS-EMF] section 2.3.5.8).

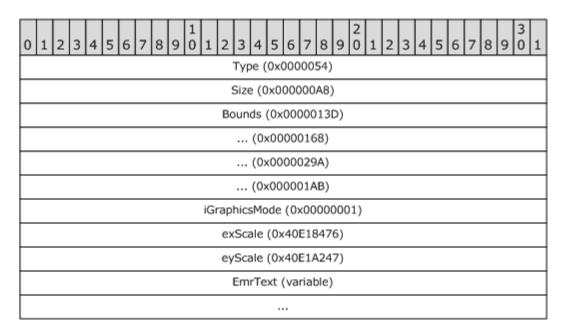


Figure 84: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x000000A8 specifies the size of this record in bytes.

Bounds: 0x0000013D, 0x00000168, 0x0000029A, 0x000001AB values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E18476 specifies the X scale from Page units to .01mm units if the graphics mode is $GM_COMPATIBLE$.

eyScale: 0x40E1A247 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

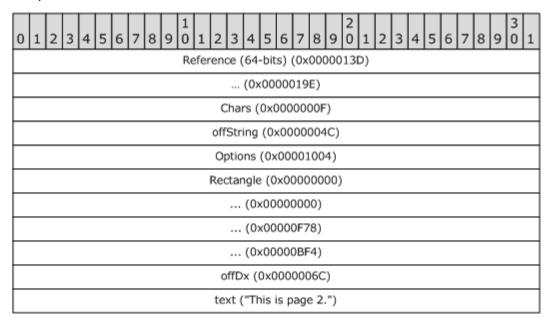


Figure 85: EMF EmrText Object Example

Reference: 0x0000013D, 0x0000019E specifies the coordinates of the reference point used to position the string.

Chars: 0x0000000F specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000F78, 0x00000BF4 defines the clipping rectangle in logical units.

 $\label{eq:offDx:ox0000006C} \textbf{offDx} \colon 0x0000006C \text{ specifies the offset to the intercharacter spacing array}.$

text: "This is page 2.".

3.2.6.20 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF EMR EXTTEXTOUTW record ([MS-EMF] section 2.3.5.8).

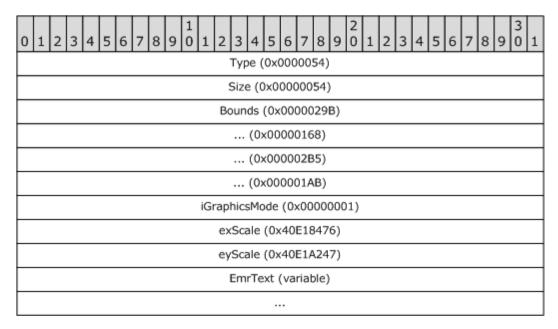


Figure 86: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x00000054 specifies the size of this record in bytes.

Bounds: 0x0000029B, 0x00000168, 0x0000002B5, 0x0000001AB values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E18476 specifies the X scale from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E1A247 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

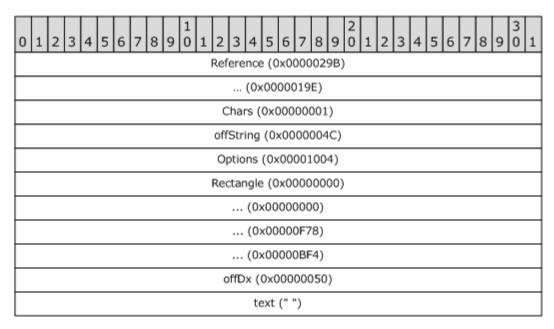


Figure 87: EMF EmrText Object Example

Reference: 0x0000029B, 0x0000019E specifies the coordinates of the reference point used to position the string.

Chars: 0x00000001 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000F78, 0x00000BF4 defines the clipping rectangle in logical units.


offDx: 0x00000050 specifies the offset to the intercharacter spacing array.

text: " ".

3.2.6.21 EMR_SETBKMODE Example

This section provides an example of the $\underline{\sf EMR}$ SETBKMODE record as specified in $\underline{\sf [MS-EMF]}$ section 2.3.11.11.

00064EEO: 12 00 00 00 0C 00 00 01 00 00 00



100 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Figure 88: EMF EMR_SETBKMODE Record Example

Type: 0x00000012 identifies this EMF record type as EMR_SETBKMODE.

Size: 0x000000C specifies the size of this record in bytes. **BackgroundMode**: 0x00000001 specifies background mode.

3.2.6.22 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF EMR EXTTEXTOUTW record ([MS-EMF] section 2.3.5.8).

```
00064EF0:54 00 00 00 88 00 00 00 3D 01 00 00 AD 01 00 00
00064F00:23 02 00 00 F0 01 00 00 01 00 00 00 76 84 E1 40
00064F10:47 A2 E1 40 3D 01 00 00 E3 01 00 00 0A 00 00 00
00064F20:4C 00 00 00 04 10 00 00 00 00 00 00 00 00 00 00
00064F30:78 OF 00 00 F4 OB 00 00 60 00 00 50 00 61 00
00064F40:67 00 65 00 20 00 32 00 20 00 69 00 73 00 20 00
00064F50:21 00 00 00 1B 00 00 00 1D 00 00 00 1B 00 00 00
00064F60:0F 00 00 00 1E 00 00 0F 00 00 00 11 00 00 00
00064F70:17 00 00 00 0F 00 00 00
```

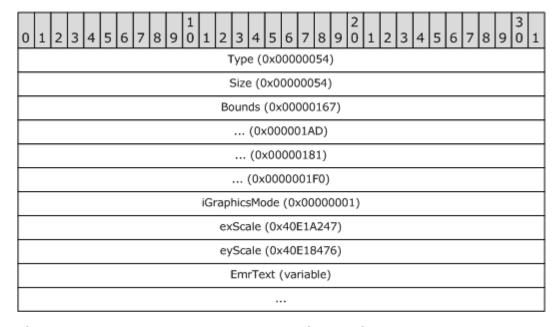


Figure 89: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR EXTTEXTOUTW.

Size: 0x00000088 specifies the size of this record in bytes.

Bounds: 0x0000013D, 0x000001AD, 0x00000223, 0x00001F0 values are not used.

iGraphicsMode: 0x00000001 specifies the GM_COMPATIBLE graphics mode from the EMF

GraphicsMode enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E18476 specifies the X scale from Page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E1A247 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

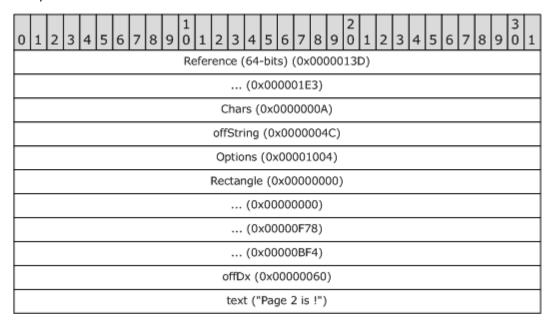


Figure 90: EMF EmrText Object Example

Reference: 0x0000013D, 0x000001E3 specifies the coordinates of the reference point used to position the string.

Chars: 0x0000000A specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000F78, 0x00000BF4 defines the clipping rectangle in logical units.

 $\label{eq:offDx:ox00000060} \textbf{offDx} \colon 0x00000060 \text{ specifies the offset to the intercharacter spacing array}.$

text: "Page 2 is !".

3.2.6.23 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF <u>EMR_EXTTEXTOUTW</u> record (<u>[MS-EMF]</u> section 2.3.5.8).

```
00064F70: 54 00 00 00 70 00 00 00 00 00 00064F80:24 02 00 00 AD 01 00 00 AD 02 00 00 F0 01 00 00 00064F90:01 00 00 00 76 84 E1 40 47 A2 E1 40 24 02 00 00
```

102 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

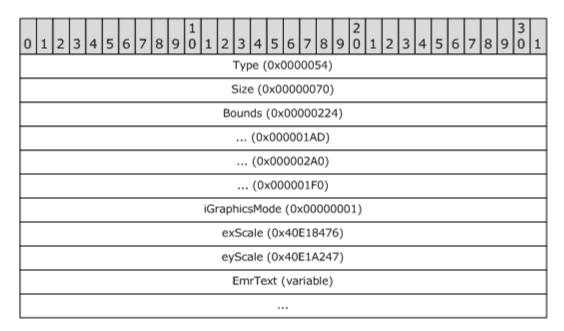


Figure 91: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR EXTTEXTOUTW.

Size: 0x00000070 specifies the size of this record in bytes.

Bounds: 0x00000224, 0x000001AD, 0x000002A0, 0x000001F0 values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E18476 specifies the X scale from Page units to .01mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E1A247 specifies the Y scales from Page units to .01mm units if the graphics mode is **GM COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

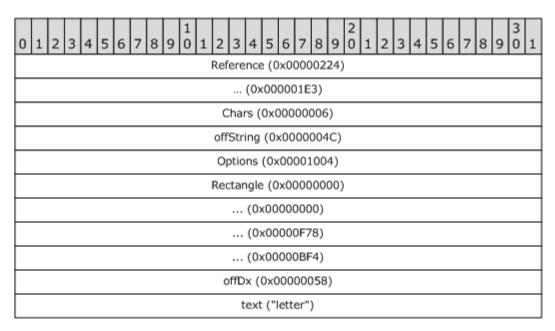


Figure 92: EMF EmrText Object Example

Reference: 0x00000224, 0x000001E3 specifies the coordinates of the reference point used to position the string.

Chars: 0x00000006 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000F78, 0x00000BF4 defines the clipping rectangle in logical units.

offDx: 0x00000058 specifies the offset to the intercharacter spacing array.

text: "letter".

3.2.6.24 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF EMR EXTTEXTOUTW record ([MS-EMF] section 2.3.5.8).

```
00064FE0: 54 00 00 54 00 00 00 00 00 00 00 00 00064FF0:A1 02 00 00 AD 01 00 00 AF 02 00 00 F0 01 00 00 00065000:01 00 00 00 76 84 E1 40 47 A2 E1 40 A1 02 00 00 00 00065010:E3 01 00 00 01 00 00 00 4c 00 00 00 04 10 00 00 00 00 00 00 65020:00 00 00 00 00 00 00 00 78 0F 00 00 F4 0B 00 00 00 00065030:50 00 00 00 2E 00 FE 26 0F 00 00 00
```

0 1 2 3 4 5 6 7 8	9 0	1	2 3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
			Тур	oe (0×0	000	005	54)													
Size (0x0000088)																					
Bounds (0x000002A1)																					
	(0x000001AD)																				
(0x000001AD)																					
				(0)	<000	000	1F	0)													
		iGra	aphic	sMc	de	(0x	000	000	000	1)											
			exSc	ale	(0x4	40E	18	47	6)												
			eySc	ale	(0x4	40E	1A	24	7)												
			Em	rTe	xt (vari	iab	le)													

Figure 93: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x00000054 specifies the size of this record in bytes.

Bounds: 0x000002A1, 0x000001AD, 0x0000002AF, 0x0000001F0 values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E18476 specifies the X scale from Page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E1A247 specifies the Y scales from Page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

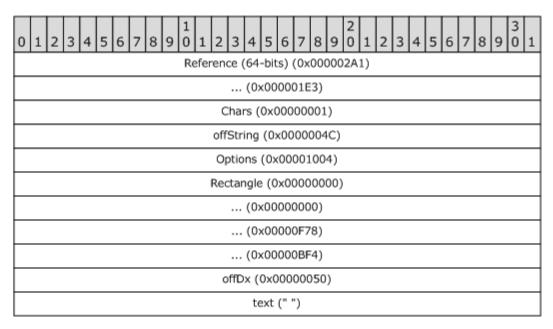


Figure 94: EMF EmrText Object Example

Reference: 0x000002A1, 0x000001E3 specifies the coordinates of the reference point used to position the string.

Chars: 0x00000001 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x00000F78, 0x0000BF4 defines the clipping rectangle in logical units.

offDx: 0x00000050 specifies the offset to the intercharacter spacing array.

text: " ".

3.2.6.25 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF EMR EXTTEXTOUTW record ([MS-EMF] section 2.3.5.8).

0 1 2 3 4 5 6 7 8	9 0	1	2 3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
			Тур	e (0×0	000	000)54)												
Size (0x00000054)																					
Bounds (0x000002B0)																					
(0x000001AD)																					
(0x000001AD)																					
				(0:	×00	000	01F	0)													
		iGr	aphic	sMo	de	(0>	(00	000	000	1)											
			exSc	ale	(0x	401	E18	347	6)												
			eySc	ale	(0x	401	E14	174	0)												
			Em	rTe	xt (vai	riat	ole)													

Figure 95: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x00000054 specifies the size of this record in bytes.

Bounds: 0x000002B0, 0x000001AD, 0x000002C9, 0x000001F0 values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E18476 specifies the X scale from Page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E14740 specifies the Y scales from Page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

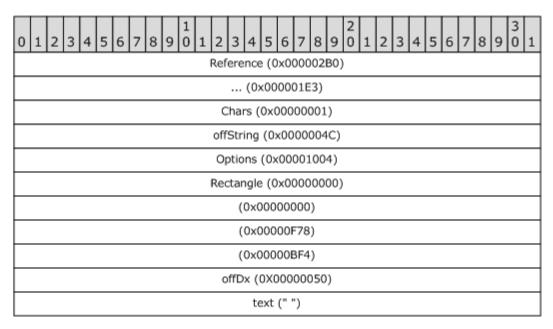


Figure 96: EMF EmrText Object Example

Reference: 0x000002B0, 0x000001E3 specifies the coordinates of the reference point used to position the string.

Chars: 0x00000001 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: (0x00000000, 0x00000000, 0x000000F78, 0x00000BF4) defines the clipping rectangle in logical units.

offDx: 0x00000050 specifies the offset to the intercharacter spacing array.

text: " ".

3.2.6.26 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF EMR EXTTEXTOUTW record ([MS-EMF] section 2.3.5.8).

108 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

00065150:1B 00 00 00 1E 00 00 00 11 00 00 00 1B 00 00 00 00 00065160:11 00 00 00 11 00 00 1E 00 00 00 00 00065170:0E 00 00 00 11 00 00 00 1E 00 00 0F 00 00 00 00065180:11 00 00 00 1B 00 00 00 1E 00 00 00 00 00065190:17 00 00 00 1A 00 00 00 1B 00 00 00 1E 00 00 00 00 000651A0:1B 00 00 00 0F 00 00 00

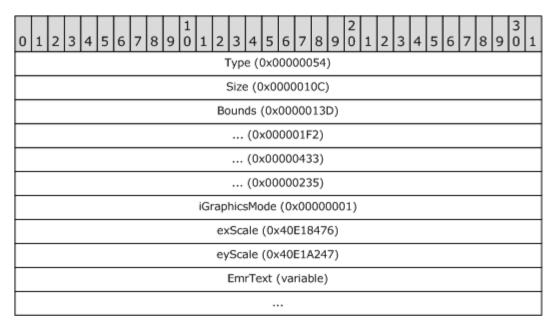


Figure 97: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x0000010C specifies the size of this record in bytes.

Bounds: 0x0000013D, 0x000001F2, 0x000000433, 0x000000235 values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E18476 specifies the X scale from Page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E1A247 specifies the Y scales from Page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

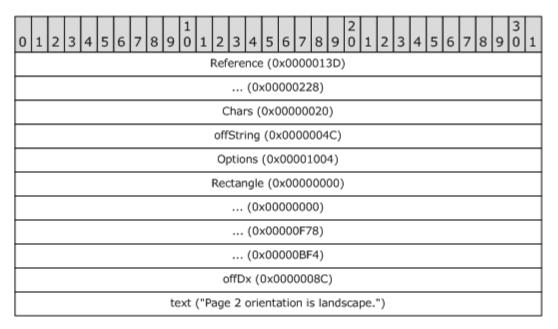


Figure 98: EMF EmrText Object Example

Reference: 0x0000013D, 0x00000228 specifies the coordinates of the reference point used to position the string.

Chars: 0x00000020 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: 0x00000000, 0x00000000, 0x000000F78, 0x00000BF4 defines the clipping rectangle in logical units.

offDx: 0x0000008c specifies the offset to intercharacter spacing array.

text: "Page 2 orientation is landscape.".

3.2.6.27 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF EMR EXTTEXTOUTW record ([MS-EMF] section 2.3.5.8).

```
000651A0: 54 00 00 54 00 00 00 00 00 000651B0:34 04 00 00 F2 01 00 00 4D 04 00 00 35 02 00 00 000651C0:01 00 00 07 684 E1 40 47 A2 E1 40 34 04 00 00 00 00651D0:28 02 00 00 01 00 00 04 C 00 00 04 10 00 00 00 00 00 051E0:00 00 00 00 00 00 00 00 78 0F 00 00 F4 0B 00 00 000651F0:50 00 00 00 20 00 00 3C 1A 00 00 00
```

0 1 2 3 4 5 6 7 8	9 0 1	L 2	3 4	5	6 7	8	9	2 0 1	2	3	4	5	6	7	8	9	3	1
Text (0x0000054)																		
Size (0x00000054)																		
Bounds (0x00000434)																		
(0x000001F2)																		
(0x0000044D)																		
	(0×00000235)																	
	iC	Graph	icsMo	ode	(0x0	000	000	l)										
		ex5	Scale	(0x	40E:	857	6)											
eyScale (0x40E1A247)																		
EmrText (variable)																		

Figure 99: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x00000054 specifies the size of this record in bytes.

Bounds: 0x00000434, 0x000001F2, 0x00000044D, 0x00000235 values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E18576 specifies the X scale from Page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E1A247 specifies the Y scales from Page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

0 1 2 3	4	5	6	7	8	9	1 0	1	2	3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 Reference (0x0000013D)																												
(0x0000026D)																												
Chars (0x00000001)																												
offString (0x0000004C)																												
Options (0x00001004)																												
	Rectangle (0x0000000)																											
											(0)	(00	000	000	00)													П
											(0)	(00	000	0F7	'8)													П
	(0×00000BF4)										П																	
offDx (0x00000050)																												
	text (" ")																											

Figure 100: EMF EmrText Object Example

Reference: 0x00000434, 0x00000282 specifies the coordinates of the reference point used to position the string.

Chars: 0x00000001 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: (0x00000000, 0x00000000, 0x00000F78, 0x00000BF4) defines the clipping rectangle in logical units.

offDx: 0x00000050 specifies the offset to the intercharacter spacing array.

text: " ".

3.2.6.28 EMR_SETBKMODE Example

This section provides an example of the <u>EMR_SETBKMODE</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.11.

000651F0: 12 00 00 00 00 00 00 00 00




Figure 101: EMF EMR_SETBKMODE Record Example

Type: 0x00000012 identifies this EMF record type as EMR_SETBKMODE.

Size: 0x000000C specifies the size of this record in bytes.

BackgroundMode: 0x00000001 specifies background mode.

3.2.6.29 EMR_EXTTEXTOUTW Example

This section provides an example of an EMF EMR EXTTEXTOUTW record ([MS-EMF] section 2.3.5.8).

```
00065200: 54 00 00 54 00 00 00 00 00 00 00 00 00 00065210:3D 01 00 00 37 02 00 00 57 01 00 00 7A 02 00 00 00065220:01 00 00 00 76 84 E1 40 47 A2 E1 40 3D 01 00 00 00065230:6D 02 00 00 01 00 00 00 4C 00 00 04 10 00 00 00 00065240:00 00 00 00 00 00 00 00 78 0f 00 00 F4 0B 00 00 00 00065250:50 00 00 00 20 00 00 4A 1B 00 00 00
```

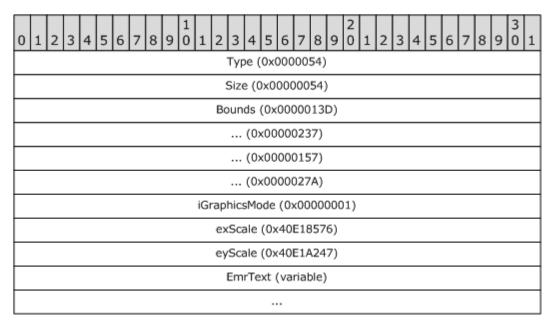


Figure 102: EMF EMR_EXTTEXTOUTW Record Example

Type: 0x00000054 identifies the record type as EMR_EXTTEXTOUTW.

Size: 0x0000054 specifies the size of this record in bytes.

Bounds: 0x0000013D, 0x00000237, 0x00000157, 0x0000027A values are not used.

iGraphicsMode: 0x00000001 specifies the **GM_COMPATIBLE** graphics mode from the EMF **GraphicsMode** enumeration ([MS-EMF] section 2.1.16).

exScale: 0x40E18576 specifies the X scale from page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

eyScale: 0x40E1A247 specifies the Y scales from page units to .01 mm units if the graphics mode is **GM_COMPATIBLE**.

EmrText: An EMF <u>EmrText</u> object (<u>[MS-EMF]</u> section 2.2.5). This is followed by strings and spacing arrays.

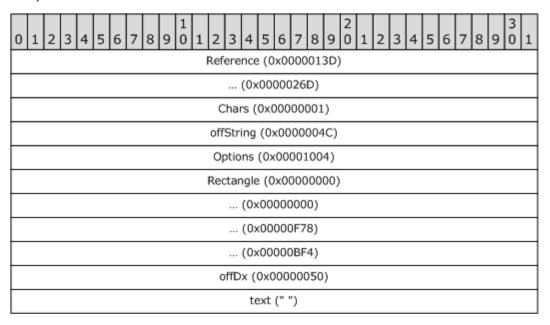


Figure 103: EMF EmrText Object Example

Reference: 0x0000013D, 0x0000026D specifies the coordinates of the reference point used to position the string.

Chars: 0x00000001 specifies the number of characters in the string.

offString: 0x0000004C specifies the offset to the string.

Options: 0x00001004 indicates that the rectangle defined in the **Rectangle** field is used for clipping, as specified in the EMF **ExtTextOutOptions** enumeration ([MS-EMF] section 2.1.11).

Rectangle: (0x00000000, 0x00000000, 0x000000F78, 0x000000BF4) defines the clipping rectangle in logical units.

offDx: 0x00000050 specifies the offset to intercharacter spacing array.

text: " ".

3.2.6.30 EMR_SELECTOBJECT Example

This section provides an example of the EMR SELECTOBJECT record as specified in [MS-EMF] section 2.3.8.5.

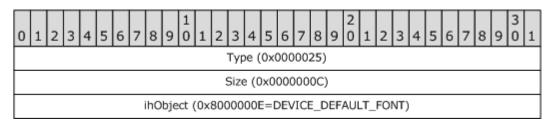


Figure 104: EMF EMR_SELECTOBJECT Record Example

Type: 0x00000025 identifies this EMF record type as EMR_SELECTOBJECT.

Size: 0x000000C specifies the size of this record in bytes.

ihObject: 0x8000000E specifies the index of an object in the object table or the stock object if it is negative.

3.2.6.31 EMR_SETICMMODE Example

This section provides an example of the <u>EMR_SETICMMODE</u> record as specified in <u>[MS-EMF]</u> section 2.3.11.14.




Figure 105: EMF EMR_SETICMMODE Record Example

Type: 0x00000062 identifies this EMF record type as EMR_SETICMMODE.

Size: 0x0000000C is the size of this EMF record in bytes.

ICMMode: 0x00000001 is an Image Color Management (ICM) mode value from the <u>ICMMode</u> enumeration, specified in <u>[MS-EMF]</u> section 2.1.18.

3.2.6.32 EMR_EOF Example

This section provides an example of an EMR EOF record, as specified in [MS-EMF] section 2.3.4.1.

115 / 129

[MS-EMFSPOOL] — v20140124 Enhanced Metafile Spool Format

Copyright © 2014 Microsoft Corporation.

Release: Thursday, February 13, 2014

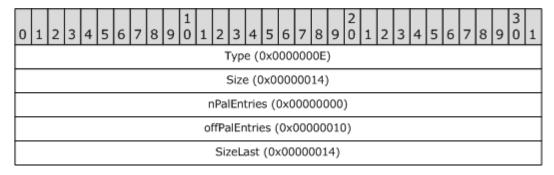


Figure 106: EMF EMR_EOF Record Example

Type: 0x0000000E identifies the type of record as an EMF **EMR_EOF** record.

Size: A 0x00000014 specifies the size of this record in bytes.

nPalEntries: 0x00000000 specifies the number of palette entries.


offPalEntries: 0x00000010 specifies the offset to the palette entries.

SizeLast: 0x00000014 is the same as **Size**.

3.2.7 EMRI_DEVMODE Example

This section provides an example of the **EMRI DEVMODE** record (section 2.2.3.5).

```
03 00 00 00 40 04 00 00
00065290:5C 00 5C 00 70 00 72 00 69 00 6E 00 74 00 65 00
000652A0:72 00 73 00 65 00 72 00 76 00 65 00 72 00 5C 00
000652B0:43 00 61 00 6E 00 6F 00 6E 00 20 00 42 00 75 00
000652C0:62 00 62 00 6C 00 65 00 2D 00 4A 00 00 00 00
000652D0:01 04 00 06 DC 00 64 03 43 EF 80 07 02 00 01 00
000652E0:EA 0A 6F 08 64 00 01 00 0F 00 FD FF 02 00 01 00
000652F0:FD FF 02 00 01 00 4C 00 65 00 74 00 74 00 65 00
00065340:00 00 00 00 01 00 00 00 00 00 00 02 00 00 00
00065360:00 00 00 00 00 00 00 00 00 00 00 44 49 4E 55
00065370:22 00 00 01 44 02 18 00 59 D8 B0 99 00 00 00 00
00065390:00 00 00 00 00 00 00 08 00 00 01 00 00 00
000653A0:03 00 01 00 01 00 02 00 02 00 00 00 00 00 00 00
```

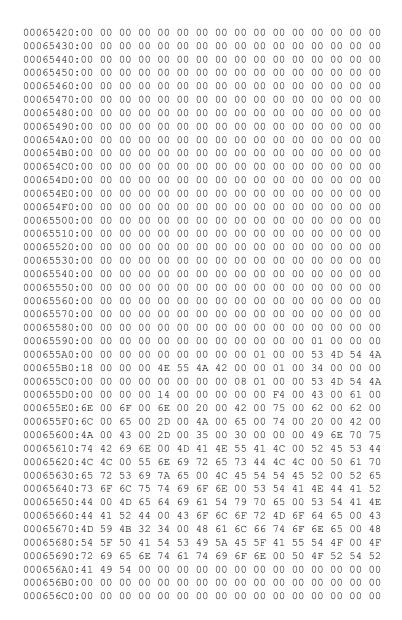

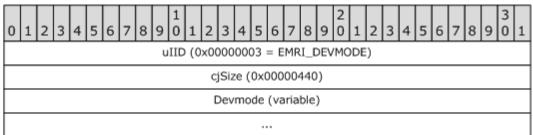


Figure 107: EMRI_DEVMODE Record Example

ulID: 0x00000003 specifies the type of the record, **EMRI_DEVMODE**, from the **RecordType enumeration** (section 2.1.1).

cjSize: 0x00000440 is the size, in bytes, of all the data in the record, including private driver-specific data. Each EMFSPOOL record is aligned to a multiple of 4 bytes.

Devmode: A complete, variable-length _DEVMODE structure ([MS-RPRN] section 2.2.2.1).

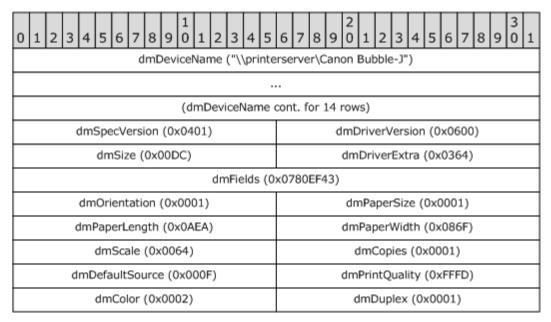


Figure 108: Print System _DEVMODE Structure, Part 1

dmDeviceName: "\printerserver\Canon Bubble-J" specifies the text name of the printer, truncated to fit into a 32-character Unicode string with null terminator.

dmSpecVersion: 0x0401 specifies the version of the initialization data specification on which the structure is based.

dmDriverVersion: 0x0600 specifies the version assigned by the implementer of the printer driver.

dmSize: 0x00DC specifies the size, in bytes, of the fixed-length portion of the **_DEVMODE** structure, which does not include the private driver-specific data that follows.

dmDriverExtra: 0x0364 specifies size, in bytes, of the variable-length driver-specific data that follows the fixed-length portion of the **_DEVMODE** structure.

dmFields: 0x0780EF43 specifies whether certain fields of the **_DEVMODE** structure are initialized. If a field is initialized, its corresponding bit is set; otherwise the bit is clear.

dmOrientation: 0x0001 specifies **Portrait** page orientation.

dmPaperSize: 0x0001 specifies **Letter** size paper, 8 1/2 x 11 inches.

dmPaperLength: 0x0AEA specifies the length of the printable area, in tenths of a millimeter.

dmPaperWidth: 0x086F specifies the width of the printable area, in tenths of a millimeter.

dmScale: 0x0064 specifies the factor by which the printed output is meant to be scaled, in percent.

dmCopies: 0x0001 specifies the number of copies to be printed.

dmDefaultSource: 0x000F specifies a device-specific value for the paper source, from which the output bin can be determined.

dmPrintQuality: 0xFFFD specifies medium-resolution printing quality with a predefined value. If this field contained a positive value, it would specify the dots per inch resolution of the device.

dmColor: 0x0002 specifies color printing.

dmDuplex: 0x0001 specifies single-sided printing.

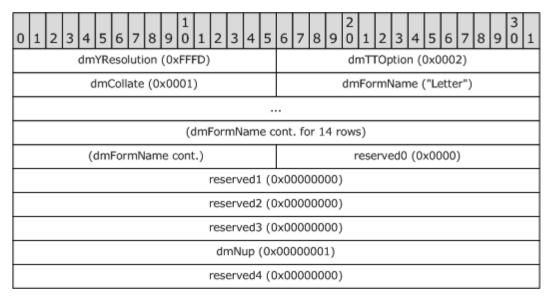


Figure 109: Print System _DEVMODE Structure, Part 2

dmYResolution: 0xFFFD specifies the vertical resolution of the printer, in dots per inch.

dmTTOption: 0x0002 specifies that TrueType fonts should be downloaded as "software fonts."

dmCollate: 0x0001 specifies that collation should be used when printing multiple copies.

dmFormName: "Letter" specifies the name of the printer form, padded with nulls to fit into a 32-character Unicode string with null terminator.

reserved0: 0x0000 is not used.

 $\textbf{reserved1} \colon 0x00000000 \text{ is not used.}$

reserved2: 0x00000000 is not used.

reserved3: 0x00000000 is not used.

dmNup: 0x00000001 specifies that the print server handles the layout of multiple logical pages on

one physical page.

reserved4: 0x00000000 is not used.

0 1 2 3 4 5 6 7	8 9 0	1	2 3	4	5	6	7	8	9	2	1	2	3	4	5	6	7	8	9	3	1
dmICMMethod (0x00000002)																					
dmlCMIntent (0x00000002)																					
dmMediaType (0x0000001)																					
dmDitherType (0x00000101)																					
reserved5 (0x0000000)																					
reserved6 (0x00000000)																					
		1	reserv	/ed7	7 (0:	x00	000	00	00)												
		1	reserv	/ed8	3 (0:	x00	000	00	00)												
dmDriverExtraData (variable)																					
(dmDriverExtraData cont. for 26 rows)																					

Figure 110: Print System _DEVMODE Structure, Part 3

dmICMMethod: 0x00000002 specifies that Image Color Management should be handled by the system on which the Page Description Language (PDL) data is generated.

dmICMIntent: 0x00000002 specifies that color matching is optimized for contrast.

dmMediaType: 0x00000001 specifies that plain-paper media type is used.

dmDitherType: 0x00000101 specifies a printer driver-specific value for the type of dithering.

reserved5: 0x00000000 is not used.
reserved6: 0x00000000 is not used.
reserved7: 0x00000000 is not used.

reserved8: 0x00000000 is not used.

dmDriverExtraData: A block of private data, of a size specified by the **dmDriverExtra** field, which is understandable only by the printer driver.

3.2.8 EMRI_BW_METAFILE_EXT Example

This section provides an example of the <u>EMRI BW METAFILE EXT</u> record, specified in section <u>2.2.3.2</u>.

000656D0:0E 00 00 00 08 00 00 00 B4 0B 00 00 00 00 00

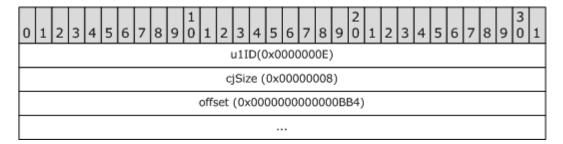


Figure 111: EMRI_BW_METAFILE_EXT Record Example

 ${f ulid}$: 0x0000000E specifies this record type as ${f EMRI_BW_METAFILE_EXT}$, which is a page offset record.

cjSize: 0x00000008 is the size in bytes of the data in this record.

offset: 0x000000000000BB4 specifies the offset backward in the metafile to the preceding <u>Page</u> <u>Content Record (section 2.2.3.1)</u>, the corresponding example of which is presented in section <u>3.2.6</u>.

This record signals the end of the page.

4	Security Considerations
	This file format enables third parties to send payloads (such as PostScript) to pass through as executable code.

5 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Windows NT 4.0 operating system Service Pack 2 (SP2)
- Windows 2000 operating system
- Windows XP operating system
- Windows Server 2003 operating system
- Windows Vista operating system
- Windows Server 2008 operating system
- Windows 7 operating system
- Windows Server 2008 R2 operating system
- Windows 8 operating system
- Windows Server 2012 operating system
- Windows 8.1 operating system
- Windows Server 2012 R2 operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

<1> Section 1.3.1: When a Windows application needs to print, it performs the following operations:

- 1. First, the application creates a printer device context specifying the target printer.
- 2. The application then calls Windows graphics device interface (GDI) methods such as **DrawLine** to pass drawing instructions to the GDI graphics engine.
- 3. The GDI graphics engine accumulates the drawing instructions into an EMFSPOOL file.
- 4. The spool file is sent to the Windows print spooler. One of the spool file formats accepted by the Windows print spooler is the EMFSPOOL.
- 5. The Windows print spooler interprets the EMFSPOOL, possibly also inserting page layout information and job control instructions into the data stream.
- 6. The spooler then sends the data stream to the serial, parallel, or network **port** driver associated with the target printer's I/O port.

<2> Section 1.4: EMF evolved from Windows metafile format (WMF), as specified in [MS-WMF].

<a>Section 1.5: The EMF spool format was defined and intended for use as the spool file format for Windows operating systems.

<4> Section 2.2.3.1: This record is not written to metafiles by the following implementations:

- Windows 2000
- Windows XP
- Windows Server 2003
- Windows Vista
- Windows Server 2008
- Windows 7
- Windows Server 2008 R2
- Windows 8
- Windows Server 2012
- Windows 8.1
- Windows Server 2012 R2
- <5> Section 2.2.3.1: This record is not written to metafiles by Windows implementations.
- <6> Section 2.2.3.1: This record is not written to metafiles by Windows implementations.
- <7> Section 2.2.3.1: This record is not written to metafiles by Windows implementations.
- <8> Section 2.2.3.3.2: Windows NT 4.0: This is set to a nonzero value.
- Section 2.2.3.3.3: This record is written to metafiles by Windows 2000 implementations only.

5.1 Version-Specific Support

This section describes Windows version-specific support for EMFSPOOL Records (section 2.2) by type, as specified in the RecordType enumeration (section 2.1.1).

The following table shows support for EMFSPOOL records by Windows version.

Record type	Windows NT Workstation 4.0 operating system SP2	Windows 2000 operating system	Windows XP operating system, Windows Server 2003 operating system, Windows Vista operating system, Windows Server 2008 operating system, Windows 7 operating system, Windows Server 2008 R2 operating system, Windows 8 operating system, Windows Server 2012 operating system, Windows 8.1 operating system, and Windows Server 2012 R2 operating system
EMRI_METAFILE	Х	X Note This record type is parsed, but is not written to metafiles.	X Note This record type is parsed, but is not written to metafiles.
EMRI_ENGINE_FONT	Х	Х	Х
EMRI_DEVMODE	х	х	Х
EMRI_TYPE1_FONT	Х	х	X
EMRI_PRESTARTPAGE	Х	х	X
EMRI_DESIGNVECTOR		X	X Note This record type is parsed, but is not written to metafiles.
EMRI_SUBSET_FONT		Х	Х
EMRI_DELTA_FONT		х	Х
EMRI_FORM_METAFILE		X Note This record type is parsed, but is not written to metafiles.	X Note This record type is parsed, but is not written to metafiles.
EMRI_BW_METAFILE		X Note This record type is parsed, but is not written to metafiles.	X Note This record type is parsed, but is not written to metafiles.
EMRI_BW_FORM_METAFILE		X Note This record type is parsed, but is not written to metafiles.	X Note This record type is parsed, but is not written to metafiles.

Record type	Windows NT Workstation 4.0 operating system SP2	Windows 2000 operating system	Windows XP operating system, Windows Server 2003 operating system, Windows Vista operating system, Windows Server 2008 operating system, Windows 7 operating system, Windows Server 2008 R2 operating system, Windows 8 operating system, Windows Server 2012 operating system, Windows 8.1 operating system, and Windows Server 2012 R2 operating system
EMRI_METAFILE_DATA		X	X
EMRI_METAFILE_EXT		x	X
EMRI_BW_METAFILE_EXT		x	X
EMRI_ENGINE_FONT_EXT		х	Х
EMRI_TYPE1_FONT_EXT		x	X
EMRI_DESIGNVECTOR_EXT		х	Х
EMRI_SUBSET_FONT_EXT		х	X
EMRI_DELTA_FONT_EXT		х	Х
EMRI_PS_JOB_DATA		х	Х
EMRI_EMBED_FONT_EXT			X

6	Change Tracking
	No table of changes is available. The document is either new or has had no changes since its last release.

7 Index

A	EMR_SETICMMODE Example (section 3.2.2.2 44,
A 11 1 110 40	section 3.2.2.8 46, section 3.2.2.34 76, section
Applicability 12	3.2.6.2 86, section 3.2.6.8 89, section 3.2.6.31
В	115) EMR_SETTEXTALIGN Example (section 3.2.2.10 47,
	section 3.2.2.12 48, section 3.2.6.10 90, section
Byte ordering example (section 1.3.2 12, section	3.2.6.12 91)
<u>3.1</u> 31)	EMR SETTEXTCOLOR Example 54
	EMR_SETVIEWPORTORGEX Example (section
С	3.2.2.14 49, section 3.2.6.14 92)
Change to aline 127	EMRI_BW_METAFILE_EXT Record example (section
Change tracking 127	3.2.5 82, section 3.2.8 120) EMRI DELTA FONT Record 25
D	EMRI DELTA FONT Record packet 25
	EMRI DESIGNVECTOR Record 24
Data Records 18	EMRI DESIGNVECTOR Record packet 24
Data Records packet 18	EMRI DEVMODE Record 27
	EMRI_DEVMODE Record example (section 3.2.4 78,
E	<u>section 3.2.7</u> 116)
	EMRI DEVMODE Record packet 27
EMFSPOOL header example (section 2.2.2 16,	EMRI ENGINE FONT Record 21
section 3.2.1 40)	EMRI ENGINE FONT EXT Record example 77
EMFSPOOL metafile example 31	EMRI ENGINE FONT Record packet 21
EMR EXTCREATEFONTINDIRECTW Example 93 EMR COMMENT Example 55	EMRI_METAFILE_DATA record examples (<u>section</u> 3.2.2 41, <u>section</u> 3.2.6 83)
EMR_EOF Example (section 3.2.2.35 76, section	EMRI PRESTARTPAGE Record 27
3.2.6.32 115)	EMRI PRESTARTPAGE Record packet 27
EMR EXTCREATEFONTINDIRECTW Example 50	EMRI PS JOB DATA Record 28
EMR_EXTTEXTOUTW Example (section 3.2.2.21 56,	EMRI PS JOB DATA Record packet 28
section 3.2.2.22 58, section 3.2.2.24 61, section	EMRI SUBSET FONT Record 25
3.2.2.25 62, section 3.2.2.27 65, section	EMRI SUBSET FONT Record packet 25
3.2.2.28 67, section 3.2.2.29 69, section	EMRI TYPE1 FONT Record 22
3.2.2.30 71, section 3.2.2.32 74, section	EMRI TYPE1 FONT Record packet 22
3.2.6.19 97, section 3.2.6.20 98, section 3.2.6.22 101, section 3.2.6.23 102, section	Enumerations 13 Examples
3.2.6.24 104, section 3.2.6.25 106, section	byte ordering example (<u>section 1.3.2</u> 12, <u>section</u>
3.2.6.26 108, section 3.2.6.27 110, section	3.1 31)
3.2.6.29 113)	EMFSPOOL metafile example 31
EMR_FORCEUFIMAPPING Example (section 3.2.2.19	
54, <u>section 3.2.6.18</u> 96)	F
EMR_HEADER Example (section 3.2.2.1 41, section	
3.2.6.1 83)	Fields - vendor-extensible 12
EMR_MOVETOEX Example (section 3.2.2.6 45,	Font definition records 21
section 3.2.6.6 88) EMR_SELECTOBJECT Example (section 3.2.2.3 44,	Font Offset Records 26 Font Offset Records packet 26
section 3.2.2.4 45, section 3.2.2.5 45, section	Fort Offset Records packet 20
3.2.2.11 48, section 3.2.2.17 53, section	G
3.2.2.33 76, section 3.2.6.3 87, section 3.2.6.4	
87, section 3.2.6.5 88, section 3.2.6.11 90,	Glossary 7
section 3.2.6.17 96, section 3.2.6.30 115)	
EMR_SETBKMODE Example (section 3.2.2.13 49,	Н
<u>section 3.2.2.15</u> 50, <u>section 3.2.2.23</u> 60, <u>section</u>	
3.2.2.26 64, section 3.2.2.31 73, section	Header Record 16
3.2.6.13 91, section 3.2.6.15 92, section 3.2.6.21 100, section 3.2.6.28 112)	<u>Header Record packet</u> 16
EMR_SETBRUSHORGEX Example (section 3.2.2.7	I
46, section 3.2.6.7 89)	-
EMR_SETCOLORSPACE Example (section 3.2.2.9	<u>Informative references</u> 10
47, <u>section 3.2.6.9</u> 89)	Introduction 7

```
L
Localization 12
Metafile structure 10
Ν
Normative references 10
0
Overview (synopsis) 10
Page Content Records 19
Page Offset Records 20
Page Content Records packet 19
Page Offset Records packet 20
Product behavior 123
R
Record syntax 15
Records 18
RecordType enumeration 13
References
  informative 10
  normative 10
Relationship to protocols and other structures 12
S
Security 122
SpecVersion enumeration 14
Structures
  EMF Spool Format data records 18
  EMFSPOOL enumerations 13
  overview 13
Т
Tracking changes 127
V
Vendor-extensible fields 12
Versioning 12
```